

FCC TEST REPORT
For
Guangzhou EZVALO Technology Company Limited
Wireless Charger Music Lamp
Test Model: LYYD02
Additional Model No.: N/A

Prepared for : Guangzhou EZVALO Technology Company Limited
Address : Unit 1503 and 1504, 15/F, 166 Huangpu Park West Road,
Huangpu District, Guangzhou, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Address : Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 10, 2022
Number of tested samples : 2
Sample No. : 220406102A-1, 220406102A-2
Date of Test : April 10, 2022 ~ April 15, 2022
Date of Report : April 16, 2022

**FCC TEST REPORT
FCC CFR 47 PART 18****Report Reference No. : LCS220406102AEB**

Date Of Issue..... : April 16, 2022

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.Address..... : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, ChinaTesting Location/ Procedure..... : Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐**Applicant's Name..... : Guangzhou EZVALO Technology Company Limited**Address..... : Unit 1503 and 1504, 15/F, 166 Huangpu Park West Road,
Huangpu District, Guangzhou, China**Test Specification**

Standard..... : FCC CFR 47 PART 18

Test Report Form No..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : Wireless Charger Music Lamp

Trade Mark..... : EZVALO

Test Model..... : LYD02

Power Supply..... : Input: DC 5V, 2A Wireless Charger Output: 5W MAX
Input: DC 9V, 2A Wireless Charger Output: 10W MAX
DC 3.7V by Rechargeable Li-ion Battery 1, 1800mAh
DC 3.7V by Rechargeable Li-ion Battery 2, 1800mAh
DC 3.7V by Rechargeable Li-ion Battery 3, 1800mAh
LED Power: 1W(36X0.2W) / LED Module)**Result : Positive****Compiled by:**

Kevin Huang

Supervised by:

Jin Wang

Approved by:

Gavin Liang

Kevin Huang/ File administrators

Jin Wang/ Technique principal

Gavin Liang/ Manager

This report shall not be reproduced except in full, without the written approval of Shenzhen LCS Compliance Testing Laboratory Ltd.

FCC TEST REPORT

Test Report No. :	LCS220406102AEB	April 16, 2022 Date of issue
-------------------	-----------------	---------------------------------

Test Model..... : LYD02

EUT..... : Wireless Charger Music Lamp

Applicant..... : Guangzhou EZVALO Technology Company Limited
Address..... : Unit 1503 and 1504, 15/F, 166 Huangpu Park West Road,
Huangpu District, Guangzhou, China
Telephone..... : /
Fax..... : /

Manufacturer..... : Guangzhou EZVALO Technology Company Limited
Address..... : Unit 1503 and 1504, 15/F, 166 Huangpu Park West Road,
Huangpu District, Guangzhou, China
Telephone..... : /
Fax..... : /

Factory..... : Guangzhou EZVALO Technology Company Limited
Address..... : Unit 1503 and 1504, 15/F, 166 Huangpu Park West Road,
Huangpu District, Guangzhou, China
Telephone..... : /
Fax..... : /

Test Result	Positive
-------------	----------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	April 16, 2022	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1 Description of Device (EUT)	6
1.2 Support equipment List	7
1.3 External I/O Cable	7
1.4 Description of Test Facility	7
1.5 Statement of the Measurement Uncertainty	8
1.6 Measurement Uncertainty	8
1.7 Description of Test Modes	8
2. TEST METHODOLOGY	9
2.1 EUT Configuration	9
2.2 EUT Exercise	9
2.3 General Test Procedures	9
2.3.1 Conducted Emissions	9
2.3.2 Radiated Emissions	9
3. SYSTEM TEST CONFIGURATION	10
3.1 Justification	10
3.2 EUT Exercise Software	10
3.3 Special Accessories	10
3.4 Block Diagram/Schematics	10
3.5 Equipment Modifications	10
3.6 Test Setup	10
4. SUMMARY OF TEST EQUIPMENT	11
5. SUMMARY OF TEST RESULT	12
6. POWER LINE CONDUCTED MEASUREMENT	13
7. RADIATED EMISSION MEASUREMENT	16
7.1. Block Diagram of Test Setup	16
7.2. Radiated Emission Limit	17
7.3. EUT Configuration on Measurement	17
7.4. Operating Condition of EUT	17
7.5. Measuring Setting	17
7.6. Test Procedure	18
7.7. Test Results	19
8. PHOTOGRAPHS OF TEST SETUP	23
9. EXTERNAL PHOTOGRAPHS OF THE EUT	23
10. INTERNAL PHOTOGRAPHS OF THE EUT	23

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT	: Wireless Charger Music Lamp
Test Model	: LYD02
Additional Model No	: N/A
Model Declaration	: N/A
Power Supply	Input: DC 5V, 2A Wireless Charger Output: 5W MAX Input: DC 9V, 2A Wireless Charger Output: 10W MAX DC 3.7V by Rechargeable Li-ion Battery 1, 1800mAh DC 3.7V by Rechargeable Li-ion Battery 2, 1800mAh DC 3.7V by Rechargeable Li-ion Battery 3, 1800mAh LED Power: 1W(36X0.2W) / LED Module)
Hardware Version	: S-21PRO-01-V2.0
Software Version	: V2.0
Bluetooth	:
Frequency Range	: 2402MHz ~ 2480MHz
Channel Number	: 79 channels for Bluetooth V5.0(DSS)
Channel Spacing	: 1MHz for Bluetooth V5.0(DSS)
Modulation Type	: GFSK, $\pi/4$ -DQPSK for Bluetooth V5.0(DSS)
Bluetooth Version	: V5.0
Antenna Description	: PCB Antenna, -0.58dBi(Max.)
Wireless Charging	:
Operating Frequency	: 111.0~205.0KHz
Modulation Type	: Continuous Wave
Antenna Type	: Coil Antenna

1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
OPPO	ADAPTER	OP52KAUH	--	SDOC
Huawei	Mobile phone	FRD-AL10	FRD-AL10C00B373	SDOC

Note: The are only used test, not shipped

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Type-C Port	1	USB Cable: 0.8m, unshielded

1.4 Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

FCC Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7 Description of Test Modes

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Modulation Type: CW

Test Modes		
Mode 1	AC/DC Adapter (9V/2A) + EUT+ Mobile Phone (Battery Status: <1%)	Record
Mode 2	AC/DC Adapter (9V/2A) + EUT+ Mobile Phone (Battery Status: <50%)	Pre-tested
Mode 3	AC/DC Adapter (9V/2A) + EUT+ Mobile Phone (Battery Status: 100%)	Pre-tested
Mode 4	AC/DC Adapter (5V/2A) + EUT+ Mobile Phone (Battery Status: <1%)	Pre-tested
Mode 5	AC/DC Adapter (5V/2A) + EUT+ Mobile Phone (Battery Status: <50%)	Pre-tested
Mode 6	AC/DC Adapter (5V/2A) + EUT+ Mobile Phone (Battery Status: 100%)	Pre-tested
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		

For AC conducted emission, pre-test at both AC 120V/60Hz and AC 240V/50Hz, recorded worst case;

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with MP-5, and FCC CFR PART 18.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the charging and compunction mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 18.305 and 18.307 under the FCC Rules Part 18.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in FCC MP-5 for Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in FCC MP-5 for radiated emission.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a normal condition.

3.2 EUT Exercise Software

N/A.

3.3 Special Accessories

N/A.

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2021-06-21	2022-06-20
2	DC Power Supply	Agilent	E3642A	N/A	2021-11-12	2022-11-11
3	Temperature & Humidity Chamber	GUANGZHOU GOGNWEN	GDS-100	70932	2021-10-07	2022-10-06
4	EMI Test Software	Farad	EZ	/	N/A	N/A
5	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2021-09-26	2022-09-25
6	Positioning Controller	MF	MF-7082	/	2021-06-21	2022-06-20
7	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2021-07-25	2022-07-24
8	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-07-25	2022-07-24
9	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-07-01	2022-06-30
10	EMI Test Receiver	R&S	ESR 7	101181	2021-06-10	2022-06-09
11	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2021-11-12	2022-11-11
12	Broadband Preamplifier	/	BP-01M18G	P190501	2021-06-29	2022-06-28
13	RF Cable-R03m	Jye Bao	RG142	CB021	2021-06-21	2022-06-20
14	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2021-06-21	2022-06-20
15	EMI Test Receiver	R&S	ESPI	101840	2021-06-21	2022-06-20
16	Artificial Mains	R&S	ENV216	101288	2021-06-21	2022-06-20
17	Broadband Preamplifier	SCHWARZBECK	BBV9745	9719-025	2021-06-21	2022-06-20
18	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2021-06-21	2022-06-20

5. SUMMARY OF TEST RESULT


Test Item	FCC Rule No.	Temperature conditions	Power source conditions	C	NC	NA	NP	Remark
Radiated Emission	§18.305 (b)	Nominal	Nominal	☒	☐	☐	☐	-/-
AC conducted emission	§18.307 (a)	Nominal	Nominal	☒	☐	☐	☐	-/-

Remark: The measurement uncertainty is not included in the test result.

N/A – Not Applicable!!!

6. POWER LINE CONDUCTED MEASUREMENT

6.1. Block Diagram of Test Setup

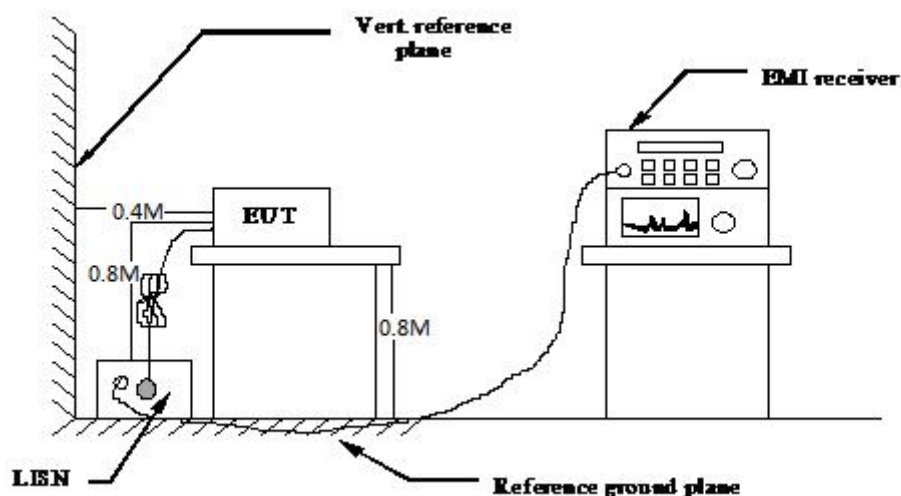

6.2. Standard Applicable

According to §18.307 (b): For all other part 18 consumer devices which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Test Results


PASS

The test data please refer to following page.

Temperature	22.5°C	Humidity	53.7%
Test Engineer	Kay Hu	Configurations	Transmit


AC Power Line Conducted Emission (Power input to adapter @ AC 120V/60Hz (Worst Case))

Line

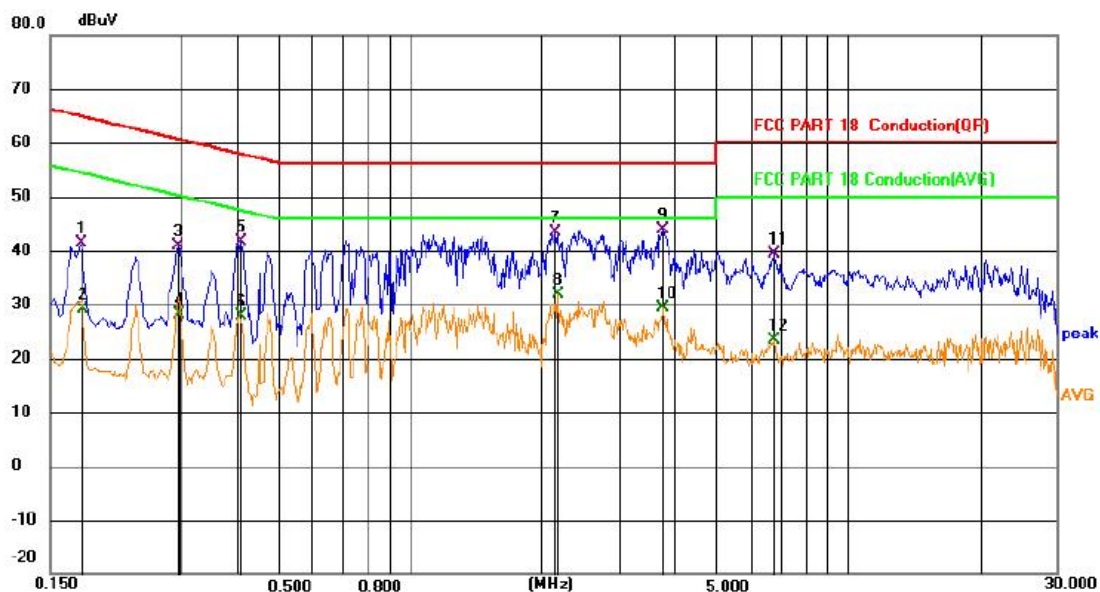

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1771	21.59	19.76	41.35	64.62	-23.27	QP
2		0.1776	9.42	19.76	29.18	54.60	-25.42	AVG
3		0.2938	21.09	19.76	40.85	60.42	-19.57	QP
4		0.2983	8.33	19.76	28.09	50.29	-22.20	AVG
5		0.4111	21.75	19.77	41.52	57.63	-16.11	QP
6		0.4111	8.08	19.77	27.85	47.63	-19.78	AVG
7		2.1480	23.60	19.85	43.45	56.00	-12.55	QP
8		2.1749	12.01	19.85	31.86	46.00	-14.14	AVG
9	*	3.7951	24.03	19.89	43.92	56.00	-12.08	QP
10		3.7951	9.38	19.89	29.27	46.00	-16.73	AVG
11		6.7876	19.34	19.98	39.32	60.00	-20.68	QP
12		6.7876	3.39	19.98	23.37	50.00	-26.63	AVG

Neutral

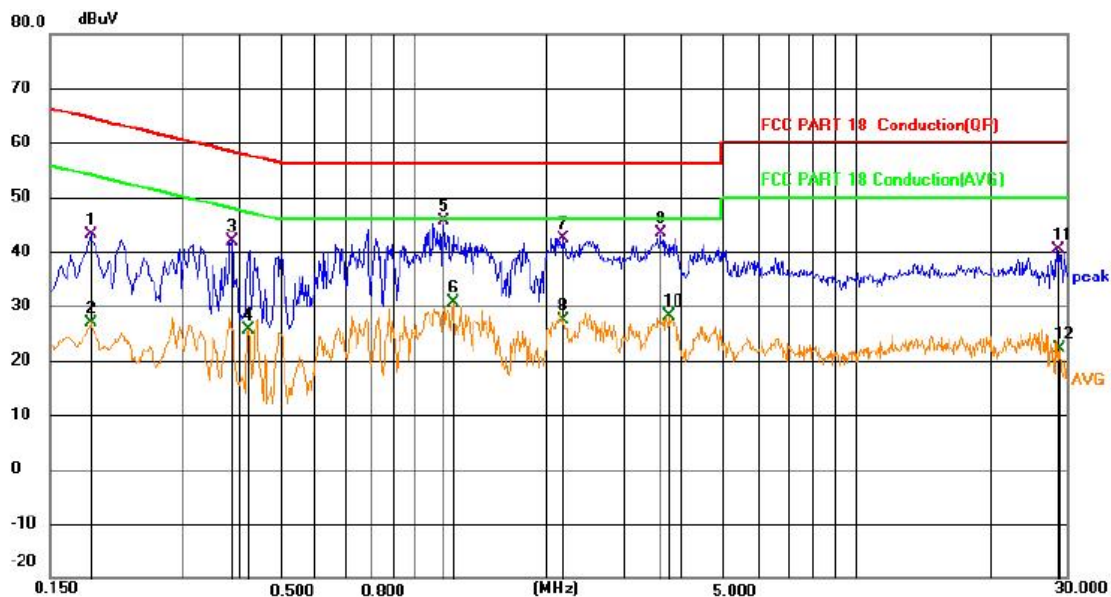


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1859	23.46	19.75	43.21	64.22	-21.01	QP
2		0.1859	7.16	19.75	26.91	54.22	-27.31	AVG
3		0.3886	22.21	19.76	41.97	58.09	-16.12	QP
4		0.4213	5.76	19.76	25.52	47.42	-21.90	AVG
5	*	1.1670	25.80	19.78	45.58	56.00	-10.42	QP
6		1.2255	10.84	19.79	30.63	46.00	-15.37	AVG
7		2.1749	22.63	19.83	42.46	56.00	-13.54	QP
8		2.1793	7.59	19.83	27.42	46.00	-18.58	AVG
9		3.6105	23.39	19.88	43.27	56.00	-12.73	QP
10		3.7905	8.31	19.88	28.19	46.00	-17.81	AVG
11		28.4636	19.71	20.65	40.36	60.00	-19.64	QP
12		29.0176	1.56	20.64	22.20	50.00	-27.80	AVG

***Note: Pre-scan all modes and recorded the worst case results in this report.


Result = Reading + Correct, Margin = Result – Limit.

7. RADIATED EMISSION MEASUREMENT


7.1. Block Diagram of Test Setup

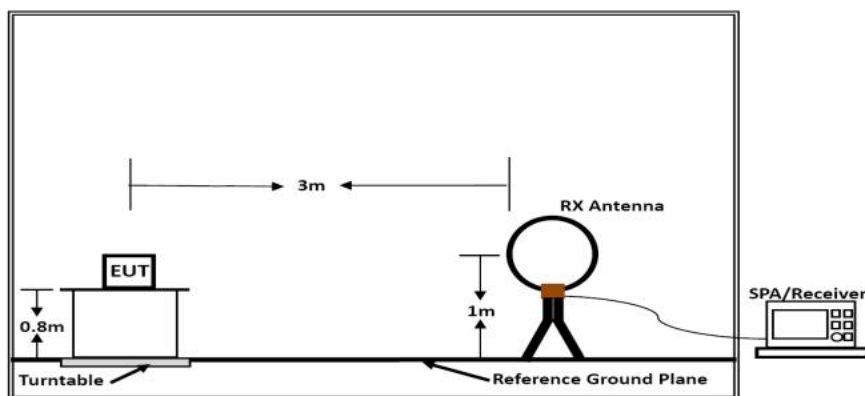

Below 30MHz

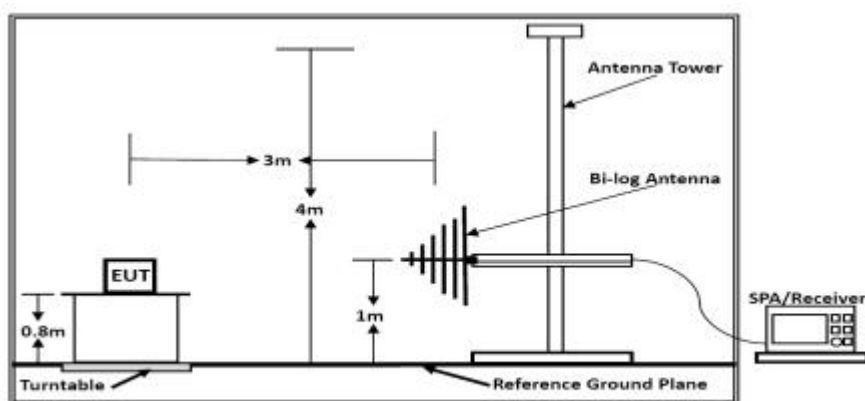

Below 1GHz

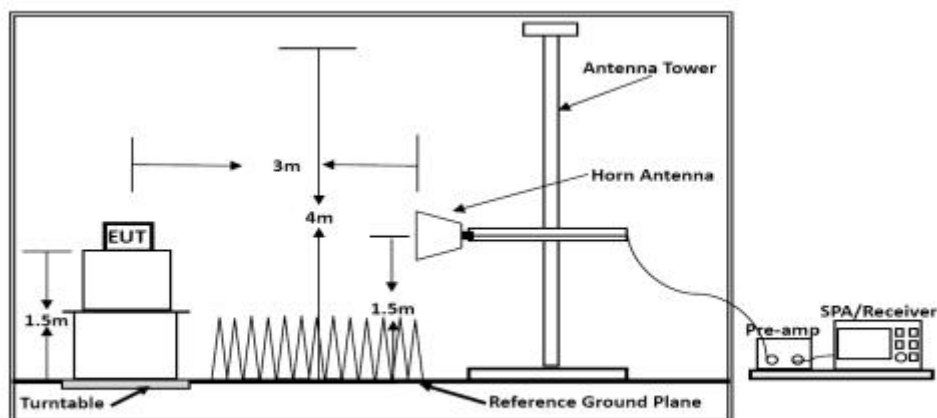

Above 1GHz

7.2. Radiated Emission Limit

Except as provided elsewhere in this Subpart 18.305 (b), the field strength levels of emissions which lie outside the bands specified in §18.301, unless otherwise indicated, shall not exceed the following table:

Frequency MHz	Distance Meters	Field Strengths Limit	
		dB μ V/m	Remark
0.009~30MHz	3	103.5	Quasi-peak

Remark:

- (1) Emission level dB μ V/m for 0.009~30MHz = 20log (15) + 40log (300/3) dB μ V/m;
- (2) Calculated according FCC 18.305.
- (3) The smaller limit shall apply at the cross point between two frequency bands.
- (4) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

7.3. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

- (1) Setup the EUT as shown in Section 4.1.
- (2) Let the EUT work in worst test mode (Mode 1) and measure it.

7.5. Measuring Setting

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

7.6. Test Procedure

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

7.7. Test Results


PASS.

Only report the worst test data (Mode 1) in test report;

The test data please refer to following page:

Temperature	23.8°C	Humidity	52.5%
Test Engineer	Kay Hu	Configurations	Transmit


0.009 MHz – 30 MHz

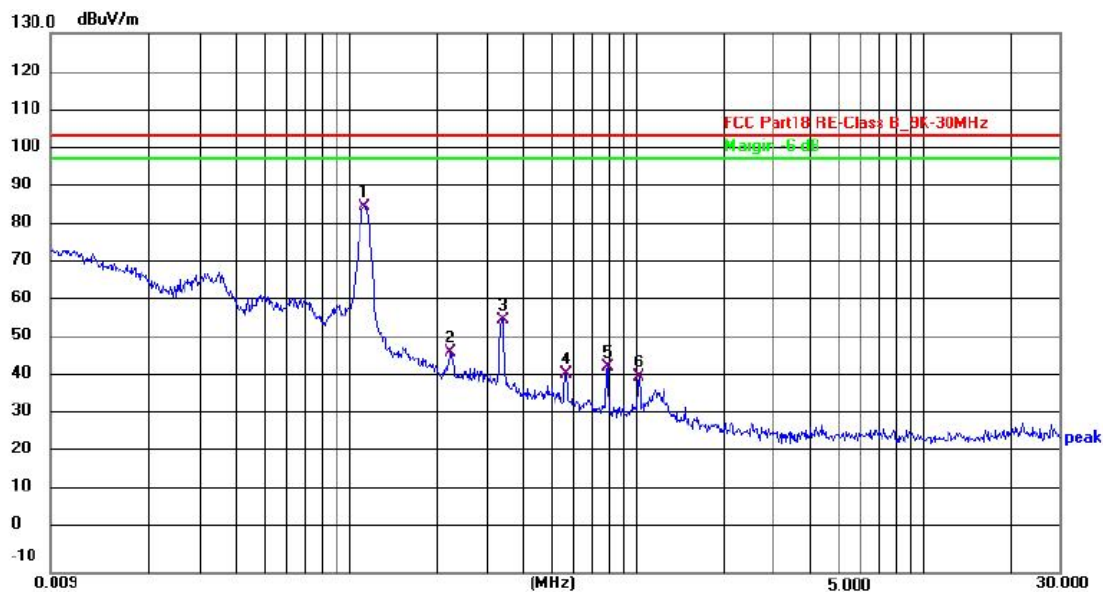

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1121	94.56	-9.41	85.15	103.50	-18.35	QP
2	0.2253	56.26	-9.04	47.22	103.50	-56.28	QP
3	0.3407	64.41	-8.83	55.58	103.50	-47.92	QP
4	0.5681	49.90	-8.35	41.55	103.50	-61.95	QP
5	0.7922	51.21	-7.78	43.43	103.50	-60.07	QP
6	1.0184	48.17	-7.21	40.96	103.50	-62.54	QP

Remark: 1. Margin = Reading + Factor – Limit.

2. Measured at antenna position coaxial and coplanar, recorded worst case at coplanar.

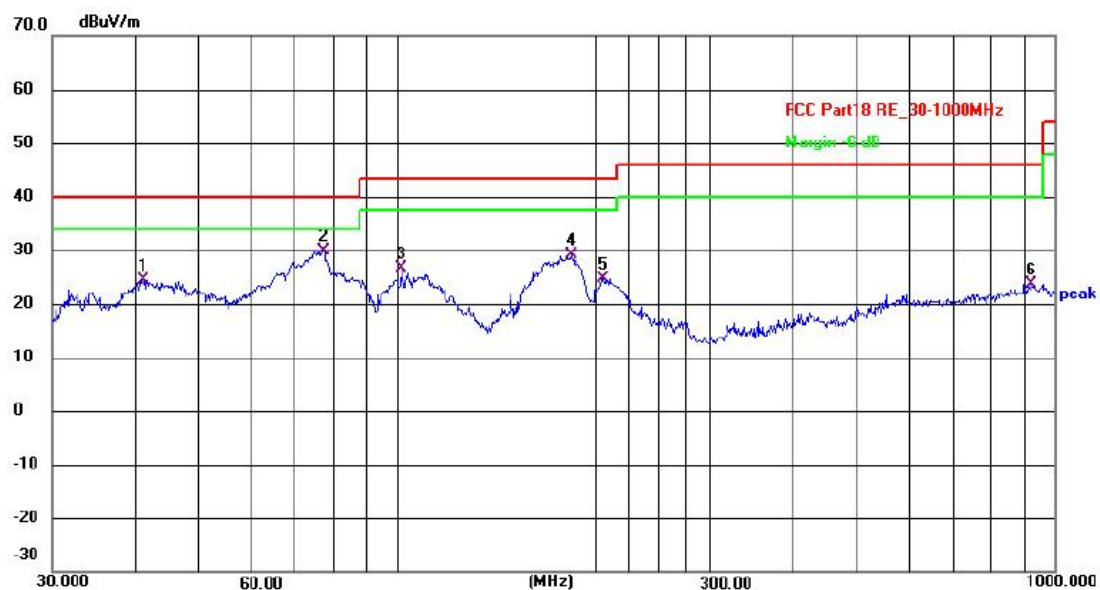Below 1GHz**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	41.2764	41.72	-17.38	24.34	40.00	-15.66	QP
2	77.5926	49.65	-19.78	29.87	40.00	-10.13	QP
3	101.6443	44.92	-18.32	26.60	43.50	-16.90	QP
4	184.4898	47.16	-18.09	29.07	43.50	-14.43	QP
5	206.3975	41.93	-17.23	24.70	43.50	-18.80	QP
6	922.5157	31.65	-7.97	23.68	46.00	-22.32	QP

Vertical



- 1). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 2). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

8. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files for Test Setup Photos of the EUT.

9. EXTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

10. INTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----