

TEST REPORT
Nr. R23188101**Federal Communication Commission (FCC)**

Report Reference No.	R23188101
Date of issue:	08.02.2024
Total number pages:	14
Customer name	Imet S.r.l.
Address	Via Ronche, 93 – 33077 Sacile (PN) – Italy
Test specification:	
Standards	KDB 447498 D01 General RF Exposure Guidance v06
Non-standard test method	N/A
Test Report Form No.	15-247_HoppingDEKRA
Test Report Form(s) Originator ...:	DEKRA Testing and Certification S.r.l.
Master TRF	2024-01

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of DEKRA Testing and Certification S.r.l.

(*) Test item description	RF Transceiver module 915-928MHz
(*) Trademark	Imet
(*) Manufacturer	Imet S.r.l.
(*) Model / Type reference	B921C
(*) FCC ID	2AYRTB921C
(*) Rating(s)	3,7 Vdc from battery

Report

Tested by (name + signature): G. Gandini



Approved by (name +
signature): F. Marenda



(*) information provided by the customer

1 Summary	
1	Summary.....2
2	Reference standard3
3	List of attachments.....3
4	Deviation(s) from test specification.....3
5	Testing location.....3
6	General description of test item(s).....5
6.1	Photos of the test item.....6
7	Verdict summary section7
8	Test conditions.....9
8.1	General9
9	Test results10
9.1	RF Exposure Analysis10

2 Reference standard	
KDB 447498 D01 General RF Exposure Guidance v06	RF exposure procedures and equipment authorization policies for mobile and portable devices
3 List of attachments	
Attachment 1: Measurement uncertainty, judgement of compliance and quality manual references	
4 Deviation(s) from test specification	
None	
5 Testing location	
DEKRA Testing and Certification S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	


<i>Revision index</i>	<i>Date</i>	<i>Change history</i>
1.0	08.02.2024	--

Testing and sampling:	
Date of receipt of test item	16.10.2023
Testing start date	08.02.2024
Testing end date	08.02.2024
Sampling procedure	Sample used for testing chosen by the customer; DEKRA Testing and Certification S.r.l. cannot be considered responsible for the selection of the sample
Internal identification	Adhesive label with the product number P230926
General remarks:	
This report shall not be reproduced, except in full, without the written approval of DEKRA Testing and Certification S.r.l.	
The test results presented in this report relate only to the object tested.	
"(see appended table)": refers to a table appended to the report.	
Throughout this report a comma is used as the decimal separator.	
Possible test case verdicts:	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object meets the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object was not evaluated for the requirement:	N/E (Not Executed)
Definition of symbols used in this test report:	
<input checked="" type="checkbox"/> Indicates that the listed condition, standard or equipment is applicable for this report. <input type="checkbox"/> Indicates that the listed condition, standard or equipment is not applicable for this report.	

6 General description of test item(s)

Description	RF Transceiver module 915-928MHz											
Model Number	B921C											
FCC ID	2AYRTB921C											
Serial Number.....	--											
Brand name	Imet											
Frequency band.....	902 – 928 MHz											
Nominal frequencies	F_L : 915,200 MHz	F_M : 921,400 MHz	F_H : 927,800 MHz									
Test power supply.....		Voltage and Frequency		Reference poles								
				N	L1	L2	L3	PE				
		<input type="checkbox"/> AC:		<input type="checkbox"/>								
		<input type="checkbox"/> AC:		<input type="checkbox"/>								
	<input checked="" type="checkbox"/> DC: 3,7 V from battery						<input type="checkbox"/>					
Software version.....	PCB921_R00_IC326_915MHz_1v3.hex											
Type of equipment.....	<input checked="" type="checkbox"/> Transmitter unit <input checked="" type="checkbox"/> Receiver unit											
Type of station	<input checked="" type="checkbox"/> Portable station <input type="checkbox"/> Mobile station											
Test arrangements of EUT	<i>Intended operational arrangement(s) of EUT</i>		<i>Test arrangement (see basic standard)</i>									
	<input type="checkbox"/> Table-top only		Table-top									
	<input type="checkbox"/> Floor-standing only		Floor-standing									
	<input type="checkbox"/> Can be floor-standing or table-top		Table-top									
	<input type="checkbox"/> Rack mounted		In rack or table-top									
	<input checked="" type="checkbox"/> Other, for example wall mounted, ceiling mounted, handheld, body worn		Table-top									
Operating modes	No.	Operating mode of test item										
	1	EUT in continuous transmission at maximum power										
Declination of responsibility	Information relating to the description of the sample, components list, and software/hardware version (if reported) are provided by the customer. DEKRA Testing and Certification S.r.l. cannot be considered responsible for this information, for any other document sent by the customer and for any difference between the software version present in the tested sample and that present in the object intended for final sale. In some cases, the software in the tested sample is in a version dedicated exclusively to the test, and therefore does not represent the software installed in the final version of the product.											

6.1 Photos of the test item

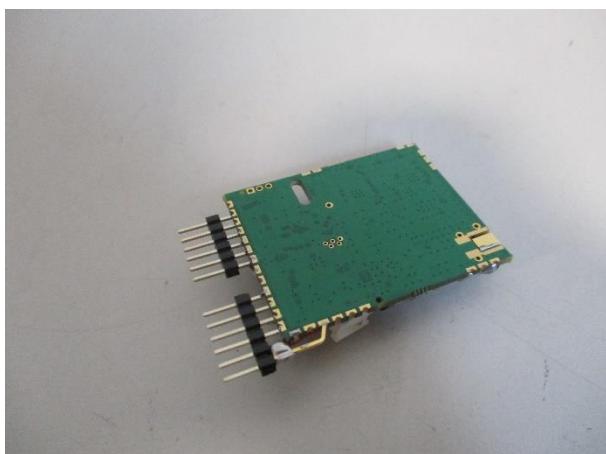

7 Verdict summary section

KDB 447498 D01 General RF Exposure Guidance v06			
Clause	Requirement – Test case	Basic standard	Verdict
7.1	RF Exposure Analysis	--	P

Normative references

Reference no.	Description
KDB 447498 D01 General RF Exposure Guidance v06	RF exposure procedures and equipment authorization policies for mobile and portable devices

8 Test conditions

8.1 General

Temperature	Humidity	Atmospheric pressure
15 °C – 35 °C	30 % - 60 %	800 hPa – 1060 hPa

If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.

Environmental reference conditions.....:	<p>The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment.</p> <p>The climatic conditions during the tests were within the following limits:</p> <table border="1"><thead><tr><th>Temperature</th><th>Humidity</th><th>Atmospheric pressure</th></tr></thead><tbody><tr><td>15 °C – 35 °C</td><td>30 % - 60 %</td><td>800 hPa – 1060 hPa</td></tr></tbody></table> <p>If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.</p>			Temperature	Humidity	Atmospheric pressure	15 °C – 35 °C	30 % - 60 %	800 hPa – 1060 hPa
Temperature	Humidity	Atmospheric pressure							
15 °C – 35 °C	30 % - 60 %	800 hPa – 1060 hPa							
Measurement uncertainties:	Attachment 1								

9 Test results

9.1 RF Exposure Analysis

Tested by	G. Gandini
Test date	08.02.2024
Test location (stand)	Laboratory
Reference standards.....	KDB 447498 D01 cl. 7.1 ANSI C63.10
Supplementary information	--

Acceptance limits

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition(s), listed below, is (are) satisfied.

For 100 MHz to 6 GHz and test separation distances \leq 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following.

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. separation distance, mm})] \times (\sqrt{f(\text{GHz})}) \leq 3 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g SAR}$

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

10-g Extremity SAR Test Exclusion Power Thresholds are 2,5 times higher than the 1-g SAR Test Exclusion Thresholds indicated above.

Result

<i>Transmission channel (MHz)</i>	<i>Peak Output Power (dBm)</i>	<i>Peak Output Power (mW)</i>
915,20	12,01	15,89
921,40	11,98	15,78
927,80	11,87	15,38

Standalone 1-g head or body

Using separation distance of 10 mm with the formula above results:

$$(15,89 \text{ mW} / 10 \text{ mm}) * \sqrt{0,91520 \text{ GHz}} = 1,52 \leq 3$$

Thus for portable use the SAR exclusion condition is fulfilled and SAR evaluation is not required for separation distance of 10 mm or more.

Standalone 10-g extremity

Using separation distance of 10 mm with the formula above results:

$$(15,89 \text{ mW} / 10 \text{ mm}) * \sqrt{0,91520 \text{ GHz}} = 1,52 \leq 7,5$$

Thus for portable use the SAR exclusion condition is fulfilled and SAR evaluation is not required for separation distance of 10 mm or more.

Remarks: the measured levels have been derived from Test Report nr. R23187901.

Attachment 1

Measurement uncertainty

Test	Test Setup	Expanded uncertainty		Note
Conducted emission CISPR 16 <u>LISN 50uH 0,009-0,0150 MHz</u>	PE001_01	3,4	dB	1
Conducted emission CISPR 16 <u>LISN 50uH 0,150-30,0 MHz</u>	PE001_01	2,9	dB	1
Conducted emission CISPR 16 <u>Voltage Probe 0,15-30 MHz</u>	PE001_02	2,1	dB	1
Conducted emission CISPR 16 <u>Current Probe 0,15-30 MHz</u>	PE001_03	2,5	dB	1
Conducted emission CISPR 16 <u>ISN 0,15-30 MHz</u>	PE001_04	4,7	dB	1
Clic CISPR 16 <u>LISN 50uH 0,150-30,0 MHz</u>	PE001_05	2,9	dB	1
Radiated Emission CDNE <u>30-300 MHz</u>	PE001_06	3,3	dB	1
Disturbance Power <u>30-300 MHz</u>	PE002_01	3,7	dB	1
Radiated Emission LAS <u>0,15-30 MHz</u>	PE003_01	1,9	dB	1
Radiated Emission CISPR 16 <u>Loop Ant. 0,15-30 MHz</u>	PE004_01	4,1	dB	1
Radiated Emission CISPR 16 <u>Bicon. Ant. 30-300 MHz</u>	PE004_02	4,6	dB	1
Radiated Emission CISPR 16 <u>LogP. Ant. 300-1000 MHz</u>	PE004_03	4,5	dB	1
Radiated Emission CISPR 16 <u>Horn Ant. 1-18 GHz</u>	PE004_04	4,7	dB	1
Human Exposure to electromagnetic fields	PE005_01	14,2	%	1
Harmonics	PE006_01	10 mA	+	2,9 %
Flicker	PE007_01			4,20 %
Radiated Immunity <u>80 MHz - 6 GHz</u>	PE102_XX	2,25	dB	0,89 V/m a 3V/m
Conducted Immunity <u>0,15 - 230 MHz</u>	PE105_XX	1,19	dB	0,44 V a 3V
AC Magnetic field	PE106_01	1,55	%	0,15 A/m a 10A/m
Pulse Magnetic field	PE107_01	6,25	%	18,8 A/m a 300A/m
Dumped Magnetic field	PE108_01	6,25	%	1,88 A/m a 30A/m
Common mode conducted immunity	PE112_01	2,22	%	0,22 V a 10V

Attachment 1

<i>Test</i>	<i>Test Setup</i>	<i>Expanded uncertainty</i>	<i>Note</i>
Power/Spurious 9kHz-30MHz	PR001_01	4,1 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,7 dB	1
Misura della potenza EiRP 1-18GHz d=3m	PR001_04+05	4,7 dB	1
Misura della potenza EiRP 18-40GHz d=3m	PR001_06	5,1 dB	1
Frequency error	PR002_01+02	< 1x10-7	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	< 1x10-7	1
Conducted RF power and spurious emission	PR002_01+02	1,1 dB	1
Adjacent channel power	PR002_01+02	1,1 dB	1
Blocking	PR002_01+02	1,1 dB	1

<i>Test</i>	<i>Test Setup</i>	<i>Expanded uncertainty</i>	<i>Note</i>
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Ring Wave immunity test	PE110_01		2
Low frequency immunity test	PE111_01		2
Dumped Oscillatory immunity test	PE113_01		2

Rev_23_01 date 20/03/2023

Note 1:

The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of p = 95%

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k=2

Attachment 1

Judgement of compliance

Case 1	Case 2	Case 3	Case 4
<p>The sample complies with the requirements.</p> <p>The measurement results is within the specification limit when the measurement uncertainty is taken into account.</p>	<p>The sample complies with the requirements.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.</p>	<p>The sample does not comply with the requirements.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.</p>	<p>The sample does not comply with the requirements.</p> <p>The measurement results is outside the specification limit when the measurement uncertainty is taken into account.</p>

In agreement with ILAC-G8:09/2019 cl.4.2.1 Guidelines on Decision Rules and Statements of Conformity

Quality manual references – Internal procedure

Internal Procedure PM001 rev. 4.0 (Quality Manual)	Measure procedure
Internal Procedure INC_M rev. 10.0 (Quality Manual)	Measurement uncertainty calculation