

# TEST REPORT

Report No.: SHATBL2412011W01

**Applicant** : Jiangsu Niu Electric Technology Co., Ltd

**Product Name** : NIU Kick Scooter

**Brand Name** : NIU

**Model Name** : KQi 200P

**FCC ID** : 2AZ6G-K2YC3121


**Test Standard** : 47 CFR 15.247

**Date of Test** : 2024.12.16-2025.01.06

**Report Prepared by** :

  
(Emily)

**Report Approved by** :

  
(Guozheng Li)

**Authorized Signatory** :

  
(Terry Yang)



## TABLE OF CONTENTS

|                                                               |    |
|---------------------------------------------------------------|----|
| REVISION HISTORY .....                                        | 3  |
| DECLARATION OF REPORT .....                                   | 4  |
| SUMMARY OF TEST RESULT .....                                  | 5  |
| 1. GENERAL DESCRIPTION .....                                  | 6  |
| 1.1. Applicant .....                                          | 6  |
| 1.2. Manufacturer .....                                       | 6  |
| 1.3. Factory .....                                            | 6  |
| 1.4. General Information of EUT .....                         | 7  |
| 1.5. Equipment Specification .....                            | 8  |
| 1.6. Modification of EUT .....                                | 9  |
| 1.7. Laboratory Information .....                             | 9  |
| 1.8. Applicable Standards .....                               | 9  |
| 2. TEST CONFIGURATION OF EUT .....                            | 10 |
| 2.1. Carrier Frequency Channel .....                          | 10 |
| 2.2. Test Modes .....                                         | 10 |
| 2.3. Block Diagram of Test System .....                       | 11 |
| 2.4. Description of Support Units .....                       | 11 |
| 2.5. Test Software and Power Level .....                      | 11 |
| 2.6. EUT Operating Conditions .....                           | 11 |
| 2.7. Equipment List .....                                     | 12 |
| 2.8. Measurement Uncertainty .....                            | 14 |
| 3. TEST RESULT .....                                          | 15 |
| 3.1. Maximum Peak Conducted Output Power .....                | 15 |
| 3.2. Duty Cycle .....                                         | 17 |
| 3.3. 6dB Bandwidth and 99% Bandwidth .....                    | 18 |
| 3.4. Power Spectral Density .....                             | 20 |
| 3.5. Conducted Band Edge .....                                | 21 |
| 3.6. Conducted Spurious Emission .....                        | 22 |
| 3.7. Radiated Spurious Emission and Restricted Band .....     | 23 |
| 3.8. AC Power-Line Conducted Emission .....                   | 27 |
| 3.9. Antenna Requirement .....                                | 29 |
| 4. TEST SETUP PHOTOGRAPHS .....                               | 29 |
| 5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....              | 29 |
| Appendix A _ Conducted Test Data .....                        | 30 |
| Appendix B _ Radiated Test Data .....                         | 39 |
| Appendix C _ AC Power-Line Conducted Emission Test Data ..... | 49 |

## REVISION HISTORY

| Rev. | Issue Date | Revisions       | Revised by  |
|------|------------|-----------------|-------------|
| 00   | 2025.01.06 | Initial Release | Guozheng Li |

## DECLARATION OF REPORT

1. The device has been tested by ATBL, and the test results show that the equipment under test (EUT) is in compliance with the requirements of 47 CFR 15.247. And it is applicable only to the tested sample identified in the report.
2. This report shall not be reproduced except in full, without the written approval of ATBL, this document only be altered or revised by ATBL, personal only, and shall be noted in the revision of the document.
3. The general information of EUT in this report is provided by the customer or manufacture, ATBL is only responsible for the test data but not for the information provided by the customer or manufacture.
4. The results in this report is only apply to the sample as tested under conditions. The customer or manufacturer is responsible for ensuring that the additional production units of this model have the same electrical and mechanical components.
5. In this report, '☐' indicates that EUT does not support content after '☐', and '☑' indicates that it supports content after '☑'
6. Both the conducted and radiated tests are conducted using modules with a supply voltage of 3.3V

## SUMMARY OF TEST RESULT

| Report Section | Standard Section                     | Test Item                                      | Judgment    | Remark |
|----------------|--------------------------------------|------------------------------------------------|-------------|--------|
| 3.1            | 47 CFR 15.247(b)(3)                  | Maximum Peak Conducted Output Power            | PASS        | --     |
| 3.2            | --                                   | Duty Cycle                                     | Report only | --     |
| 3.3            | 47 CFR 15.247(a)(2)                  | 6dB Bandwidth                                  | PASS        | --     |
|                | --                                   | 99% Bandwidth                                  | Report only | --     |
| 3.4            | 47 CFR 15.247(e)                     | Power Spectral Density                         | PASS        | --     |
| 3.5            | 47 CFR 15.247(d)                     | Conducted Band Edge                            | PASS        | --     |
| 3.6            | 47 CFR 15.247(d)                     | Conducted Spurious Emission                    | PASS        | --     |
| 3.7            | 47 CFR 15.247(d)/15.209(a)/15.205(a) | Radiated Spurious Emission and Restricted Band | PASS        | --     |
| 3.8            | 47 CFR 15.207(a)                     | AC Power-Line Conducted Emission               | PASS        | --     |
| 3.9            | 47 CFR 15.203                        | Antenna Requirements                           | PASS        | --     |

## 1. GENERAL DESCRIPTION

### 1.1. Applicant

Name : Jiangsu Niu Electric Technology Co., Ltd  
Address : No.387 Changting Road, West Taihu Science and Technology Industrial Park,  
Changzhou City,Jiangsu P.R. China

### 1.2. Manufacturer

Name : Jiangsu Niu Electric Technology Co., Ltd  
Address : No.387 Changting Road, West Taihu Science and Technology Industrial Park,  
Changzhou City,Jiangsu P.R. China

### 1.3. Factory

Name : Jiangsu Niu Electric Technology Co., Ltd  
Address : No.387 Changting Road, West Taihu Science and Technology Industrial Park,  
Changzhou City,Jiangsu P.R. China

#### 1.4. General Information of EUT

| General Information    |                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------|
| Equipment Name         | NIU Kick Scooter                                                                                        |
| Brand Name             | NIU                                                                                                     |
| Model Name             | KQi 200P                                                                                                |
| Series Model           | KQi 200F                                                                                                |
| Model Difference       | The KQi 200P bar is not foldable, and the KQi 200F bar is foldable.                                     |
| Sample No              | 202412040006003                                                                                         |
| Adapter                | Model: PLD70-EVCN88-54<br>Brand: /<br>Input: 100-240Vac,1.5A Max,50-60Hz<br>Output: 53.5Vdc,1.3A        |
| Battery 1              | Model: NIU-48N7A1<br>Brand: /<br>Rated Voltage: 46.8V<br>Charge Limit Voltage: 54.6V<br>Capacity: 7.8Ah |
| Battery 2              | Model: NIU-48N7A0<br>Brand: /<br>Rated Voltage: 46.8V<br>Charge Limit Voltage: 54.6V<br>Capacity: 7.8Ah |
| Hardware Version       | KDE13P01                                                                                                |
| Software Version       | KDE13G07                                                                                                |
| Connecting I/O Port(s) | Refer to the remark below.                                                                              |

Remark:

The above information of EUT was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.5. Equipment Specification

| Equipment Specification           |                            |                       |
|-----------------------------------|----------------------------|-----------------------|
| Frequency Range                   | 2402 MHz - 2480 MHz        |                       |
| Number of Channels                | 40                         |                       |
| Carrier Frequency of Each Channel | 2402 + n*2 MHz; n = 0 ~ 39 |                       |
| Maximum Output Power To Antenna   | ☑Bluetooth LE(1Mbps):      | -1.573dBm (0.000696W) |
| Type of Modulation                | Bluetooth LE:              | GFSK                  |
| Antenna Type                      | PIFA antenna               |                       |
| Antenna Gain                      | -2.25 dBi                  |                       |

## 1.6. Modification of EUT

No modifications are made to the EUT during all test items.

## 1.7. Laboratory Information

|                                   |   |                                                                                        |
|-----------------------------------|---|----------------------------------------------------------------------------------------|
| Company Name                      | : | Shanghai ATBL Technology Co., Ltd.                                                     |
| Address                           | : | Building 8, No.160 Basheng Road, Waigaoqiao Free Trade Zone, Pudong New Area, Shanghai |
| Telephone                         | : | +86(0)21-51298625                                                                      |
| FCC Test Firm registration Number | : | 485917                                                                                 |
| A2LA Number                       | : | 6184.01                                                                                |
| CNAS Number                       | : | CNAS L14531                                                                            |
| CAB Identifier                    | : | CN0116                                                                                 |

## 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

47 CFR Part 15 Subpart C §15.247

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

## 2. TEST CONFIGURATION OF EUT

### 2.1. Carrier Frequency Channel

| Frequency Band    | Channel | Frequency MHz | Channel | Frequency MHz | Channel | Frequency MHz |
|-------------------|---------|---------------|---------|---------------|---------|---------------|
| 2400 - 2483.5 MHz | 00      | 2402          | 14      | 2430          | 28      | 2458          |
|                   | 01      | 2404          | 15      | 2432          | 29      | 2460          |
|                   | 02      | 2406          | 16      | 2434          | 30      | 2462          |
|                   | 03      | 2408          | 17      | 2436          | 31      | 2464          |
|                   | 04      | 2410          | 18      | 2438          | 32      | 2466          |
|                   | 05      | 2412          | 19      | 2440          | 33      | 2468          |
|                   | 06      | 2414          | 20      | 2442          | 34      | 2470          |
|                   | 07      | 2416          | 21      | 2444          | 35      | 2472          |
|                   | 08      | 2418          | 22      | 2446          | 36      | 2474          |
|                   | 09      | 2420          | 23      | 2448          | 37      | 2476          |
|                   | 10      | 2422          | 24      | 2450          | 38      | 2478          |
|                   | 11      | 2424          | 25      | 2452          | 39      | 2480          |
|                   | 12      | 2426          | 26      | 2454          | --      | --            |
|                   | 13      | 2428          | 27      | 2456          | --      | --            |

Remark:

Low Channel: **CH 00\_2402 MHz**; Middle Channel: **CH 19\_2440 MHz**; High Channel: **CH 39\_2480 MHz**.


### 2.2. Test Modes

The table below is showing all test modes to demonstrate in compliance with the standard.


| Summary Table of Test Modes          |                                                            |                                              |
|--------------------------------------|------------------------------------------------------------|----------------------------------------------|
| Test Item                            | Data Rate / Modulation                                     |                                              |
|                                      | <input checked="" type="checkbox"/> Bluetooth LE(1Mbps)    | <input type="checkbox"/> Bluetooth LE(2Mbps) |
| For Conducted and Radiated Test      | Mode 1: CH00_2402 MHz                                      | Mode 4: CH00_2402 MHz                        |
|                                      | Mode 2: CH19_2440 MHz                                      | Mode 5: CH19_2440 MHz                        |
|                                      | Mode 3: CH39_2480 MHz                                      | Mode 6: CH39_2480 MHz                        |
| For AC Power-line Conducted Emission | Mode 7: Keep Bluetooth link under the maximum output power |                                              |

## 2.3. Block Diagram of Test System

### 2.3.1. For AC Power-Line Conducted Emission

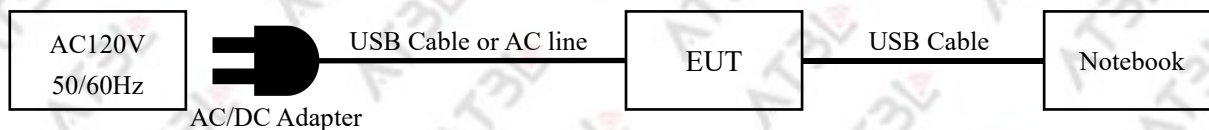

### 2.3.2. For Radiated Spurious Emission

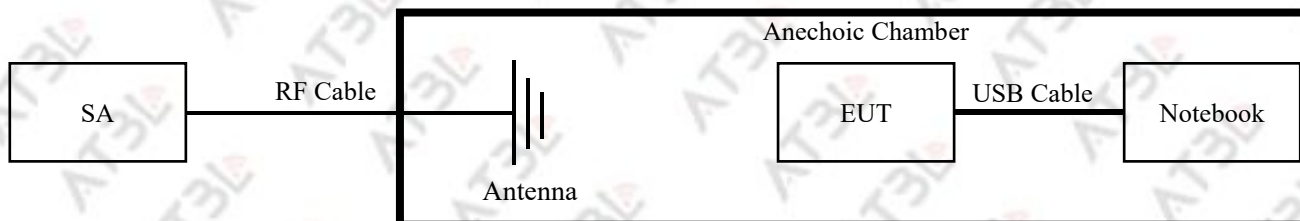

### 2.3.3. For Conducted Test



## 2.4. Description of Support Units

| NO. | Unit      | Brand  | Description           |
|-----|-----------|--------|-----------------------|
| 1   | Notebook  | Lenovo | Model:DESKTOP-USDEO09 |
| 2   | USB Cable | N/A    | 100cm                 |

## 2.5. Test Software and Power Level

During the test, the channel and power control software provided by the customer is used to control the operation channel and output power level.

## 2.6. EUT Operating Conditions

For AC power-line conducted emission, the EUT was connected under the large package sizes transmission.

For radiated spurious emission and conducted test, the engineering test program was provided and make the EUT to continuous transmit/receive.

## 2.7. Equipment List

### 2.7.1. For AC Power-Line Conducted Emission

| Equipment Name | Manufacturer | Model  | Serial No. | Equipment No. | Calibration Date | Calibration Due Date |
|----------------|--------------|--------|------------|---------------|------------------|----------------------|
| Test Receiver  | R&S          | ESPI   | 101679     | SHATBL-E012   | 2024.03.28       | 2025.03.27           |
| LISN           | R&S          | ENV216 | 100300     | SHATBL-E013   | 2024.03.28       | 2025.03.27           |
| LISN           | R&S          | ENV216 | 100333     | SHATBL-E041   | 2024.03.28       | 2025.03.27           |
| Thermometer    | DeLi         | N/A    | N/A        | SHATBL-E016   | 2024.07.18       | 2025.07.17           |
| Test Software  | FALA         | EZ-EMC | N/A        | SHATBL-E046   | N/A              | N/A                  |

### 2.7.2. For Radiated Spurious Emission

| Equipment Name               | Manufacturer | Model           | Serial No.       | Equipment No. | Calibration Date | Calibration Due Date |
|------------------------------|--------------|-----------------|------------------|---------------|------------------|----------------------|
| Signal analyzer              | Agilent      | N9020A          | MY50200811       | SHATBL-E017   | 2024.03.28       | 2025.03.27           |
| Amplifier                    | JPT          | JPA0118-55-303A | 1910001800055000 | SHATBL-E006   | 2024.03.28       | 2025.03.27           |
| Amplifier                    | JPT          | JPA-10M1G32     | 21010100035001   | SHATBL-E005   | 2024.03.28       | 2025.03.27           |
| Antenna/Turntable Controller | Brilliant    | N/A             | N/A              | SHATBL-E007   | N/A              | N/A                  |
| Loop Antenna                 | Daze         | ZN30900C        | 20077            | SHATBL-E042   | 2024.05.13       | 2025.05.12           |
| Bilog Antenna                | SCHWARZBECK  | VULB 9168       | 01174            | SHATBL-E008   | 2024.05.17       | 2025.05.16           |
| Broad-band Horn Antenna      | SCHWARZBECK  | BBHA 9120D      | 02334            | SHATBL-E009   | 2024.05.17       | 2025.05.16           |
| Horn Antenna                 | COM-POWER    | AH-1840         | 10100008         | SHATBL-E043   | 2024.07.19       | 2025.07.16           |
| Thermometer                  | DeLi         | N/A             | N/A              | SHATBL-E015   | 2024.07.18       | 2025.07.17           |
| Test Software                | FALA         | EMC-RI          | N/A              | SHATBL-E046   | N/A              | N/A                  |

### 2.7.3. For Conducted Test

| Equipment Name                      | Manufacturer | Model       | Serial No. | Equipment No. | Calibration Date | Calibration Due Date |
|-------------------------------------|--------------|-------------|------------|---------------|------------------|----------------------|
| Power meter                         | Anritsu      | ML2496A     | 1935001    | SHATBL-W030   | 2024.07.18       | 2025.07.17           |
| Power sensor                        | Anritsu      | MA2411B     | 1911006    | SHATBL-W031   | 2024.07.18       | 2025.07.17           |
| Adjustable Attenuator               | Agilent      | 8494B       | MY42144015 | SHATBL-W009   | 2024.07.18       | 2025.07.17           |
| Adjustable Attenuator               | Agilent      | 8496B       | MY42143776 | SHATBL-W010   | 2024.07.18       | 2025.07.17           |
| Environmental Test Chamber          | KSON         | THS-B6C-150 | 9159K      | SHATBL-W019   | 2024.03.28       | 2025.03.27           |
| Signal analyzer                     | Keysight     | N9020A      | MY50510136 | SHATBL-W003   | 2024.07.18       | 2025.07.17           |
| Vector signal generator             | Keysight     | N5182B      | MY57300196 | SHATBL-W005   | 2024.07.18       | 2025.07.17           |
| Vector signal generator             | Agilent      | N5182A      | MY50143555 | SHATBL-W037   | 2024.07.18       | 2025.07.17           |
| Analog signal generator             | Keysight     | N5173B      | MY60403026 | SHATBL-W038   | 2024.07.18       | 2025.07.17           |
| Wideband radio communication tester | R&S          | CMW500      | 101331     | SHATBL-W007   | 2024.07.18       | 2025.07.17           |
| Spectrum analyzer                   | R&S          | FSV40-N     | 101761     | SHATBL-W036   | 2024.07.18       | 2025.07.17           |
| Switch Box                          | N/A          | RFSW3003328 | RFSW201019 | SHATBL-W029   | N/A              | N/A                  |
| Thermometer                         | DeLi         | N/A         | N/A        | SHATBL-W012   | 2024.07.18       | 2025.07.17           |
| Test Software                       | FALA         | LZ-RF       | N/A        | SHATBL-W020   | N/A              | N/A                  |

## 2.8. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                               | Uncertainty |
|-----|------------------------------------|-------------|
| 1   | RF output power, conducted         | 0.958dB     |
| 2   | Conducted spurious emissions       | 2.988dB     |
| 3   | All emissions, radiated 30MHz-1GHz | 2.50dB      |
| 4   | All emissions, radiated 1GHz-18GHz | 3.51dB      |
| 5   | Occupied bandwidth                 | 23.20Hz     |
| 6   | Power spectral density             | 0.886dB     |

### 3. TEST RESULT

#### 3.1. Maximum Peak Conducted Output Power

##### 3.1.1. Limit

47 CFR 15.247(b)(3): For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

47 CFR 15.247(b)(4): If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

47 CFR 15.247(c)(1)(i): Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

##### 3.1.2. Test Procedure

ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter method: The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM: Method AVGPM is a measurement using an RF average power meter, as follows:

1. As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied:

- ① The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- ② At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- ③ The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

2. If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal as described in ANSI C63.10-2013 clause 11.6.

3. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.

4. Adjust the measurement in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle.

### 3.1.3. Test Setup



### 3.1.4. Test Result of Maximum Peak Conducted Output Power

Please refer to the Appendix A.

### 3.2. Duty Cycle

#### 3.2.1. Limit

There is no limit requirement for Duty Cycle.

#### 3.2.2. Test Procedure

ANSI C63.10-2013 clause 11.6: Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

1. A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
2. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- ① Set the center frequency of the instrument to the center frequency of the transmission.
- ② Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
- ③ Set  $VBW \geq RBW$ . Set detector = peak or average.
- ④ The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

#### 3.2.3. Test Setup



#### 3.2.4. Test Result of Duty Cycle

Please refer to the Appendix A.

### 3.3. 6dB Bandwidth and 99% Bandwidth

#### 3.3.1. Limit

47 CFR 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

There is no limit requirement for 99% Bandwidth.

#### 3.3.2. Test Procedure

1. The testing of 6dB Bandwidth follows ANSI C63.10-2013 clause 11.8.1: The steps for the first option are as follows:

- ① Set RBW = 100 kHz.
- ② Set the VBW  $\geq [3 \times \text{RBW}]$ .
- ③ Detector = peak.
- ④ Trace mode = max hold.
- ⑤ Sweep = auto couple.
- ⑥ Allow the trace to stabilize.
- ⑦ Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2. The testing of 99% Bandwidth follows ANSI C63.10-2013 clause 6.9.3: The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- ① The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- ② The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- ③ Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level. Specific guidance is given in ANSI C63.10-2013 clause 4.1.5.2.
- ④ Step a) through step c) might require iteration to adjust within the specified range.
- ⑤ Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- ⑥ Use the 99% power bandwidth function of the instrument (if available) and report the

measured bandwidth.

⑦ If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

⑧ The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

### 3.3.3. Test Setup



### 3.3.4. Test Result of 6dB Bandwidth and 99% Bandwidth

Please refer to the Appendix A.

### 3.4. Power Spectral Density

#### 3.4.1. Limit

47 CFR 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 3.4.2. Test Procedure

ANSI C63.10-2013 clause 11.10.2: The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to 3 kHz.
4. Set the VBW  $\geq [3 \times \text{RBW}]$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.

#### 3.4.3. Test Setup



#### 3.4.4. Test Result of Power Spectral Density

Please refer to the Appendix A.

### 3.5. Conducted Band Edge


#### 3.5.1. Limit

47 CFR 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

#### 3.5.2. Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Conducted Band Edge measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the 100 kHz bandwidth within the band that contains the highest level of the desired power when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 3.5.3. Test Setup

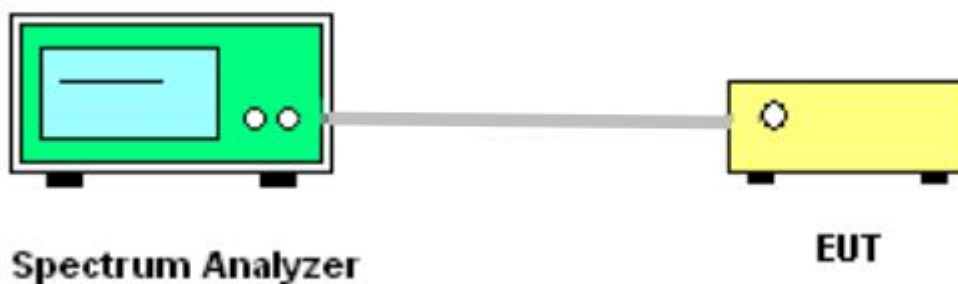

#### 3.5.4. Test Result of Conducted Band Edge

Please refer to the Appendix A.

### 3.6. Conducted Spurious Emission

#### 3.6.1. Limit

47 CFR 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

#### 3.6.2. Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 3.6.3. Test Setup



#### 3.6.4. Test Result of Conducted Spurious Emission

Please refer to the Appendix A.

### 3.7. Radiated Spurious Emission and Restricted Band

#### 3.7.1. Limit

47 CFR 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

47 CFR 15.205(a): Only spurious emissions are permitted in any of the frequency bands listed below:

| Frequency (MHz) | Frequency (MHz)   | Frequency (MHz)     | Frequency (MHz) | Frequency (MHz) |
|-----------------|-------------------|---------------------|-----------------|-----------------|
| 0.090-0.110     | 12.29-12.293      | 149.9-150.05        | 1660-1710       | 8.025-8.5       |
| 0.495-0.505     | 12.51975-12.52025 | 156.52475-156.52525 | 1718.8-1722.2   | 9.0-9.2         |
| 2.1735-2.1905   | 12.57675-12.57725 | 156.7-156.9         | 2200-2300       | 9.3-9.5         |
| 4.125-4.128     | 13.36-13.41       | 162.0125-167.17     | 2310-2390       | 10.6-12.7       |
| 4.17725-4.17775 | 16.42-16.423      | 167.72-173.2        | 2483.5-2500     | 13.25-13.4      |
| 4.20725-4.20775 | 16.69475-16.69525 | 240-285             | 2690-2900       | 14.47-14.5      |
| 6.215-6.218     | 16.80425-16.80475 | 322-335.4           | 3260-3267       | 15.35-16.2      |
| 6.26775-6.26825 | 25.5-25.67        | 399.9-410           | 3332-3339       | 17.7-21.4       |
| 6.31175-6.31225 | 37.5-38.25        | 608-614             | 3345.8-3358     | 22.01-23.12     |
| 8.291-8.294     | 73-74.6           | 960-1240            | 3600-4400       | 23.6-24.0       |
| 8.362-8.366     | 74.8-75.2         | 1300-1427           | 4500-5150       | 31.2-31.8       |
| 8.37625-8.38675 | 108-121.94        | 1435-1626.5         | 5350-5460       | 36.43-36.5      |
| 8.41425-8.41475 | 123-138           | 1645.5-1646.5       | 7250-7750       | Above 38.6      |

47 CFR 15.209(a): The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                           |
| 0.490-1.705     | 24000/F(kHz)                      | 30                            |
| 1.705-30.0      | 30                                | 30                            |
| 30-88           | 100                               | 3                             |
| 88-216          | 150                               | 3                             |
| 216-960         | 200                               | 3                             |
| Above 960       | 500                               | 3                             |

**3.7.2. Test Procedure**


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.1 meter for frequency below 1GHz and 0.1 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Pre-amp Factor = Level.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - ① Span shall wide enough to fully capture the emission being measured;
  - ② When frequency < 1 GHz:
    - Set RBW=100 kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - ③ When frequency  $\geq$  1 GHz:
    - Set RBW = 1 MHz; VBW = 3 MHz for peak measurement;
    - Set RBW = 1 MHz; VBW = 10 Hz, when duty cycle is no less than 98 percent or VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.7.3. Test Setup


#### 3.7.3.1. For radiated emissions below 30MHz

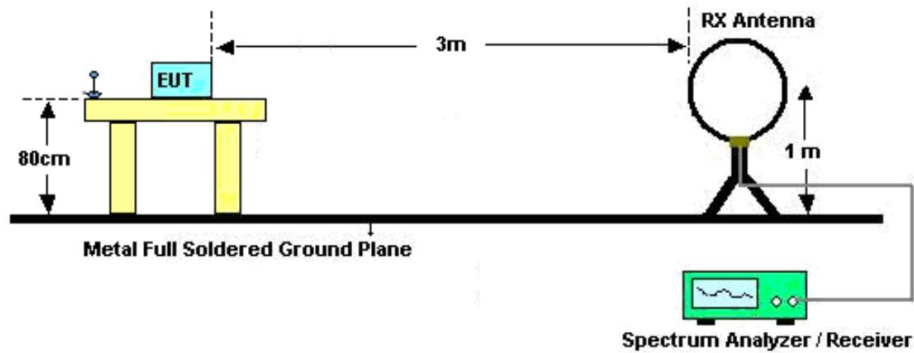

#### 3.7.3.2. For radiated emissions from 30MHz to 1GHz

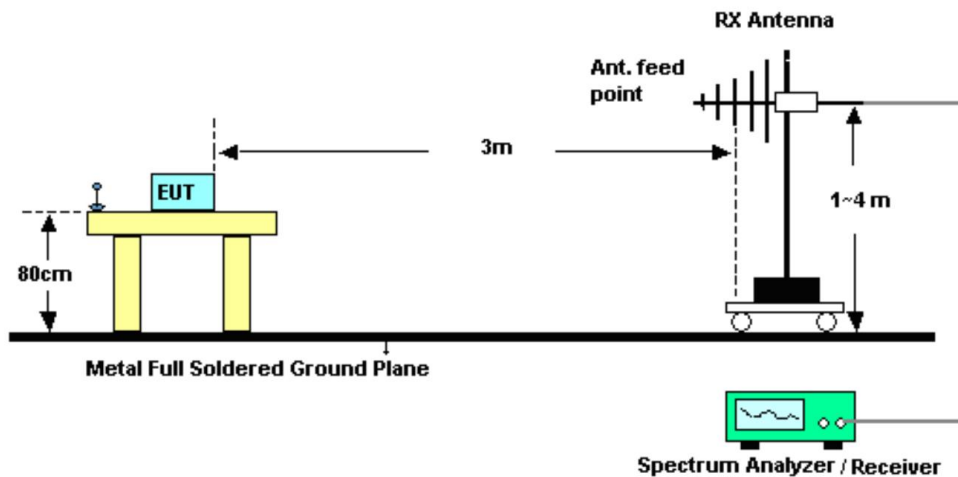

#### 3.7.3.3. For radiated emissions above 1GHz

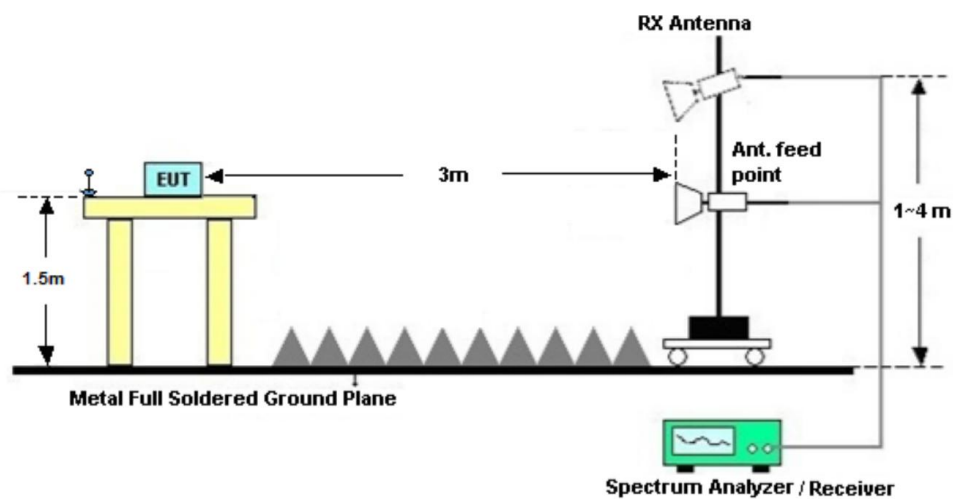

### **3.7.4. Test Result of Radiated Spurious Emission**

#### **3.7.4.1. For 9 kHz ~ 30 MHz**

Please refer to the Appendix B.

#### **3.7.4.2. For 30 MHz ~ 1 GHz**

Please refer to the Appendix B.

#### **3.7.4.3. For 1 GHz ~ 18GHz**

Please refer to the Appendix B.

#### **3.7.4.4. For above 18GHz**

Please refer to the Appendix B.

### **3.7.5. Test Result of Restricted Band**

Please refer to the Appendix B.

### 3.8. AC Power-Line Conducted Emission

#### 3.8.1. Limit

47 CFR 15.207(a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table:


| Frequency of emission (MHz) | Conducted limit (dBμV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15-0.5                    | 66 to 56*              | 56 to 46* |
| 0.5-5                       | 56                     | 46        |
| 5-30                        | 60                     | 50        |

\*Decreases with the logarithm of the frequency.

#### 3.8.2. Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 10 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

#### 3.8.3. Test Setup

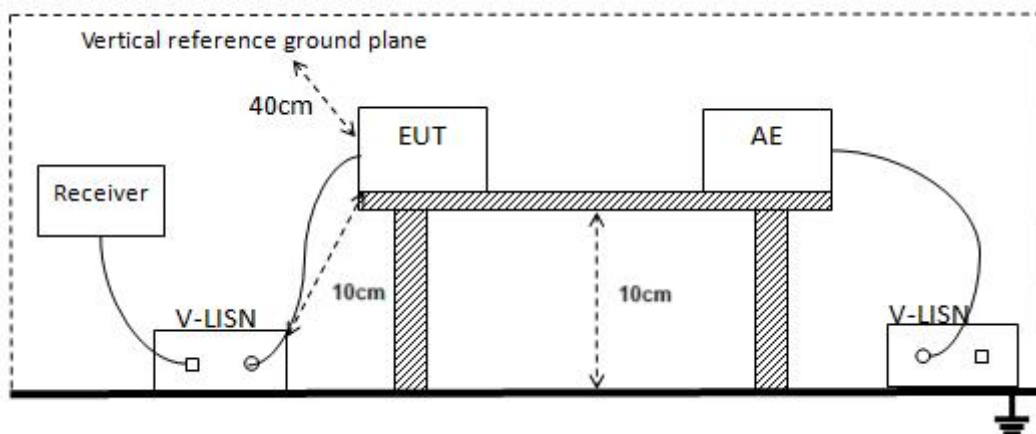

#### 3.8.4. Test Result of AC Power-Line Conducted Emission

Please refer to the Appendix C.

### **3.9. Antenna Requirement**

#### **3.9.1. Standard Requirement**

According to 47 CFR 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### **3.9.2. EUT Antenna**

The antenna used for the EUT is PIFA antenna, which meets the antenna requirements.

## **4. TEST SETUP PHOTOGRAPHS**

Please refer to the Appendix D.

## **5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT**

External Photos Please refer to the Appendix E.

Internal Photos Please refer to the Appendix F.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*

## Appendix A\_ Conducted Test Data

### 3.1.4. Test Result of Maximum Peak Conducted Output Power

#### Test Result

| Mode   | Channel | Peak Output Power (dBm) | Peak Output Power (mW) | Max. Avg. Power (dBm) | Limit (dBm) | Result |
|--------|---------|-------------------------|------------------------|-----------------------|-------------|--------|
| BLE 1M | 0       | -1.573                  | 0.696                  | -2.227                | ≤30         | PASS   |
|        | 19      | -2.274                  | 0.592                  | -2.955                | ≤30         | PASS   |
|        | 39      | -3.011                  | 0.500                  | -3.657                | ≤30         | PASS   |

Note:

1.  $EIRP = P_{out} + G_{ant}$ , where  $P_{out}$  is the conducted output power (i.e., the Peak Output Power in the table), and  $G_{ant}$  is the antenna gain equal to -2.25 dBi.
2. Offset=cable loss

#### Test Graphs





Average Output Power  
BLE 1M\_Channel 0



Average Output Power  
BLE 1M\_Channel 19




Average Output Power  
BLE 1M\_Channel 39


### 3.2.4. Test Result of Duty Cycle

#### Test Result


| Mode   | Channel | On Time (ms) | Period (ms) | Duty Cycle (%) | Duty Cycle (linear) | Duty Cycle Factor (dB) | 1/T    |
|--------|---------|--------------|-------------|----------------|---------------------|------------------------|--------|
| BLE 1M | 0       | 5.000        | 5.000       | 100            | 1                   | 0.0                    | 0.2000 |
|        | 19      | 5.000        | 5.000       | 100            | 1                   | 0.0                    | 0.2000 |
|        | 39      | 5.000        | 5.000       | 100            | 1                   | 0.0                    | 0.2000 |

#### Test Graphs

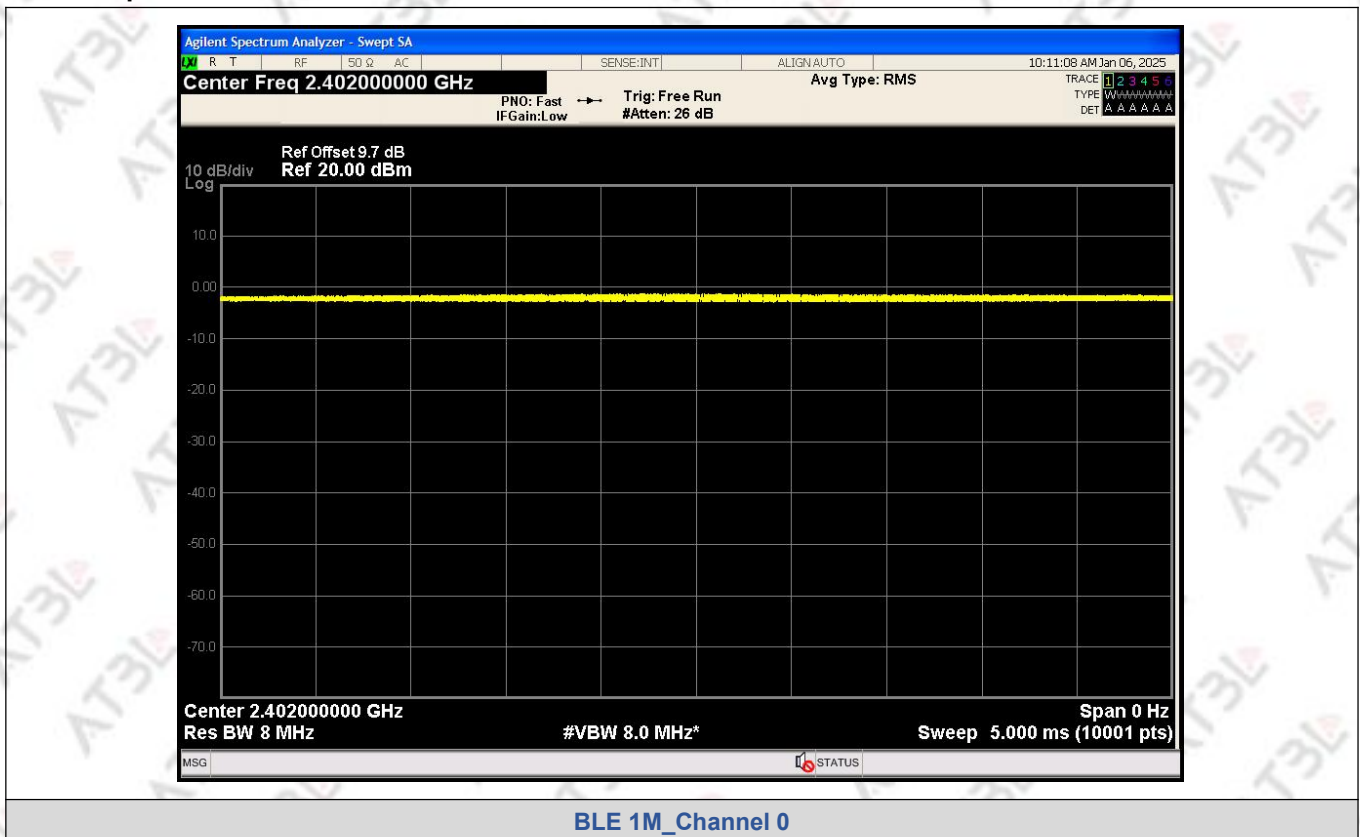

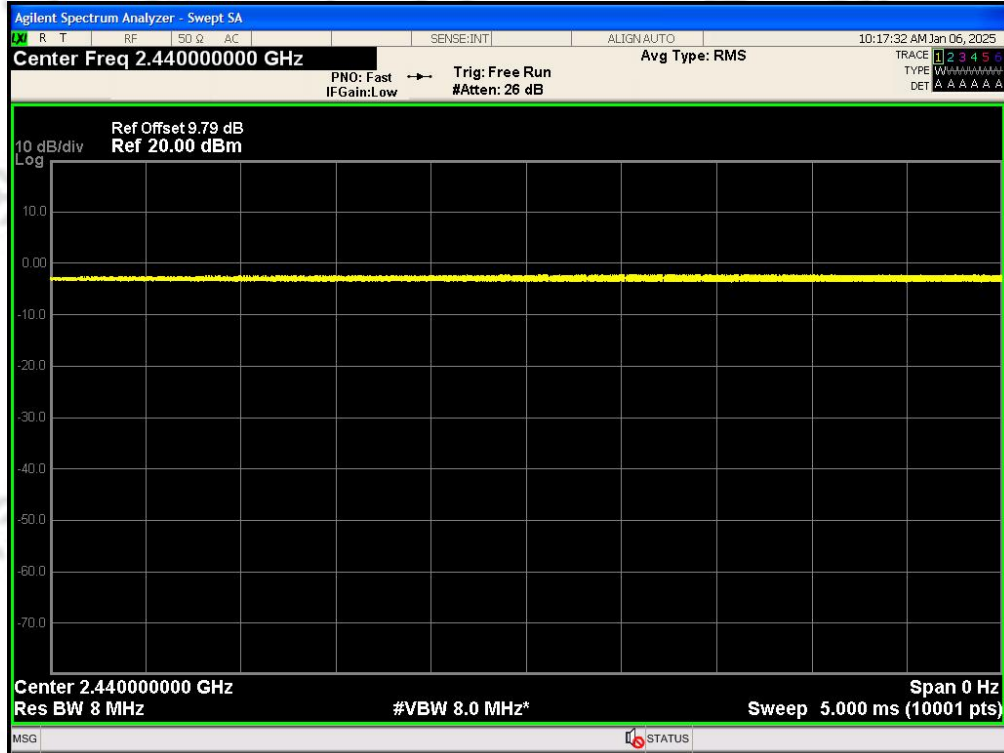

BLE 1M\_Channel 19

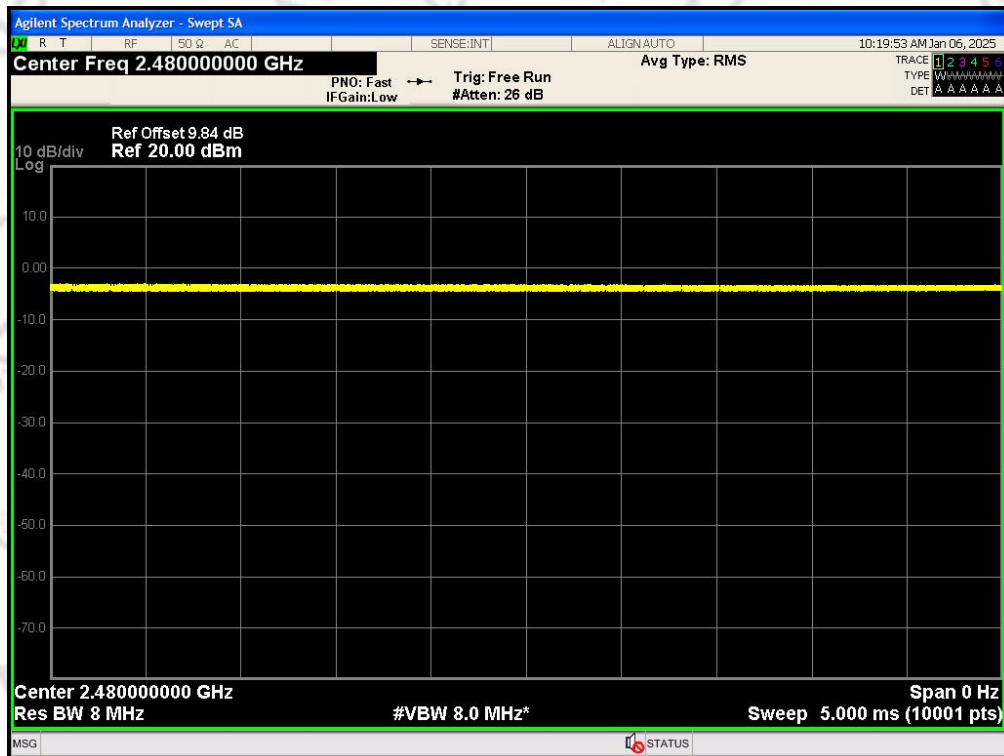

BLE 1M\_Channel 39


### 3.3.4. Test Result of 6dB Bandwidth and 99% Bandwidth

#### 6dB Bandwidth

#### Test Result

| Mode   | Channel | Center Frequency (MHz) | 6 dB Bandwidth (MHz) | Limit (MHz) | Result |
|--------|---------|------------------------|----------------------|-------------|--------|
| BLE 1M | 0       | 2402                   | 0.7340               | ≥0.5        | PASS   |
|        | 19      | 2440                   | 0.7350               |             | PASS   |
|        | 39      | 2480                   | 0.7381               |             | PASS   |

#### Test Graphs

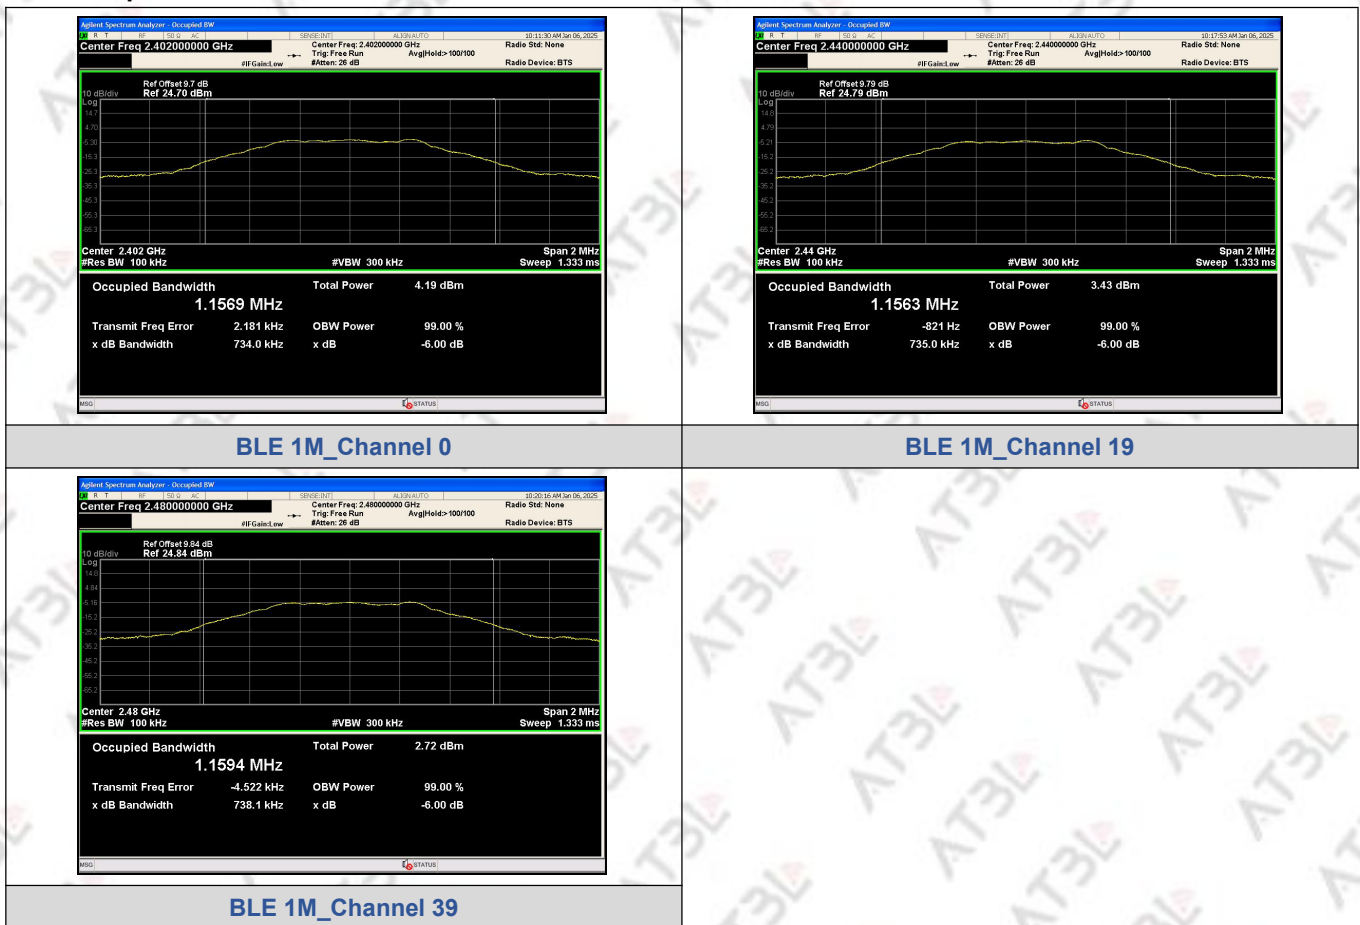


## 99% Bandwidth

### Test Result

| Mode   | Channel | Center Frequency (MHz) | 99% BW (MHz) |
|--------|---------|------------------------|--------------|
| BLE 1M | 0       | 2402                   | 1.1743       |
| BLE 1M | 19      | 2440                   | 1.1710       |
| BLE 1M | 39      | 2480                   | 1.1774       |

### Test Graphs

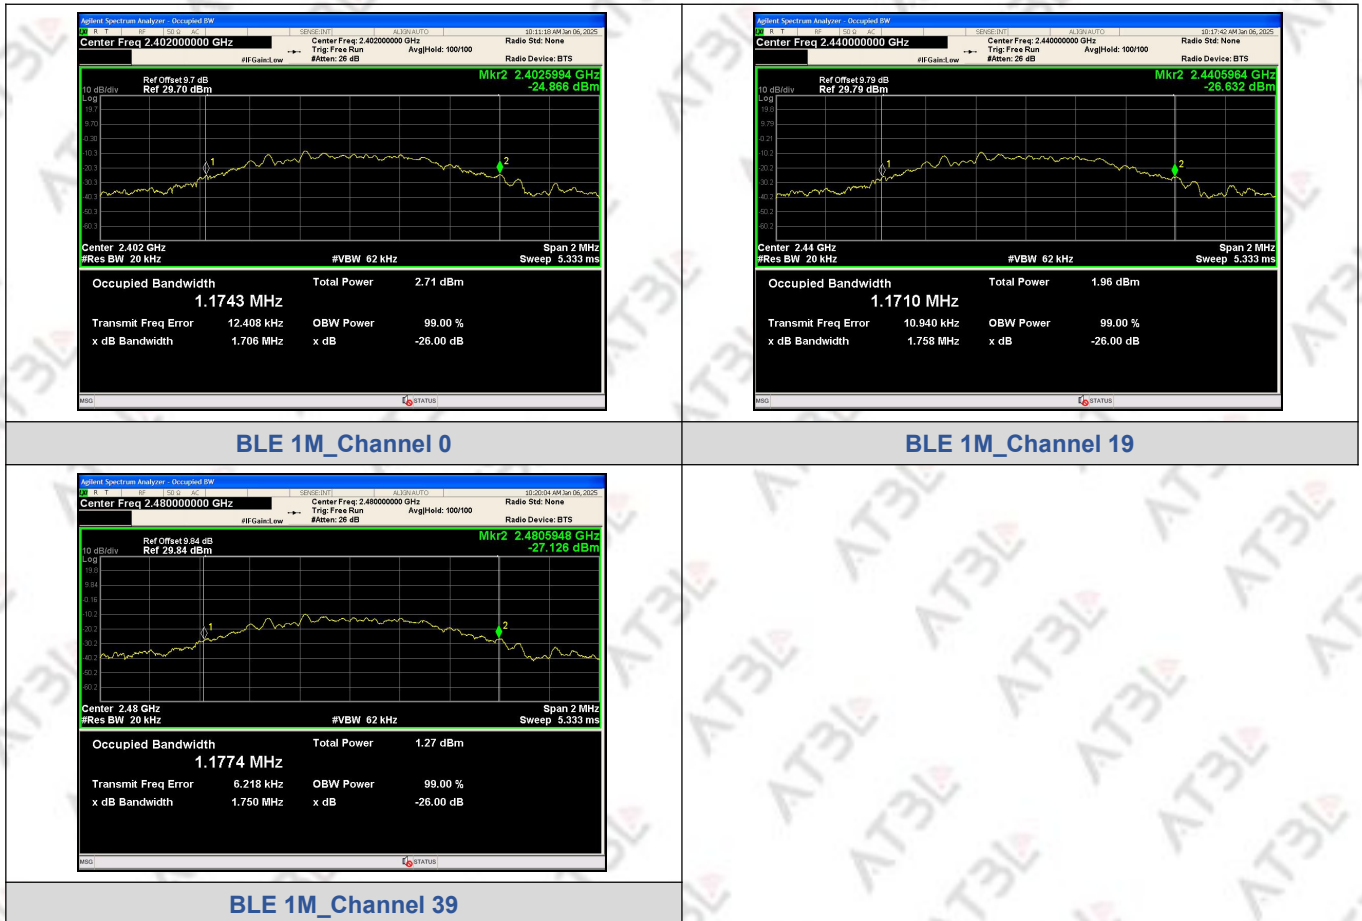


### 3.4.4. Test Result of Power Spectral Density

#### Test Result

| Mode   | Channel | PSD (dBm/3kHz) | Limit (dBm/3kHz) | Result |
|--------|---------|----------------|------------------|--------|
| BLE 1M | 0       | -17.637        | $\leq 8$         | PASS   |
| BLE 1M | 19      | -18.812        | $\leq 8$         | PASS   |
| BLE 1M | 39      | -19.165        | $\leq 8$         | PASS   |

#### Test Graphs

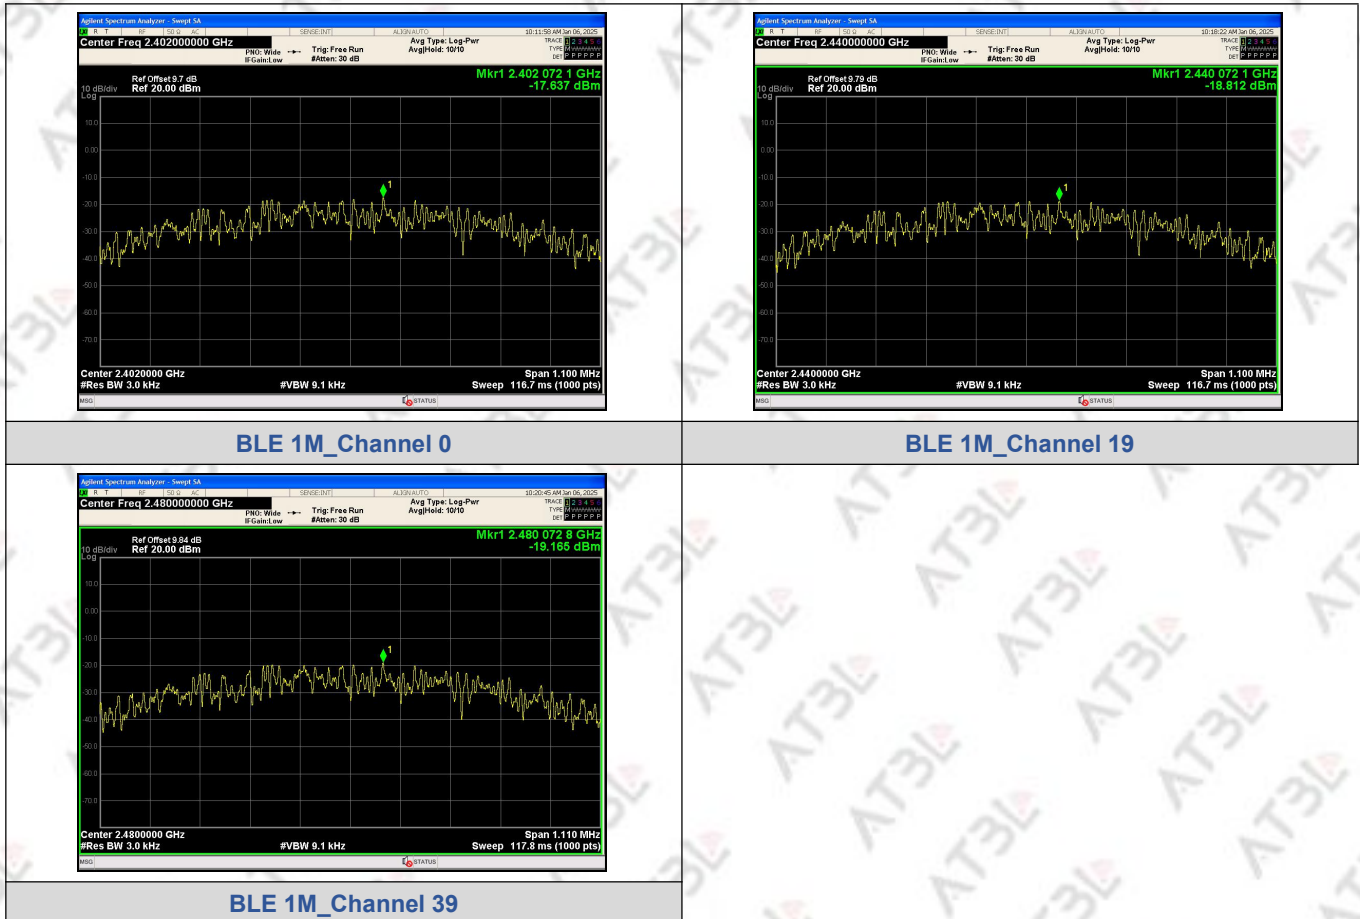



### 3.5.4. Test Result of Conducted Out Of Band Emission

#### Test Result

| Mode   | Channel | OOB Emission Frequency (MHz) | OOB Emission Level (dBm) | Limit (dBm) | Over Limit (dB) | Result |
|--------|---------|------------------------------|--------------------------|-------------|-----------------|--------|
| BLE 1M | 0       | 2400.00                      | -46.471                  | -23.15      | -23.321         | PASS   |
|        |         | 3202.44                      | -39.263                  | -23.15      | -16.113         | PASS   |
|        |         | 4804.26                      | -55.475                  | -23.15      | -32.325         | PASS   |
|        |         | 7205.75                      | -60.043                  | -23.15      | -36.893         | PASS   |
|        |         | 9607.87                      | -66.763                  | -23.15      | -43.613         | PASS   |
|        | 19      | 3253.63                      | -42.827                  | -23.87      | -18.957         | PASS   |
|        |         | 4880.42                      | -54.518                  | -23.87      | -30.648         | PASS   |
|        |         | 7319.99                      | -61.038                  | -23.87      | -37.168         | PASS   |
|        |         | 9761.43                      | -68.536                  | -23.87      | -44.666         | PASS   |
|        | 39      | 2483.50                      | -50.732                  | -24.58      | -26.152         | PASS   |
|        |         | 3306.69                      | -45.228                  | -24.58      | -20.648         | PASS   |
|        |         | 4960.33                      | -52.815                  | -24.58      | -28.235         | PASS   |
|        |         | 7439.85                      | -62.454                  | -24.58      | -37.874         | PASS   |
|        |         | 9919.99                      | -68.680                  | -24.58      | -44.100         | PASS   |

#### Test Graphs

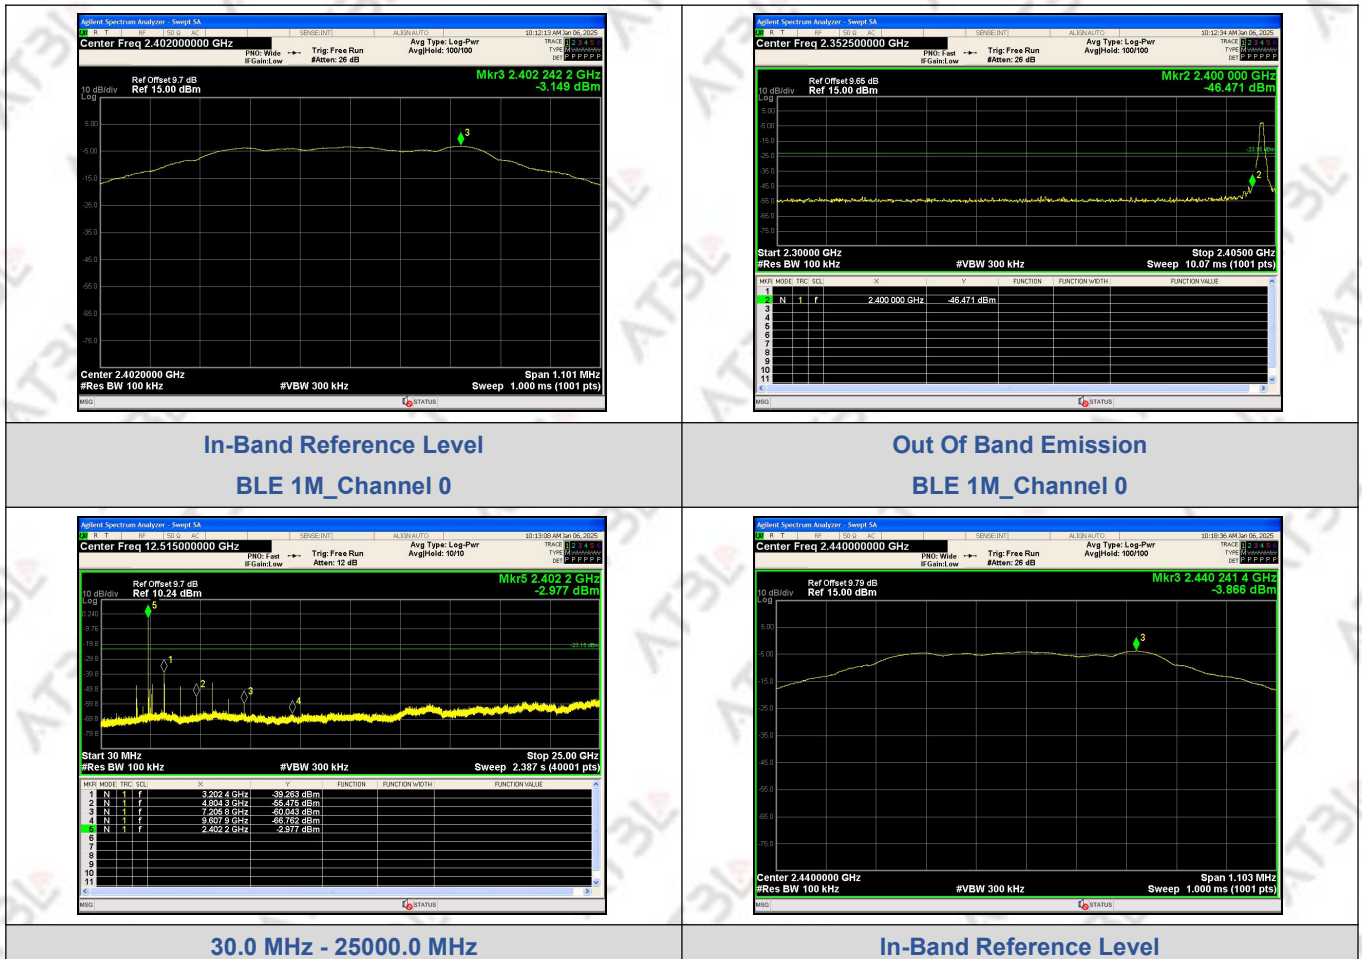

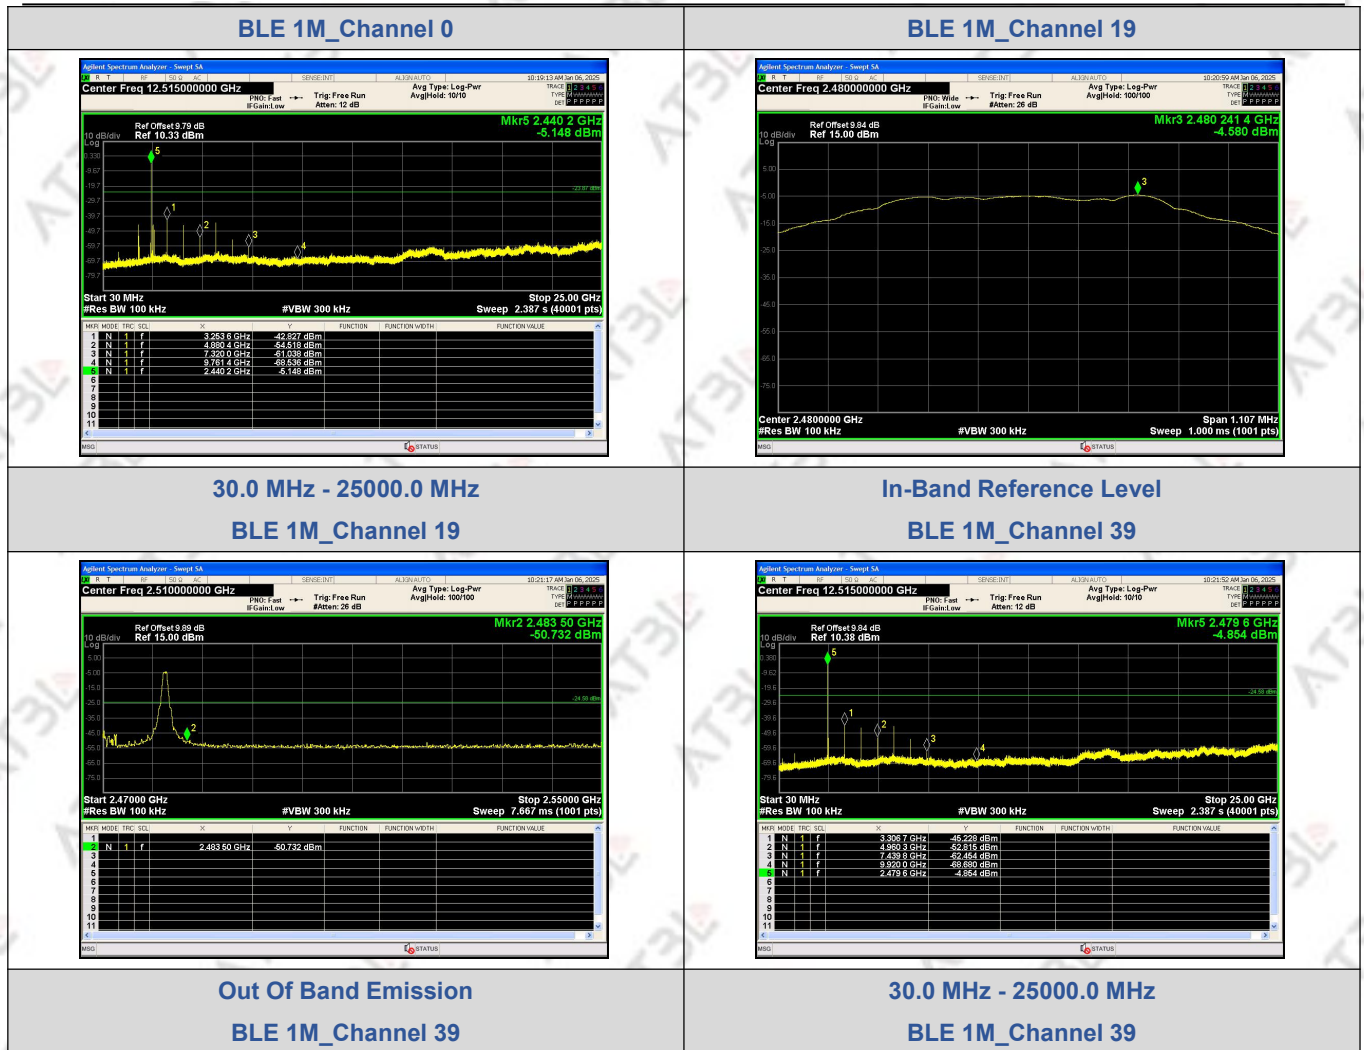

\*\*\*\*\*END OF APPENDIX A\*\*\*\*\*

## Appendix B \_ Radiated Test Data

### 3.7.4. Test Result of Radiated Spurious Emission

#### For 9 kHz ~ 30 MHz

Note:The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBμV) + distance extrapolation factor.

#### For 30 MHz ~ 1 GHz:


Note:All modes have been tested, only worst case(TX\_1M\_2402MHz )mode was recorded in the test report if no any others.

TX\_1M\_2402MHz Horizontal

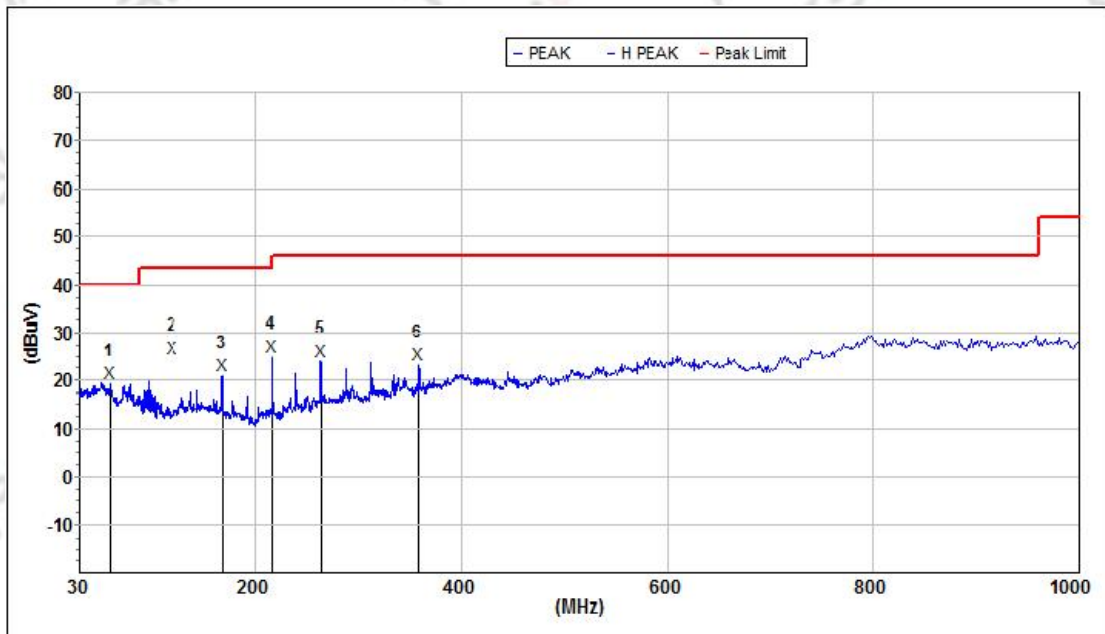

| Mk.   | Freq.<br>(MHz) | Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Deg.<br>(deg.) | Hi.<br>(cm) | Ant.F/G.<br>(dB) | Amp.G.<br>(dB) | Cbl.L.<br>(dB) | Pol. |
|-------|----------------|----------------|----------------|----------------|----------------|-------------|------------------|----------------|----------------|------|
| Peak: |                |                |                |                |                |             |                  |                |                |      |
| 1     | 59.545         | 19.4           | 40.0           | 20.6           | 140            | 100         | 18.1             | 29.6           | 1.1            | H    |
| 2     | 120.066        | 24.7           | 43.5           | 18.8           | 289            | 300         | 16.6             | 32.2           | 1.4            | H    |
| 3     | 168.119        | 21.2           | 43.5           | 22.3           | 258            | 400         | 17.9             | 33.5           | 1.6            | H    |
| 4     | 216.024        | 25.0           | 46.0           | 21.0           | 275            | 200         | 16.3             | 33.0           | 1.8            | H    |
| 5     | 263.819        | 24.1           | 46.0           | 21.9           | 26             | 100         | 18.0             | 32.2           | 2.0            | H    |
| 6     | 359.186        | 23.3           | 46.0           | 22.7           | 140            | 300         | 20.4             | 32.4           | 2.3            | H    |

## TX\_1M\_2402MHz Vertical

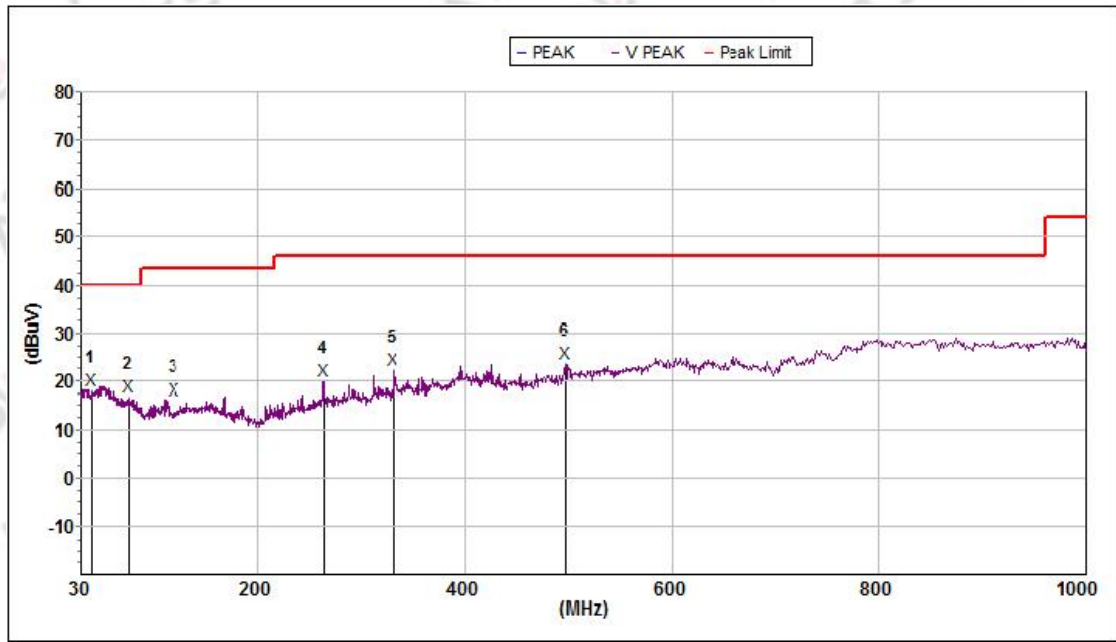


| Mk.   | Freq.<br>(MHz) | Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Deg.<br>(deg.) | Hi.<br>(cm) | Ant.F/G.<br>(dB) | Amp.G.<br>(dB) | Cbl.L.<br>(dB) | Pol. |
|-------|----------------|----------------|----------------|----------------|----------------|-------------|------------------|----------------|----------------|------|
| Peak: |                |                |                |                |                |             |                  |                |                |      |
| 1     | 40.630         | 18.2           | 40.0           | 21.8           | 240            | 100         | 19.0             | 29.6           | 0.9            | V    |
| 2     | 75.977         | 16.7           | 40.0           | 23.3           | 348            | 300         | 15.4             | 29.2           | 1.2            | V    |
| 3     | 120.066        | 16.2           | 43.5           | 27.3           | 360            | 400         | 16.6             | 32.2           | 1.4            | V    |
| 4     | 263.819        | 20.0           | 46.0           | 26.0           | 15             | 200         | 18.0             | 32.2           | 2.0            | V    |
| 5     | 331.355        | 22.3           | 46.0           | 23.7           | 323            | 100         | 19.8             | 32.3           | 2.2            | V    |
| 6     | 496.805        | 23.6           | 46.0           | 22.4           | 108            | 300         | 23.4             | 32.3           | 2.7            | V    |

## For 1 GHz ~ 18GHz

Note:


- 1.The all data rate modes had been test, but only worse test data was recorded in the test report.
- 2.In frequency ranges 18 ~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.
- 3.We used the filter to test and the main frequency was filtered out.

TX\_1M\_2402MHz Horizontal

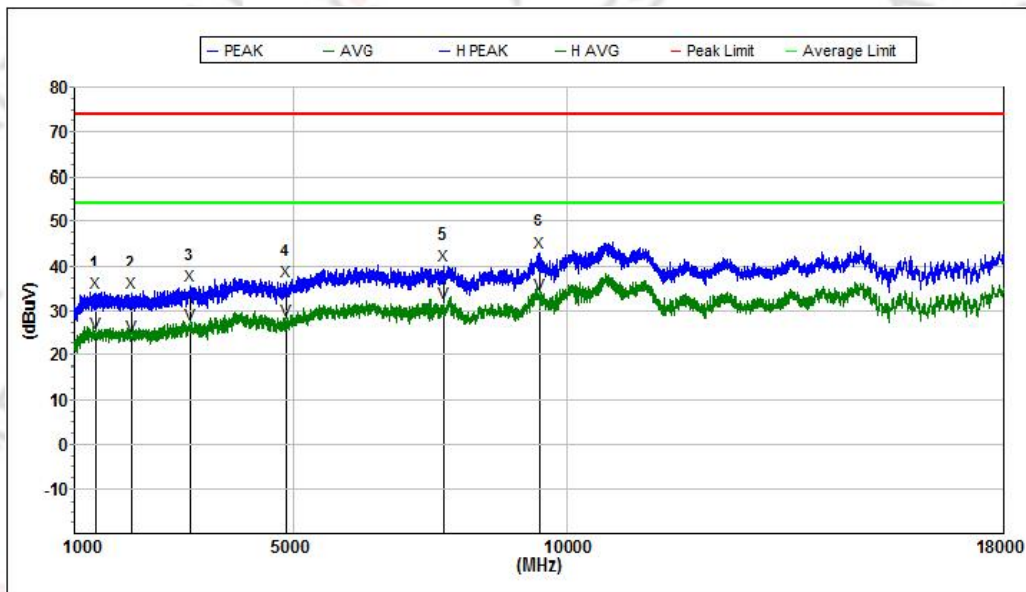


| Mk.   | Freq.<br>(MHz) | Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Deg.<br>(deg.) | Hi.<br>(cm) | Ant.F/G.<br>(dB) | Amp.G.<br>(dB) | Pol. |
|-------|----------------|----------------|----------------|----------------|----------------|-------------|------------------|----------------|------|
| Peak: |                |                |                |                |                |             |                  |                |      |
| 1     | 1380.800       | 33.8           | 74.0           | 40.2           | 36             | 100         | 25.5             | 58.5           | H    |
| 2     | 2044.650       | 34.1           | 74.0           | 39.9           | 183            | 300         | 26.6             | 59.2           | H    |
| 3     | 3128.400       | 35.7           | 74.0           | 38.3           | 257            | 400         | 29.4             | 58.6           | H    |
| 4     | 4875.150       | 36.6           | 74.0           | 37.4           | 183            | 200         | 32.7             | 59.8           | H    |
| 5     | 7746.450       | 40.2           | 74.0           | 33.8           | 330            | 100         | 36.6             | 59.2           | H    |
| 6     | 9493.200       | 43.1           | 74.0           | 30.9           | 0              | 300         | 38.1             | 60.8           | H    |
| Avg   |                |                |                |                |                |             |                  |                |      |
| 1     | 1380.800       | 25.1           | 54.0           | 28.9           | 36             | 100         | 25.5             | 58.5           | H    |
| 2     | 2044.650       | 24.4           | 54.0           | 29.6           | 183            | 300         | 26.6             | 59.2           | H    |
| 3     | 3128.400       | 27.2           | 54.0           | 26.8           | 257            | 400         | 29.4             | 58.6           | H    |
| 4     | 4875.150       | 28.0           | 54.0           | 26.0           | 183            | 200         | 32.7             | 59.8           | H    |
| 5     | 7746.450       | 31.5           | 54.0           | 22.5           | 330            | 100         | 36.6             | 59.2           | H    |
| 6     | 9493.200       | 33.5           | 54.0           | 20.5           | 0              | 300         | 38.1             | 60.8           | H    |

## TX\_1M\_2402MHz Vertical

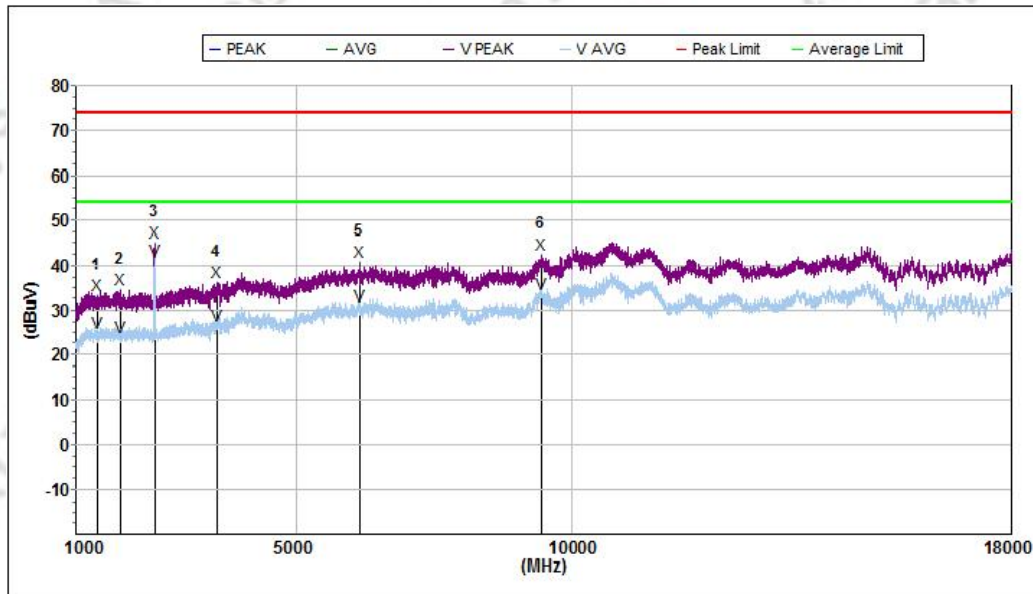


| Mk.   | Freq.<br>(MHz) | Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Deg.<br>(deg.) | Hi.<br>(cm) | Ant.F/G.<br>(dB) | Amp.G.<br>(dB) | Pol. |
|-------|----------------|----------------|----------------|----------------|----------------|-------------|------------------|----------------|------|
| Peak: |                |                |                |                |                |             |                  |                |      |
| 1     | 1381.650       | 33.3           | 74.0           | 40.7           | 31             | 100         | 25.5             | 58.5           | V    |
| 2     | 1811.750       | 34.6           | 74.0           | 39.4           | 0              | 300         | 25.2             | 58.1           | V    |
| 3     | 2411.000       | 45.0           | 74.0           | 29.0           | 178            | 400         | 27.4             | 59.6           | V    |
| 4     | 3557.650       | 36.1           | 74.0           | 37.9           | 252            | 200         | 29.7             | 58.2           | V    |
| 5     | 6129.750       | 40.7           | 74.0           | 33.3           | 105            | 100         | 34.4             | 59.3           | V    |
| 6     | 9444.750       | 42.4           | 74.0           | 31.6           | 31             | 300         | 38.1             | 60.8           | V    |
| Avg   |                |                |                |                |                |             |                  |                |      |
| 1     | 1381.650       | 25.2           | 54.0           | 28.8           | 31             | 100         | 25.5             | 58.5           | V    |
| 2     | 1811.750       | 24.1           | 54.0           | 29.9           | 0              | 300         | 25.2             | 58.1           | V    |
| 3     | 2411.000       | 41.3           | 54.0           | 12.7           | 178            | 400         | 27.4             | 59.6           | V    |
| 4     | 3557.650       | 26.6           | 54.0           | 27.4           | 252            | 200         | 29.7             | 58.2           | V    |
| 5     | 6129.750       | 30.9           | 54.0           | 23.1           | 105            | 100         | 34.4             | 59.3           | V    |
| 6     | 9444.750       | 33.7           | 54.0           | 20.3           | 31             | 300         | 38.1             | 60.8           | V    |

## TX\_1M\_2480MHz Horizontal

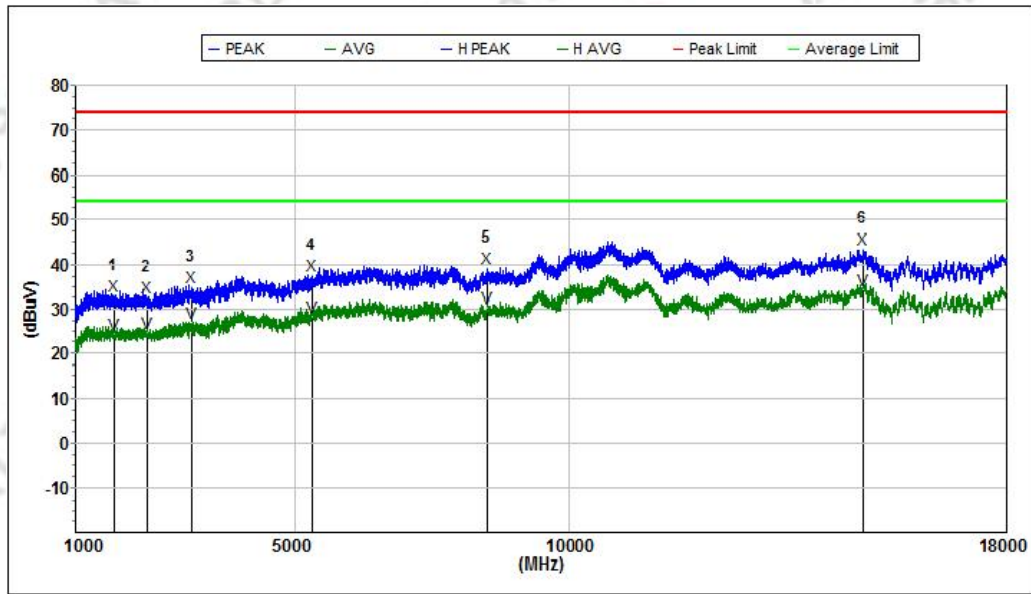

| Mk.   | Freq.<br>(MHz) | Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Deg.<br>(deg.) | Hi.<br>(cm) | Ant.F/G.<br>(dB) | Amp.G.<br>(dB) | Pol. |
|-------|----------------|----------------|----------------|----------------|----------------|-------------|------------------|----------------|------|
| Peak: |                |                |                |                |                |             |                  |                |      |
| 1     | 1688.500       | 32.9           | 74.0           | 41.1           | 256            | 100         | 25.2             | 58.2           | H    |
| 2     | 2297.100       | 32.7           | 74.0           | 41.3           | 333            | 300         | 27.2             | 59.5           | H    |
| 3     | 3123.300       | 34.8           | 74.0           | 39.2           | 360            | 400         | 29.4             | 58.6           | H    |
| 4     | 5318.000       | 37.7           | 74.0           | 36.3           | 104            | 200         | 33.0             | 58.8           | H    |
| 5     | 8514.000       | 39.1           | 74.0           | 34.9           | 360            | 100         | 37.4             | 60.7           | H    |
| 6     | 15354.800      | 43.4           | 74.0           | 30.6           | 29             | 300         | 38.9             | 58.9           | H    |
| Avg   |                |                |                |                |                |             |                  |                | H    |
| 1     | 1688.500       | 24.5           | 54.0           | 29.5           | 256            | 100         | 25.2             | 58.2           | H    |
| 2     | 2297.100       | 24.8           | 54.0           | 29.2           | 333            | 300         | 27.2             | 59.5           | H    |
| 3     | 3123.300       | 27.1           | 54.0           | 26.9           | 360            | 400         | 29.4             | 58.6           | H    |
| 4     | 5318.000       | 28.4           | 54.0           | 25.6           | 104            | 200         | 33.0             | 58.8           | H    |
| 5     | 8514.000       | 30.4           | 54.0           | 23.6           | 360            | 100         | 37.4             | 60.7           | H    |
| 6     | 15354.800      | 34.2           | 54.0           | 19.8           | 29             | 300         | 38.9             | 58.9           | H    |

## TX\_1M\_2480MHz Vertical

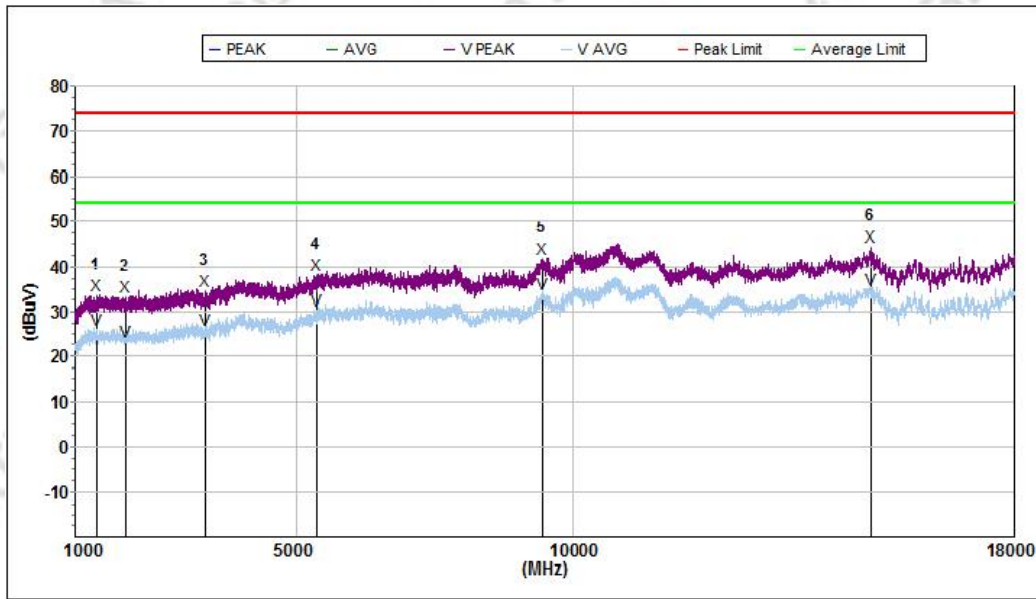


| Mk.   | Freq.<br>(MHz) | Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Deg.<br>(deg.) | Hi.<br>(cm) | Ant.F/G.<br>(dB) | Amp.G.<br>(dB) | Pol. |
|-------|----------------|----------------|----------------|----------------|----------------|-------------|------------------|----------------|------|
| Peak: |                |                |                |                |                |             |                  |                |      |
| 1     | 1375.700       | 33.5           | 74.0           | 40.5           | 252            | 100         | 25.5             | 58.5           | V    |
| 2     | 1899.300       | 33.2           | 74.0           | 40.8           | 360            | 300         | 25.8             | 58.6           | V    |
| 3     | 3341.750       | 34.5           | 74.0           | 39.5           | 252            | 400         | 29.5             | 58.4           | V    |
| 4     | 5378.350       | 38.2           | 74.0           | 35.8           | --             | --          | 32.9             | 58.6           | V    |
| 5     | 9444.750       | 42.0           | 74.0           | 32.0           | --             | --          | 38.1             | 60.8           | V    |
| 6     | 15380.300      | 44.6           | 74.0           | 29.4           | --             | --          | 38.8             | 58.9           | V    |
| Avg   |                |                |                |                |                |             |                  |                |      |
| 1     | 1375.700       | 26.0           | 54.0           | 28.0           | 252            | 100         | 25.5             | 58.5           | V    |
| 2     | 1899.300       | 23.4           | 54.0           | 30.6           | 360            | 300         | 25.8             | 58.6           | V    |
| 3     | 3341.750       | 26.2           | 54.0           | 27.8           | 252            | 400         | 29.5             | 58.4           | V    |
| 4     | 5378.350       | 30.3           | 54.0           | 23.7           | --             | --          | 32.9             | 58.6           | V    |
| 5     | 9444.750       | 34.0           | 54.0           | 20.0           | --             | --          | 38.1             | 60.8           | V    |
| 6     | 15380.300      | 34.8           | 54.0           | 19.2           | --             | --          | 38.8             | 58.9           | V    |

## 1. Test Result of Restricted Band


### GFSK-Low

TX\_1M\_2402MHz Horizontal

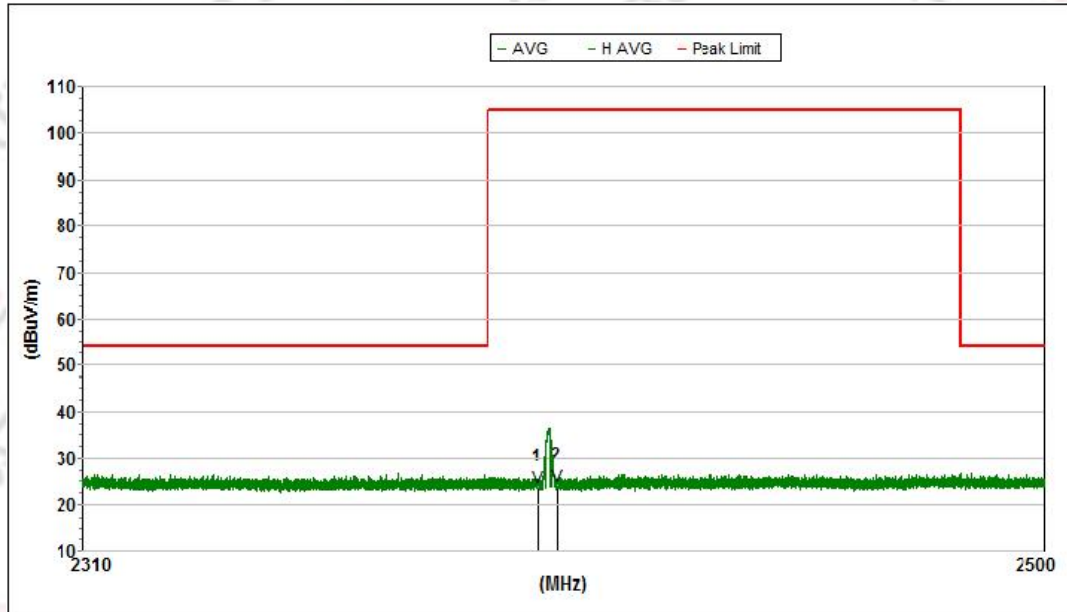

| Mk. | Frequency<br>(MHz) | Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Ant.F/G.<br>(dB/m) | Amp.G.<br>(dB) | Cbl.L.<br>(dB) | Pol. |
|-----|--------------------|-------------------|-------------------|----------------|--------------------|----------------|----------------|------|
| Avg |                    |                   |                   |                |                    |                |                |      |
| 1   | 2400.060           | 23.9              | --                | --             | 27.4               | 59.6           | 0.0            | H    |
| 2   | 2403.594           | 24.1              | --                | --             | 27.4               | 59.6           | 0.0            | H    |


TX\_1M\_2402MHz Vertical

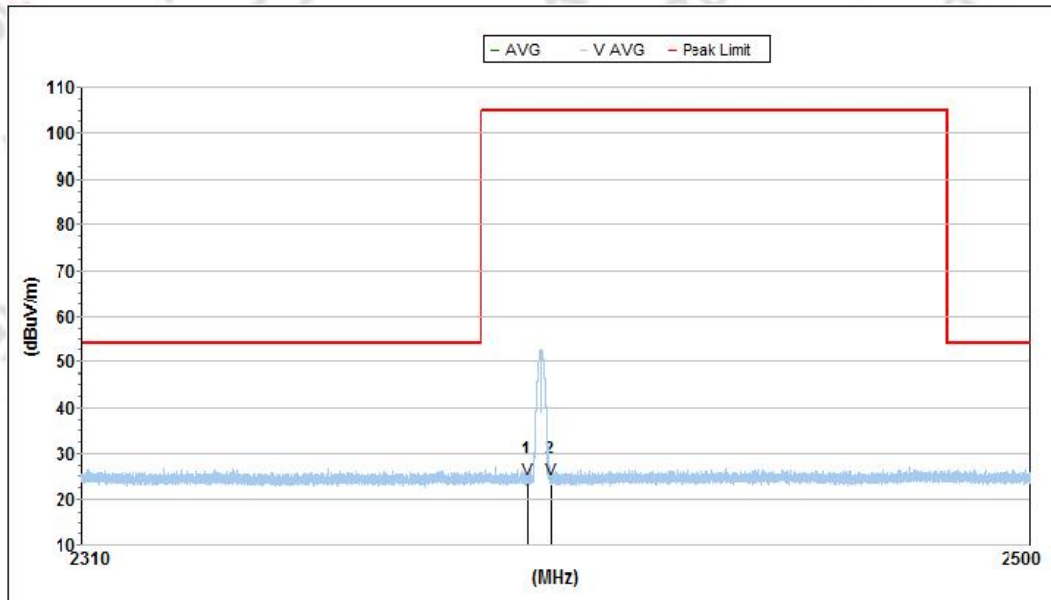

| Mk. | Frequency<br>(MHz) | Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Ant.F/G.<br>(dB/m) | Amp.G.<br>(dB) | Cbl.L.<br>(dB) | Pol. |
|-----|--------------------|-------------------|-------------------|----------------|--------------------|----------------|----------------|------|
| Avg |                    |                   |                   |                |                    |                |                |      |
| 1   | 2399.253           | 24.6              | --                | --             | 27.4               | 59.6           | 0.0            | V    |
| 2   | 2403.860           | 24.5              | --                | --             | 27.4               | 59.6           | 0.0            | V    |


### GFSK-Low

TX\_1M\_2402MHz Horizontal

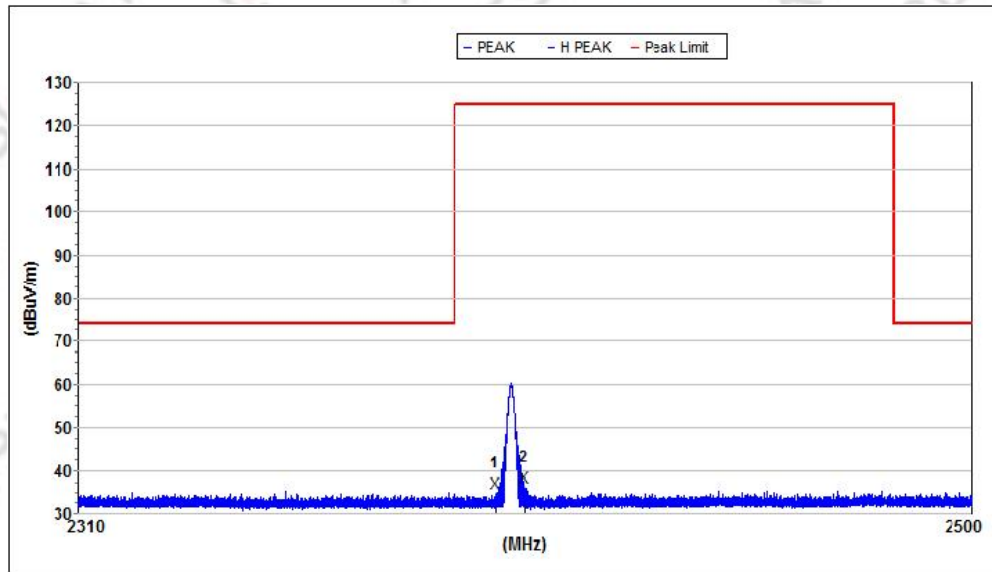

| Mk.  | Frequency<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Ant.F/G.<br>(dB/m) | Amp.G.<br>(dB) | Cbl.L.<br>(dB) | Pol. |
|------|--------------------|-------------------|-------------------|----------------|--------------------|----------------|----------------|------|
| Peak |                    |                   |                   |                |                    |                |                |      |
| 1    | 2398.730           | 34.9              | 125.2             | 90.3           | 27.4               | 59.6           | 0.0            | H    |
| 2    | 2404.748           | 36.1              | 125.2             | 89.1           | 27.4               | 59.6           | 0.0            | H    |


TX\_1M\_2402MHz Vertical

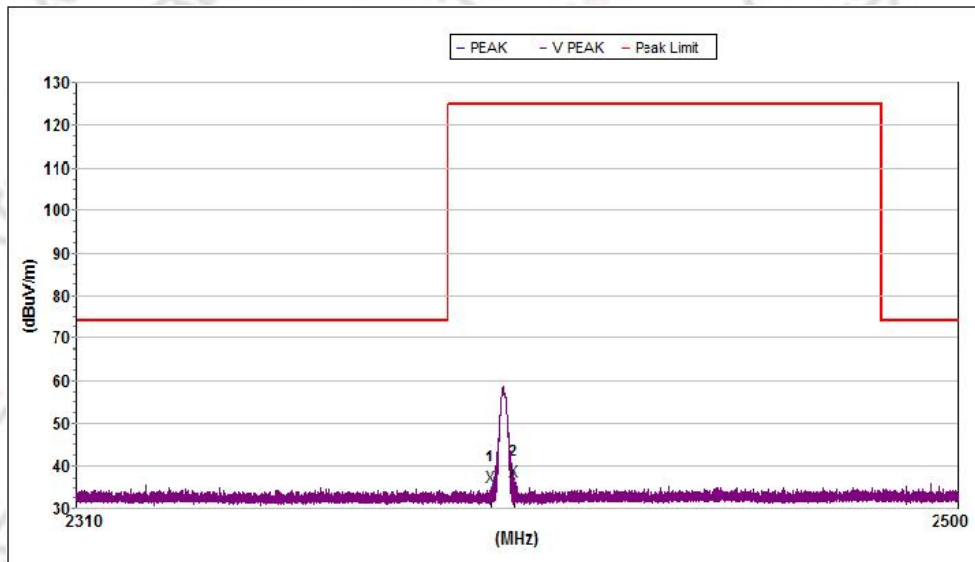

| Mk.  | Frequency<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Ant.F/G.<br>(dB/m) | Amp.G.<br>(dB) | Cbl.L.<br>(dB) | Pol. |
|------|--------------------|-------------------|-------------------|----------------|--------------------|----------------|----------------|------|
| Peak |                    |                   |                   |                |                    |                |                |      |
| 1    | 2399.213           | 35.3              | 125.2             | 89.9           | 27.4               | 59.6           | 0.0            | V    |
| 2    | 2404.348           | 36.6              | 125.2             | 88.6           | 27.4               | 59.6           | 0.0            | V    |


### GFSK-High

TX\_1M\_2480MHz Horizontal

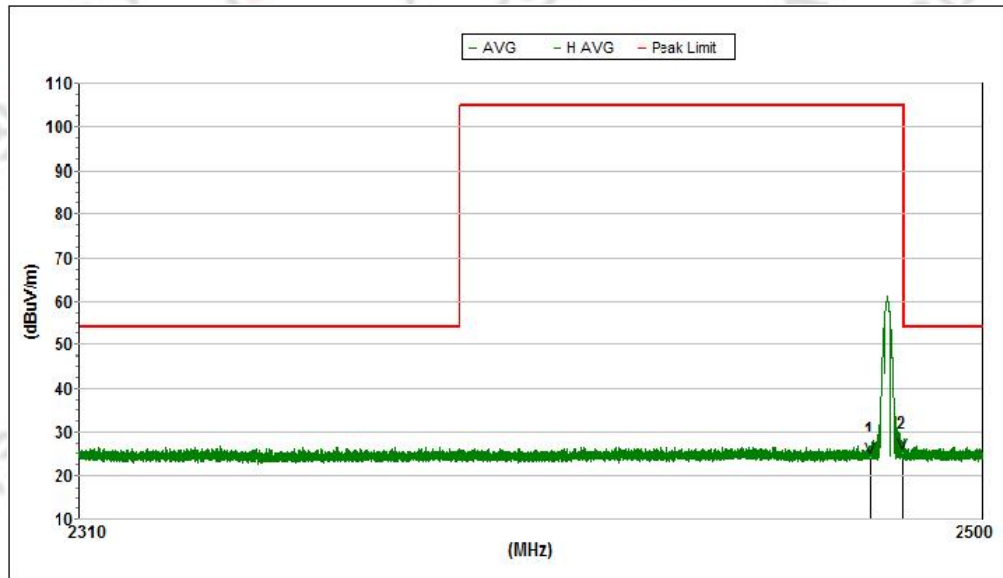


| Mk. | Frequency<br>(MHz) | Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Ant.F/G.<br>(dB/m) | Amp.G.<br>(dB) | Cbl.L.<br>(dB) | Pol. |
|-----|--------------------|-------------------|-------------------|----------------|--------------------|----------------|----------------|------|
| Avg |                    |                   |                   |                |                    |                |                |      |
| 1   | 2476.620           | 24.3              | --                | --             | 27.5               | 59.7           | 0.0            | H    |
| 2   | 2483.223           | 25.1              | --                | --             | 27.6               | 59.7           | 0.0            | H    |

TX\_1M\_2480MHzVertical

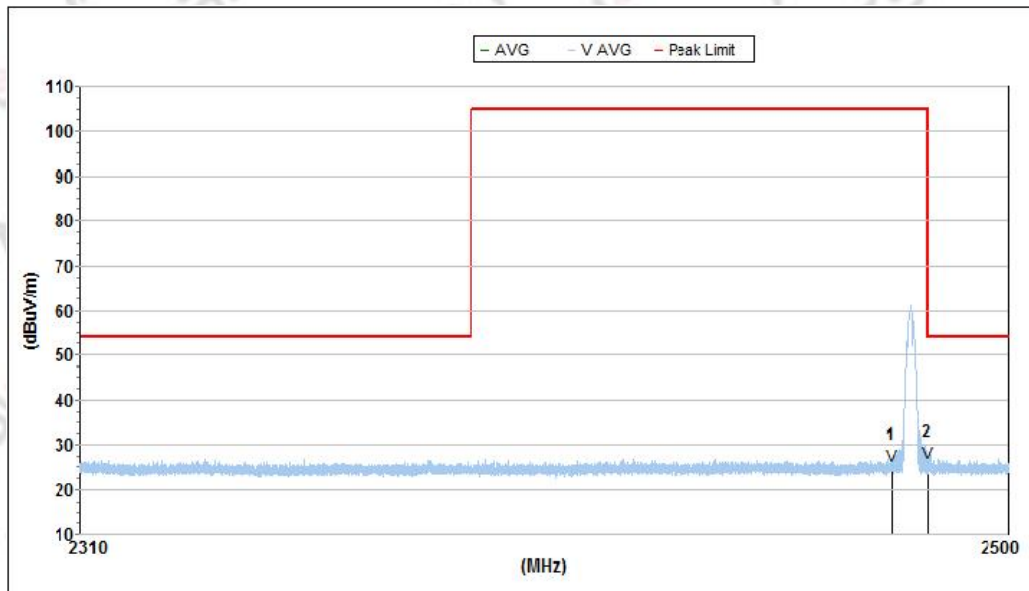


| Mk. | Frequency<br>(MHz) | Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Ant.F/G.<br>(dB/m) | Amp.G.<br>(dB) | Cbl.L.<br>(dB) | Pol. |
|-----|--------------------|-------------------|-------------------|----------------|--------------------|----------------|----------------|------|
| Avg |                    |                   |                   |                |                    |                |                |      |
| 1   | 2476.202           | 25.4              | --                | --             | 27.5               | 59.7           | 0.0            | V    |
| 2   | 2483.499           | 26.1              | --                | --             | 27.6               | 59.7           | 0.0            | V    |

**GFSK- High**  
TX\_1M\_2480MHz Horizontal

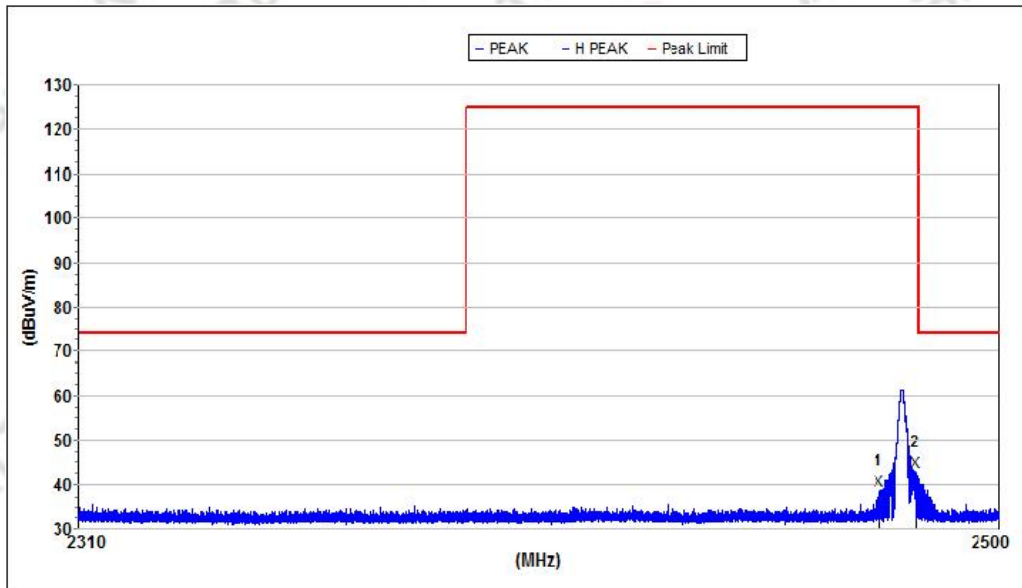

| Mk.  | Frequency<br>(MHz) | Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Ant.F/G.<br>(dB/m) | Amp.G.<br>(dB) | Cbl.L.<br>(dB) | Pol. |
|------|--------------------|-------------------|-------------------|----------------|--------------------|----------------|----------------|------|
| Peak |                    |                   |                   |                |                    |                |                |      |
| 1    | 2475.421           | 38.6              | 125.2             | 86.6           | 27.6               | 59.7           | 0.0            | H    |
| 2    | 2482.749           | 42.7              | 125.2             | 82.5           | 27.6               | 59.7           | 0.0            | H    |

TX\_1M\_2480MHz Vertical

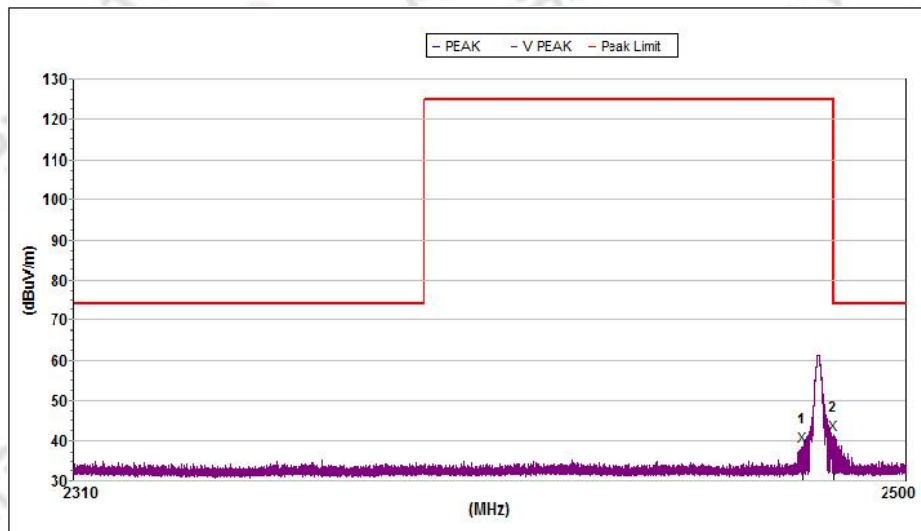

| Mk.  | Frequency<br>(MHz) | Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Ant.F/G.<br>(dB/m) | Amp.G.<br>(dB) | Cbl.L.<br>(dB) | Pol. |
|------|--------------------|-------------------|-------------------|----------------|--------------------|----------------|----------------|------|
| Peak |                    |                   |                   |                |                    |                |                |      |
| 1    | 2476.438           | 38.7              | 125.2             | 86.5           | 27.6               | 59.7           | 0.0            | V    |
| 2    | 2483.574           | 41.4              | 74.0              | 32.6           | 27.6               | 59.7           | 0.0            | V    |

\*\*\*\*\*END OF APPENDIX B\*\*\*\*\*


## Appendix C \_ AC Power-Line Conducted Emission Test Data

### 3.8.4. Test Result of AC Power-Line Conducted Emission

|               |              |                    |       |
|---------------|--------------|--------------------|-------|
| Temperature:  | 18.5℃        | Relative Humidity: | 50%RH |
| Test Voltage: | AC 120V/60Hz | Phase:             | L     |
| Test Mode:    | Mode 7       |                    |       |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor)–Limit.
3. Factor=LISN factor+Cable loss+Limiter (10dB)

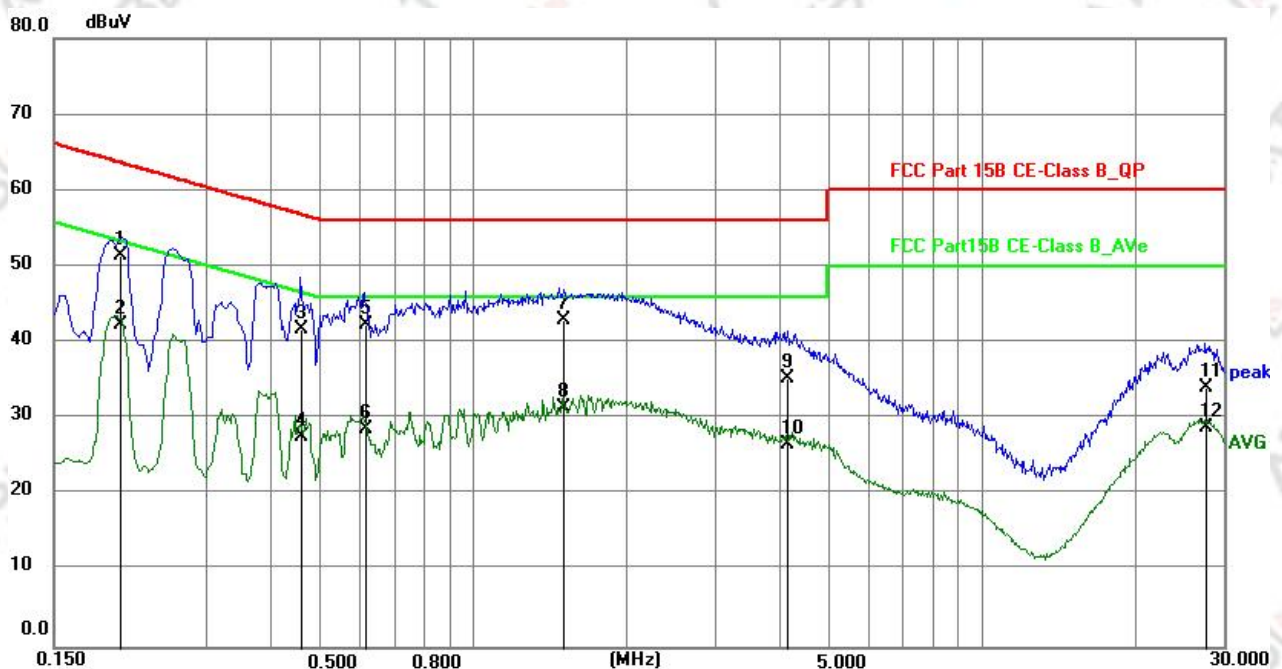


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-----------------|------------------|-----------------|----------------|--------|
| 1   | 0.2020             | 41.36             | 10.08           | 51.44            | 63.53           | -12.09         | QP     |
| 2   | 0.2020             | 32.40             | 10.08           | 42.48            | 53.53           | -11.05         | AVG    |
| 3   | 0.4590             | 31.84             | 10.02           | 41.86            | 56.71           | -14.85         | QP     |
| 4   | 0.4590             | 17.73             | 10.02           | 27.75            | 46.71           | -18.96         | AVG    |
| 5   | 0.6140             | 32.44             | 9.96            | 42.40            | 56.00           | -13.60         | QP     |
| 6   | 0.6140             | 18.85             | 9.96            | 28.81            | 46.00           | -17.19         | AVG    |
| 7   | 1.5040             | 33.08             | 9.96            | 43.04            | 56.00           | -12.96         | QP     |
| 8   | 1.5040             | 21.66             | 9.96            | 31.62            | 46.00           | -14.38         | AVG    |
| 9   | 4.1490             | 25.26             | 10.05           | 35.31            | 56.00           | -20.69         | QP     |
| 10  | 4.1490             | 16.66             | 10.05           | 26.71            | 46.00           | -19.29         | AVG    |
| 11  | 27.6630            | 23.05             | 11.16           | 34.21            | 60.00           | -25.79         | QP     |
| 12  | 27.6630            | 17.83             | 11.16           | 28.99            | 50.00           | -21.01         | AVG    |

|               |              |                    |       |
|---------------|--------------|--------------------|-------|
| Temperature:  | 18.5℃        | Relative Humidity: | 50%RH |
| Test Voltage: | AC 120V/60Hz | Phase:             | N     |
| Test Mode:    | Mode 7       |                    |       |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor)–Limit.
3. Factor=LISN factor+Cable loss+Limiter (10dB)

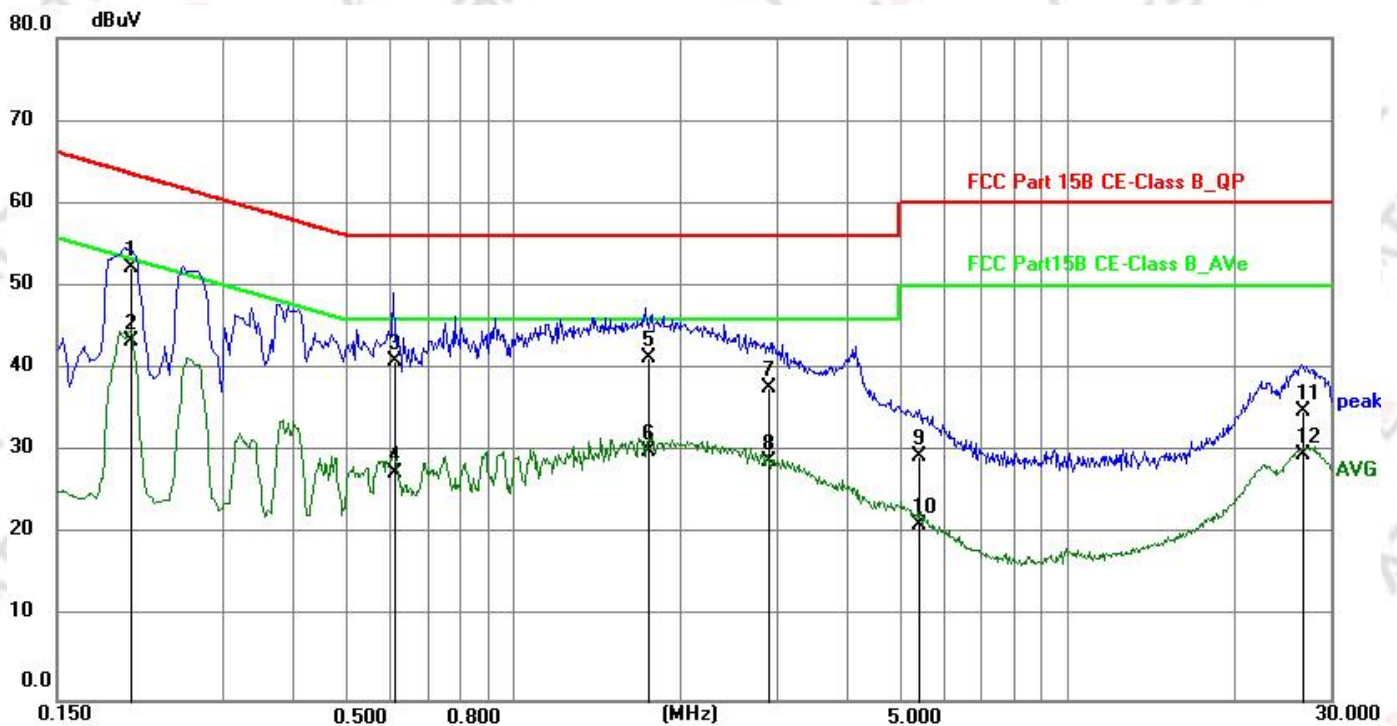

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-----------------|------------------|-----------------|----------------|--------|
| 1   | 0.2030             | 42.00             | 10.36           | 52.36            | 63.49           | -11.13         | QP     |
| 2   | 0.2030             | 33.00             | 10.36           | 43.36            | 53.49           | -10.13         | AVG    |
| 3   | 0.6120             | 30.85             | 10.16           | 41.01            | 56.00           | -14.99         | QP     |
| 4   | 0.6120             | 17.42             | 10.16           | 27.58            | 46.00           | -18.42         | AVG    |
| 5   | 1.7580             | 31.23             | 10.20           | 41.43            | 56.00           | -14.57         | QP     |
| 6   | 1.7580             | 19.88             | 10.20           | 30.08            | 46.00           | -15.92         | AVG    |
| 7   | 2.8980             | 27.53             | 10.28           | 37.81            | 56.00           | -18.19         | QP     |
| 8   | 2.8980             | 18.54             | 10.28           | 28.82            | 46.00           | -17.18         | AVG    |
| 9   | 5.4110             | 19.38             | 10.16           | 29.54            | 60.00           | -30.46         | QP     |
| 10  | 5.4110             | 11.03             | 10.16           | 21.19            | 50.00           | -28.81         | AVG    |
| 11  | 26.6470            | 23.96             | 11.08           | 35.04            | 60.00           | -24.96         | QP     |
| 12  | 26.6470            | 18.58             | 11.08           | 29.66            | 50.00           | -20.34         | AVG    |

\*\*\*\*\*END OF APPENDIX C\*\*\*\*\*