



FCC RF Test Report

APPLICANT : NOTHING TECHNOLOGY LIMITED
EQUIPMENT : Smart Phone
BRAND NAME : NOTHING
MODEL NAME : A059P
FCC ID : 2AZEQ-24111
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Nov. 27, 2024 ~ Nov. 30, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.



Approved by: Jason Jia

Sportun International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
3 TEST RESULT	11
3.1 Radiated Band Edges and Spurious Emission Measurement	11
3.2 AC Conducted Emission Measurement.....	15
3.3 Antenna Requirements	17
4 LIST OF MEASURING EQUIPMENT.....	18
5 MEASUREMENT UNCERTAINTY	19
APPENDIX A. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.24 dB at 35.82 MHz
3.2	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.85 dB at 0.25 MHz
3.3	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-
Remark: This is a variant report for A059P, the change note could be referred to the Product Equality Declaration which is exhibit separately. According to the change, only the related test cases were verified from original report FR490417B.					

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

NOTHING TECHNOLOGY LIMITED

Bedford House, 21A John Street, London, United Kingdom WC1N 2BF

1.2 Manufacturer

NOTHING TECHNOLOGY LIMITED

Bedford House, 21A John Street, London, United Kingdom WC1N 2BF

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	NOTHING
Model Name	A059P
FCC ID	2AZEQ-24111
IMEI Code	Conduction: 353458700043030/353458700043022 Radiation: 353458700016747/353458700016754
HW Version	24111 Pro
SW Version	Nothing OS 3.1
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Antenna Type / Gain	<Ant. 6> Metal frame Antenna with gain -0.58 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sportun International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sportun International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sportun Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ ; 03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Radiated TCs	Mode 1: Bluetooth Tx CH39_2480 MHz_BLE 2Mbps
AC Conducted Emission	Mode 1: GSM 850 Idle + Bluetooth Link + Adapter + USB Cable + Battery

Remark: For Radiated Test Cases, The tests were performance with Adapter and USB Cable.




2.3 Connection Diagram of Test System

AC Conducted Emission:

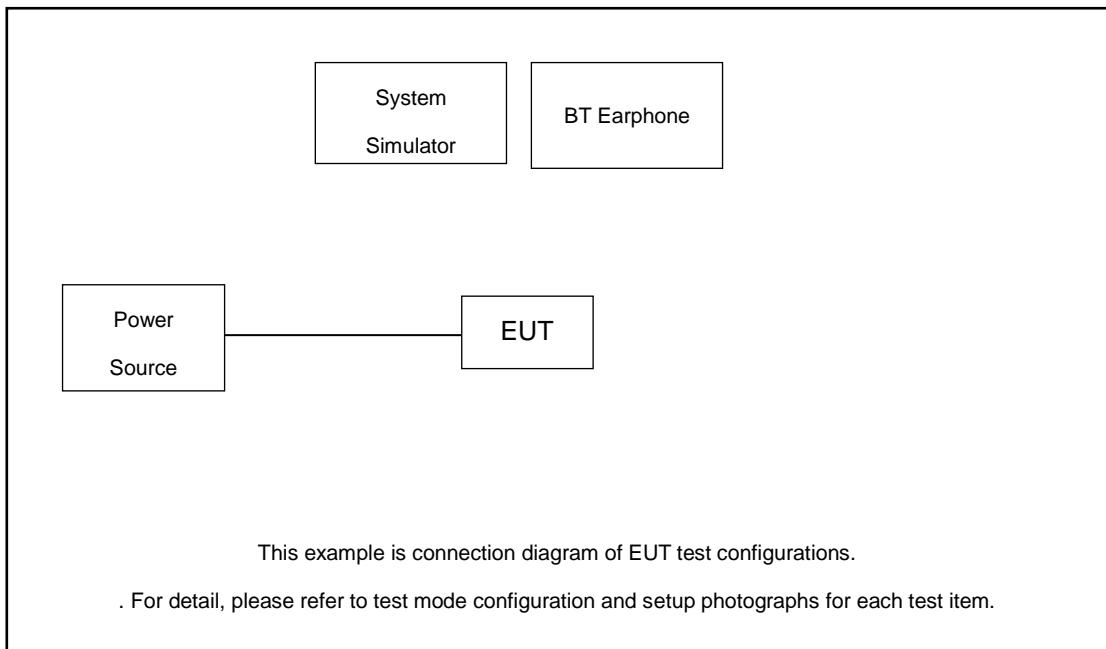

Radiated Emission:

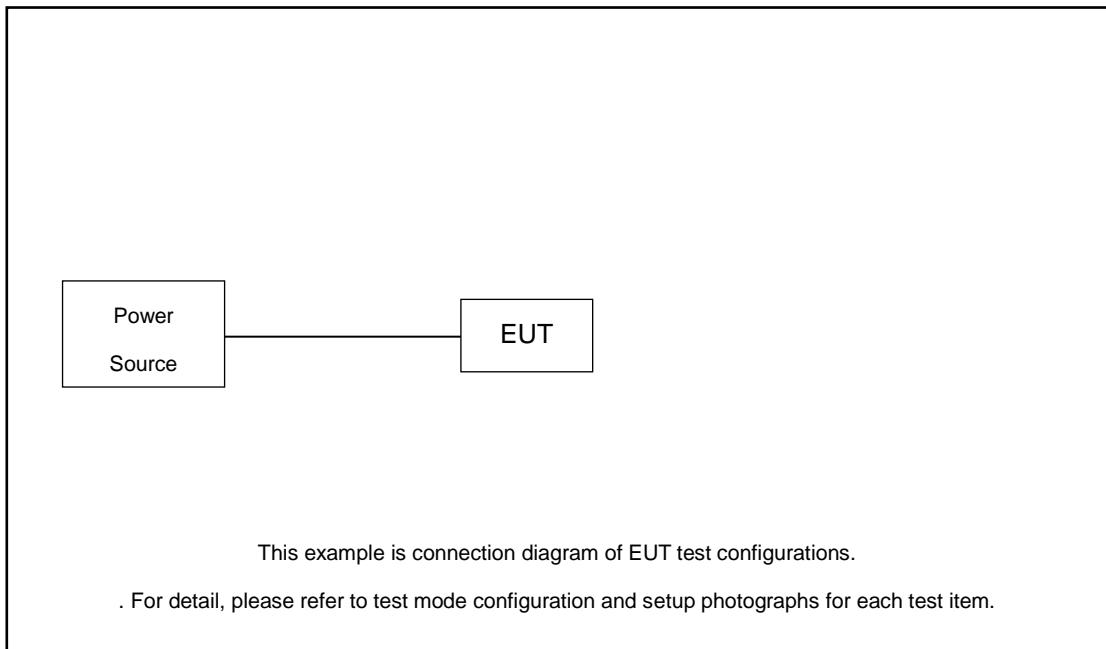



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAH5-107W	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.



3 Test Result

3.1 Radiated Band Edges and Spurious Emission Measurement

3.1.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.



3.1.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.1.4 Test Setup


For radiated emissions below 30MHz

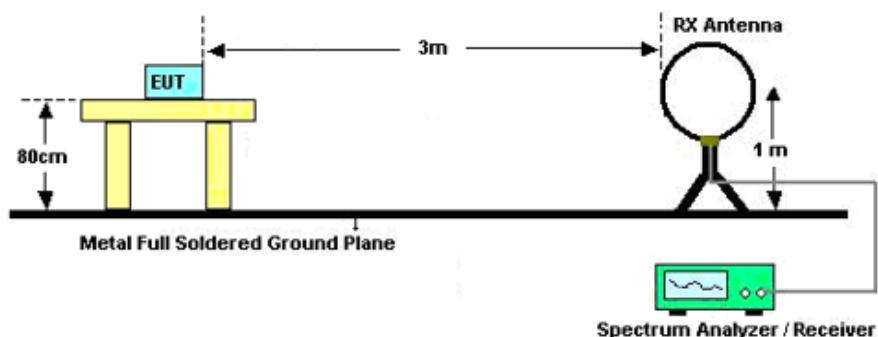

For radiated emissions from 30MHz to 1GHz

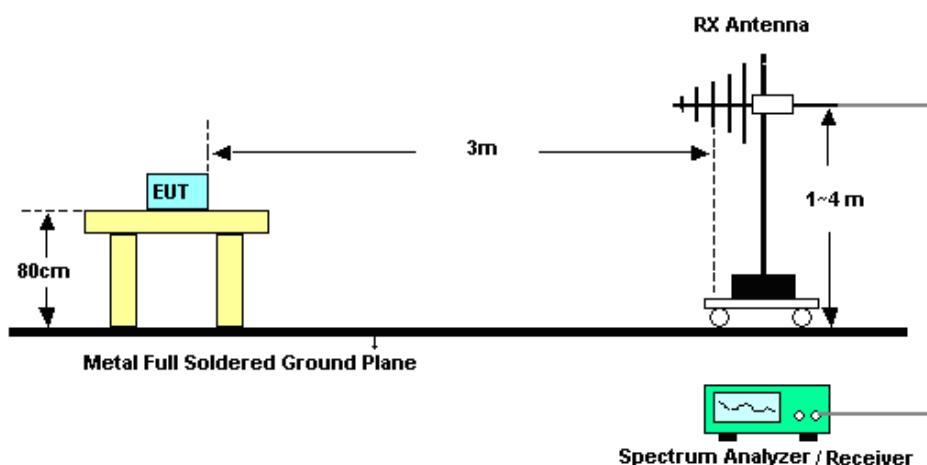

For radiated emissions above 1GHz

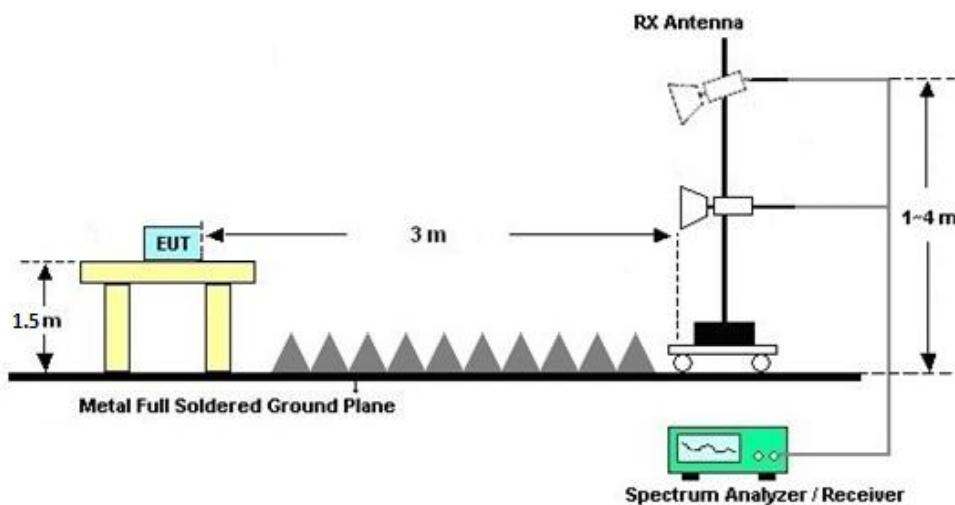



3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.1.7 Duty Cycle

Please refer to Appendix C.

3.1.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.



3.2 AC Conducted Emission Measurement

3.2.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.2.4 Test Setup

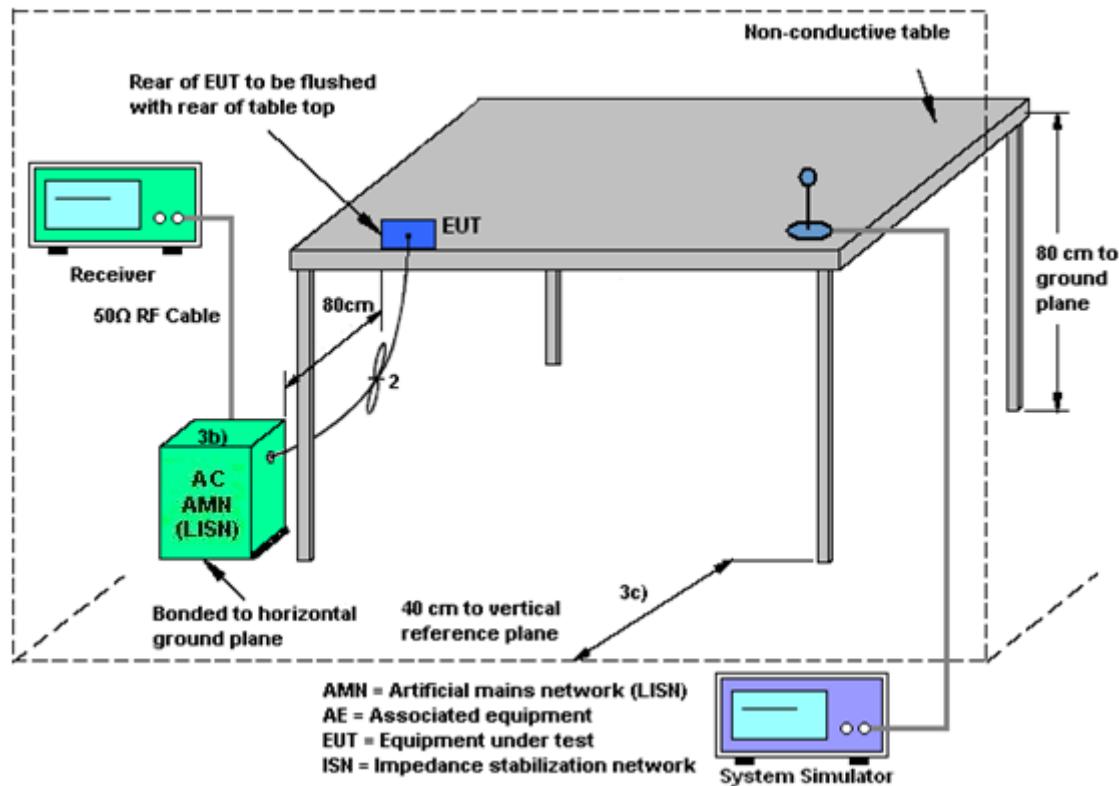

3.2.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY522601 85	20Hz~26.5GHz	Dec. 27, 2023	Nov. 27, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 03, 2024	Nov. 27, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Nov. 27, 2024	Dec. 28, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Nov. 27, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Nov. 27, 2024	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 09,2024	Nov. 27, 2024	Apr. 08,2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Nov. 27, 2024	Apr. 08,2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 14,2024	Nov. 27, 2024	Oct. 13,2025	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY532701 05	0.5GHz~26.5Ghz	Oct. 14,2024	Nov. 27, 2024	Oct. 13,2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Nov. 27, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001 985	N/A	Oct. 14,2024	Nov. 27, 2024	Oct. 13,2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Nov. 27, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Nov. 27, 2024	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Nov. 30, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Nov. 30, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002 470	100Vac~250Vac	Dec.25, 2022	Nov. 30, 2024	Dec. 24, 2024	Conduction (CO02-SZ)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	2.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	2.8 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	4.2 dB
--	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	5.0 dB
--	--------


Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	4.3 dB
--	--------

----- THE END -----



Appendix A. AC Conducted Emission Test Results

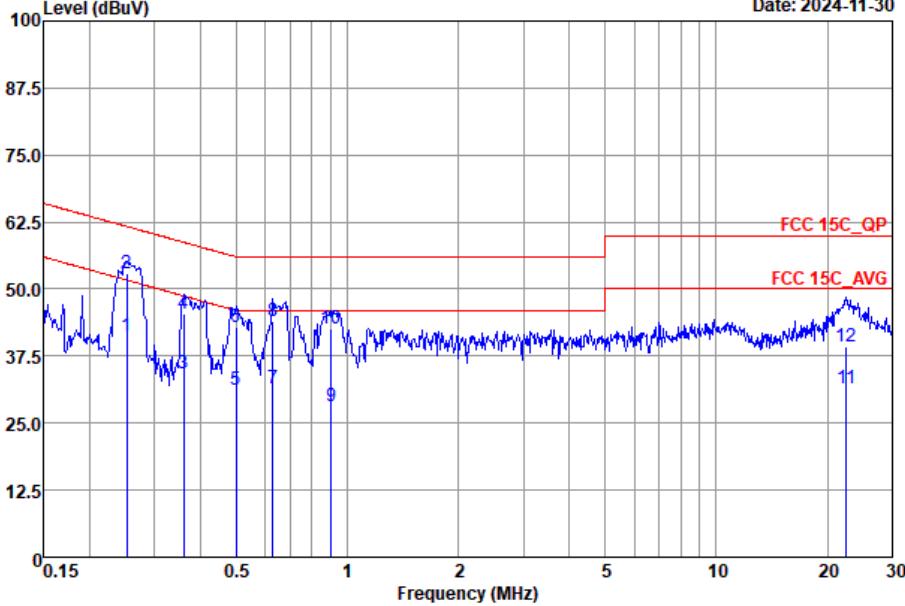Test Engineer :	Nathon	Temperature :		22~24°C																																																																																																																														
		Relative Humidity :		44~50%																																																																																																																														
Test Voltage :	120Vac / 60Hz	Phase :		Line																																																																																																																														
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.																																																																																																																																	
 <p>Level (dBuV)</p> <p>Date: 2024-11-30</p> <p>FCC 15C_QP</p> <p>FCC 15C_AVG</p> <p>Frequency (MHz)</p>																																																																																																																																		
Site	: CO02-SZ																																																																																																																																	
Condition	: FCC 15C_QP LISN_2024-L-1 LINE																																																																																																																																	
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit</th><th>Read Line</th><th>LISN</th><th>Cable</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dBuV</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.25</td><td>41.24</td><td>-10.45</td><td>51.69</td><td>21.50</td><td>9.70</td><td>10.04</td><td>Average</td></tr><tr><td>2 *</td><td>0.25</td><td>52.84</td><td>-8.85</td><td>61.69</td><td>33.10</td><td>9.70</td><td>10.04</td><td>QP</td></tr><tr><td>3</td><td>0.36</td><td>34.14</td><td>-14.60</td><td>48.74</td><td>14.40</td><td>9.67</td><td>10.07</td><td>Average</td></tr><tr><td>4</td><td>0.36</td><td>45.44</td><td>-13.30</td><td>58.74</td><td>25.70</td><td>9.67</td><td>10.07</td><td>QP</td></tr><tr><td>5</td><td>0.50</td><td>31.33</td><td>-14.68</td><td>46.01</td><td>11.60</td><td>9.62</td><td>10.11</td><td>Average</td></tr><tr><td>6</td><td>0.50</td><td>43.03</td><td>-12.98</td><td>56.01</td><td>23.30</td><td>9.62</td><td>10.11</td><td>QP</td></tr><tr><td>7</td><td>0.63</td><td>31.49</td><td>-14.51</td><td>46.00</td><td>11.70</td><td>9.65</td><td>10.14</td><td>Average</td></tr><tr><td>8</td><td>0.63</td><td>43.89</td><td>-12.11</td><td>56.00</td><td>24.10</td><td>9.65</td><td>10.14</td><td>QP</td></tr><tr><td>9</td><td>0.90</td><td>28.16</td><td>-17.84</td><td>46.00</td><td>8.30</td><td>9.67</td><td>10.19</td><td>Average</td></tr><tr><td>10</td><td>0.90</td><td>42.56</td><td>-13.44</td><td>56.00</td><td>22.70</td><td>9.67</td><td>10.19</td><td>QP</td></tr><tr><td>11</td><td>22.54</td><td>31.39</td><td>-18.61</td><td>50.00</td><td>10.99</td><td>9.67</td><td>10.73</td><td>Average</td></tr><tr><td>12</td><td>22.54</td><td>39.39</td><td>-20.61</td><td>60.00</td><td>18.99</td><td>9.67</td><td>10.73</td><td>QP</td></tr></tbody></table>						Freq	Level	Over Limit	Limit	Read Line	LISN	Cable	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.25	41.24	-10.45	51.69	21.50	9.70	10.04	Average	2 *	0.25	52.84	-8.85	61.69	33.10	9.70	10.04	QP	3	0.36	34.14	-14.60	48.74	14.40	9.67	10.07	Average	4	0.36	45.44	-13.30	58.74	25.70	9.67	10.07	QP	5	0.50	31.33	-14.68	46.01	11.60	9.62	10.11	Average	6	0.50	43.03	-12.98	56.01	23.30	9.62	10.11	QP	7	0.63	31.49	-14.51	46.00	11.70	9.65	10.14	Average	8	0.63	43.89	-12.11	56.00	24.10	9.65	10.14	QP	9	0.90	28.16	-17.84	46.00	8.30	9.67	10.19	Average	10	0.90	42.56	-13.44	56.00	22.70	9.67	10.19	QP	11	22.54	31.39	-18.61	50.00	10.99	9.67	10.73	Average	12	22.54	39.39	-20.61	60.00	18.99	9.67	10.73	QP
	Freq	Level	Over Limit	Limit	Read Line	LISN	Cable	Remark																																																																																																																										
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																											
1	0.25	41.24	-10.45	51.69	21.50	9.70	10.04	Average																																																																																																																										
2 *	0.25	52.84	-8.85	61.69	33.10	9.70	10.04	QP																																																																																																																										
3	0.36	34.14	-14.60	48.74	14.40	9.67	10.07	Average																																																																																																																										
4	0.36	45.44	-13.30	58.74	25.70	9.67	10.07	QP																																																																																																																										
5	0.50	31.33	-14.68	46.01	11.60	9.62	10.11	Average																																																																																																																										
6	0.50	43.03	-12.98	56.01	23.30	9.62	10.11	QP																																																																																																																										
7	0.63	31.49	-14.51	46.00	11.70	9.65	10.14	Average																																																																																																																										
8	0.63	43.89	-12.11	56.00	24.10	9.65	10.14	QP																																																																																																																										
9	0.90	28.16	-17.84	46.00	8.30	9.67	10.19	Average																																																																																																																										
10	0.90	42.56	-13.44	56.00	22.70	9.67	10.19	QP																																																																																																																										
11	22.54	31.39	-18.61	50.00	10.99	9.67	10.73	Average																																																																																																																										
12	22.54	39.39	-20.61	60.00	18.99	9.67	10.73	QP																																																																																																																										



Test Engineer :	Nathon	Temperature :	22~24°C																																																																																																																														
		Relative Humidity :	44~50%																																																																																																																														
Test Voltage :	120Vac / 60Hz	Phase :	Neutral																																																																																																																														
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.																																																																																																																																
Site	: CO02-5Z																																																																																																																																
Condition	: FCC 15C_QP LISN_2024-N-1 NEUTRAL																																																																																																																																
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>LISN Factor</th><th>Cable Loss</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dBuV</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.17</td><td>32.73</td><td>-22.26</td><td>54.99</td><td>13.00</td><td>9.72</td><td>10.01</td><td>Average</td></tr><tr><td>2</td><td>0.17</td><td>41.23</td><td>-23.76</td><td>64.99</td><td>21.50</td><td>9.72</td><td>10.01</td><td>QP</td></tr><tr><td>3</td><td>0.25</td><td>39.81</td><td>-11.88</td><td>51.69</td><td>20.09</td><td>9.68</td><td>10.04</td><td>Average</td></tr><tr><td>4 *</td><td>0.25</td><td>51.91</td><td>-9.78</td><td>61.69</td><td>32.19</td><td>9.68</td><td>10.04</td><td>QP</td></tr><tr><td>5</td><td>0.39</td><td>29.97</td><td>-18.11</td><td>48.08</td><td>10.19</td><td>9.70</td><td>10.08</td><td>Average</td></tr><tr><td>6</td><td>0.39</td><td>42.97</td><td>-15.11</td><td>58.08</td><td>23.19</td><td>9.70</td><td>10.08</td><td>QP</td></tr><tr><td>7</td><td>0.50</td><td>28.90</td><td>-17.15</td><td>46.05</td><td>9.10</td><td>9.69</td><td>10.11</td><td>Average</td></tr><tr><td>8</td><td>0.50</td><td>39.90</td><td>-16.15</td><td>56.05</td><td>20.10</td><td>9.69</td><td>10.11</td><td>QP</td></tr><tr><td>9</td><td>0.82</td><td>22.06</td><td>-23.94</td><td>46.00</td><td>2.21</td><td>9.68</td><td>10.17</td><td>Average</td></tr><tr><td>10</td><td>0.82</td><td>35.46</td><td>-20.54</td><td>56.00</td><td>15.61</td><td>9.68</td><td>10.17</td><td>QP</td></tr><tr><td>11</td><td>22.18</td><td>32.38</td><td>-17.62</td><td>50.00</td><td>12.00</td><td>9.66</td><td>10.72</td><td>Average</td></tr><tr><td>12</td><td>22.18</td><td>40.38</td><td>-19.62</td><td>60.00</td><td>20.00</td><td>9.66</td><td>10.72</td><td>QP</td></tr></tbody></table>					Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.17	32.73	-22.26	54.99	13.00	9.72	10.01	Average	2	0.17	41.23	-23.76	64.99	21.50	9.72	10.01	QP	3	0.25	39.81	-11.88	51.69	20.09	9.68	10.04	Average	4 *	0.25	51.91	-9.78	61.69	32.19	9.68	10.04	QP	5	0.39	29.97	-18.11	48.08	10.19	9.70	10.08	Average	6	0.39	42.97	-15.11	58.08	23.19	9.70	10.08	QP	7	0.50	28.90	-17.15	46.05	9.10	9.69	10.11	Average	8	0.50	39.90	-16.15	56.05	20.10	9.69	10.11	QP	9	0.82	22.06	-23.94	46.00	2.21	9.68	10.17	Average	10	0.82	35.46	-20.54	56.00	15.61	9.68	10.17	QP	11	22.18	32.38	-17.62	50.00	12.00	9.66	10.72	Average	12	22.18	40.38	-19.62	60.00	20.00	9.66	10.72	QP
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																									
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																										
1	0.17	32.73	-22.26	54.99	13.00	9.72	10.01	Average																																																																																																																									
2	0.17	41.23	-23.76	64.99	21.50	9.72	10.01	QP																																																																																																																									
3	0.25	39.81	-11.88	51.69	20.09	9.68	10.04	Average																																																																																																																									
4 *	0.25	51.91	-9.78	61.69	32.19	9.68	10.04	QP																																																																																																																									
5	0.39	29.97	-18.11	48.08	10.19	9.70	10.08	Average																																																																																																																									
6	0.39	42.97	-15.11	58.08	23.19	9.70	10.08	QP																																																																																																																									
7	0.50	28.90	-17.15	46.05	9.10	9.69	10.11	Average																																																																																																																									
8	0.50	39.90	-16.15	56.05	20.10	9.69	10.11	QP																																																																																																																									
9	0.82	22.06	-23.94	46.00	2.21	9.68	10.17	Average																																																																																																																									
10	0.82	35.46	-20.54	56.00	15.61	9.68	10.17	QP																																																																																																																									
11	22.18	32.38	-17.62	50.00	12.00	9.66	10.72	Average																																																																																																																									
12	22.18	40.38	-19.62	60.00	20.00	9.66	10.72	QP																																																																																																																									

Note:

1. Level(dB μ V) = Read Level(dB μ V) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dB μ V) – Limit Line(dB μ V)



Appendix B Radiated Spurious Emission Test Data

Test Engineer :	Jia Kuang	Relative Humidity :		48~49%
		Temperature :		24-25°C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	6	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 2	2400-2483.5	6	Bluetooth-LE-LF	39	2480	2Mbps	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	39	2484.52	40.57	54.00	-13.43	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	46.89	74.00	-27.11	H	Peak	Pass	Harmonic
2	Bluetooth-LE-LF	39	35.82	33.76	40.00	-6.24	V	QP	Pass	LF

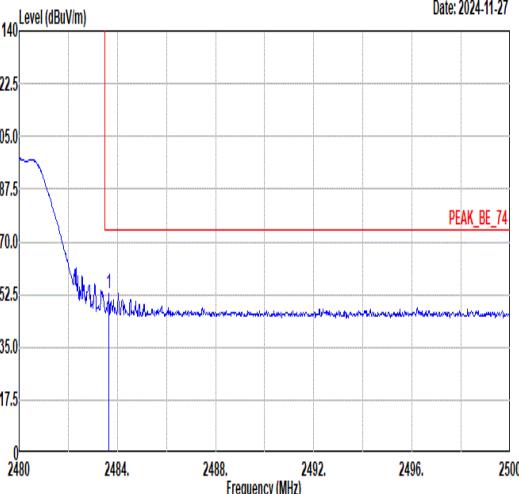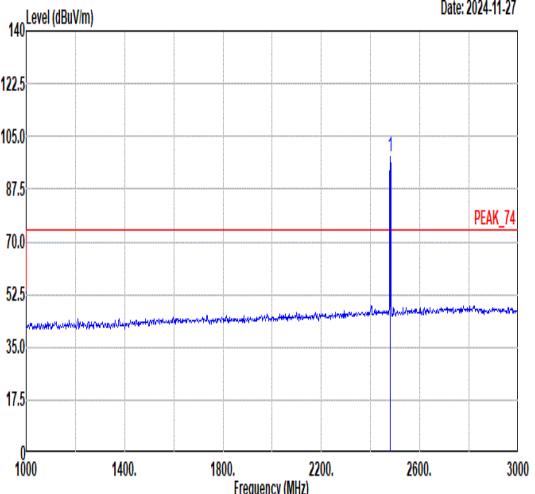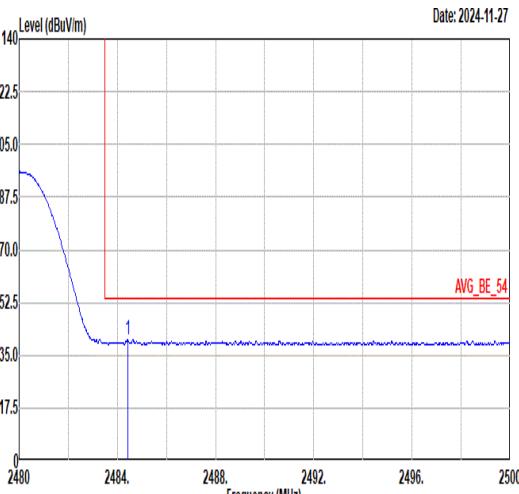
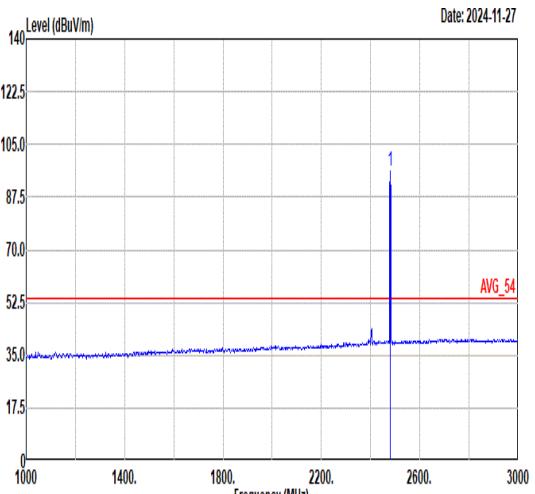


Mode	1																																																																																																													
	Band Edge																																																																																																													
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																													
ANT	6																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	 <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.66</td><td>52.95</td><td>74.00</td><td>-21.05</td><td>47.05</td><td>30.63</td><td>7.88</td><td>32.61</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td><td>20</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.66	52.95	74.00	-21.05	47.05	30.63	7.88	32.61								400	20									PEAK	 <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>98.07</td><td>-----</td><td>-----</td><td>92.17</td><td>30.64</td><td>7.87</td><td>32.61</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td><td>20</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	98.07	-----	-----	92.17	30.64	7.87	32.61								400	20									PEAK
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																						
1	2483.66	52.95	74.00	-21.05	47.05	30.63	7.88	32.61																																																																																																						
							400	20																																																																																																						
								PEAK																																																																																																						
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																						
1	2480.00	98.07	-----	-----	92.17	30.64	7.87	32.61																																																																																																						
							400	20																																																																																																						
								PEAK																																																																																																						
 <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.42</td><td>40.12</td><td>54.00</td><td>-13.88</td><td>34.22</td><td>30.63</td><td>7.88</td><td>32.61</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td><td>20</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.42	40.12	54.00	-13.88	34.22	30.63	7.88	32.61								400	20									AVERAGE	 <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>95.98</td><td>-----</td><td>-----</td><td>90.08</td><td>30.64</td><td>7.87</td><td>32.61</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td><td>20</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	95.98	-----	-----	90.08	30.64	7.87	32.61								400	20									AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																						
1	2484.42	40.12	54.00	-13.88	34.22	30.63	7.88	32.61																																																																																																						
							400	20																																																																																																						
								AVERAGE																																																																																																						
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																						
1	2480.00	95.98	-----	-----	90.08	30.64	7.87	32.61																																																																																																						
							400	20																																																																																																						
								AVERAGE																																																																																																						

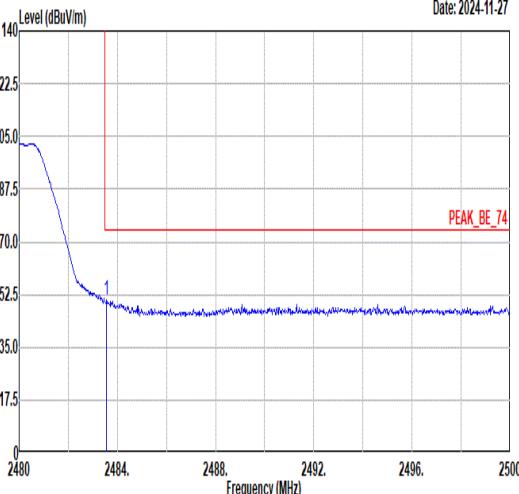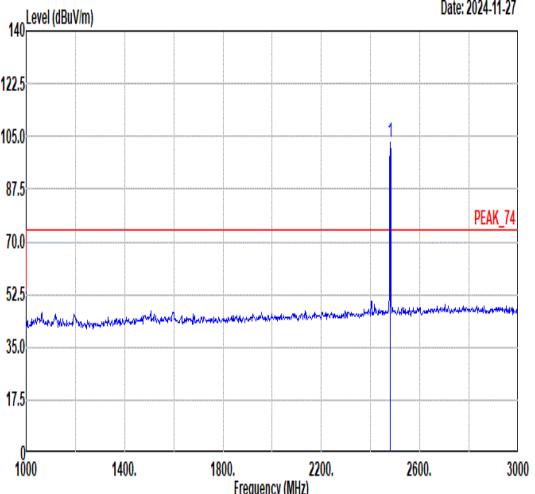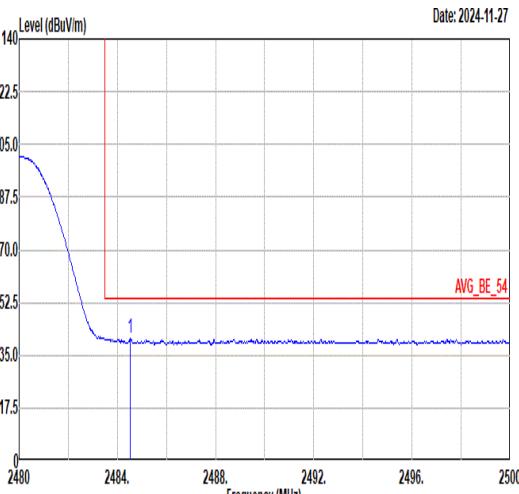
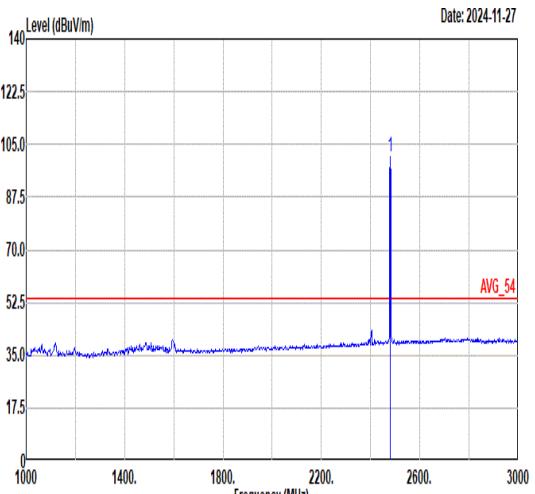


Mode	1																																																																																																													
	Band Edge																																																																																																													
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																													
ANT	6																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	 <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>2483.56</td><td>50.70</td><td>74.00</td><td>-23.30</td><td>44.80</td><td>30.63</td><td>7.88</td><td>32.61</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>397</td><td>315</td></tr><tr><td></td><td>PEAK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.56	50.70	74.00	-23.30	44.80	30.63	7.88	32.61								397	315		PEAK								 <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>2480.00</td><td>102.89</td><td>-----</td><td>-----</td><td>96.99</td><td>30.64</td><td>7.87</td><td>32.61</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>397</td><td>315</td></tr><tr><td></td><td>PEAK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	102.89	-----	-----	96.99	30.64	7.87	32.61								397	315		PEAK							
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																						
1	2483.56	50.70	74.00	-23.30	44.80	30.63	7.88	32.61																																																																																																						
							397	315																																																																																																						
	PEAK																																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																						
1	2480.00	102.89	-----	-----	96.99	30.64	7.87	32.61																																																																																																						
							397	315																																																																																																						
	PEAK																																																																																																													
 <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>2484.52</td><td>40.57</td><td>54.00</td><td>-13.43</td><td>34.67</td><td>30.63</td><td>7.88</td><td>32.61</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>397</td><td>315</td></tr><tr><td></td><td>AVERAGE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.52	40.57	54.00	-13.43	34.67	30.63	7.88	32.61								397	315		AVERAGE								 <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>2480.00</td><td>100.97</td><td>-----</td><td>-----</td><td>95.07</td><td>30.64</td><td>7.87</td><td>32.61</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>397</td><td>315</td></tr><tr><td></td><td>AVERAGE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	100.97	-----	-----	95.07	30.64	7.87	32.61								397	315		AVERAGE								
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																						
1	2484.52	40.57	54.00	-13.43	34.67	30.63	7.88	32.61																																																																																																						
							397	315																																																																																																						
	AVERAGE																																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																						
1	2480.00	100.97	-----	-----	95.07	30.64	7.87	32.61																																																																																																						
							397	315																																																																																																						
	AVERAGE																																																																																																													

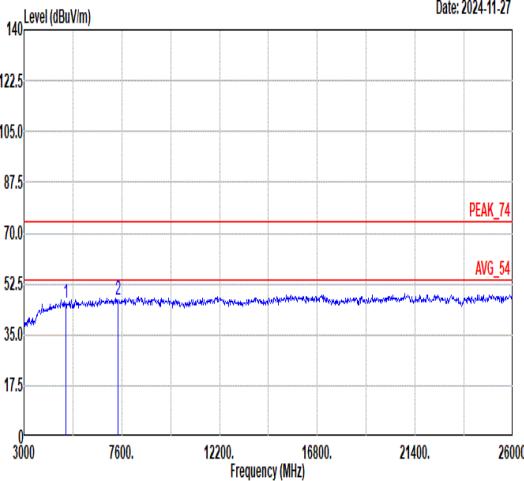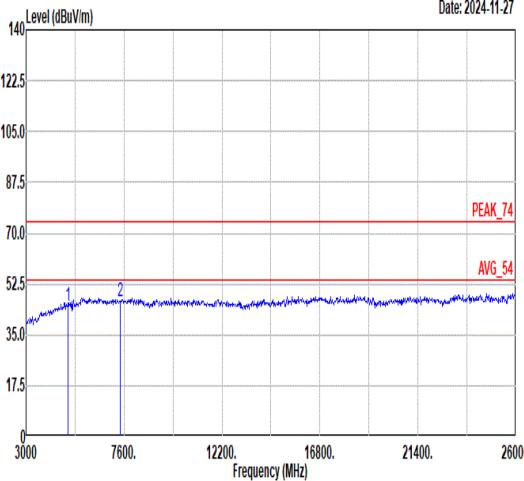

Mode	1																																																							
	Harmonic																																																							
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																							
ANT	6																																																							
Pol.	Horizontal																																																							
Peak	 <p>Level (dBuV/m)</p> <p>Date: 2024-11-27</p> <p>Frequency (MHz)</p> <p>PEAK_74</p> <p>AVG_54</p> <p>1 2</p> <table border="1"><thead><tr><th>Freq</th><th>Level</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr></thead><tbody><tr><td>4960.00</td><td>46.04</td><td>74.00</td><td>-27.96</td><td>51.86</td><td>35.72</td><td>11.14</td><td>52.68</td><td>---</td></tr><tr><td>7440.00</td><td>46.89</td><td>74.00</td><td>-27.11</td><td>49.60</td><td>36.60</td><td>12.97</td><td>52.28</td><td>---</td></tr></tbody></table>	Freq	Level	Read	Ant	Cable	Preamp	APos	TPos	Remark	4960.00	46.04	74.00	-27.96	51.86	35.72	11.14	52.68	---	7440.00	46.89	74.00	-27.11	49.60	36.60	12.97	52.28	---	 <p>Level (dBuV/m)</p> <p>Date: 2024-11-27</p> <p>Frequency (MHz)</p> <p>PEAK_74</p> <p>AVG_54</p> <p>1 2</p> <table border="1"><thead><tr><th>Freq</th><th>Level</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr></thead><tbody><tr><td>4960.00</td><td>45.11</td><td>74.00</td><td>-28.89</td><td>50.93</td><td>35.72</td><td>11.14</td><td>52.68</td><td>---</td></tr><tr><td>7440.00</td><td>46.59</td><td>74.00</td><td>-27.41</td><td>49.30</td><td>36.60</td><td>12.97</td><td>52.28</td><td>---</td></tr></tbody></table>	Freq	Level	Read	Ant	Cable	Preamp	APos	TPos	Remark	4960.00	45.11	74.00	-28.89	50.93	35.72	11.14	52.68	---	7440.00	46.59	74.00	-27.41	49.30	36.60	12.97	52.28	---
Freq	Level	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																
4960.00	46.04	74.00	-27.96	51.86	35.72	11.14	52.68	---																																																
7440.00	46.89	74.00	-27.11	49.60	36.60	12.97	52.28	---																																																
Freq	Level	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																
4960.00	45.11	74.00	-28.89	50.93	35.72	11.14	52.68	---																																																
7440.00	46.59	74.00	-27.41	49.30	36.60	12.97	52.28	---																																																
Avg																																																								

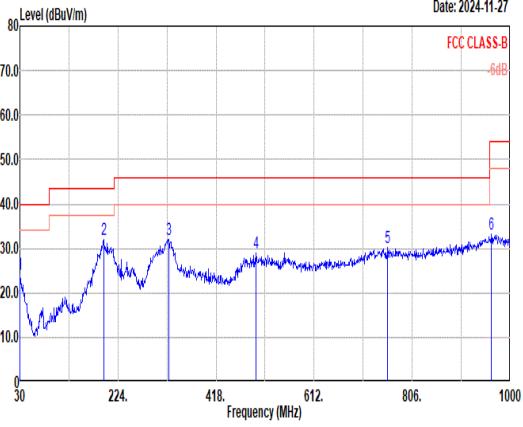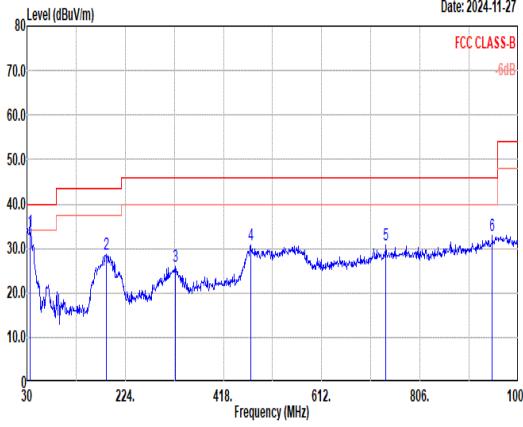

Mode	2																																																																																																																																																																		
	LF																																																																																																																																																																		
	Bluetooth-LE-LF																																																																																																																																																																		
ANT	6																																																																																																																																																																		
Pol.	Horizontal																																																																																																																																																																		
QP/ Peak																																																																																																																																																																			
	<table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>30.00</td><td>24.29</td><td>40.00</td><td>-15.71</td><td>29.28</td><td>25.20</td><td>1.01</td><td>31.20</td></tr><tr><td>2</td><td>195.87</td><td>32.03</td><td>43.50</td><td>-11.47</td><td>45.03</td><td>15.38</td><td>2.54</td><td>30.92</td></tr><tr><td>3</td><td>323.91</td><td>31.99</td><td>46.00</td><td>-14.01</td><td>39.67</td><td>19.93</td><td>3.24</td><td>30.85</td></tr><tr><td>4</td><td>497.54</td><td>28.84</td><td>46.00</td><td>-17.16</td><td>31.86</td><td>23.66</td><td>4.02</td><td>30.70</td></tr><tr><td>5</td><td>757.50</td><td>30.11</td><td>46.00</td><td>-15.89</td><td>30.20</td><td>25.93</td><td>4.95</td><td>30.97</td></tr><tr><td>6</td><td>963.14</td><td>33.20</td><td>54.00</td><td>-20.80</td><td>31.37</td><td>27.23</td><td>5.60</td><td>31.00</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	30.00	24.29	40.00	-15.71	29.28	25.20	1.01	31.20	2	195.87	32.03	43.50	-11.47	45.03	15.38	2.54	30.92	3	323.91	31.99	46.00	-14.01	39.67	19.93	3.24	30.85	4	497.54	28.84	46.00	-17.16	31.86	23.66	4.02	30.70	5	757.50	30.11	46.00	-15.89	30.20	25.93	4.95	30.97	6	963.14	33.20	54.00	-20.80	31.37	27.23	5.60	31.00	<table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>35.82</td><td>33.76</td><td>40.00</td><td>-6.24</td><td>42.18</td><td>21.68</td><td>1.10</td><td>31.20</td></tr><tr><td>2</td><td>187.14</td><td>28.67</td><td>43.50</td><td>-14.83</td><td>41.90</td><td>15.23</td><td>2.49</td><td>30.95</td></tr><tr><td>3</td><td>322.94</td><td>26.00</td><td>46.00</td><td>-20.00</td><td>33.70</td><td>19.91</td><td>3.24</td><td>30.85</td></tr><tr><td>4</td><td>471.35</td><td>30.64</td><td>46.00</td><td>-15.36</td><td>34.13</td><td>23.30</td><td>3.91</td><td>30.70</td></tr><tr><td>5</td><td>739.07</td><td>30.66</td><td>46.00</td><td>-15.34</td><td>30.94</td><td>25.75</td><td>4.89</td><td>30.92</td></tr><tr><td>6</td><td>948.59</td><td>32.77</td><td>46.00</td><td>-13.23</td><td>31.11</td><td>27.09</td><td>5.57</td><td>31.00</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	35.82	33.76	40.00	-6.24	42.18	21.68	1.10	31.20	2	187.14	28.67	43.50	-14.83	41.90	15.23	2.49	30.95	3	322.94	26.00	46.00	-20.00	33.70	19.91	3.24	30.85	4	471.35	30.64	46.00	-15.36	34.13	23.30	3.91	30.70	5	739.07	30.66	46.00	-15.34	30.94	25.75	4.89	30.92	6	948.59	32.77	46.00	-13.23	31.11	27.09	5.57
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																											
1	30.00	24.29	40.00	-15.71	29.28	25.20	1.01	31.20																																																																																																																																																											
2	195.87	32.03	43.50	-11.47	45.03	15.38	2.54	30.92																																																																																																																																																											
3	323.91	31.99	46.00	-14.01	39.67	19.93	3.24	30.85																																																																																																																																																											
4	497.54	28.84	46.00	-17.16	31.86	23.66	4.02	30.70																																																																																																																																																											
5	757.50	30.11	46.00	-15.89	30.20	25.93	4.95	30.97																																																																																																																																																											
6	963.14	33.20	54.00	-20.80	31.37	27.23	5.60	31.00																																																																																																																																																											
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																											
1	35.82	33.76	40.00	-6.24	42.18	21.68	1.10	31.20																																																																																																																																																											
2	187.14	28.67	43.50	-14.83	41.90	15.23	2.49	30.95																																																																																																																																																											
3	322.94	26.00	46.00	-20.00	33.70	19.91	3.24	30.85																																																																																																																																																											
4	471.35	30.64	46.00	-15.36	34.13	23.30	3.91	30.70																																																																																																																																																											
5	739.07	30.66	46.00	-15.34	30.94	25.75	4.89	30.92																																																																																																																																																											
6	948.59	32.77	46.00	-13.23	31.11	27.09	5.57	31.00																																																																																																																																																											

Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 2Mbps	38.89	0.21	4.762	10KHZ

Bluetooth LE 2Mbps

