



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V03

Report Template Revision Date: Mar.1st, 2017

Test Report

Report No. : CQASZ20210300359E-02

Applicant: JXD TECHNOLOGY CO.,LTD

Address of Applicant: OFFICE NO.12 19/F ,HO KING COMMERCIAL CENTRE,NO.2-16 FA YUEN STREET ,MONGKOK KOWLOON,HONGKONG

Manufacturer: JXD TECHNOLOGY CO.,LTD

Address of Manufacturer: OFFICE NO.12 19/F ,HO KING COMMERCIAL CENTRE,NO.2-16 FA YUEN STREET ,MONGKOK KOWLOON,HONGKONG

Equipment Under Test (EUT):

Product: LTE CPE

Model No.: A311-ZEV

Series Model: A311-ZIV(The just a different model)

Brand Name: N/A

FCC ID: 2AZG9-JXDA311

Standards: 47 CFR Part 15, Subpart C

Date of Receipt: 2021-03-26

Date of Test: 2021-03-23 to 2021-04-6

Date of Issue: 2021-04-6

Test Result : PASS*

Tested By:

Jun Li

(Jun Li)

Reviewed By:

Sheek, Luo

(Sheek Luo)

Approved By:

Jack Ai

(Jack Ai)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20210300359E-02	Rev.01	Initial report	2021-04-20

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

3 Contents

	Page
1 VERSION.....	2
2 TEST SUMMARY.....	3
3 CONTENTS.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 DUTY CYCLE.....	7
4.4 DESCRIPTION OF SUPPORT UNITS.....	10
4.5 TEST LOCATION.....	10
4.6 TEST FACILITY.....	10
4.7 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	11
4.8 DEVIATION FROM STANDARDS.....	11
4.9 ABNORMALITIES FROM STANDARD CONDITIONS.....	11
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	11
4.11 EQUIPMENT LIST.....	12
5 TEST RESULTS AND MEASUREMENT DATA.....	13
5.1 ANTENNA REQUIREMENT.....	13
5.2 CONDUCTED EMISSIONS.....	14
5.3 CONDUCTED PEAK OUTPUT POWER.....	18
5.4 6dB OCCUPY BANDWIDTH.....	20
5.5 POWER SPECTRAL DENSITY.....	38
5.6 RADIATED SPURIOUS EMISSIONS.....	48
5.6.1 Radiated emission below 1GHz.....	51
5.6.2 Transmitter emission above 1GHz.....	53
5.7 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY.....	55
6 PHOTOGRAPHS - EUT TEST SETUP.....	73
6.1 RADIATED SPURIOUS EMISSION.....	73
6.2 CONDUCTED EMISSION.....	74
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....	75

4 General Information

4.1 Client Information

Applicant:	JXD TECHNOLOGY CO.,LTD
Address of Applicant:	OFFICE NO.12 19/F ,HO KING COMMERCIAL CENTRE,NO.2-16 FA YUEN STREET ,MONGKOK KOWLOON,HONGKONG
Manufacturer:	JXD TECHNOLOGY CO.,LTD
Address of Manufacturer:	OFFICE NO.12 19/F ,HO KING COMMERCIAL CENTRE,NO.2-16 FA YUEN STREET ,MONGKOK KOWLOON,HONGKONG

4.2 General Description of EUT

Product Name:	LTE CPE																																																																													
Model No.:	A311-ZEV																																																																													
Trade Mark:	n/a																																																																													
Type of Modulation:	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)																																																																													
Channel Spacing:	IEEE 802.11b/g/n(HT20):20MHz IEEE 802.11n(HT40):40MHz																																																																													
Operation Frequency:	<table><tr><td colspan="6">IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20</td></tr><tr><td>Channel</td><td>Frequency (MHz)</td><td>Channel</td><td>Frequency (MHz)</td><td>Channel</td><td>Frequency (MHz)</td></tr><tr><td>1</td><td>2412</td><td>6</td><td>2437</td><td>11</td><td>2462</td></tr><tr><td>2</td><td>2417</td><td>7</td><td>2442</td><td></td><td></td></tr><tr><td>3</td><td>2422</td><td>8</td><td>2447</td><td></td><td></td></tr><tr><td>4</td><td>2427</td><td>9</td><td>2452</td><td></td><td></td></tr><tr><td>5</td><td>2432</td><td>10</td><td>2457</td><td></td><td></td></tr><tr><td colspan="6">IEEE 802.11n HT40</td></tr><tr><td>Channel</td><td>Frequency (MHz)</td><td>Channel</td><td>Frequency (MHz)</td><td>Channel</td><td>Frequency (MHz)</td></tr><tr><td>1</td><td>2422</td><td>4</td><td>2437</td><td>7</td><td>2452</td></tr><tr><td>2</td><td>2427</td><td>5</td><td>2442</td><td></td><td></td></tr><tr><td>3</td><td>2432</td><td>6</td><td>2447</td><td></td><td></td></tr></table>						IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20						Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	1	2412	6	2437	11	2462	2	2417	7	2442			3	2422	8	2447			4	2427	9	2452			5	2432	10	2457			IEEE 802.11n HT40						Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	1	2422	4	2437	7	2452	2	2427	5	2442			3	2432	6	2447		
IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20																																																																														
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)																																																																									
1	2412	6	2437	11	2462																																																																									
2	2417	7	2442																																																																											
3	2422	8	2447																																																																											
4	2427	9	2452																																																																											
5	2432	10	2457																																																																											
IEEE 802.11n HT40																																																																														
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)																																																																									
1	2422	4	2437	7	2452																																																																									
2	2427	5	2442																																																																											
3	2432	6	2447																																																																											
Antenna Type:	Spring antenna																																																																													
Antenna Gain:	2dBi																																																																													
Power Supply:	DC 12V from Adapter Input AC 120V/60Hz																																																																													

IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		
IEEE 802.11n HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	4	2437	7	2452
2	2427	5	2442		
3	2432	6	2447		

For 802.11b/g/n (HT20,HT40):

Test mode	Low Channel	Middle Channel	High Channel
IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20	2412MHz	2437MHz	2462MHz
IEEE 802.11n HT40	2422MHz	2437MHz	2452MHz

Note:

1. Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.
2. In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on X-plane.

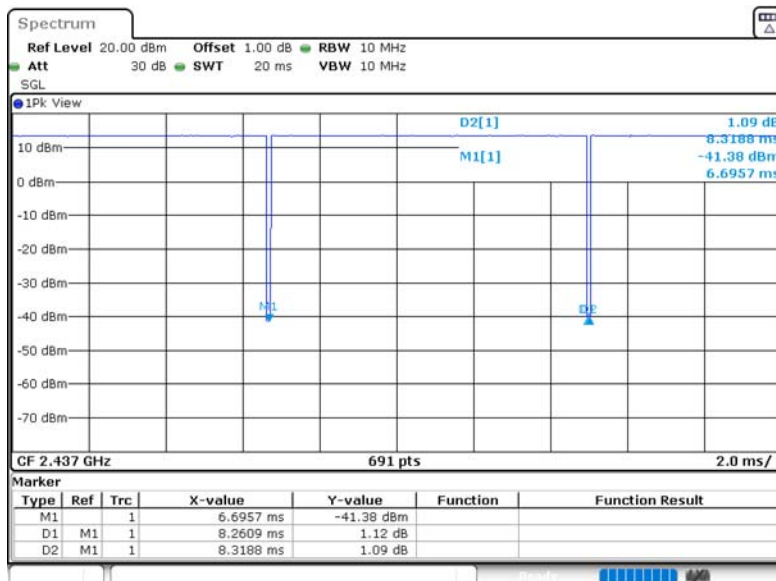
4.3 Duty Cycle

Temperature	25°C	Relative Humidity	55%	Test Voltage	120V/60Hz
Mode	Fre(MHz)	On time(ms)	Total Time(ms)	Duty Cycle	Duty Factor
802.11b	2437	8.26090	8.31880	99.30%	0.00
802.11g	2437	1.37681	1.53623	89.62%	0.48
802.11n HT20	2437	1.28986	1.38406	93.19%	0.31
802.11n HT40	2437	0.64058	0.75942	84.35%	0.74

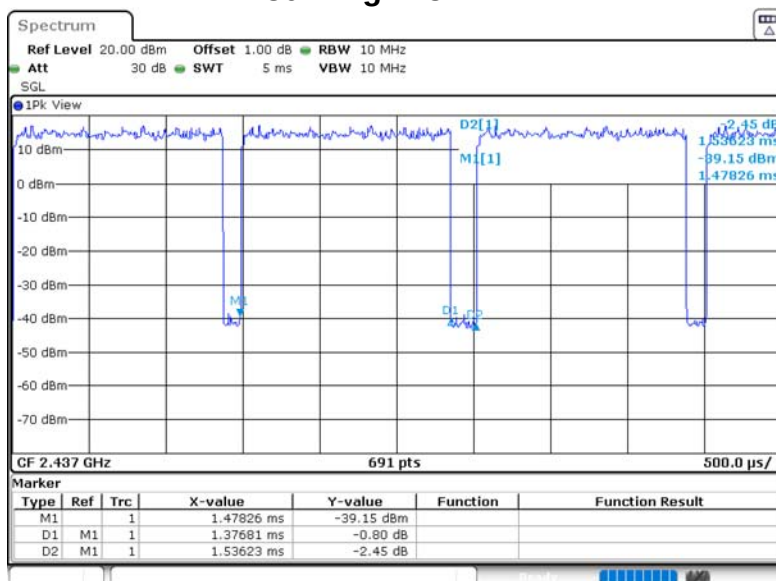
Note:

1. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
2. If duty cycle ≥98 %,the EUT is consider to be transmitting continuously,the conducted average output power and average power spectral density no need to add duty factor(consider to be zero).
3. The conducted peak output power and peak power spectral density no need to consider duty factor.
4. The on-time time is transmission duration(T).

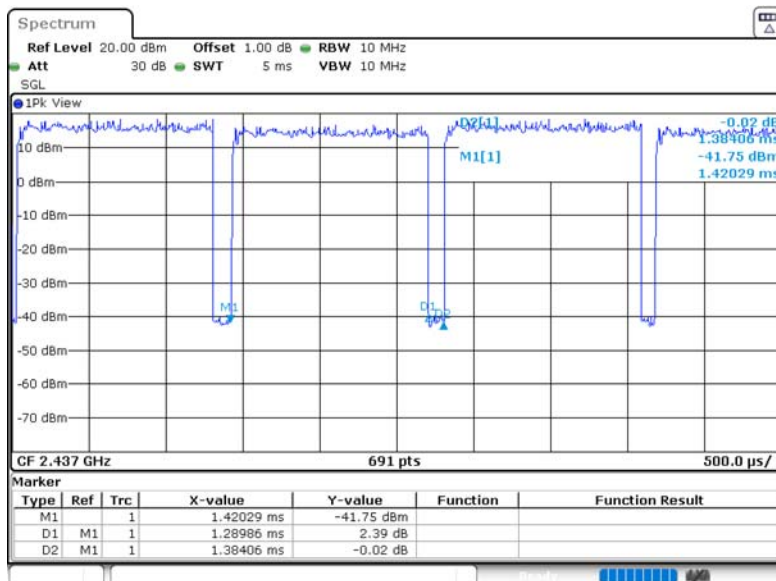
802.11b 2437MHz



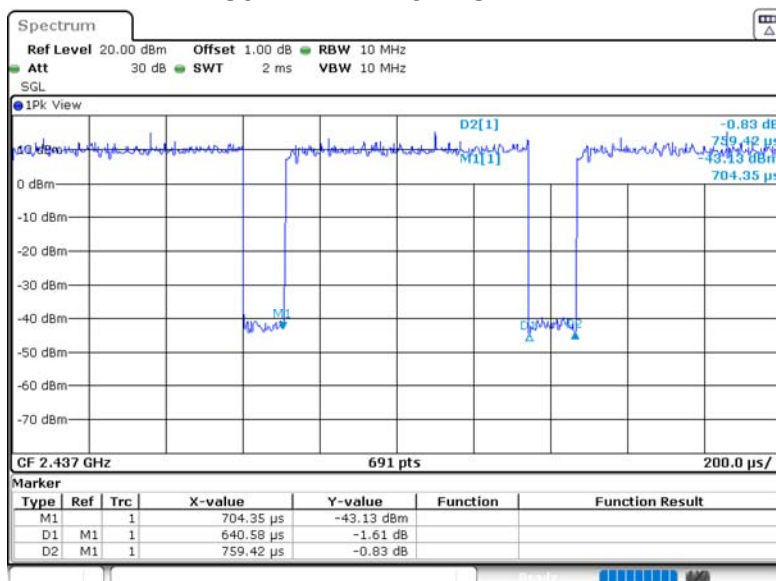
802.11g 2437MHz



802.11n HT20 2437MHz



802.11n HT40 2437MHz



4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
Adapter	/	DSX-120100-US	Provide by Applicant	SDOC
Adapter	/	JKY168-1201000US	Provide by Applicant	SDOC

4.5 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **ISED Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.7 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.8 Deviation from Standards

None.

4.9 Abnormalities from Standard Conditions

None.

4.10 Other Information Requested by the Customer

None.

4.11 Equipment List

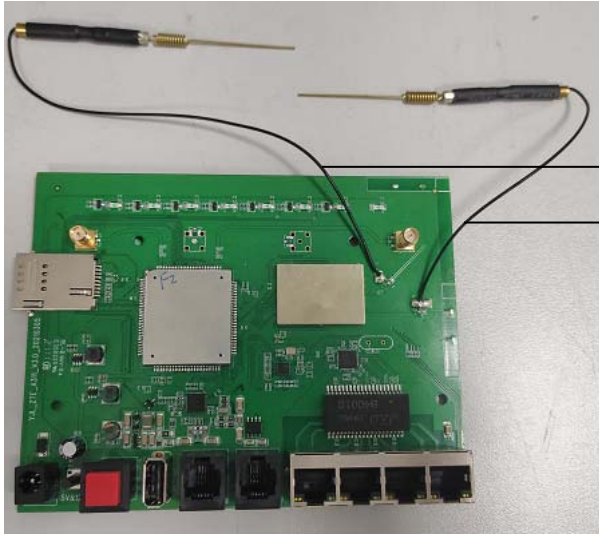
Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2020/10/25	2021/10/24
Spectrum analyzer	R&S	FSU26	CQA-038	2020/10/25	2021/10/24
Spectrum Analyzer	Agilent	E4408B	MY4421139	2020/06/20	2021/06/19
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2020/06/20	2021/06/19
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2020/10/25	2021/10/24
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2020/10/21	2021/10/20
Bilog Antenna	R&S	HL562	CQA-011	2020/9/26 2020/9/26	2021/9/25 2021/9/25
Horn Antenna	R&S	HF906	CQA-012	2020/9/26 2020/9/26	2021/9/25 2021/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2020/9/25 2020/9/25	2021/9/24 2021/9/24
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2020/9/26 2020/9/26	2021/9/25 2021/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2020/9/26 2020/9/26	2021/9/25 2021/9/25
Antenna Connector	CQA	RFC-01	CQA-080	2019/9/26 2020/9/26	2020/9/25 2021/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2020/9/26 2020/9/26	2021/9/25 2021/9/25
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2020/9/26 2020/9/26	2021/9/25 2021/9/25
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2020/9/26 2020/9/26	2021/9/25 2021/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2020/06/20	2021/06/19
EMI Test Receiver	R&S	ESPI3	CQA-013	2020/10/25	2021/10/24
LISN	R&S	ENV216	CQA-003	2020/10/21	2021/10/20
Coaxial cable	CQA	N/A	CQA-C009	2020/9/26	2021/9/25

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

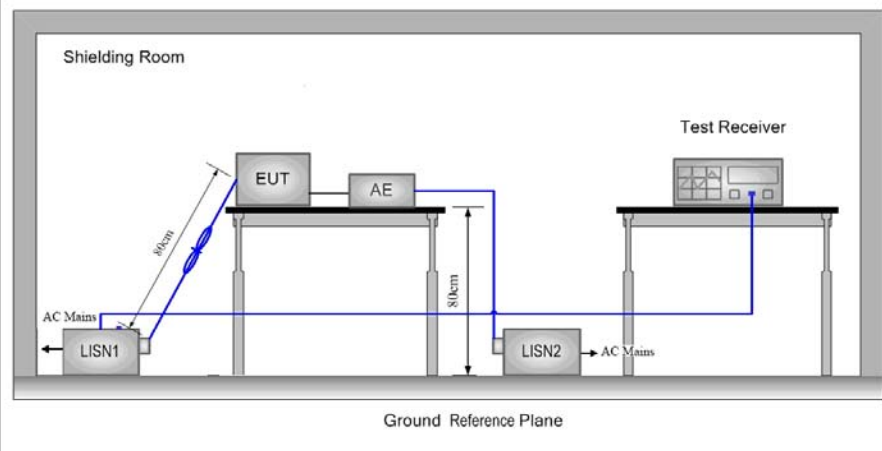
5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is a External Antenna. The best case gain of the Antenna Gain : 2dBi	

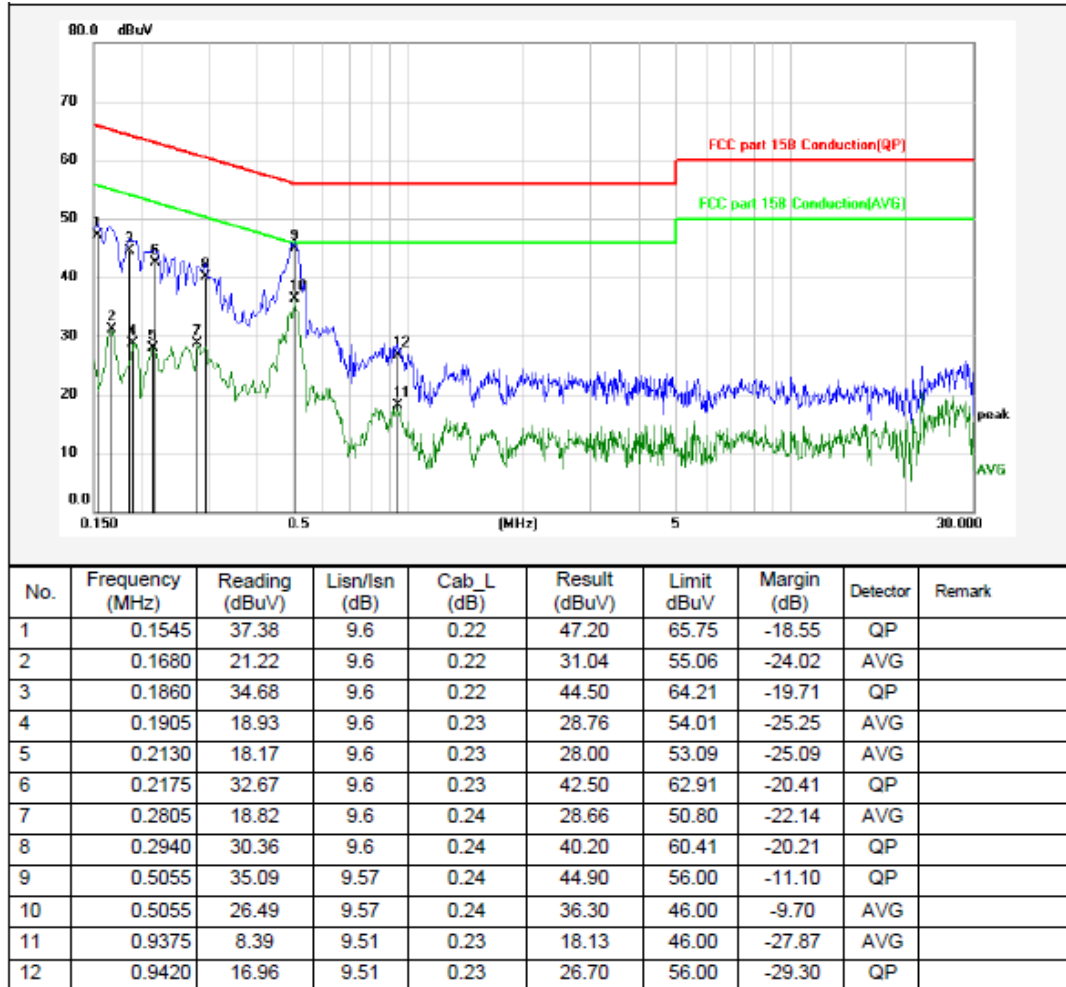
5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207,		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		

Test Setup:	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find at lowest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

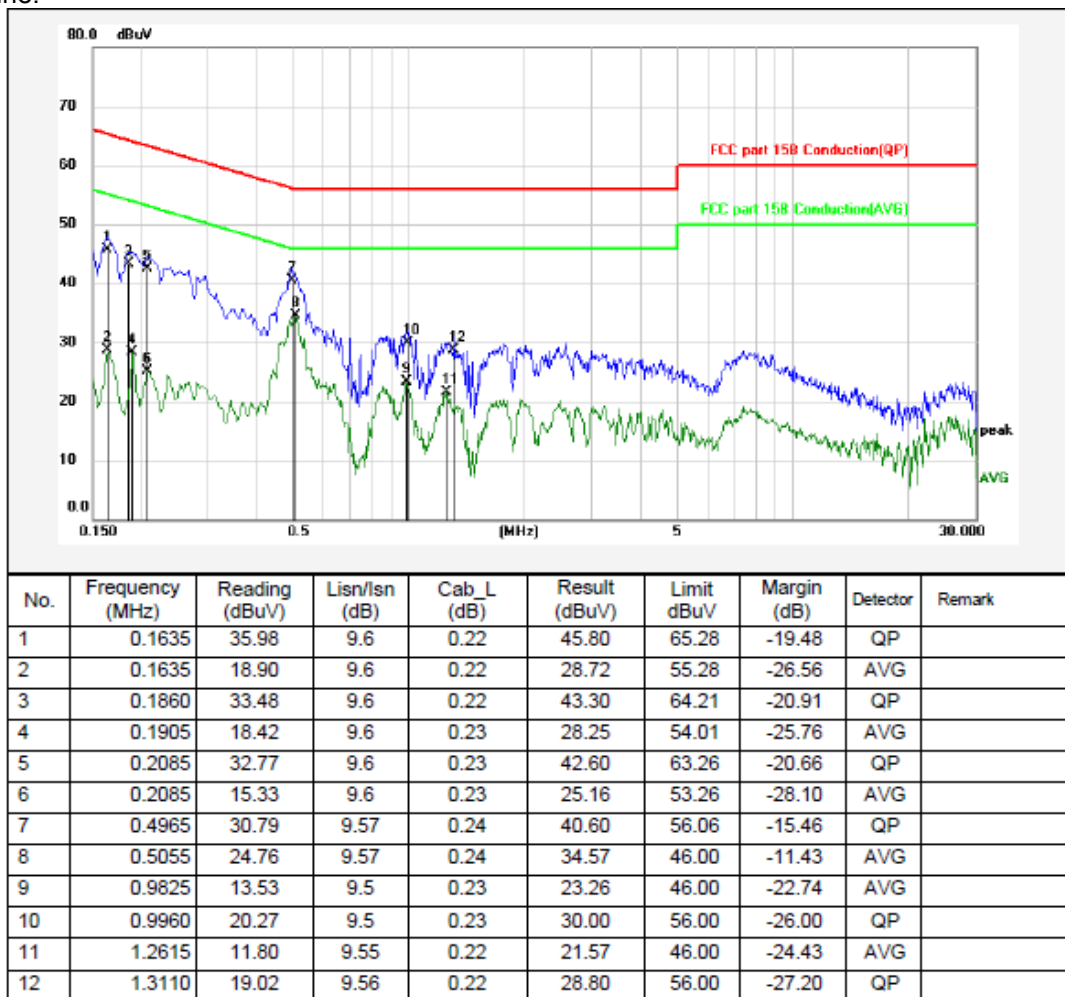
Live Line:



Remarks: 1. Result=Reading+Lisn+Cab_L

2. If the average limit is met when using a quasi-peak detector.
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


Neutral Line:



Remarks: 1. Result=Reading+Lisn+Cab_L

2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

5.3 Conducted Peak Output Power

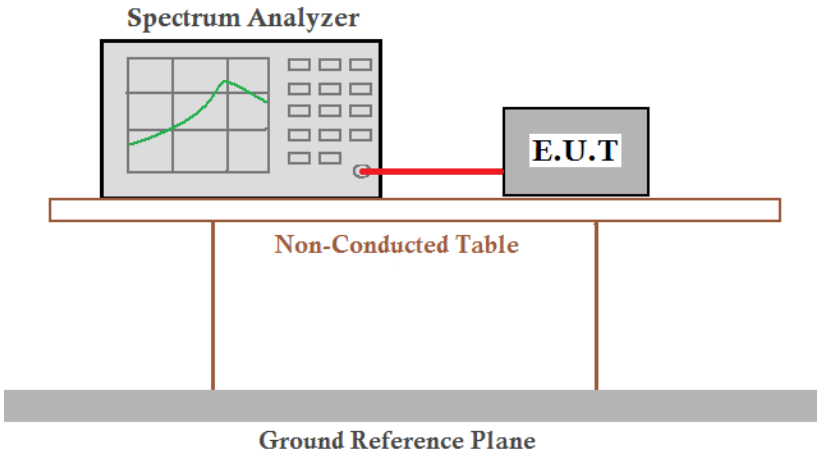
Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20/HT40) ; Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass

Measurement Data

Test Mode	CH	Conducted Power (dBm)	Limit (dBm)
IEEE 802.11 b (ANT a)	CH1	13.64	30
	CH6	13.06	30
	CH11	12.71	30
IEEE 802.11 g (ANT a)	CH1	11.91	30
	CH6	11.78	30
	CH11	11.87	30
IEEE 802.11 b (ANT b)	CH1	11.73	30
	CH6	11.66	30
	CH11	10.71	30
IEEE 802.11 g (ANT b)	CH1	10.07	30
	CH6	9.89	30
	CH11	9.64	30
Conclusion: PASS			

Test mode	CH			Conducted Power (dBm)	Limit (dBm)
		ANT a	ANT b		
IEEE 802.11 n HT20	CH1	10.26	9.17	12.76	30
	CH6	8.80	9.42	12.13	
	CH11	8.76	8.66	11.72	
IEEE 802.11 n HT40	CH1	9.52	6.99	11.45	
	CH4	7.58	7.73	10.67	
	CH7	7.44	6.57	10.04	
Conclusion: PASS					

5.4 6dB Occupy Bandwidth

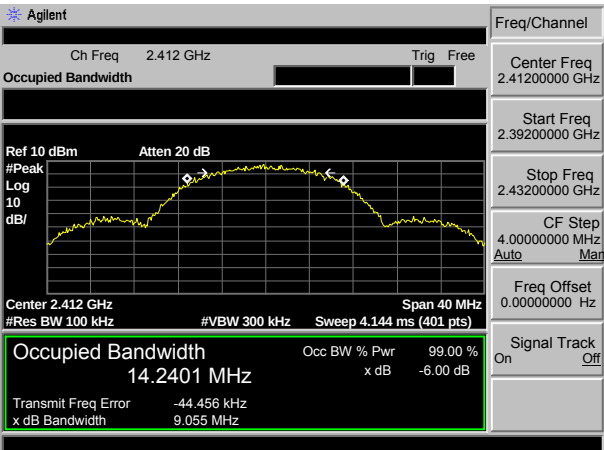
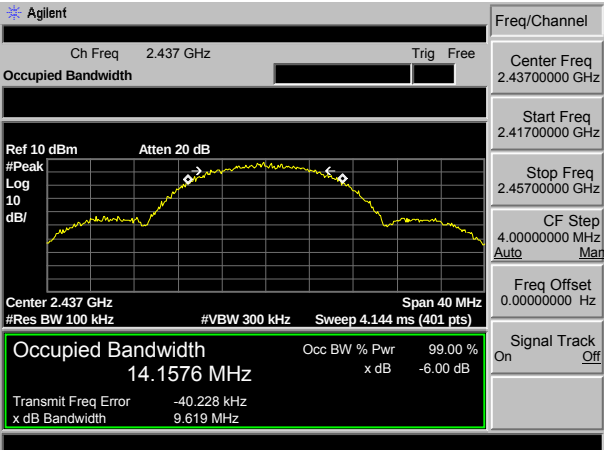
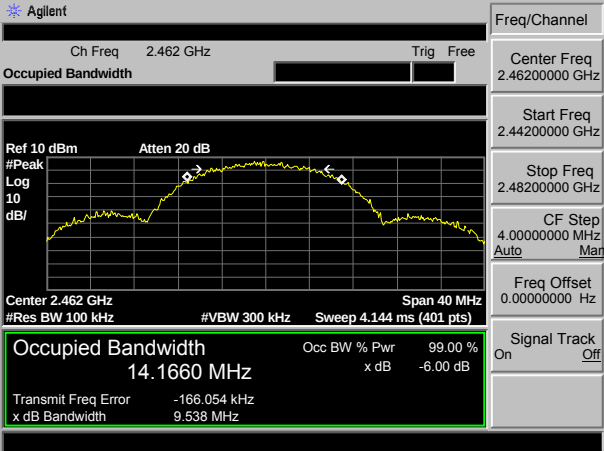
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ,802.11n(HT40)Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass

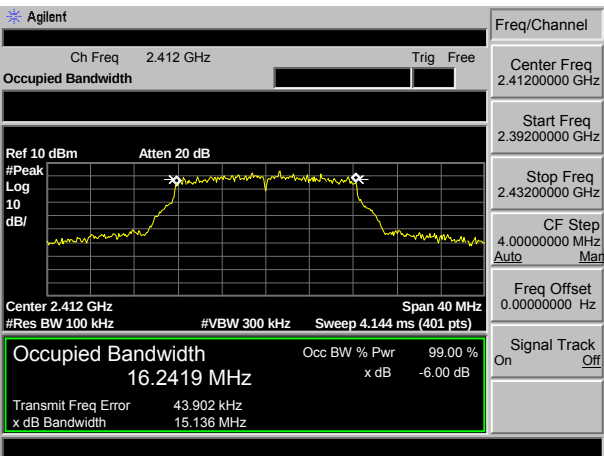
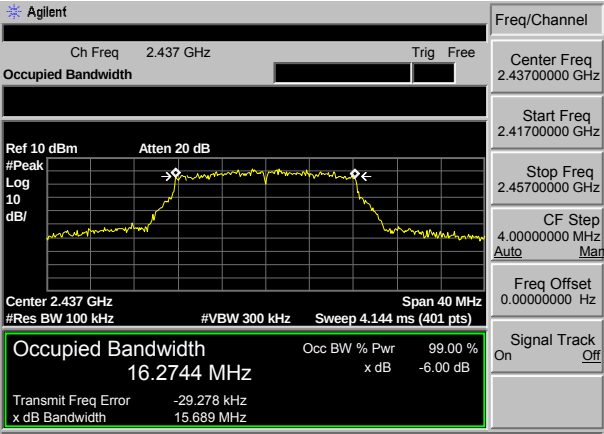
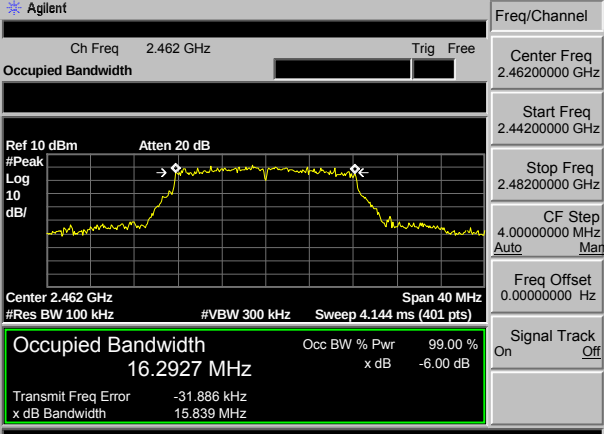
Measurement Data

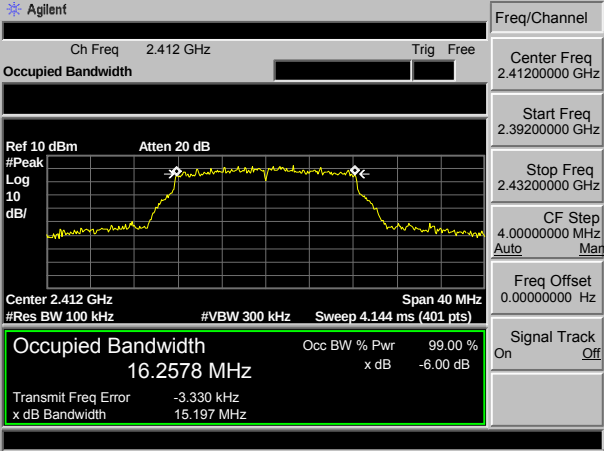
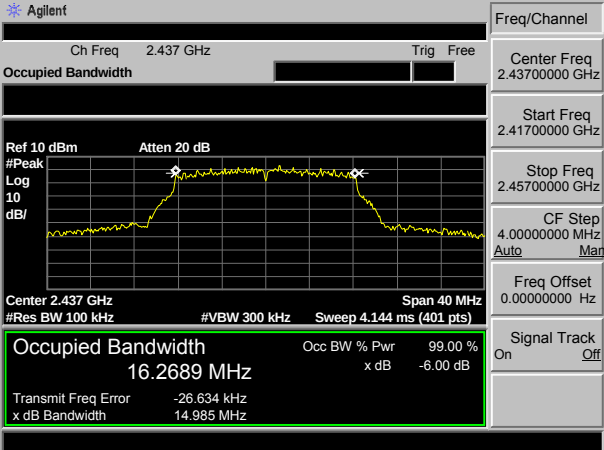
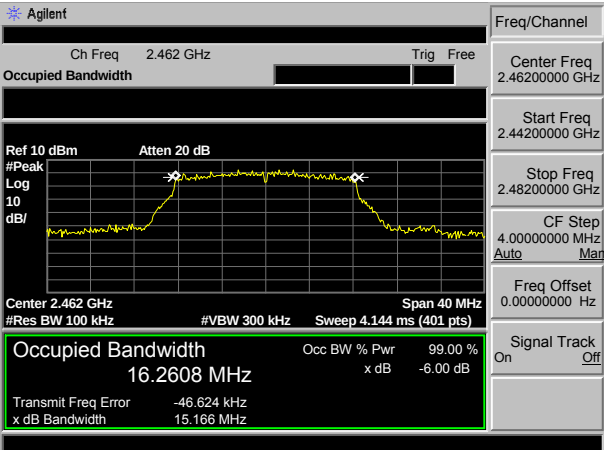
Test Mode	CH	6dB bandwidth (MHz)	20dB bandwidth (MHz)	Limit (KHz)
IEEE 802.11 b ANT a	CH1	9.055	16.224	>500
	CH6	9.619	16.209	>500
	CH11	9.538	16.369	>500
IEEE 802.11 g ANT a	CH1	15.136	18.437	>500
	CH6	15.689	18.627	>500
	CH11	15.839	18.254	>500
IEEE 802.11 n HT 20 ANT a	CH1	15.197	18.289	>500
	CH6	14.985	18.306	>500
	CH11	15.166	18.354	>500
IEEE 802.11 n HT 40 ANT a	CH1	35.125	39.233	>500
	CH4	35.066	39.548	>500
	CH7	35.055	39.572	>500
IEEE 802.11 b ANT b	CH1	9.103	16.199	>500
	CH6	9.052	16.192	>500
	CH11	8.563	16.177	>500
IEEE 802.11 g ANT b	CH1	16.315	19.119	>500
	CH6	15.803	19.037	>500
	CH11	15.020	19.031	>500
IEEE 802.11 n HT 20 ANT b	CH1	15.037	19.456	>500
	CH6	16.083	19.562	>500
	CH11	15.062	19.543	>500
IEEE 802.11 n HT 40 ANT b	CH1	35.161	39.988	>500
	CH4	35.187	39.936	>500
	CH7	35.176	39.940	>500
Conclusion: PASS				

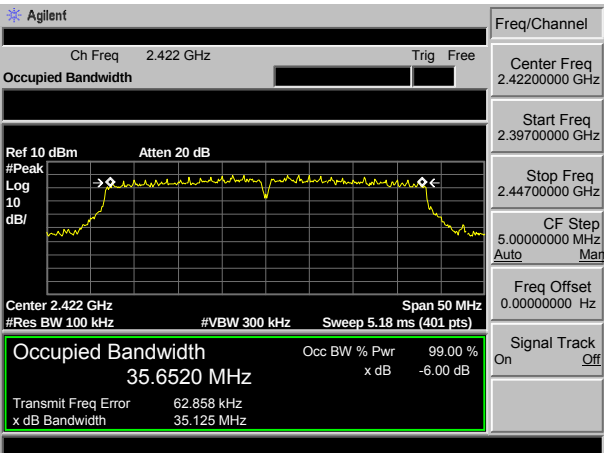
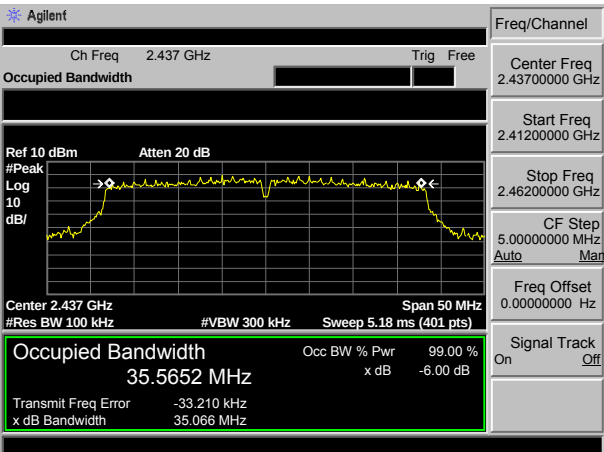
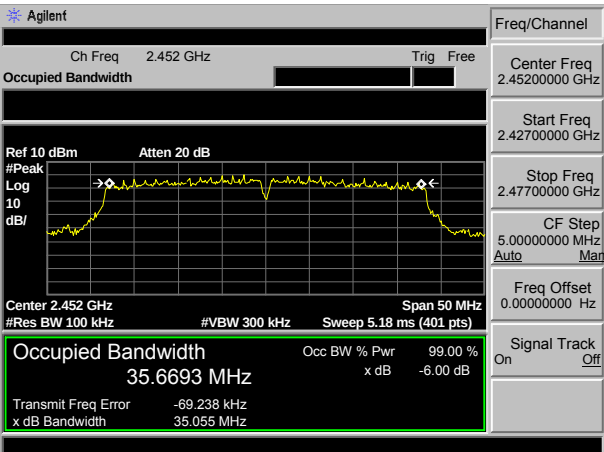
Test plot as follows:

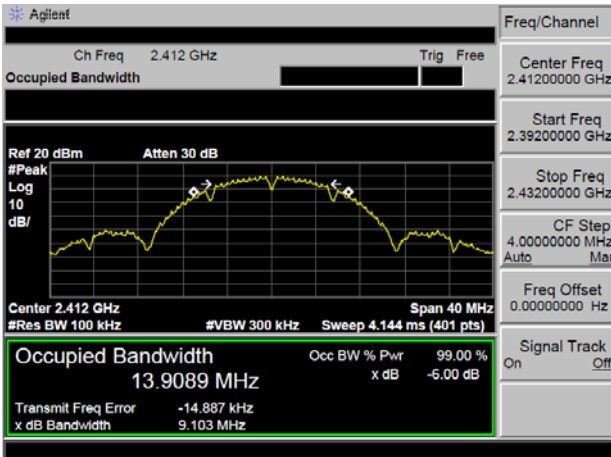
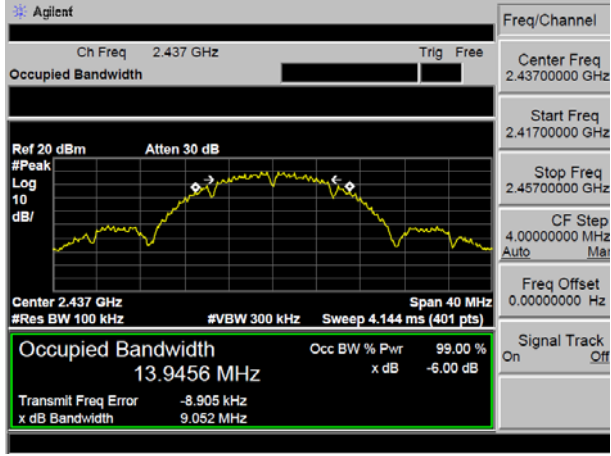
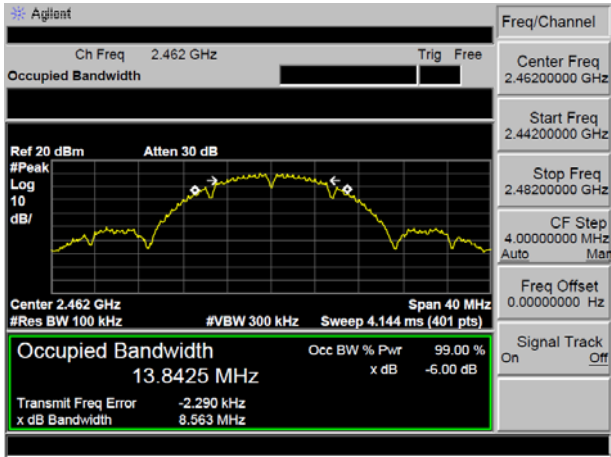
Graphs_6dB Occupy Bandwidth

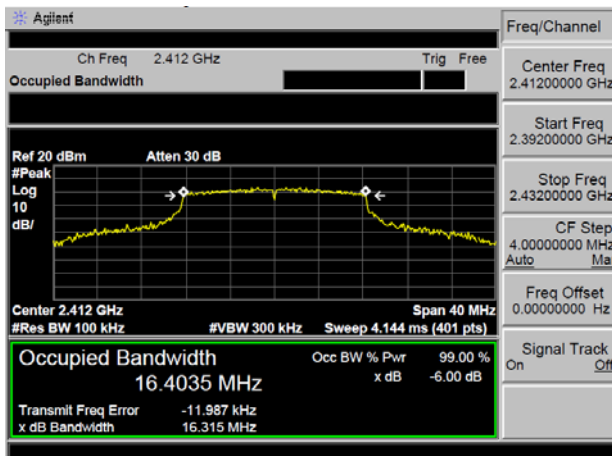
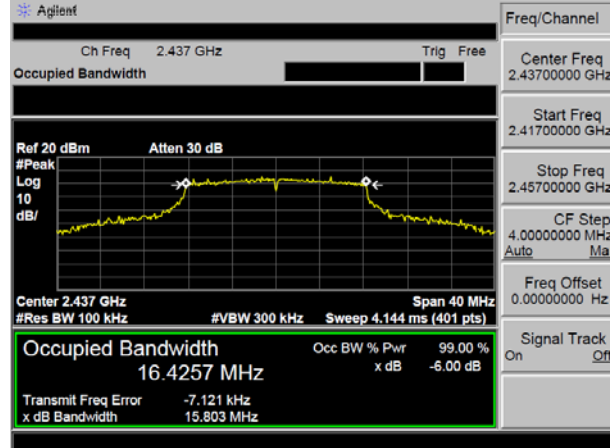
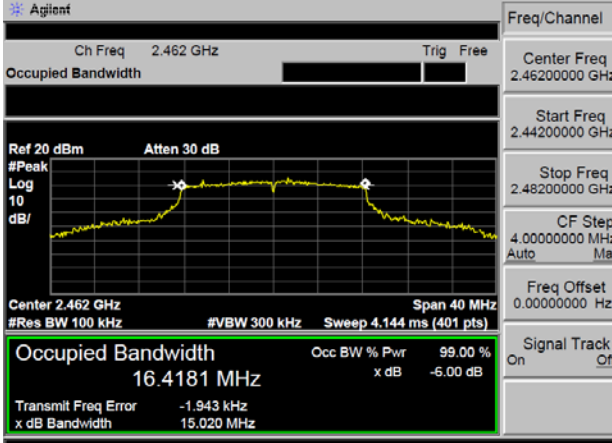
IEEE 802.11b 2412MHz ANT a	 Agilent Ch Freq 2.412 GHz Trig Free Center Freq 2.41200000 GHz Start Freq 2.39200000 GHz Stop Freq 2.43200000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.412 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Occupied Bandwidth 14.2401 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -44.456 kHz x dB Bandwidth 9.055 MHz
IEEE 802.11b 2437MHz ANT a	 Agilent Ch Freq 2.437 GHz Trig Free Center Freq 2.43700000 GHz Start Freq 2.41700000 GHz Stop Freq 2.45700000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.437 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Occupied Bandwidth 14.1576 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -40.228 kHz x dB Bandwidth 9.619 MHz
IEEE 802.11b 2462MHz ANT a	 Agilent Ch Freq 2.462 GHz Trig Free Center Freq 2.46200000 GHz Start Freq 2.44200000 GHz Stop Freq 2.48200000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.462 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Occupied Bandwidth 14.1660 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -166.054 kHz x dB Bandwidth 9.538 MHz

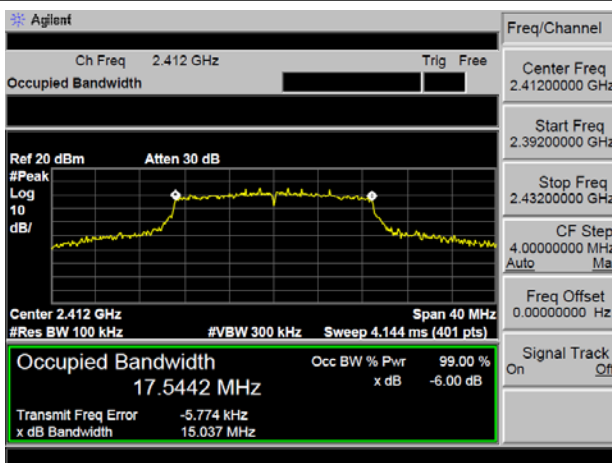
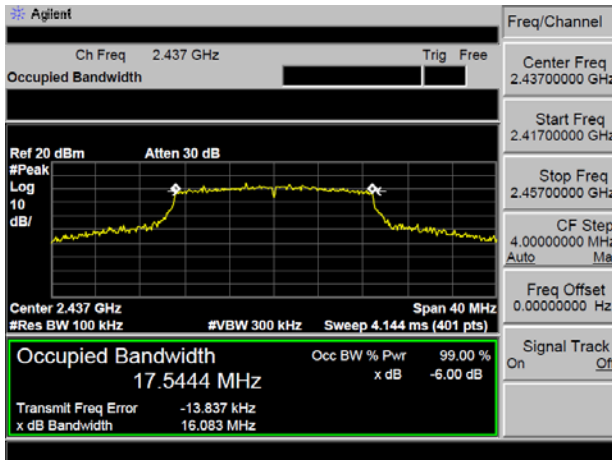
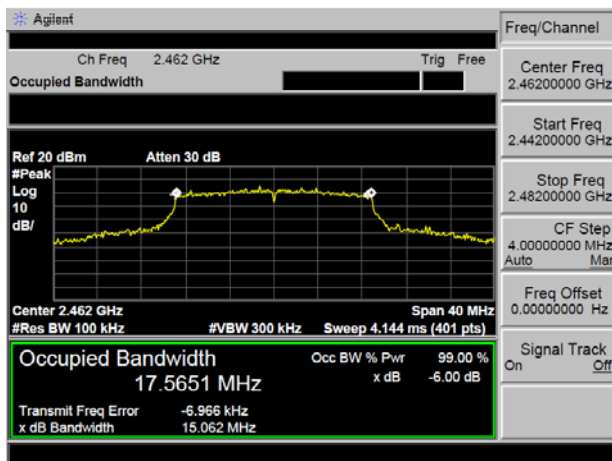
IEEE 802.11g 2412MHz ANT a	 Agilent Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.412 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Occupied Bandwidth 16.2419 MHz Transmit Freq Error 43.902 kHz x dB Bandwidth 15.136 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Freq/Channel Center Freq 2.4120000 GHz Start Freq 2.3920000 GHz Stop Freq 2.4320000 GHz CF Step 4.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off
IEEE 802.11g 2437MHz ANT a	 Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.437 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Occupied Bandwidth 16.2744 MHz Transmit Freq Error -29.278 kHz x dB Bandwidth 15.689 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Freq/Channel Center Freq 2.4370000 GHz Start Freq 2.4170000 GHz Stop Freq 2.4570000 GHz CF Step 4.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off
IEEE 802.11g 2462MHz ANT a	 Agilent Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.462 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Occupied Bandwidth 16.2927 MHz Transmit Freq Error -31.886 kHz x dB Bandwidth 15.839 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Freq/Channel Center Freq 2.4620000 GHz Start Freq 2.4420000 GHz Stop Freq 2.4820000 GHz CF Step 4.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off

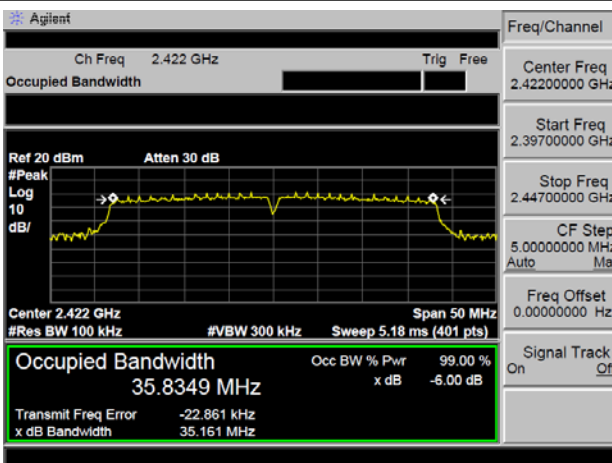
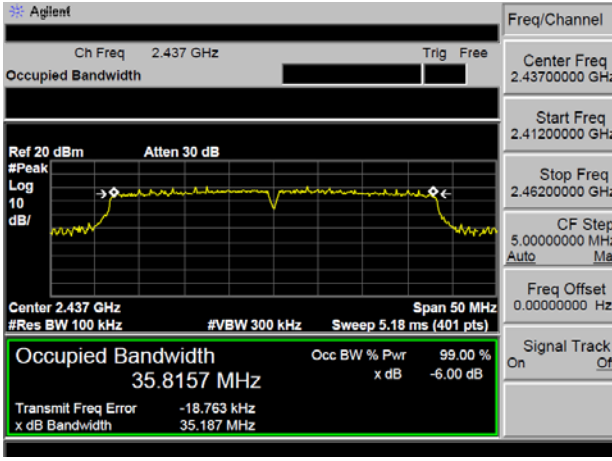
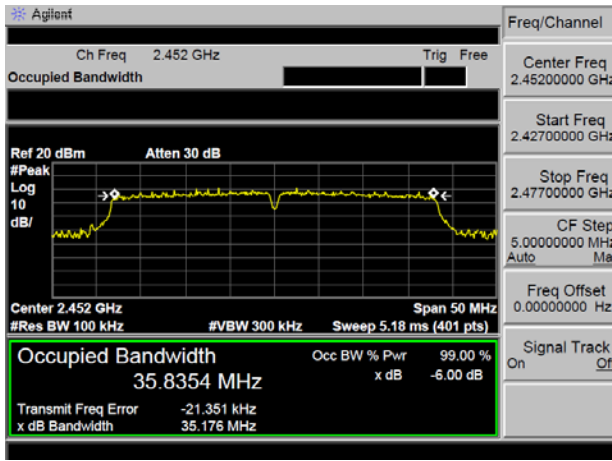
IEEE 802.11n HT20 2412MHz ANT a	 Agilent Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.412 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Occupied Bandwidth 16.2578 MHz Transmit Freq Error -3.330 kHz x dB Bandwidth 15.197 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39200000 GHz Stop Freq 2.43200000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
IEEE 802.11n HT20 2437MHz ANT a	 Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.437 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Occupied Bandwidth 16.2689 MHz Transmit Freq Error -26.634 kHz x dB Bandwidth 14.985 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.41700000 GHz Stop Freq 2.45700000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
IEEE 802.11n HT20 2462MHz ANT a	 Agilent Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.462 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Occupied Bandwidth 16.2608 MHz Transmit Freq Error -46.624 kHz x dB Bandwidth 15.166 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44200000 GHz Stop Freq 2.48200000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

IEEE 802.11n HT40 2422MHz ANT a	 Agilent Spectrum Analyzer screenshot for 2422 MHz. The display shows a signal with a peak at 2422 MHz. The occupied bandwidth is 35.6520 MHz. The transmit frequency error is 62.858 kHz. The x dB bandwidth is 35.125 MHz. The signal track is on.
IEEE 802.11n HT40 2437MHz ANT a	 Agilent Spectrum Analyzer screenshot for 2437 MHz. The display shows a signal with a peak at 2437 MHz. The occupied bandwidth is 35.5652 MHz. The transmit frequency error is -33.210 kHz. The x dB bandwidth is 35.066 MHz. The signal track is on.
IEEE 802.11n HT40 2452MHz ANT a	 Agilent Spectrum Analyzer screenshot for 2452 MHz. The display shows a signal with a peak at 2452 MHz. The occupied bandwidth is 35.6693 MHz. The transmit frequency error is -69.238 kHz. The x dB bandwidth is 35.055 MHz. The signal track is on.

IEEE 802.11b 2412MHz ANT b	
IEEE 802.11b 2437MHz ANT b	
IEEE 802.11b 2462MHz ANT b	

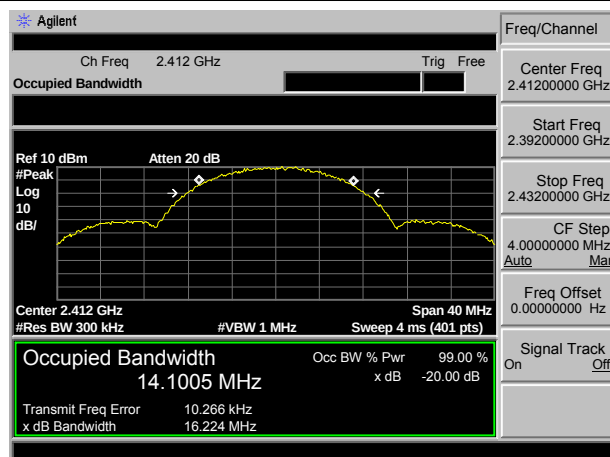
IEEE 802.11g 2412MHz ANT b	 Agilent Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.412 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Occupied Bandwidth 16.4035 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -11.987 kHz x dB Bandwidth 16.315 MHz Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39200000 GHz Stop Freq 2.43200000 GHz CF Step 4.00000000 MHz Auto Mar Freq Offset 0.00000000 Hz Signal Track On Off
IEEE 802.11g 2437MHz ANT b	 Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.437 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Occupied Bandwidth 16.4257 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -7.121 kHz x dB Bandwidth 15.803 MHz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.41700000 GHz Stop Freq 2.45700000 GHz CF Step 4.00000000 MHz Auto Ma Freq Offset 0.00000000 Hz Signal Track On Off
IEEE 802.11g 2462MHz ANT b	 Agilent Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.462 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Occupied Bandwidth 16.4181 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -1.943 kHz x dB Bandwidth 15.020 MHz Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44200000 GHz Stop Freq 2.48200000 GHz CF Step 4.00000000 MHz Auto Mar Freq Offset 0.00000000 Hz Signal Track On Off

IEEE 802.11n HT20 2412MHz ANT b	 Agilent Ch Freq 2.412 GHz Center Freq 2.41200000 GHz Start Freq 2.39200000 GHz Stop Freq 2.43200000 GHz CF Step 4.00000000 MHz Freq Offset 0.00000000 Hz Signal Track On Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Span 40 MHz Occupied Bandwidth 17.5442 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -5.774 kHz x dB Bandwidth 15.037 MHz
IEEE 802.11n HT20 2437MHz ANT b	 Agilent Ch Freq 2.437 GHz Center Freq 2.43700000 GHz Start Freq 2.41700000 GHz Stop Freq 2.45700000 GHz CF Step 4.00000000 MHz Freq Offset 0.00000000 Hz Signal Track On Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Span 40 MHz Occupied Bandwidth 17.5444 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -13.837 kHz x dB Bandwidth 16.083 MHz
IEEE 802.11n HT20 2462MHz ANT b	 Agilent Ch Freq 2.462 GHz Center Freq 2.46200000 GHz Start Freq 2.44200000 GHz Stop Freq 2.48200000 GHz CF Step 4.00000000 MHz Freq Offset 0.00000000 Hz Signal Track On Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts) Span 40 MHz Occupied Bandwidth 17.5651 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -6.966 kHz x dB Bandwidth 15.062 MHz

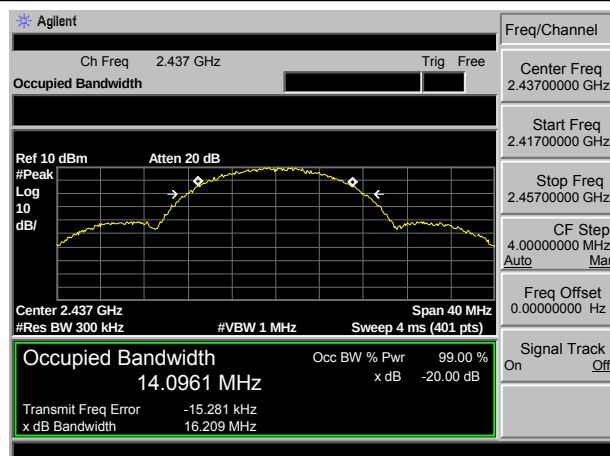
IEEE 802.11n HT40 2422MHz ANT b	
IEEE 802.11n HT40 2437MHz ANT b	
IEEE 802.11n HT40 2452MHz ANT b	

Graphs_20dB Bandwidth

IEEE 802.11b
2412MHz
ANT a

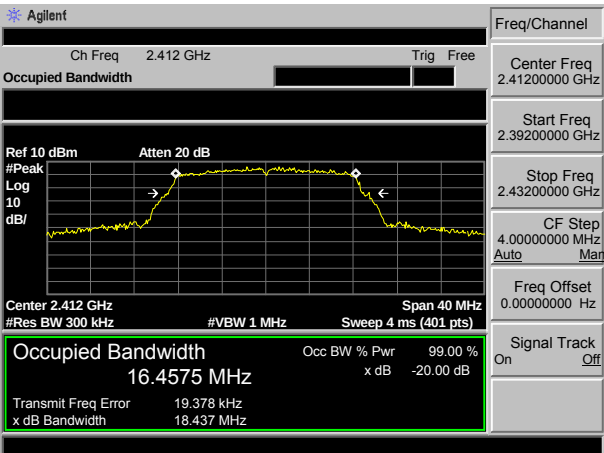
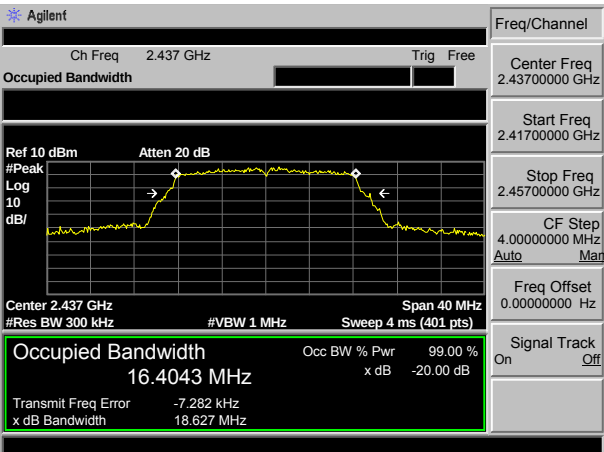
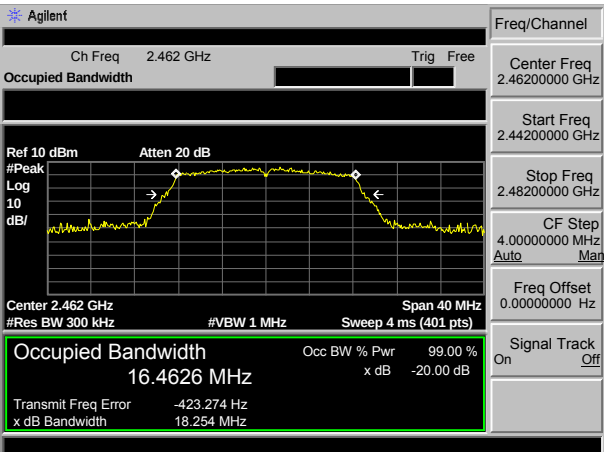


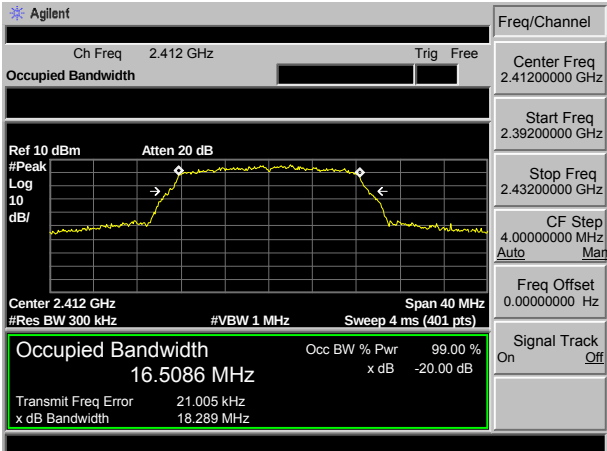
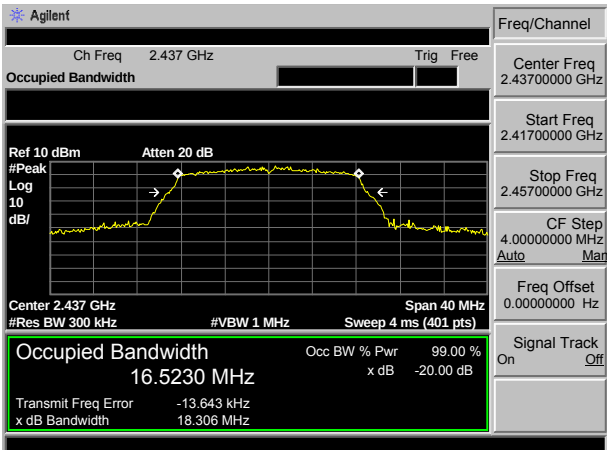
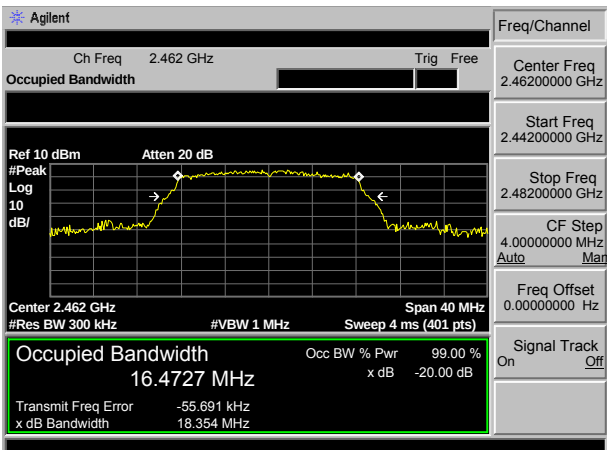
IEEE 802.11b
2437MHz
ANT a

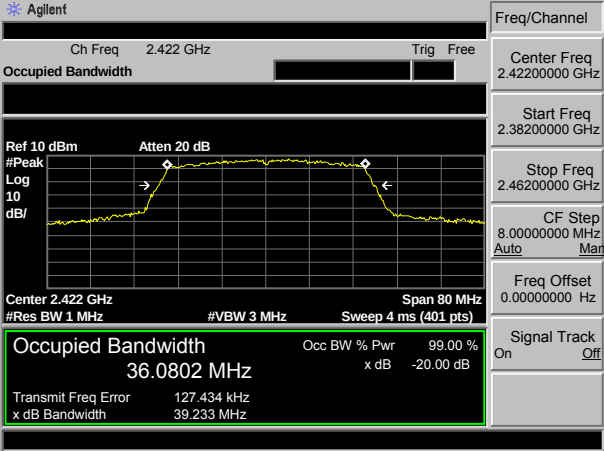
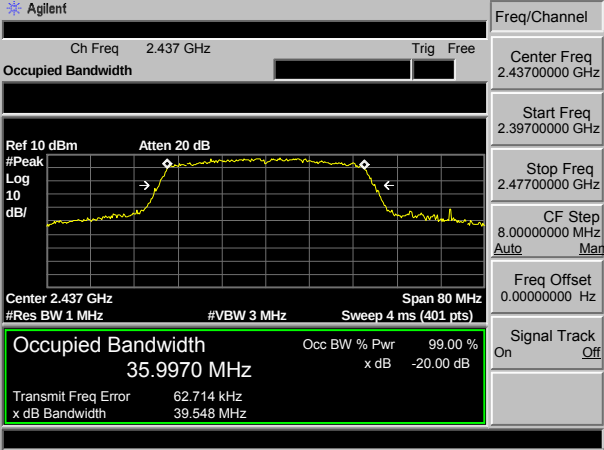
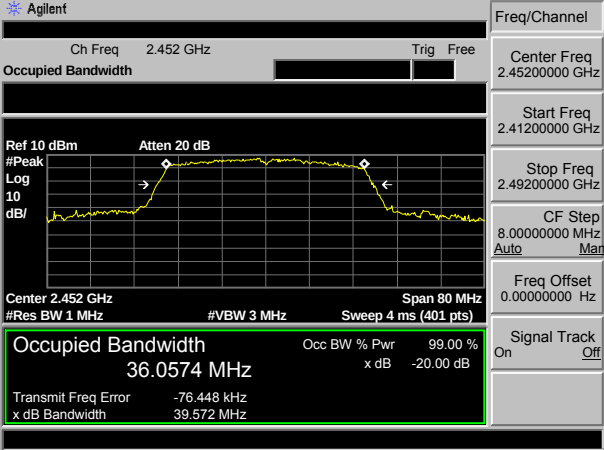


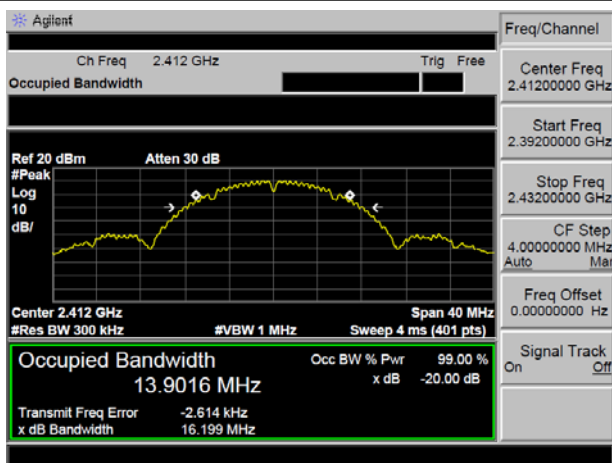
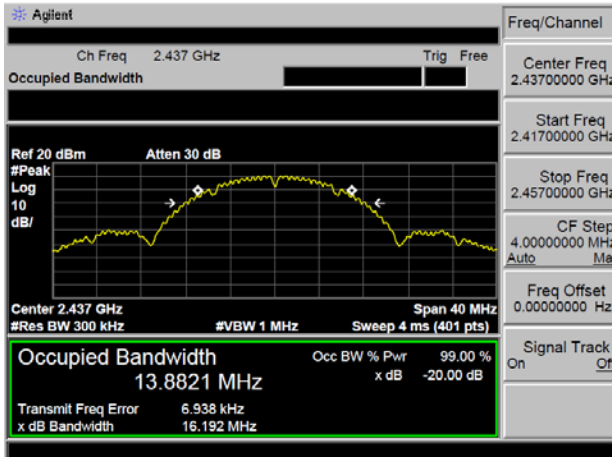
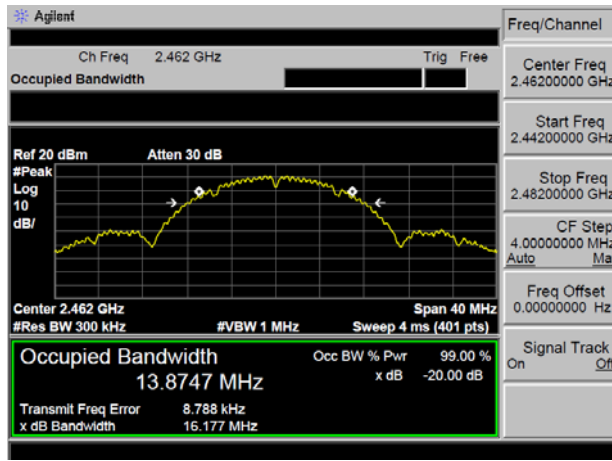
IEEE 802.11b
2462MHz
ANT a

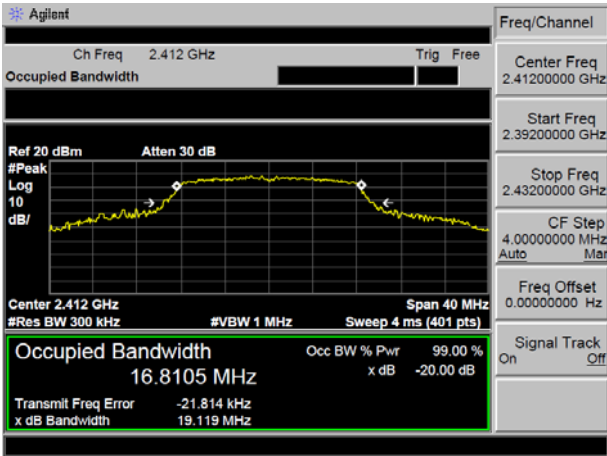
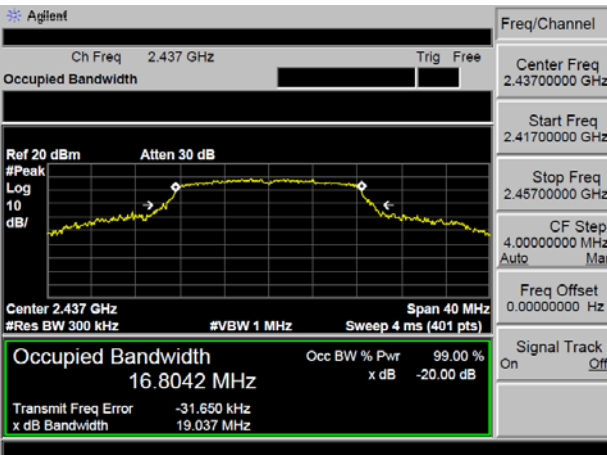
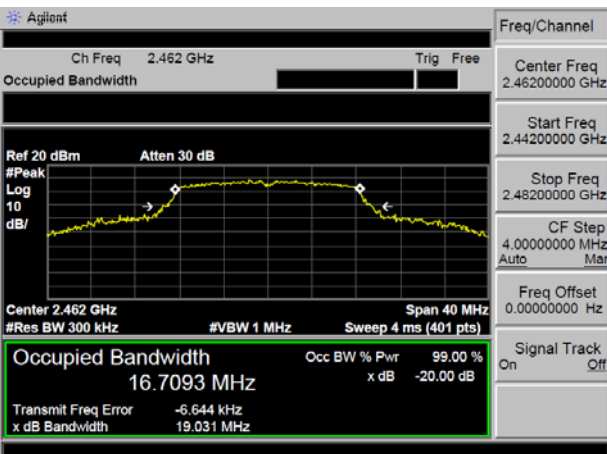


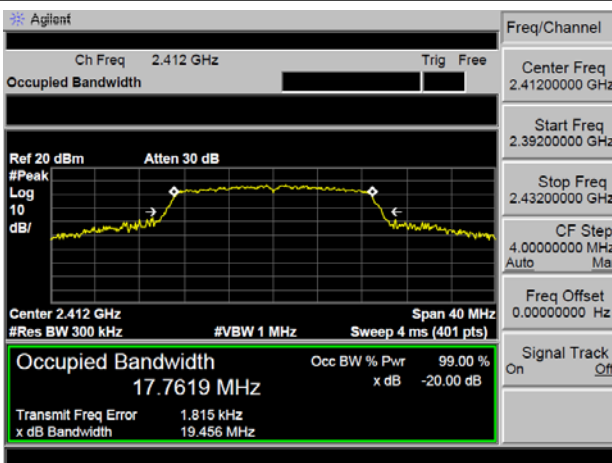
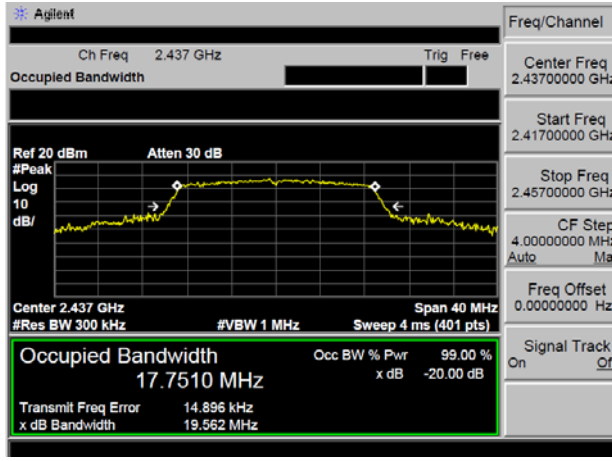
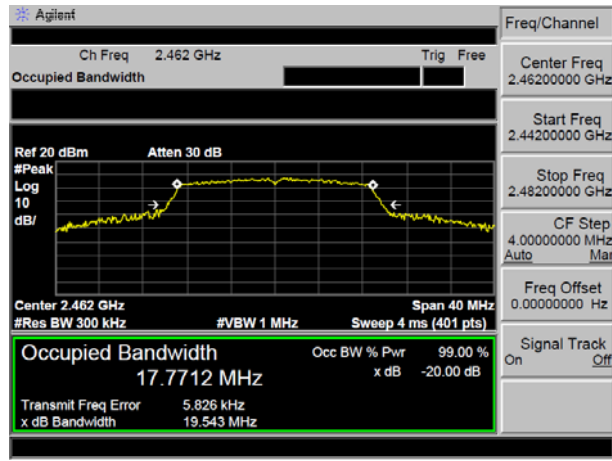
IEEE 802.11g 2412MHz ANT a	
IEEE 802.11g 2437MHz ANT a	
IEEE 802.11g 2462MHz ANT a	

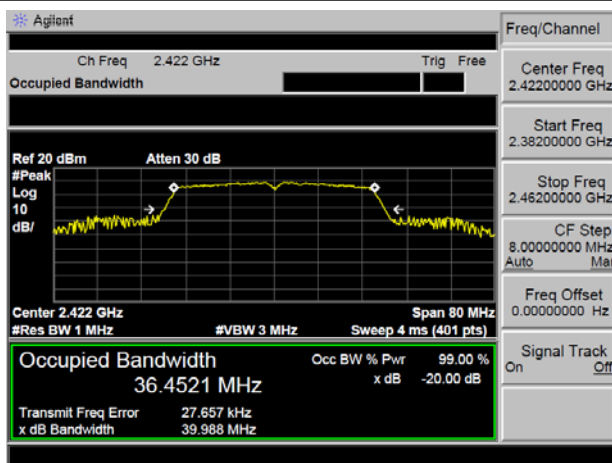
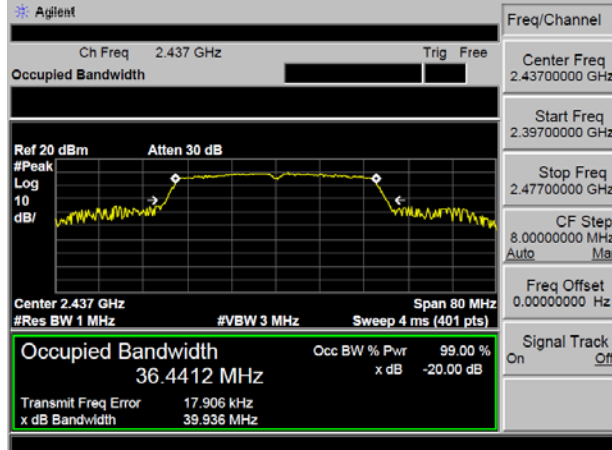
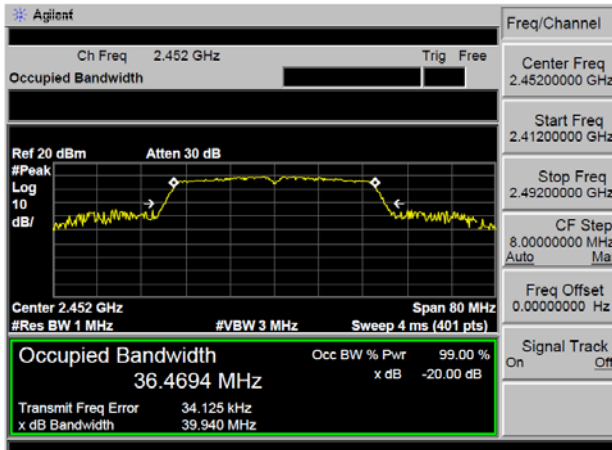
IEEE 802.11n HT20 2412MHz ANT a	 Agilent Spectrum Analyzer screenshot for 2412 MHz. The display shows a signal with a peak at 2412 MHz. The occupied bandwidth is 16.5086 MHz. The transmit frequency error is 21.005 kHz. The x dB bandwidth is 18.289 MHz. The signal is at -20.00 dB.
IEEE 802.11n HT20 2437MHz ANT a	 Agilent Spectrum Analyzer screenshot for 2437 MHz. The display shows a signal with a peak at 2437 MHz. The occupied bandwidth is 16.5230 MHz. The transmit frequency error is -13.643 kHz. The x dB bandwidth is 18.306 MHz. The signal is at -20.00 dB.
IEEE 802.11n HT20 2462MHz ANT a	 Agilent Spectrum Analyzer screenshot for 2462 MHz. The display shows a signal with a peak at 2462 MHz. The occupied bandwidth is 16.4727 MHz. The transmit frequency error is -55.691 kHz. The x dB bandwidth is 18.354 MHz. The signal is at -20.00 dB.

IEEE 802.11n HT40 2422MHz ANT a	 Agilent Ch Freq 2.422 GHz Trig Free Center Freq 2.4220000 GHz Start Freq 2.3820000 GHz Stop Freq 2.4620000 GHz CF Step 8.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.422 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 36.0802 MHz Occ BW % Pwr 99.00 % Transmit Freq Error 127.434 kHz x dB Bandwidth 39.233 MHz x dB -20.00 dB
IEEE 802.11n HT40 2437MHz ANT a	 Agilent Ch Freq 2.437 GHz Trig Free Center Freq 2.4370000 GHz Start Freq 2.3970000 GHz Stop Freq 2.4770000 GHz CF Step 8.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.437 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 35.9970 MHz Occ BW % Pwr 99.00 % Transmit Freq Error 62.714 kHz x dB Bandwidth 39.548 MHz x dB -20.00 dB
IEEE 802.11n HT40 2452MHz ANT a	 Agilent Ch Freq 2.452 GHz Trig Free Center Freq 2.4520000 GHz Start Freq 2.4120000 GHz Stop Freq 2.4920000 GHz CF Step 8.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.452 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 36.0574 MHz Occ BW % Pwr 99.00 % Transmit Freq Error -76.448 kHz x dB Bandwidth 39.572 MHz x dB -20.00 dB

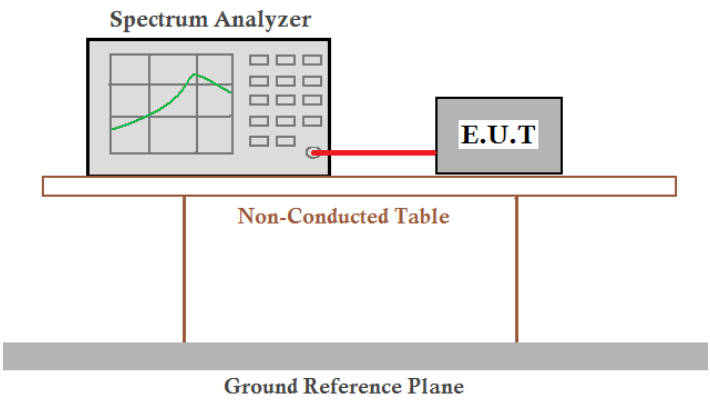
IEEE 802.11b 2412MHz ANT b	 Agilent Ch Freq 2.412 GHz Trig Free Center Freq 2.41200000 GHz Start Freq 2.39200000 GHz Stop Freq 2.43200000 GHz CF Step 4.00000000 MHz Auto Mar Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.412 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 13.9016 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -2.614 kHz x dB Bandwidth 16.199 MHz
IEEE 802.11b 2437MHz ANT b	 Agilent Ch Freq 2.437 GHz Trig Free Center Freq 2.43700000 GHz Start Freq 2.41700000 GHz Stop Freq 2.45700000 GHz CF Step 4.00000000 MHz Auto Mar Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.437 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 13.8821 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 6.938 kHz x dB Bandwidth 16.192 MHz
IEEE 802.11b 2462MHz ANT b	 Agilent Ch Freq 2.462 GHz Trig Free Center Freq 2.46200000 GHz Start Freq 2.44200000 GHz Stop Freq 2.48200000 GHz CF Step 4.00000000 MHz Auto Mar Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.462 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 13.8747 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 8.788 kHz x dB Bandwidth 16.177 MHz

IEEE 802.11g 2412MHz ANT b	
IEEE 802.11g 2437MHz ANT b	
IEEE 802.11g 2462MHz ANT b	

IEEE 802.11n HT20 2412MHz ANT b	 Agilent Ch Freq 2.412 GHz Trig Free Center Freq 2.4120000 GHz Start Freq 2.3920000 GHz Stop Freq 2.4320000 GHz CF Step 4.0000000 MHz Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.412 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 17.7619 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 1.815 kHz x dB Bandwidth 19.456 MHz
IEEE 802.11n HT20 2437MHz ANT b	 Agilent Ch Freq 2.437 GHz Trig Free Center Freq 2.4370000 GHz Start Freq 2.4170000 GHz Stop Freq 2.4570000 GHz CF Step 4.0000000 MHz Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.437 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 17.7510 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 14.896 kHz x dB Bandwidth 19.562 MHz
IEEE 802.11n HT20 2462MHz ANT b	 Agilent Ch Freq 2.462 GHz Trig Free Center Freq 2.4620000 GHz Start Freq 2.4420000 GHz Stop Freq 2.4820000 GHz CF Step 4.0000000 MHz Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.462 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 17.7712 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 5.826 kHz x dB Bandwidth 19.543 MHz

IEEE 802.11n HT40 2422MHz ANT b	 Agilent Ch Freq 2.422 GHz Trig Free Center Freq 2.4220000 GHz Start Freq 2.3820000 GHz Stop Freq 2.4620000 GHz CF Step 8.0000000 MHz Freq Offset 0.0000000 Hz Signal Track On Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.422 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 36.4521 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 27.657 kHz x dB Bandwidth 39.988 MHz
IEEE 802.11n HT40 2437MHz ANT b	 Agilent Ch Freq 2.437 GHz Trig Free Center Freq 2.4370000 GHz Start Freq 2.3970000 GHz Stop Freq 2.4770000 GHz CF Step 8.0000000 MHz Freq Offset 0.0000000 Hz Signal Track On Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.437 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 36.4412 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 17.906 kHz x dB Bandwidth 39.936 MHz
IEEE 802.11n HT40 2452MHz ANT b	 Agilent Ch Freq 2.452 GHz Trig Free Center Freq 2.4520000 GHz Start Freq 2.4120000 GHz Stop Freq 2.4920000 GHz CF Step 8.0000000 MHz Freq Offset 0.0000000 Hz Signal Track On Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Center 2.452 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts) Occupied Bandwidth 36.4694 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 34.125 kHz x dB Bandwidth 39.940 MHz

5.5 Power Spectral Density

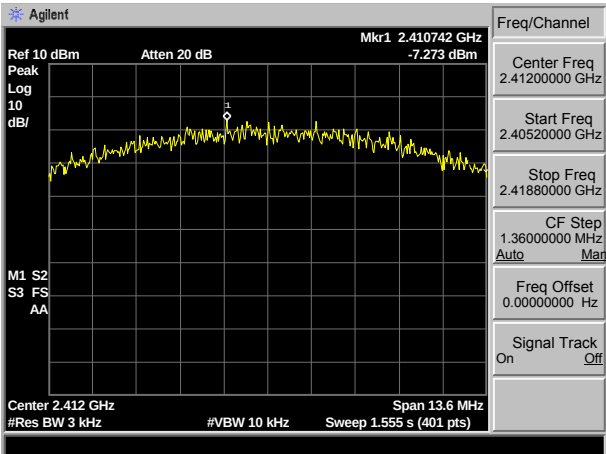
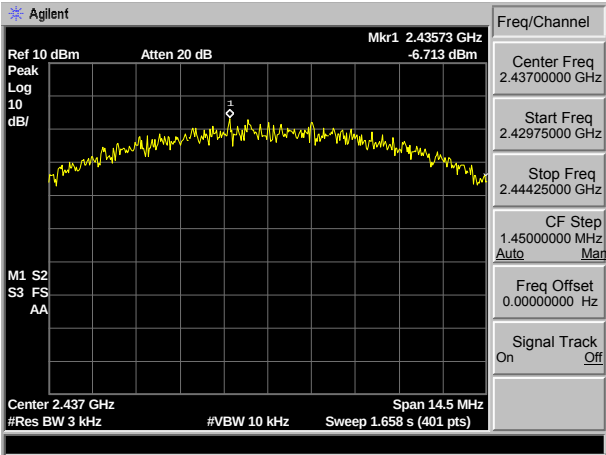
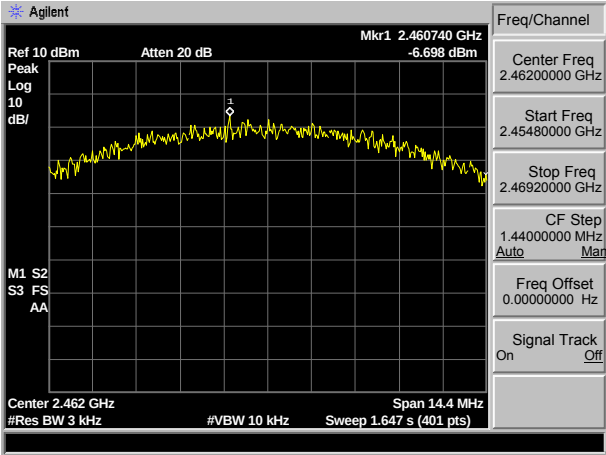
Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20/HT40) ; Only the worst case is recorded in the report.
Limit:	$\leq 8.00\text{dBm}/3\text{kHz}$
Test Results:	Pass

Measurement Data

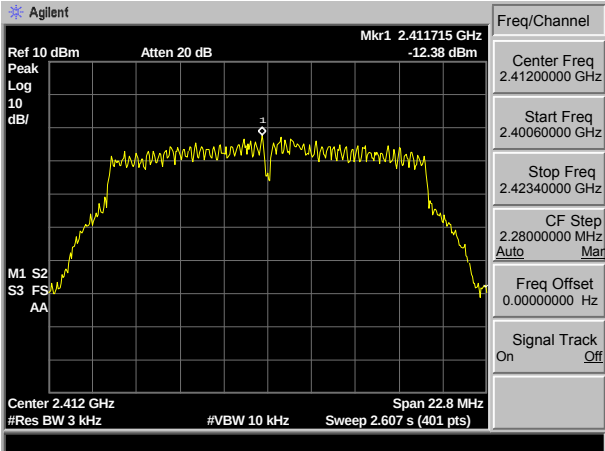
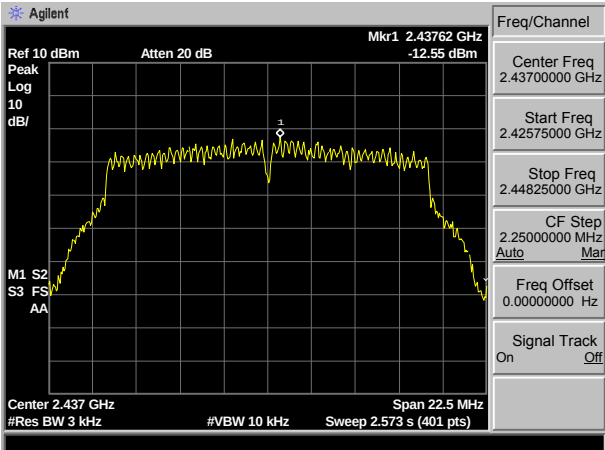
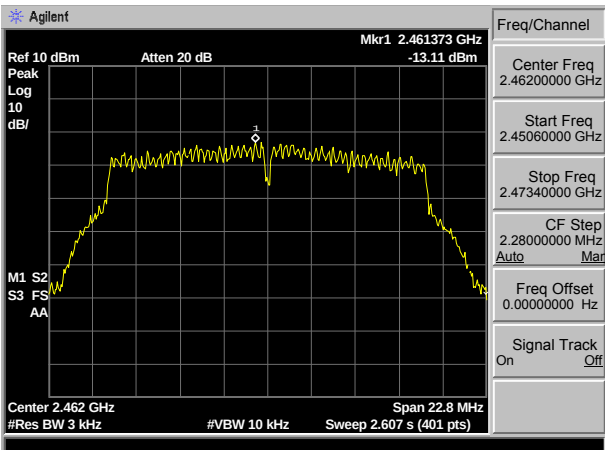
Test Mode	CH	Power density (dBm/3kHz)	Limit (dBm/3kHz)
IEEE 802.11 b ANT a	CH1	-7.273	8
	CH6	-6.713	8
	CH11	-6.698	8
IEEE 802.11 g ANT a	CH1	-11.05	8
	CH6	-12.67	8
	CH11	-12.67	8
IEEE 802.11 b ANT b	CH1	-9.42	8
	CH6	-9.12	8
	CH11	-6.49	8
IEEE 802.11 g ANT b	CH1	-13.49	8
	CH6	-12.52	8
	CH11	-13.27	8
Conclusion: PASS			

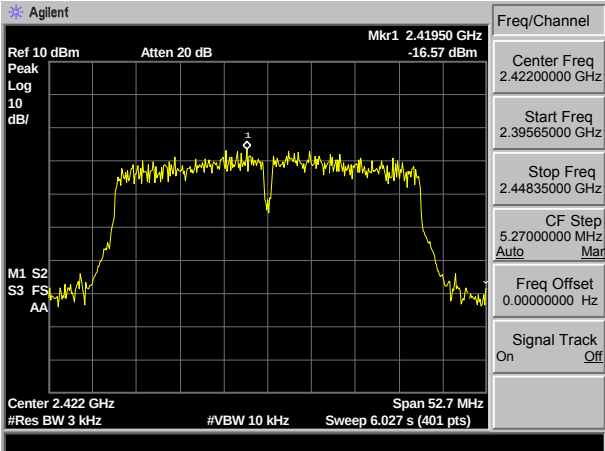
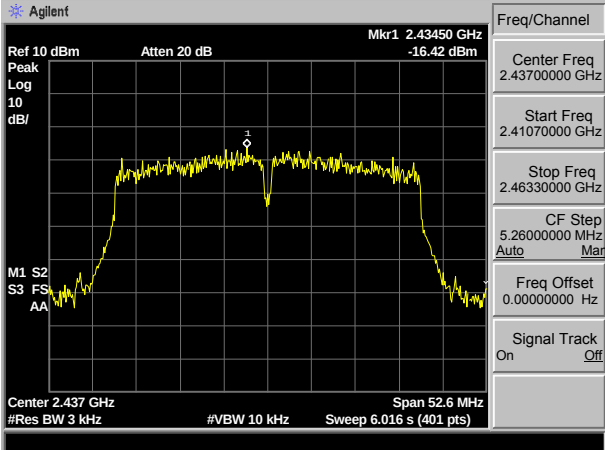
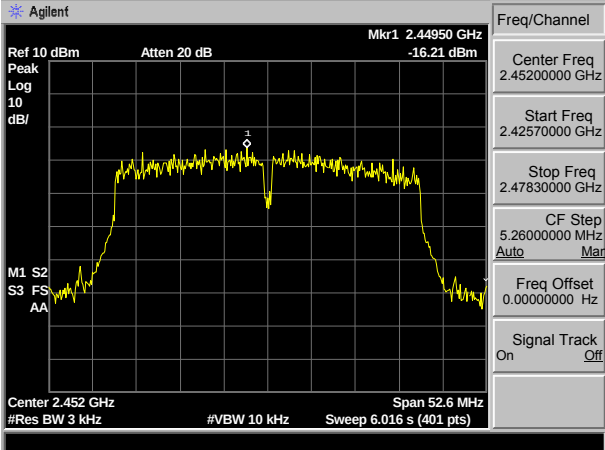
Test Mode	CH				Limit (dBm/3kHz)
		ANT 1	ANT 2	Power density (dBm/3kHz)	
IEEE 802.11n (HT20)	CH1	-12.38	-16.84	-11.05	8
	CH6	-12.55	-16.81	-11.17	
	CH11	-13.11	-15.92	-11.28	
IEEE 802.11n (HT40)	CH1	-16.52	-22.04	-15.44	
	CH4	-16.42	-21.56	-15.26	
	CH7	-16.21	-21.47	-15.08	
Conclusion: PASS					

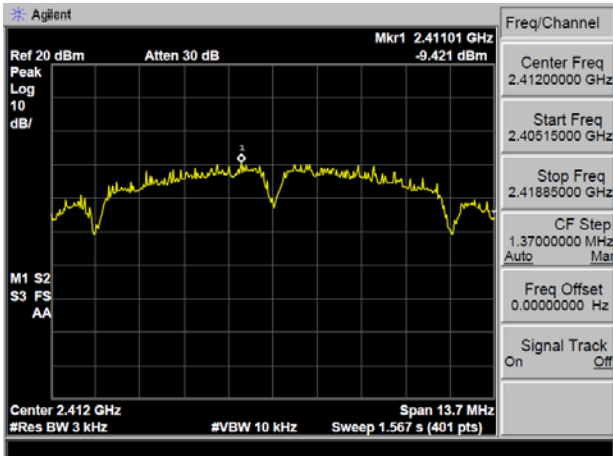
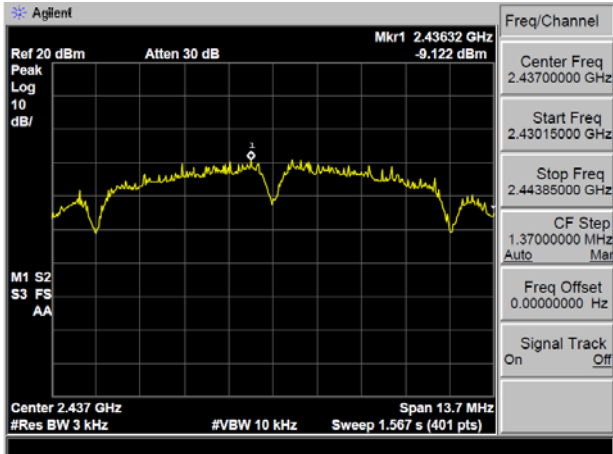
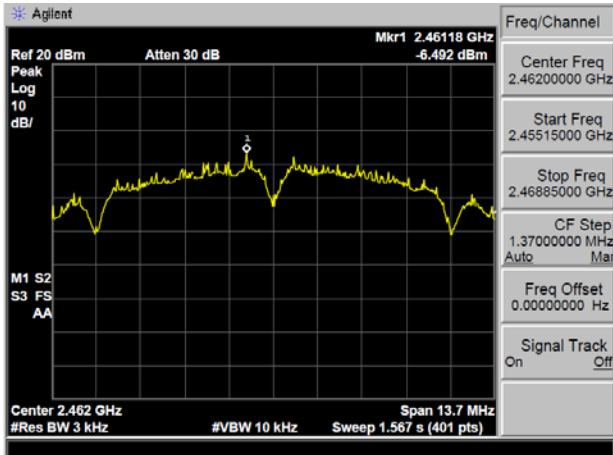
Test plot as follows:

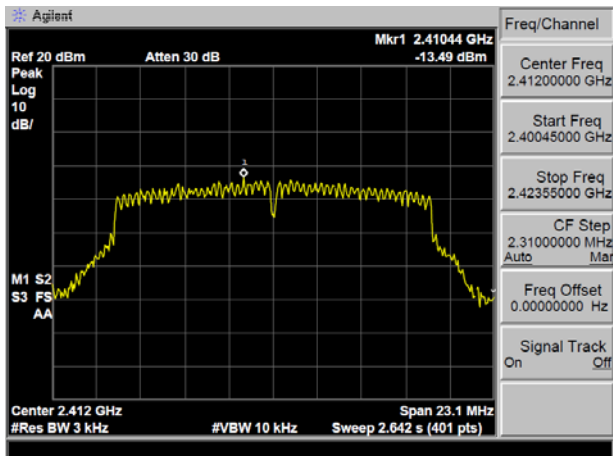
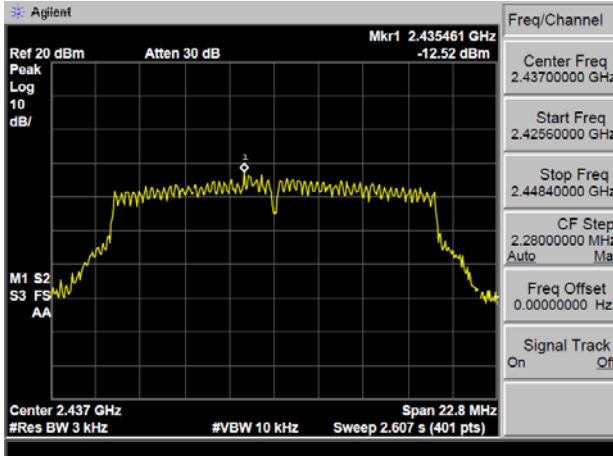
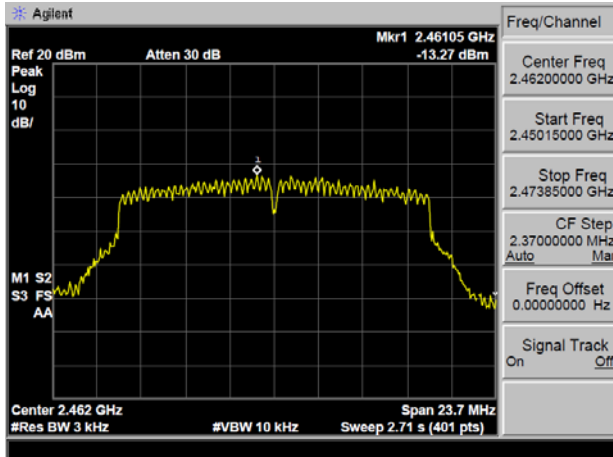
IEEE 802.11b 2412MHz ANT a	
IEEE 802.11b 2437MHz ANT a	
IEEE 802.11b 2462MHz ANT a	

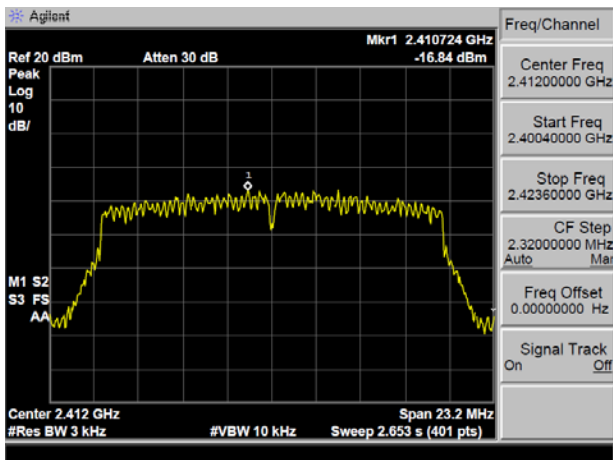
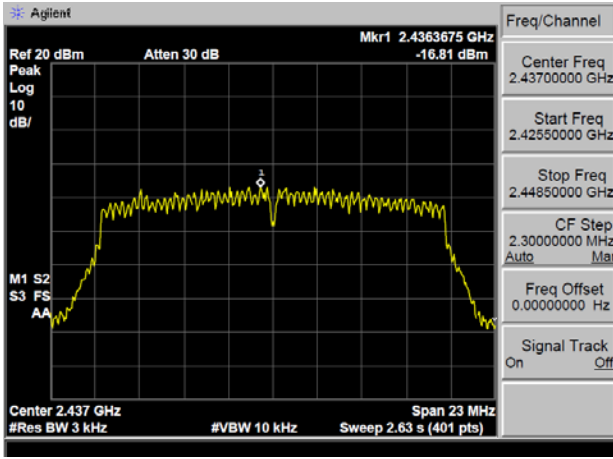
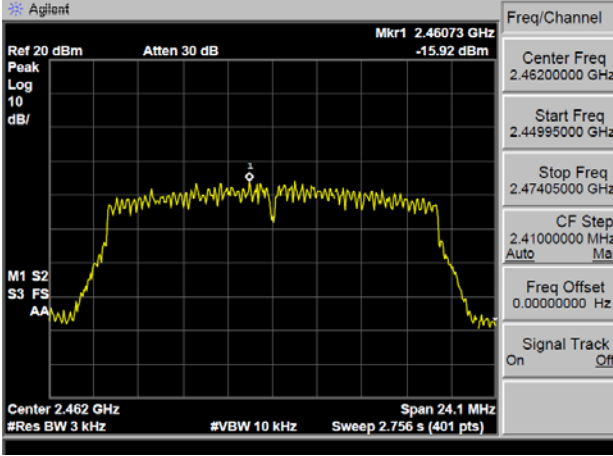
IEEE 802.11g 2412MHz ANT a	Agilent Ref 10 dBm Atten 20 dB Mkr1 2.412912 GHz -11.05 dBm Peak Log 10 dB/ M1 S2 S3 FS AA Center 2.412 GHz Span 22.8 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.607 s (401 pts) Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.40060000 GHz Stop Freq 2.42340000 GHz CF Step 2.28000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
IEEE 802.11g 2437MHz ANT a	Agilent Ref 10 dBm Atten 20 dB Mkr1 2.437413 GHz -12.67 dBm Peak Log 10 dB/ M1 S2 S3 FS AA Center 2.437 GHz Span 23.6 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.699 s (401 pts) Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42520000 GHz Stop Freq 2.44880000 GHz CF Step 2.36000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
IEEE 802.11g 2462MHz ANT a	Agilent Ref 10 dBm Atten 20 dB Mkr1 2.4607505 GHz -12.67 dBm Peak Log 10 dB/ M1 S2 S3 FS AA Center 2.462 GHz Span 23.8 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.722 s (401 pts) Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.45010000 GHz Stop Freq 2.47390000 GHz CF Step 2.38000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

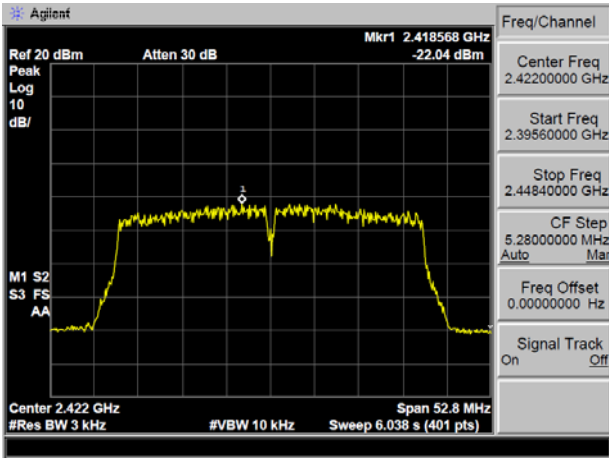
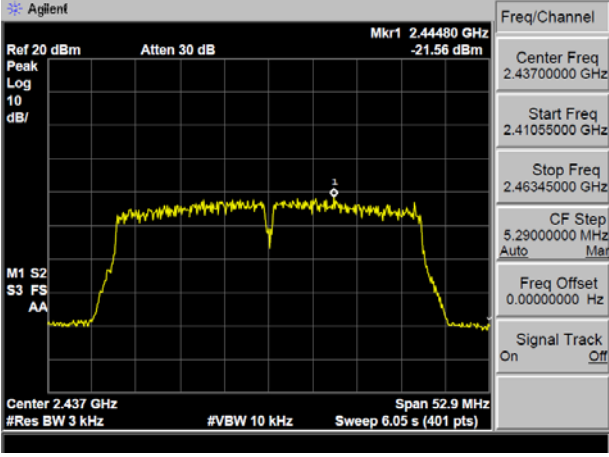
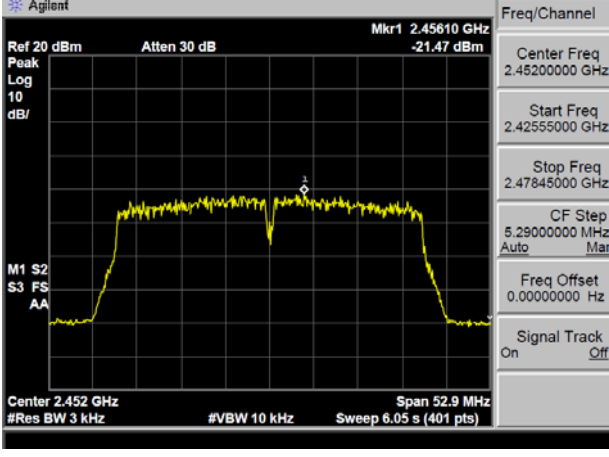
IEEE 802.11n HT20 2412MHz ANT a	
IEEE 802.11n HT20 2437MHz ANT a	
IEEE 802.11n HT20 2462MHz ANT a	

IEEE 802.11n HT40 2422MHz ANT a	
IEEE 802.11n HT40 2437MHz ANT a	
IEEE 802.11n HT40 2452MHz ANT a	

IEEE 802.11b 2412MHz ANT b	
IEEE 802.11b 2437MHz ANT b	
IEEE 802.11b 2462MHz ANT b	

IEEE 802.11g 2412MHz ANT b	 Agilent Ref 20 dBm Atten 30 dB Mkr1 2.41044 GHz -13.49 dBm Peak Log 10 dB/ M1 S2 S3 FS AA Center 2.412 GHz Span 23.1 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.642 s (401 pts) Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.40045000 GHz Stop Freq 2.42355000 GHz CF Step 2.31000000 MHz Auto Mar Freq Offset 0.00000000 Hz Signal Track On Off
IEEE 802.11g 2437MHz ANT b	 Agilent Ref 20 dBm Atten 30 dB Mkr1 2.435461 GHz -12.52 dBm Peak Log 10 dB/ M1 S2 S3 FS AA Center 2.437 GHz Span 22.8 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.607 s (401 pts) Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42560000 GHz Stop Freq 2.44840000 GHz CF Step 2.28000000 MHz Auto Mar Freq Offset 0.00000000 Hz Signal Track On Off
IEEE 802.11g 2462MHz ANT b	 Agilent Ref 20 dBm Atten 30 dB Mkr1 2.46105 GHz -13.27 dBm Peak Log 10 dB/ M1 S2 S3 FS AA Center 2.462 GHz Span 23.7 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.71 s (401 pts) Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.45015000 GHz Stop Freq 2.47385000 GHz CF Step 2.37000000 MHz Auto Mar Freq Offset 0.00000000 Hz Signal Track On Off

IEEE 802.11n HT20 2412MHz ANT b	
IEEE 802.11n HT20 2437MHz ANT b	
IEEE 802.11n HT20 2462MHz ANT b	

IEEE 802.11n HT40 2422MHz ANT b	
IEEE 802.11n HT40 2437MHz ANT b	
IEEE 802.11n HT40 2452MHz ANT b	

5.6 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

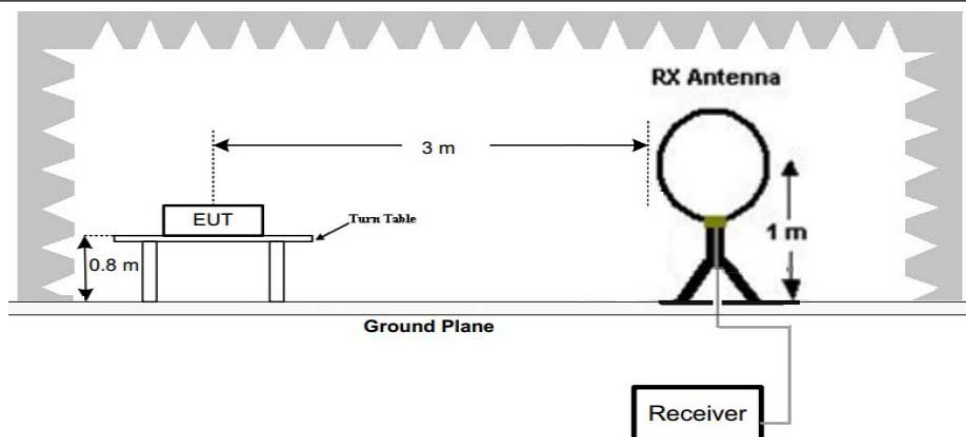


Figure 1. Below 30MHz

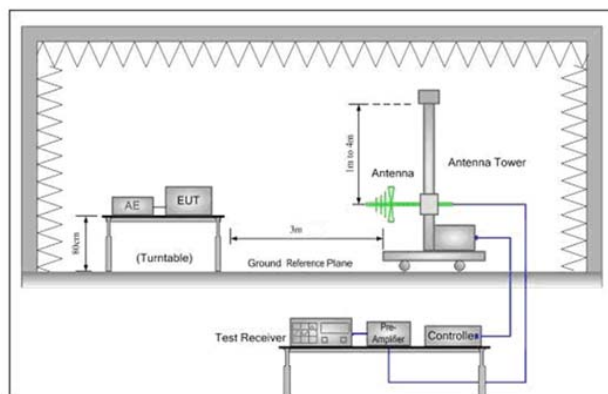


Figure 2. 30MHz to 1GHz

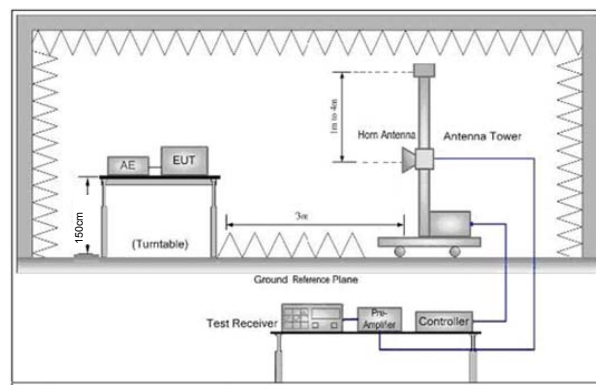


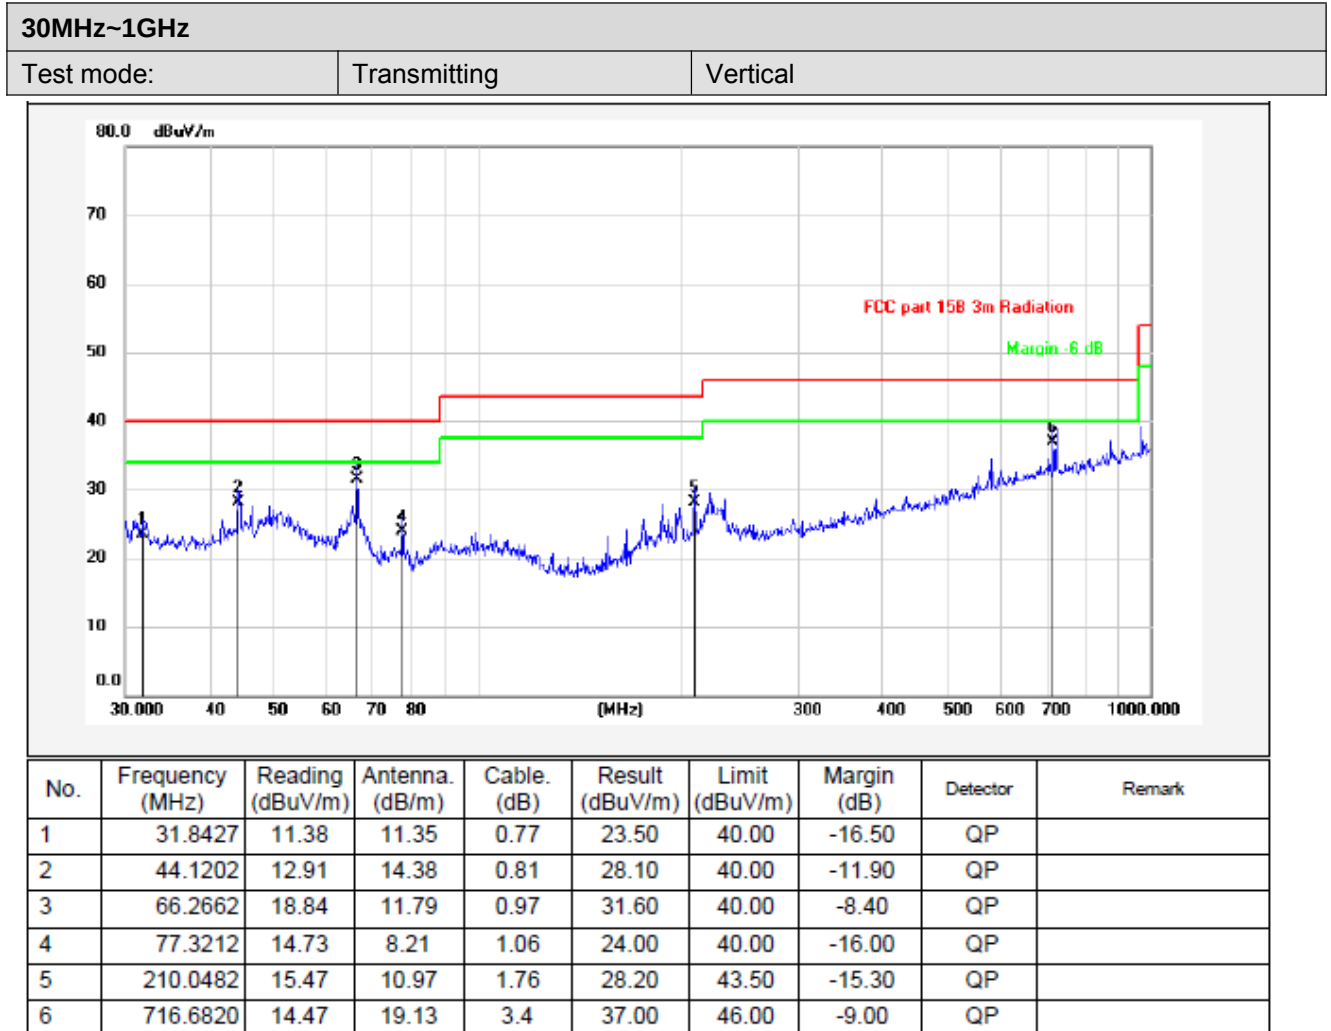
Figure 3. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode Through Pre-scan, 802.11b,802.11g M,802.11n(HT20,HT40) find the 1Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report.
Test Results:	Pass

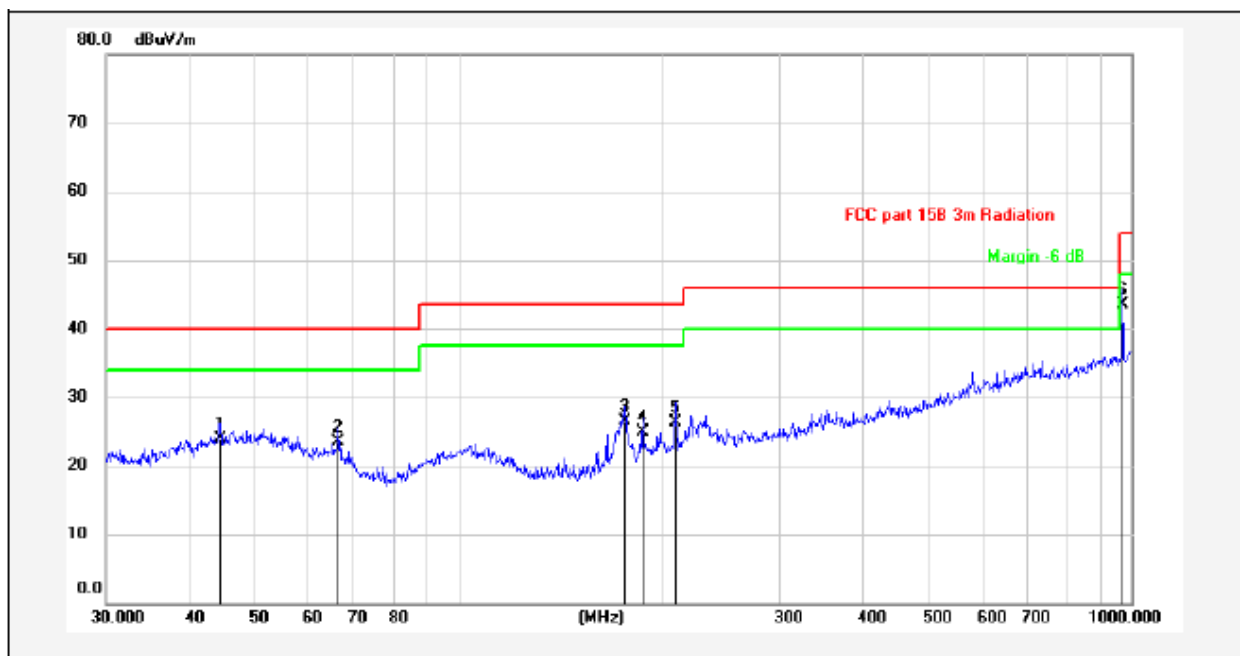
5.6.1 Radiated emission below 1GHz



Remarks: 1. Result=Reading+Antenna+Cable

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

Test mode:	Transmitting	Horizontal
------------	--------------	------------



No.	Frequency (MHz)	Reading (dBuV/m)	Antenna. (dB/m)	Cable. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	44.2752	8.80	14.39	0.81	24.00	40.00	-16.00	QP	
2	66.2662	10.84	11.79	0.97	23.60	40.00	-16.40	QP	
3	176.8878	15.60	9.43	1.57	26.60	43.50	-16.90	QP	
4	187.7530	13.05	10.32	1.63	25.00	43.50	-18.50	QP	
5	210.0482	13.67	10.97	1.76	26.40	43.50	-17.10	QP	
6	968.9338	18.23	21.33	4.04	43.60	54.00	-10.40	QP	

Remarks: 1. Result=Reading+Antenna+Cable

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

5.6.2 Transmitter emission above 1GHz

Test mode: 802.11b(1Mbps) ANT a				Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4824.000	53.54	-4.26	49.28	74	-24.72	peak	H
4824.000	36.59	-4.26	32.33	54	-21.67	AVG	H
7236.000	51.06	1.18	52.24	74	-21.76	peak	H
7236.000	37.95	1.18	39.13	54	-14.87	AVG	H
4824.000	55.76	-4.26	51.50	74	-22.50	peak	V
4824.000	39.81	-4.26	35.55	54	-18.45	AVG	V
7236.000	50.46	1.18	51.64	74	-22.36	peak	V
7236.000	36.77	1.18	37.95	54	-16.05	AVG	V

Test mode: 802.11b(1Mbps) ANT a				Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	52.63	-4.12	48.51	74	-25.49	peak	H
4874.000	36.31	-4.12	32.19	54	-21.81	AVG	H
7311.000	49.61	1.46	51.07	74	-22.93	peak	H
7311.000	35.16	1.46	36.62	54	-17.38	AVG	H
4874.000	52.32	-4.12	48.20	74	-25.80	peak	V
4874.000	36.04	-4.12	31.92	54	-22.08	AVG	V
7311.000	48.50	1.46	49.96	74	-24.04	peak	V
7311.000	35.74	1.46	37.20	54	-16.80	AVG	V

Test mode: 802.11b(1Mbps) ANT a				Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	52.31	-4.03	48.28	74	-25.72	peak	H
4924.000	37.72	-4.03	33.69	54	-20.31	AVG	H
7386.000	50.18	1.66	51.84	74	-22.16	peak	H
7386.000	36.64	1.66	38.30	54	-15.70	AVG	H
4924.000	53.40	-4.03	49.37	74	-24.63	peak	V
4924.000	38.53	-4.03	34.50	54	-19.50	AVG	V
7386.000	49.89	1.66	51.55	74	-22.45	peak	V
7386.000	36.45	1.66	38.11	54	-15.89	AVG	V

Remark:

- 1) The 1Mbps of rate of ANT 1 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.7 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

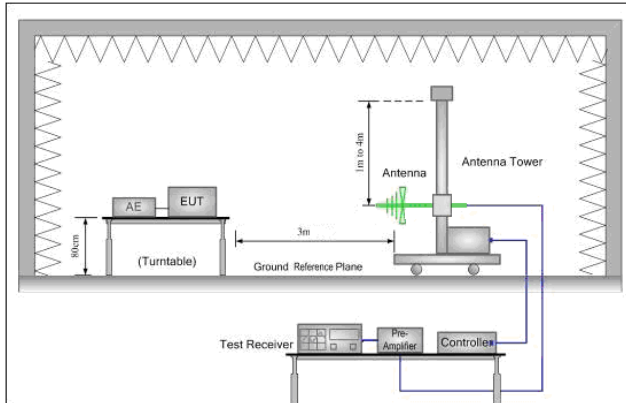


Figure 1. 30MHz to 1GHz

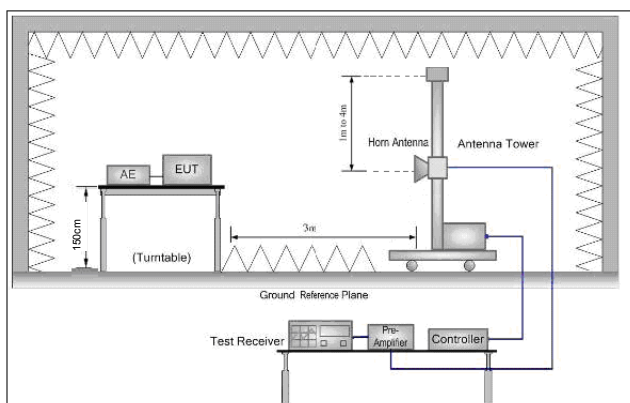


Figure 2. Above 1 GHz

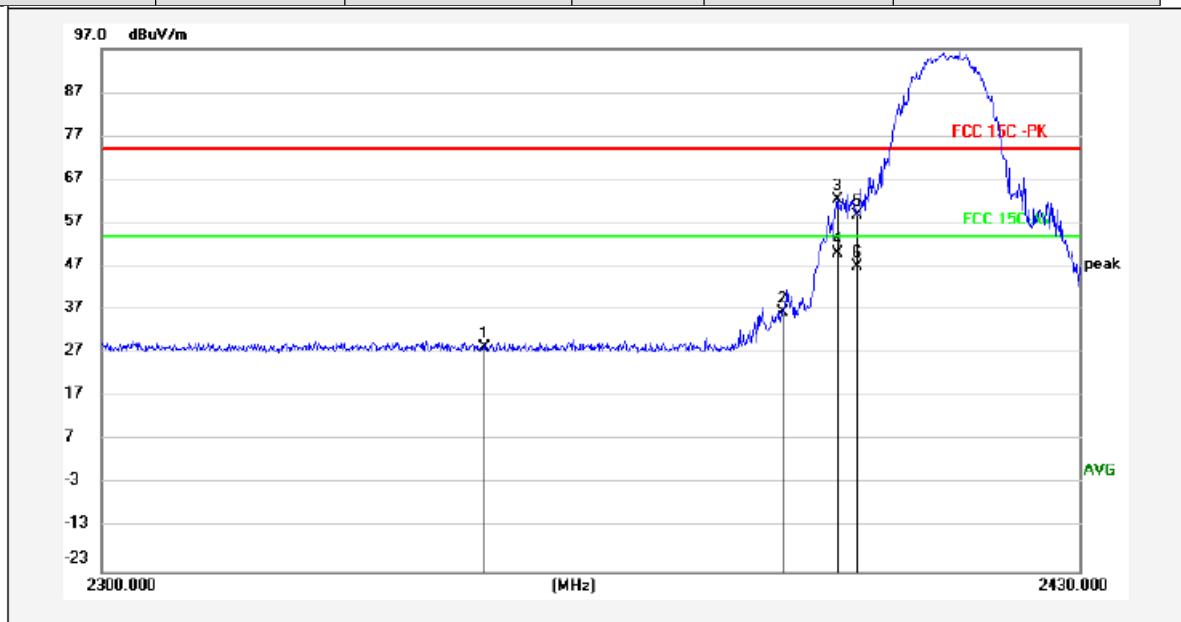
Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

		d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Exploratory Mode:	Test	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:		Pretest the EUT at Transmitting mode Through Pre-scan, 802.11b,802.11g M,802.11n(HT20,HT40) find the 802.11n HT40 is the worst case. Only the worst case is recorded in the report.
Test Results:		Pass

Test data:

Test mode:	11b ANT a	Test channel:	Lowest	Polarization:	Horizontal
------------	-----------	---------------	--------	---------------	------------

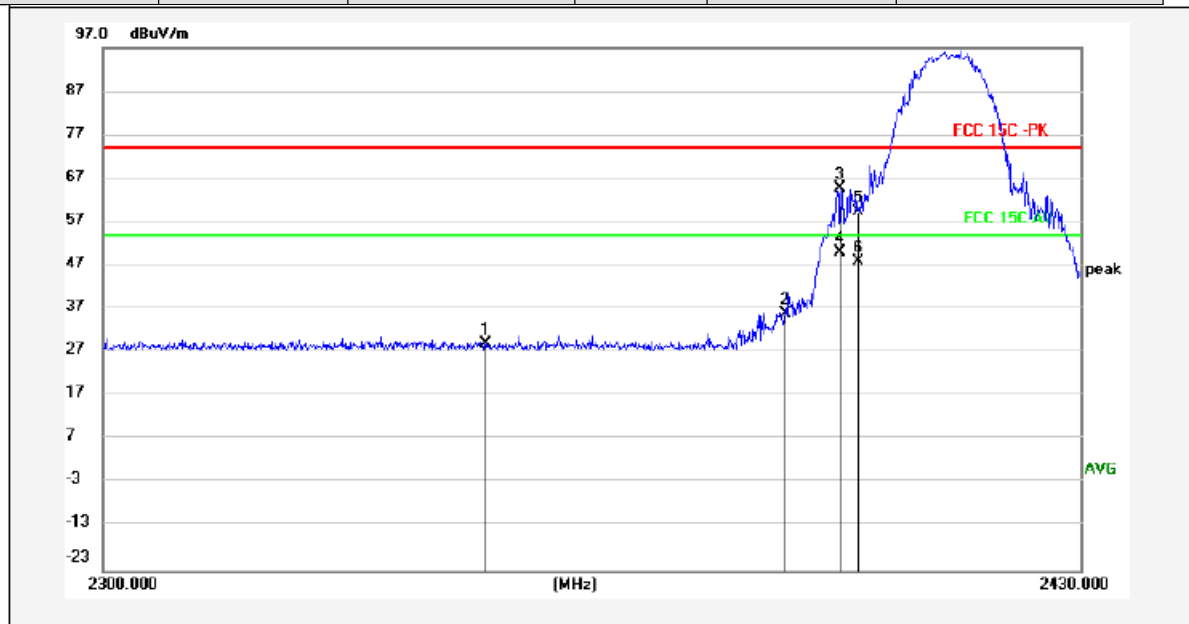


No.	Frequency (MHz)	Reading (dBuV/m)	Antenna. (dB/m)	Cable. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2350.000	33.95	27.13	-32.61	28.47	74.00	-45.53	peak	
2	2390.000	41.85	27.2	-32.52	36.53	74.00	-37.47	peak	
3	2397.240	67.61	27.22	-32.51	62.32	74.00	-11.68	peak	
4	2397.240	55.29	27.22	-32.51	50.00	54.00	-4.00	AVG	
5	2400.000	63.90	27.22	-32.5	58.62	74.00	-15.38	peak	
6	2400.000	52.31	27.22	-32.5	47.03	54.00	-6.97	AVG	

Remarks: 1. Result=Reading+Antenna+Cable

Note: The emission levels that are 20dB below the official limit are not reported.

Test mode:	11b ANT a	Test channel:	Lowest	Polarization:	Vertical
------------	-----------	---------------	--------	---------------	----------

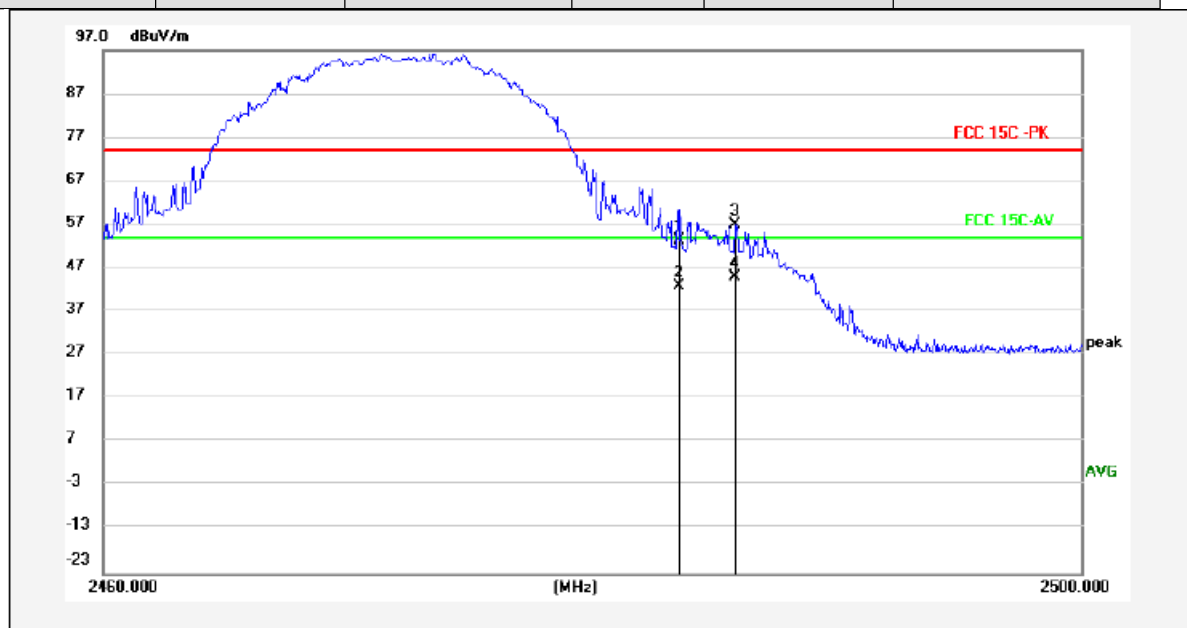


No.	Frequency (MHz)	Reading (dBuV/m)	Antenna. (dB/m)	Cable. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2350.000	34.50	27.1	-32.61	28.99	74.00	-45.01	peak	
2	2390.000	41.42	27.18	-32.52	36.08	74.00	-37.92	peak	
3	2397.370	70.02	27.19	-32.51	64.70	74.00	-9.30	peak	
4	2397.370	55.36	27.19	-32.51	50.04	54.00	-3.96	AVG	
5	2400.000	64.64	27.2	-32.5	59.34	74.00	-14.66	peak	
6	2400.000	53.30	27.2	-32.5	48.00	54.00	-6.00	AVG	

Remarks: 1. Result=Reading+Antenna+Cable

Note: The emission levels that are 20dB below the official limit are not reported.

Test mode:	11b ANT a	Test channel:	Highest	Polarization:	Vertical
------------	-----------	---------------	---------	---------------	----------

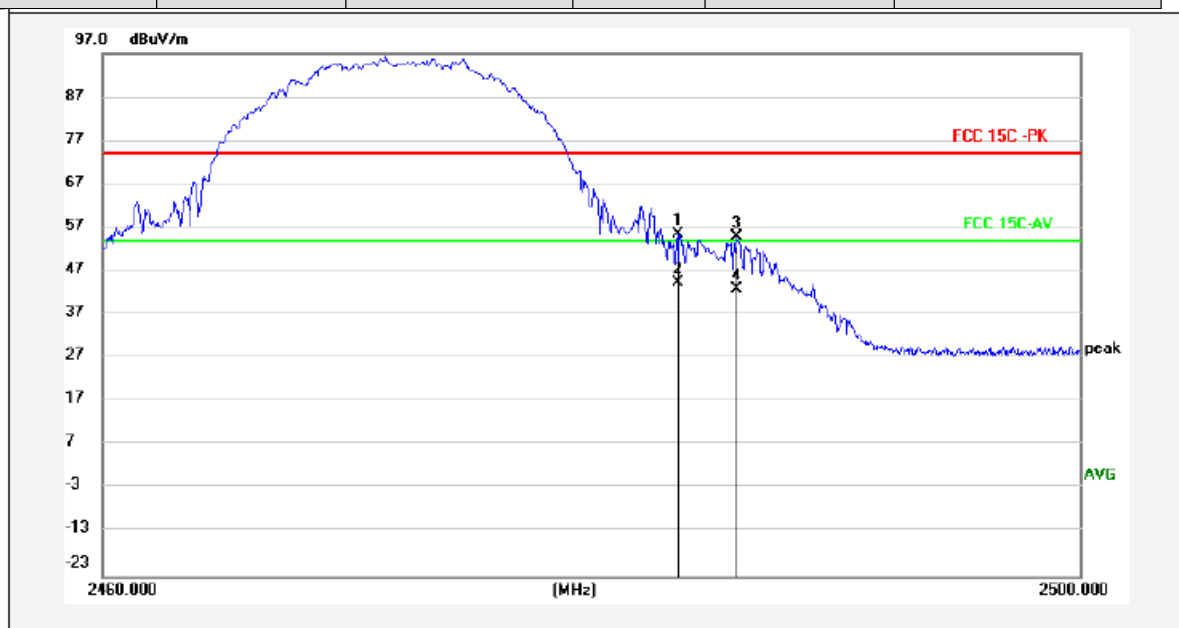


No.	Frequency (MHz)	Reading (dBuV/m)	Antenna. (dB/m)	Cable. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2483.500	58.65	27.37	-32.58	53.44	74.00	-20.56	peak	
2	2483.500	48.21	27.37	-32.58	43.00	54.00	-11.00	AVG	
3	2485.800	62.25	27.37	-32.58	57.04	74.00	-16.96	peak	
4	2485.800	50.30	27.37	-32.58	45.09	54.00	-8.91	AVG	

Remarks:1. Result=Reading+Antenna+Cable

Note: The emission levels that are 20dB below the official limit are not reported.

Test mode:	11b ANT a	Test channel:	Highest	Polarization:	Horizontal
------------	-----------	---------------	---------	---------------	------------

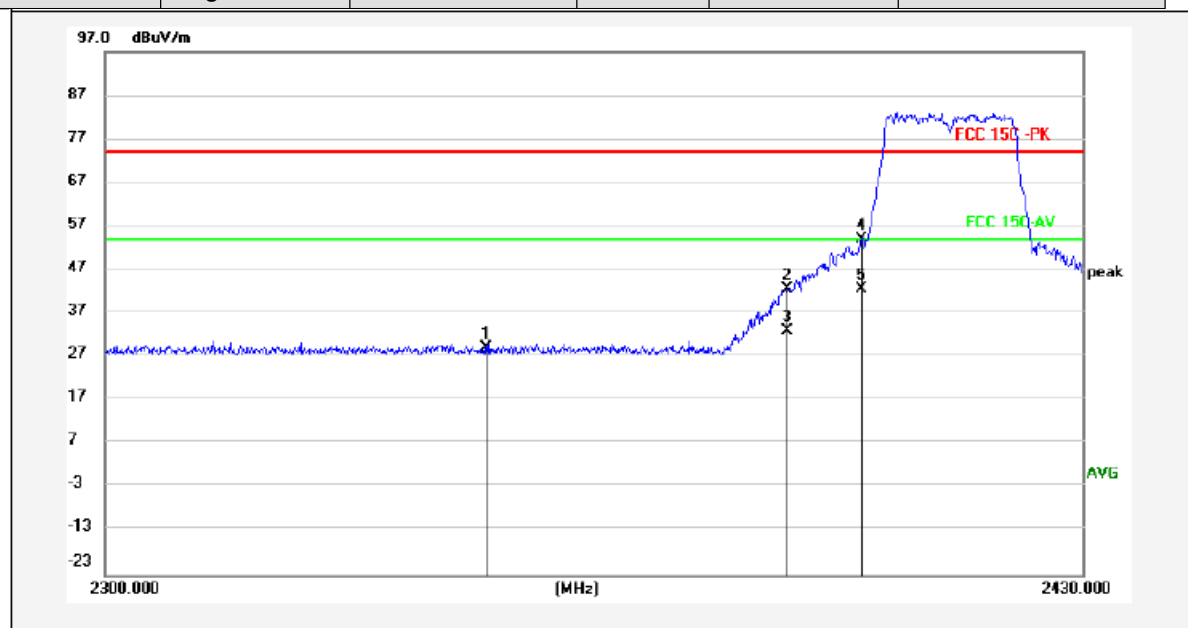


No.	Frequency (MHz)	Reading (dBuV/m)	Antenna. (dB/m)	Cable. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2483.500	60.78	27.37	-32.58	55.57	74.00	-18.43	peak	
2	2483.500	49.57	27.37	-32.58	44.36	54.00	-9.64	AVG	
3	2485.920	60.18	27.37	-32.58	54.97	74.00	-19.03	peak	
4	2485.920	48.21	27.37	-32.58	43.00	54.00	-11.00	AVG	

Remarks: 1. Result=Reading+Antenna+Cable

Note: The emission levels that are 20dB below the official limit are not reported.

Test mode:	11g ANT a	Test channel:	Lowest	Polarization:	Horizontal
------------	-----------	---------------	--------	---------------	------------

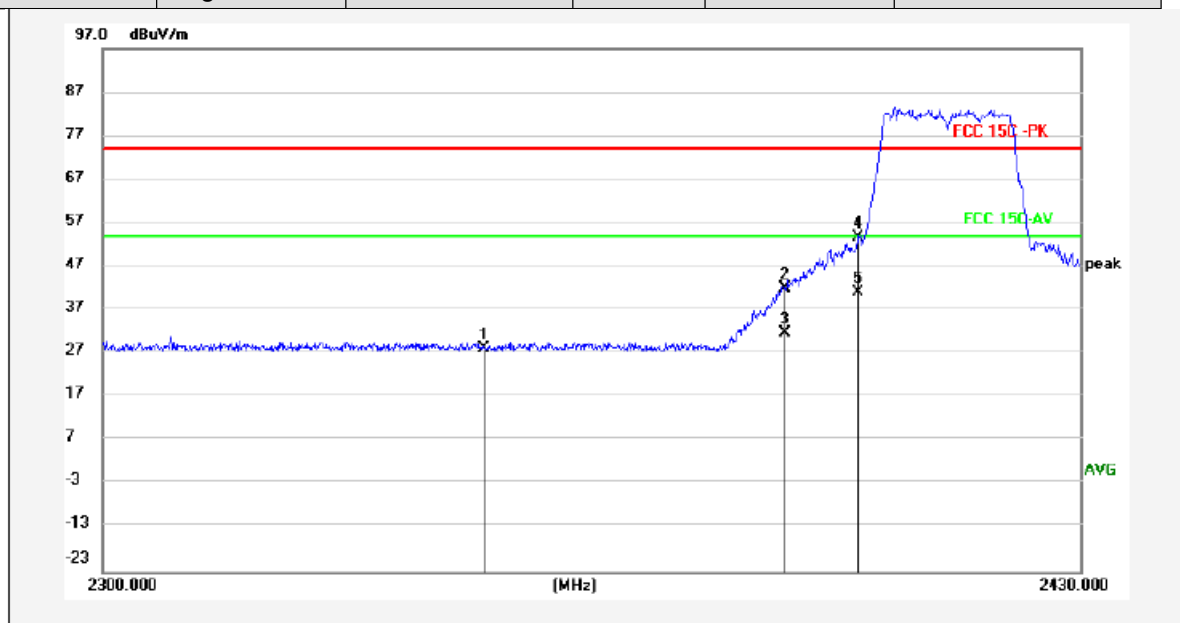


No.	Frequency (MHz)	Reading (dBuV/m)	Antenna. (dB/m)	Cable. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2350.000	34.54	27.1	-32.61	29.03	74.00	-44.97	peak	
2	2390.000	48.01	27.18	-32.52	42.67	74.00	-31.33	peak	
3	2390.000	38.22	27.18	-32.52	32.88	54.00	-21.12	AVG	
4	2400.000	59.39	27.2	-32.5	54.09	74.00	-19.91	peak	
5	2400.000	47.86	27.2	-32.5	42.56	54.00	-11.44	AVG	

Remarks: 1. Result=Reading+Antenna+Cable

Note: The emission levels that are 20dB below the official limit are not reported.

Test mode:	11g ANT a	Test channel:	Lowest	Polarization:	Vertical
------------	-----------	---------------	--------	---------------	----------

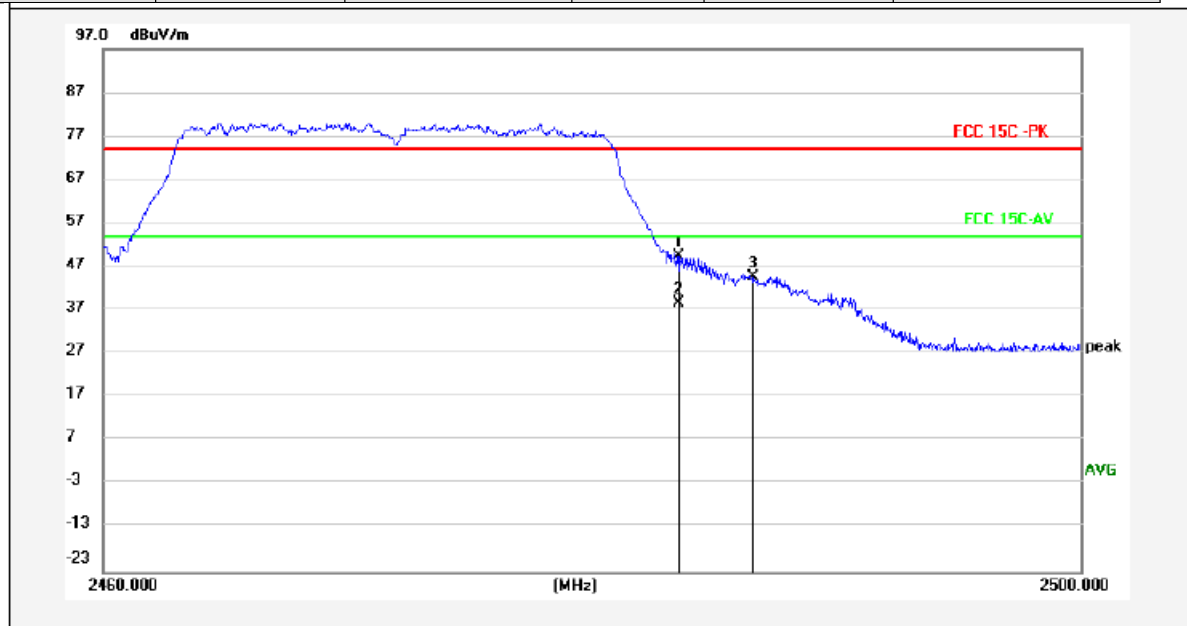


No.	Frequency (MHz)	Reading (dBuV/m)	Antenna. (dB/m)	Cable. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2350.000	33.73	27.13	-32.61	28.25	74.00	-45.75	peak	
2	2390.000	47.41	27.2	-32.52	42.09	74.00	-31.91	peak	
3	2390.000	37.01	27.2	-32.52	31.69	54.00	-22.31	AVG	
4	2400.000	58.82	27.22	-32.5	53.54	74.00	-20.46	peak	
5	2400.000	46.31	27.22	-32.5	41.03	54.00	-12.97	AVG	

Remarks: 1. Result=Reading+Antenna+Cable

Note: The emission levels that are 20dB below the official limit are not reported.

Test mode:	11g ANT a	Test channel:	Highest	Polarization:	Horizontal
------------	-----------	---------------	---------	---------------	------------

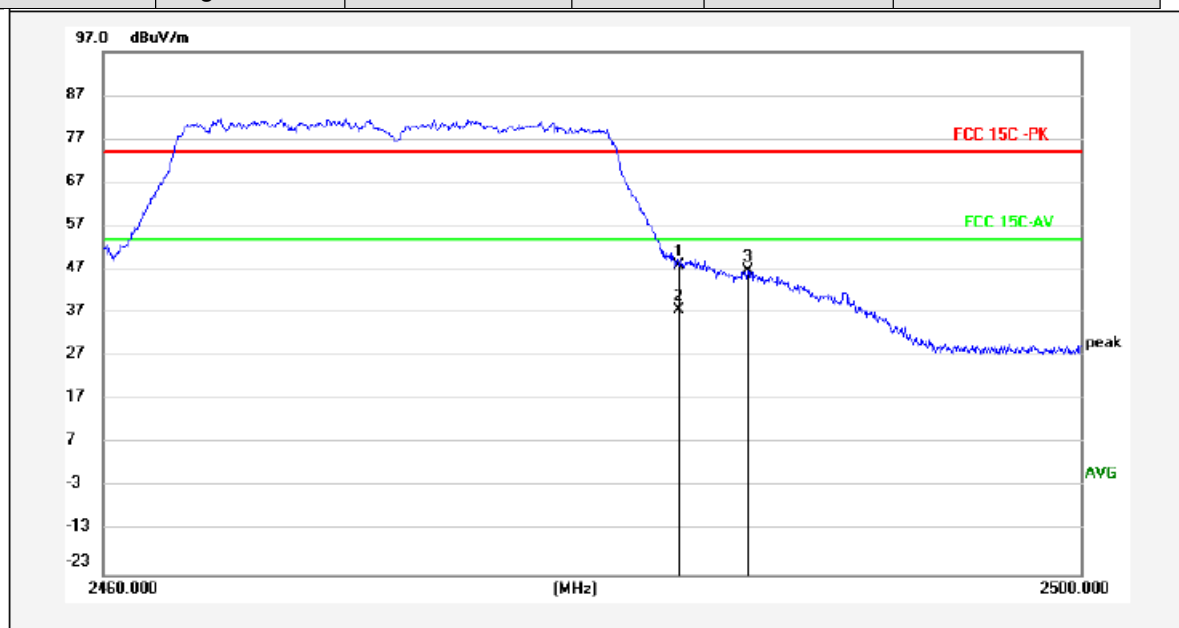


No.	Frequency (MHz)	Reading (dBuV/m)	Antenna. (dB/m)	Cable. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2483.500	54.73	27.37	-32.58	49.52	74.00	-24.48	peak	
2	2483.500	43.91	27.37	-32.58	38.70	54.00	-15.30	AVG	
3	2486.560	49.88	27.37	-32.58	44.67	74.00	-29.33	peak	

Remarks:1. Result=Reading+Antenna+Cable

Note: The emission levels that are 20dB below the official limit are not reported.

Test mode:	11g ANT a	Test channel:	Highest	Polarization:	Vertical
------------	-----------	---------------	---------	---------------	----------

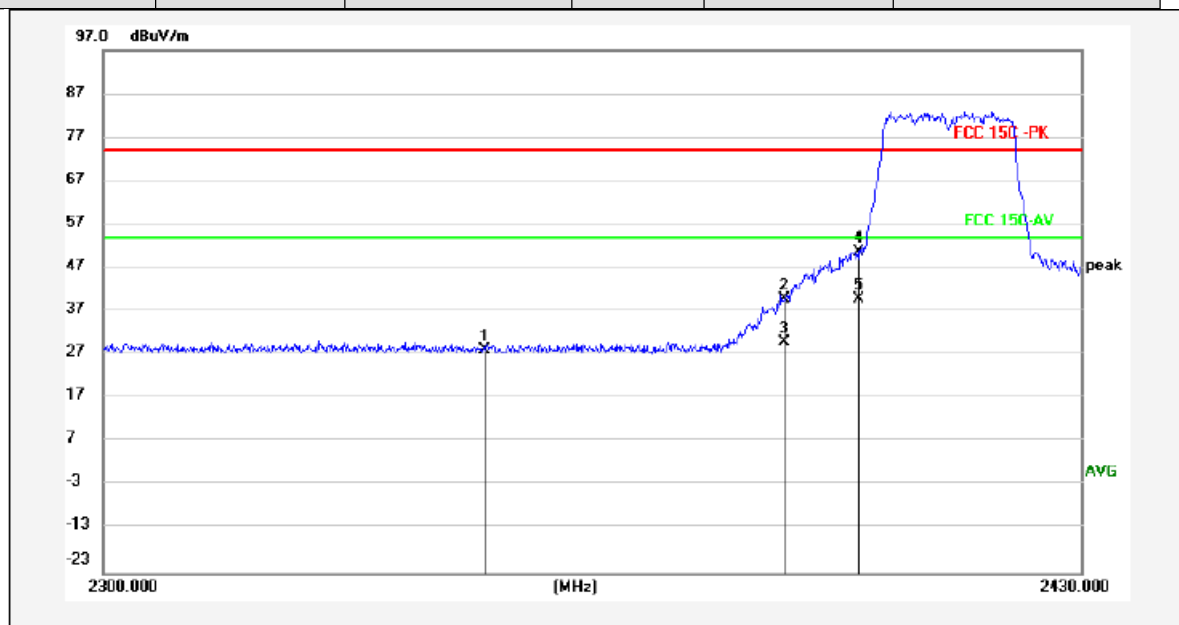


No.	Frequency (MHz)	Reading (dBuV/m)	Antenna. (dB/m)	Cable. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2483.500	53.30	27.37	-32.58	48.09	74.00	-25.91	peak	
2	2483.500	42.87	27.37	-32.58	37.66	54.00	-16.34	AVG	
3	2486.320	51.86	27.37	-32.58	46.65	74.00	-27.35	peak	

Remarks:1. Result=Reading+Antenna+Cable

Note: The emission levels that are 20dB below the official limit are not reported.

Test mode:	11n HT20 ANT a	Test channel:	Lowest	Polarization:	Horizontal
------------	-------------------	---------------	--------	---------------	------------

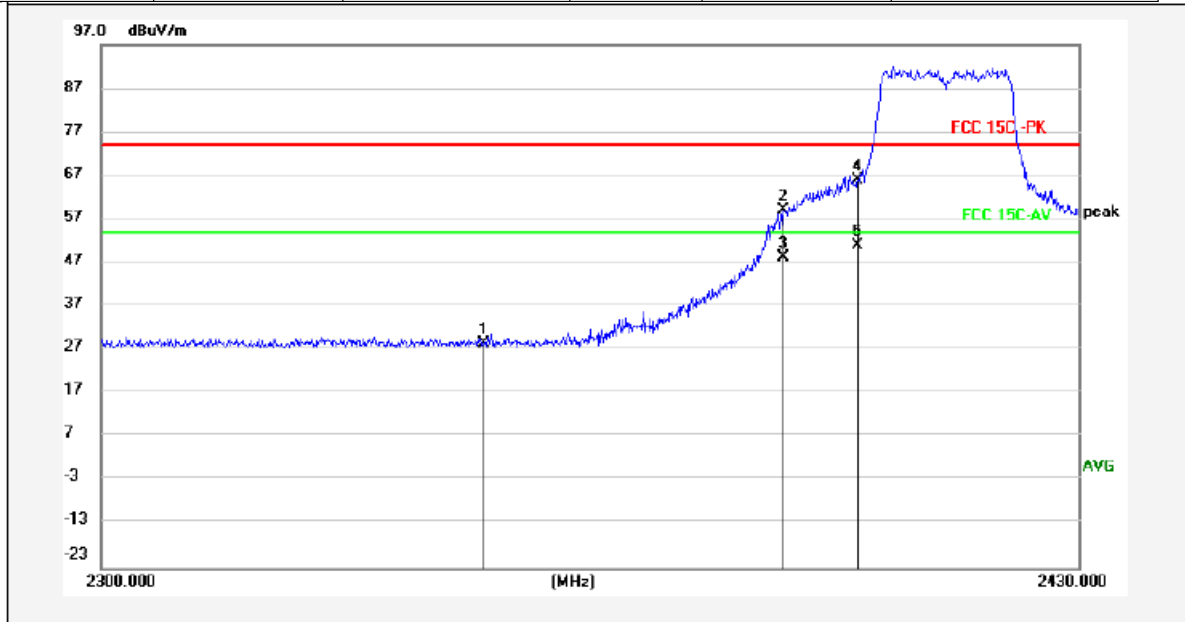


No.	Frequency (MHz)	Reading (dBuV/m)	Antenna. (dB/m)	Cable. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2350.000	33.57	27.13	-32.61	28.09	74.00	-45.91	peak	
2	2390.000	45.11	27.2	-32.52	39.79	74.00	-34.21	peak	
3	2390.000	35.32	27.2	-32.52	30.00	54.00	-24.00	AVG	
4	2400.000	56.05	27.22	-32.5	50.77	74.00	-23.23	peak	
5	2400.000	45.27	27.22	-32.5	39.99	54.00	-14.01	AVG	

Remarks:1. Result=Reading+Antenna+Cable

Note: The emission levels that are 20dB below the official limit are not reported.

Test mode:	11n HT20 ANT a	Test channel:	Lowest	Polarization:	Vertical
------------	-------------------	---------------	--------	---------------	----------

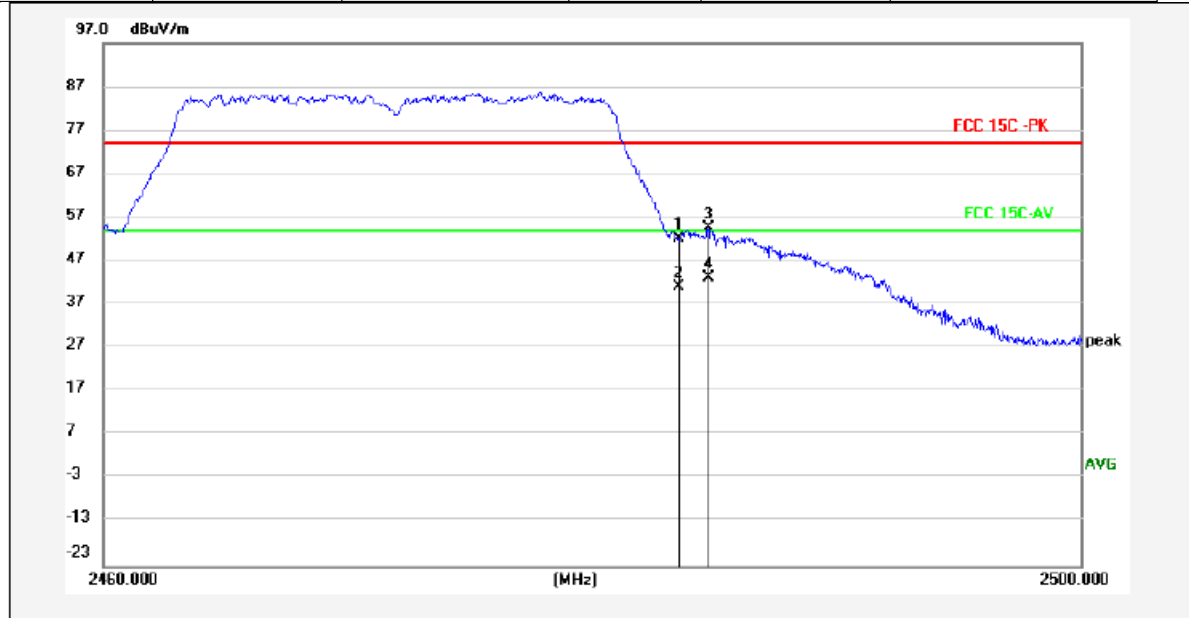


No.	Frequency (MHz)	Reading (dBuV/m)	Antenna. (dB/m)	Cable. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2350.000	33.90	27.13	-32.61	28.42	74.00	-45.58	peak	
2	2390.000	64.45	27.2	-32.52	59.13	74.00	-14.87	peak	
3	2390.000	53.43	27.2	-32.52	48.11	54.00	-5.89	AVG	
4	2400.000	71.38	27.22	-32.5	66.10	74.00	-7.90	peak	
5	2400.000	56.37	27.22	-32.5	51.09	54.00	-2.91	AVG	

Remarks:1. Result=Reading+Antenna+Cable

Note: The emission levels that are 20dB below the official limit are not reported.

Test mode:	11n HT20 ANT a	Test channel:	Highest	Polarization:	Vertical
------------	-------------------	---------------	---------	---------------	----------

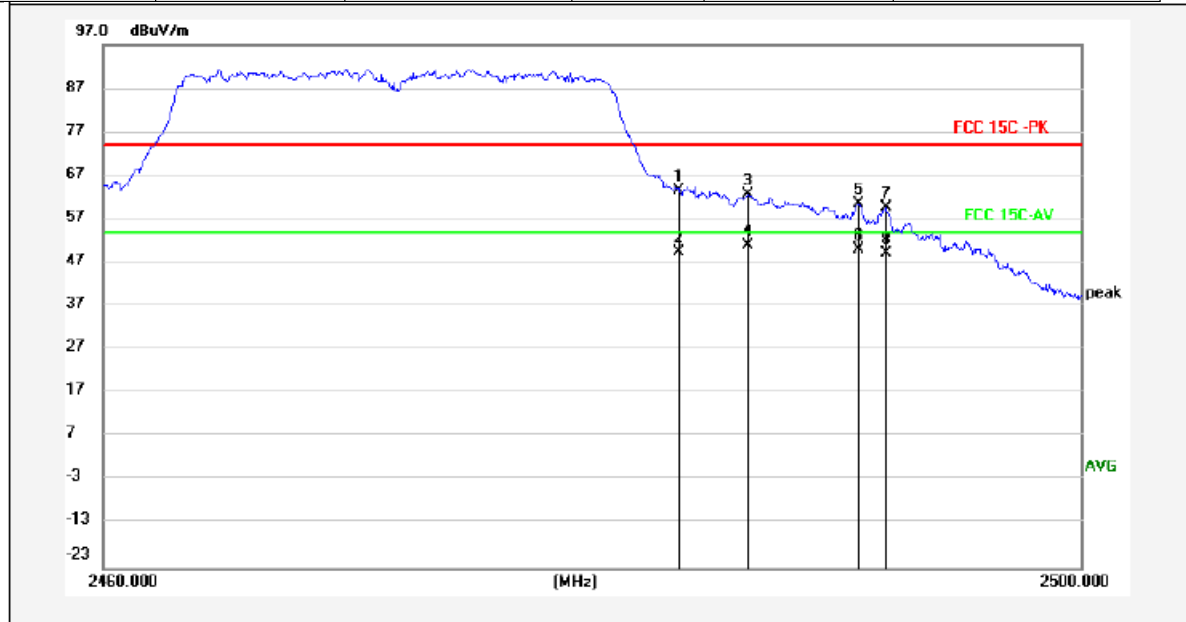


No.	Frequency (MHz)	Reading (dBuV/m)	Antenna. (dB/m)	Cable. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2483.500	57.22	27.37	-32.58	52.01	74.00	-21.99	peak	
2	2483.500	46.32	27.37	-32.58	41.11	54.00	-12.89	AVG	
3	2484.720	59.73	27.37	-32.58	54.52	74.00	-19.48	peak	
4	2484.720	48.22	27.37	-32.58	43.01	54.00	-10.99	AVG	

Remarks: 1. Result=Reading+Antenna+Cable

Note: The emission levels that are 20dB below the official limit are not reported.

Test mode:	11n HT20 ANT a	Test channel:	Highest	Polarization:	Horizontal
------------	-------------------	---------------	---------	---------------	------------

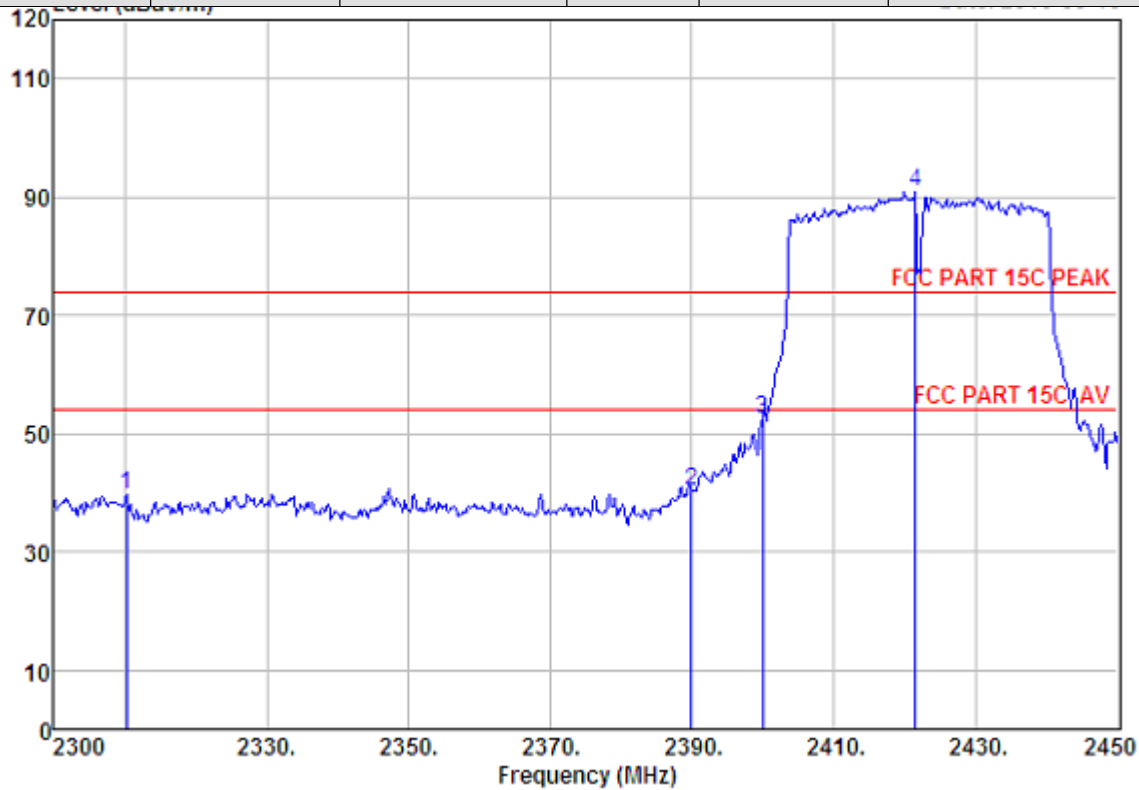


No.	Frequency (MHz)	Reading (dBuV/m)	Antenna. (dB/m)	Cable. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2483.500	68.69	27.37	-32.58	63.48	74.00	-10.52	peak	
2	2483.500	54.54	27.37	-32.58	49.33	54.00	-4.67	AVG	
3	2486.320	67.80	27.37	-32.58	62.59	74.00	-11.41	peak	
4	2486.320	56.21	27.37	-32.58	51.00	54.00	-3.00	AVG	
5	2490.880	65.72	27.38	-32.58	60.52	74.00	-13.48	peak	
6	2490.880	55.21	27.38	-32.58	50.01	54.00	-3.99	AVG	
7	2491.960	64.75	27.38	-32.58	59.55	74.00	-14.45	peak	
8	2491.960	54.30	27.38	-32.58	49.10	54.00	-4.90	AVG	

Remarks:1. Result=Reading+Antenna+Cable

Note: The emission levels that are 20dB below the official limit are not reported.

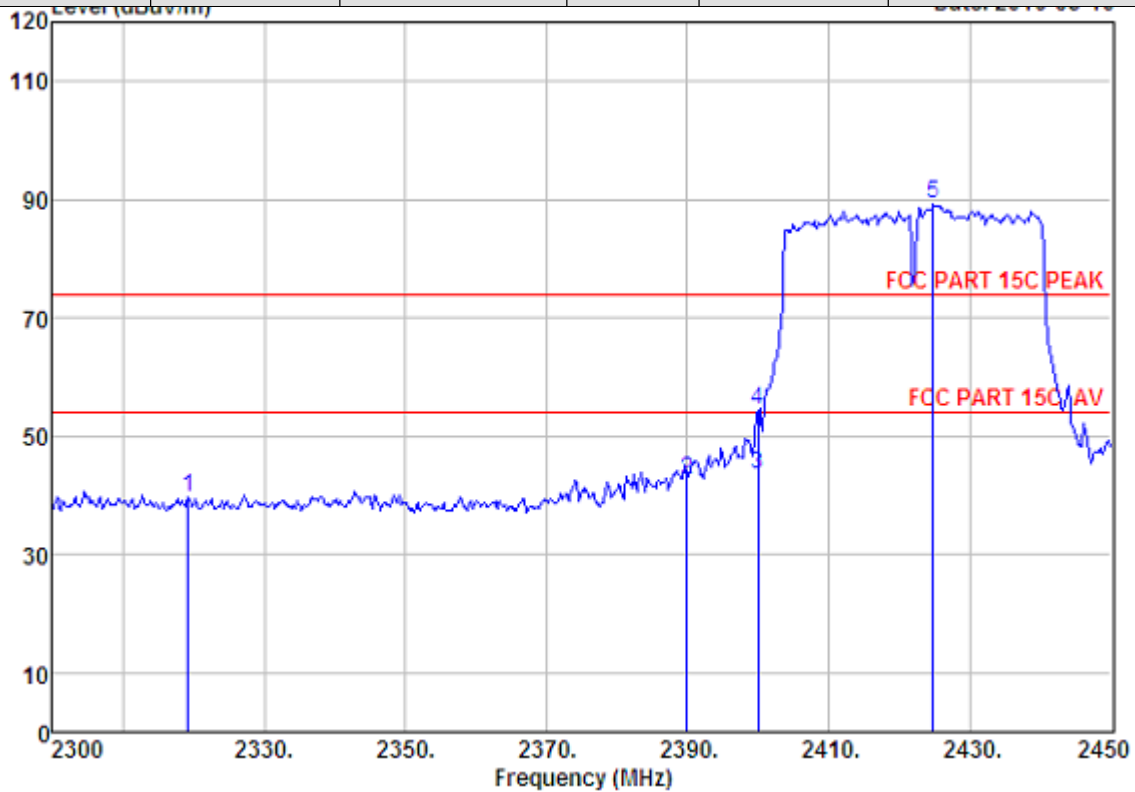
Test mode:	11n HT40 ANT a	Test channel:	Lowest	Polarization:	Horizontal
------------	-------------------	---------------	--------	---------------	------------



	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2310.20	27.76	6.53	34.60	40.12	39.81	74.00	34.19	Peak
2	2390.00	27.64	6.62	34.62	40.61	40.25	74.00	33.75	Peak
3	2400.00	27.61	6.62	34.64	52.85	52.44	74.00	21.56	Peak
4	2421.50	27.60	6.66	34.74	91.25	90.77	74.00	-16.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

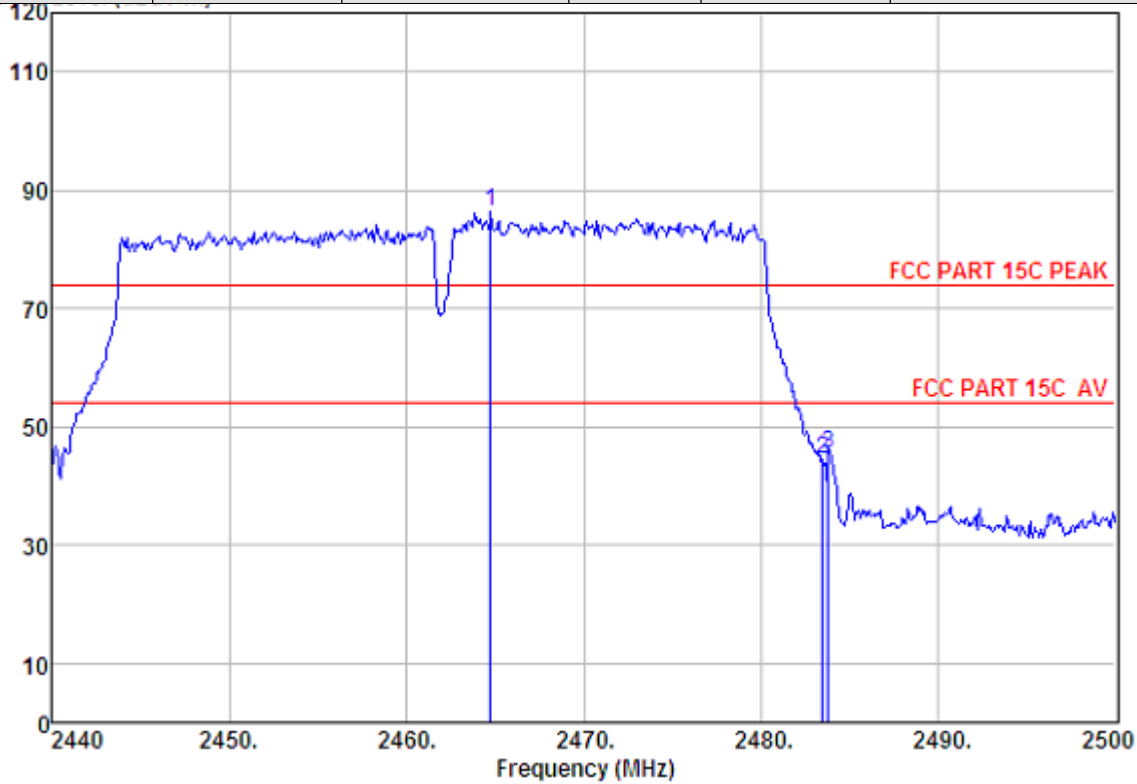
Test mode:	11n HT40 ANT a	Test channel:	Lowest	Polarization:	Vertical
------------	-------------------	---------------	--------	---------------	----------



	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2319.20	27.76	6.54	34.60	40.10	39.80	74.00	34.20	Peak
2	2390.00	27.64	6.62	34.62	43.02	42.66	74.00	31.34	Peak
3	2400.00	27.61	6.62	34.64	44.06	43.65	54.00	10.35	Average
4	2400.00	27.61	6.62	34.64	54.83	54.42	74.00	19.58	Peak
5	2424.80	27.60	6.66	34.74	89.62	89.14	74.00	-15.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

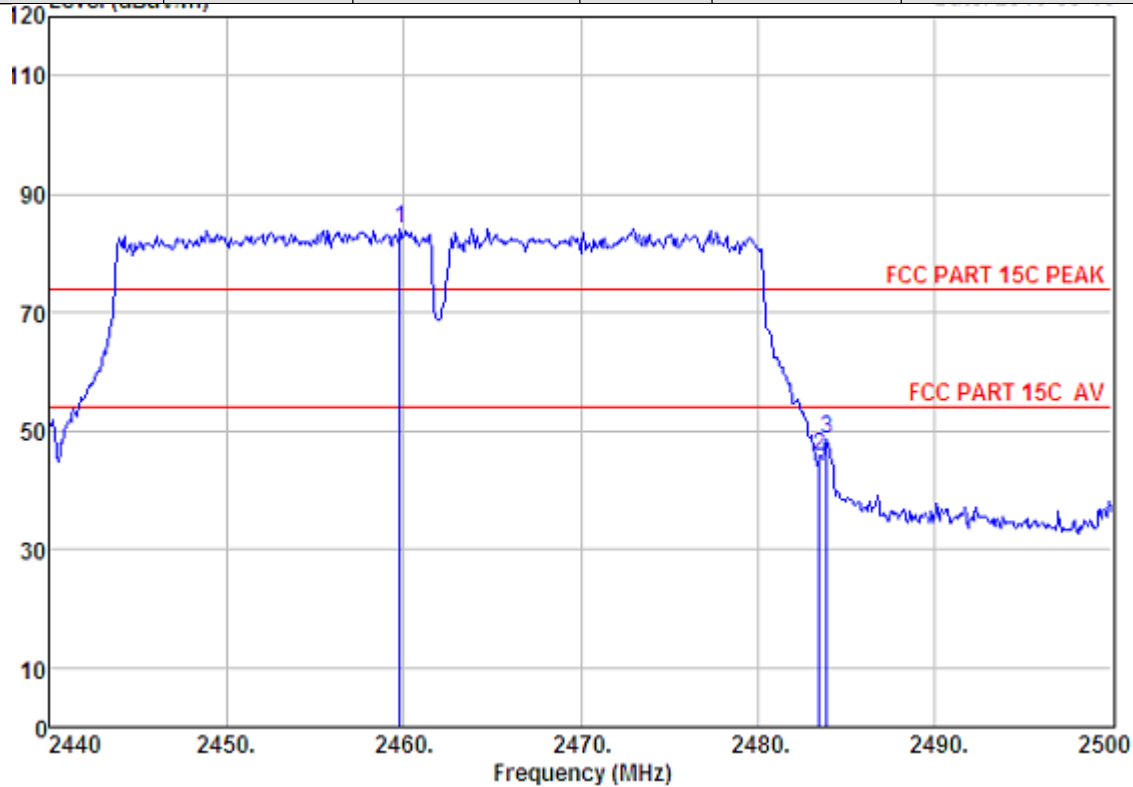
Test mode:	11n HT40 ANT a	Test channel:	Highest	Polarization:	Vertical
------------	-------------------	---------------	---------	---------------	----------



	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.72	27.58	6.69	34.98	87.09	86.38	74.00	-12.38	Peak
2	2483.50	27.58	6.71	35.11	45.35	44.53	74.00	29.47	Peak
3	2483.80	27.58	6.71	35.11	46.25	45.43	74.00	28.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Test mode:	11n HT40 ANT a	Test channel:	Highest	Polarization:	Horizontal
------------	-------------------	---------------	---------	---------------	------------



	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2459.80	27.59	6.69	34.98	84.76	84.06	74.00	-10.06	Peak
2	2483.50	27.58	6.71	35.11	46.46	45.64	74.00	28.36	Peak
3	2483.92	27.58	6.71	35.11	49.30	48.48	74.00	25.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

30MHz~1GHz:



Above 1GHz:

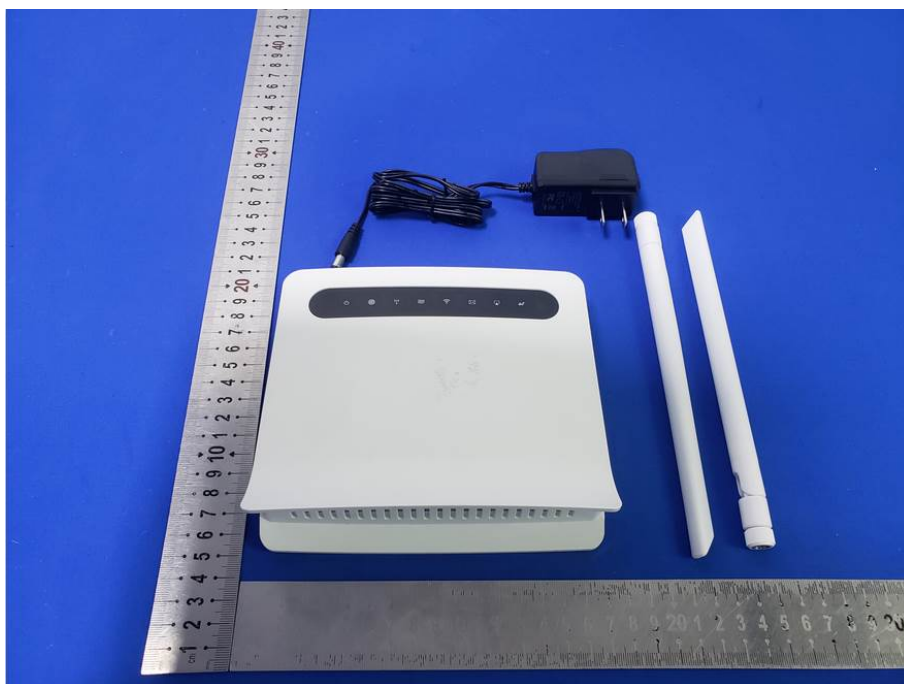


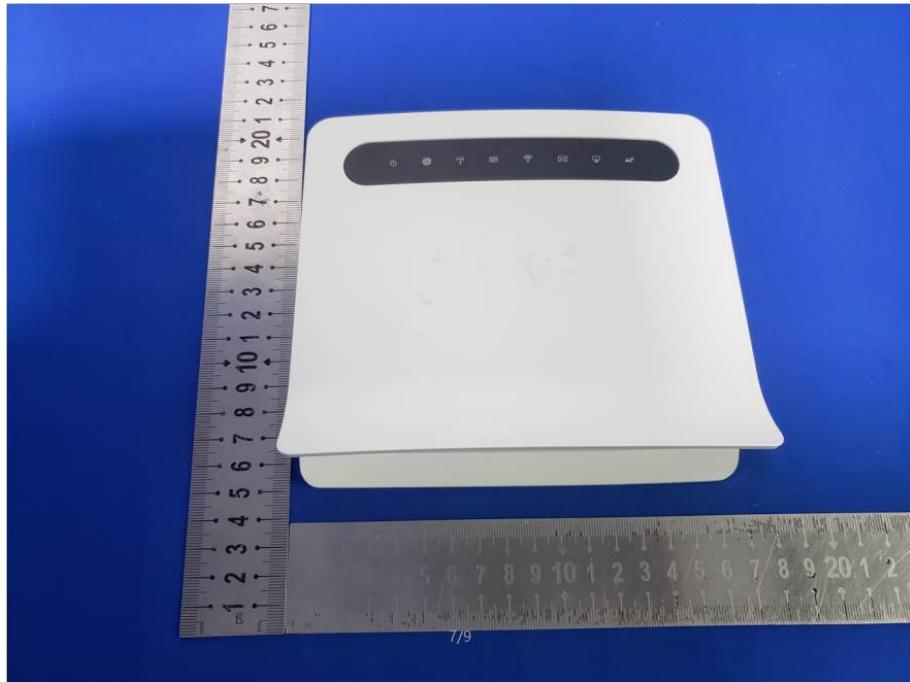
6.2 Conducted Emission

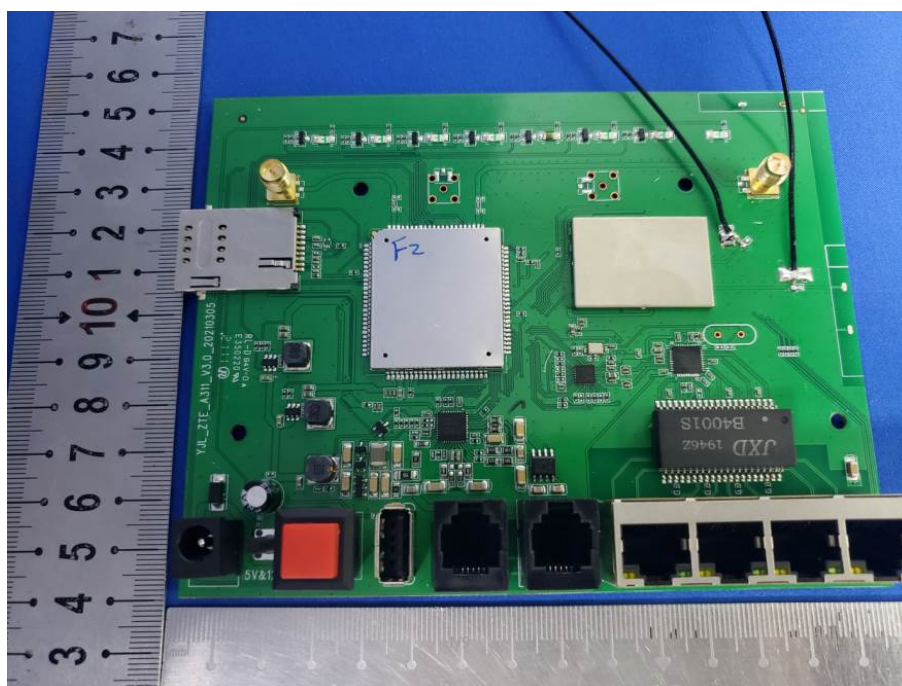
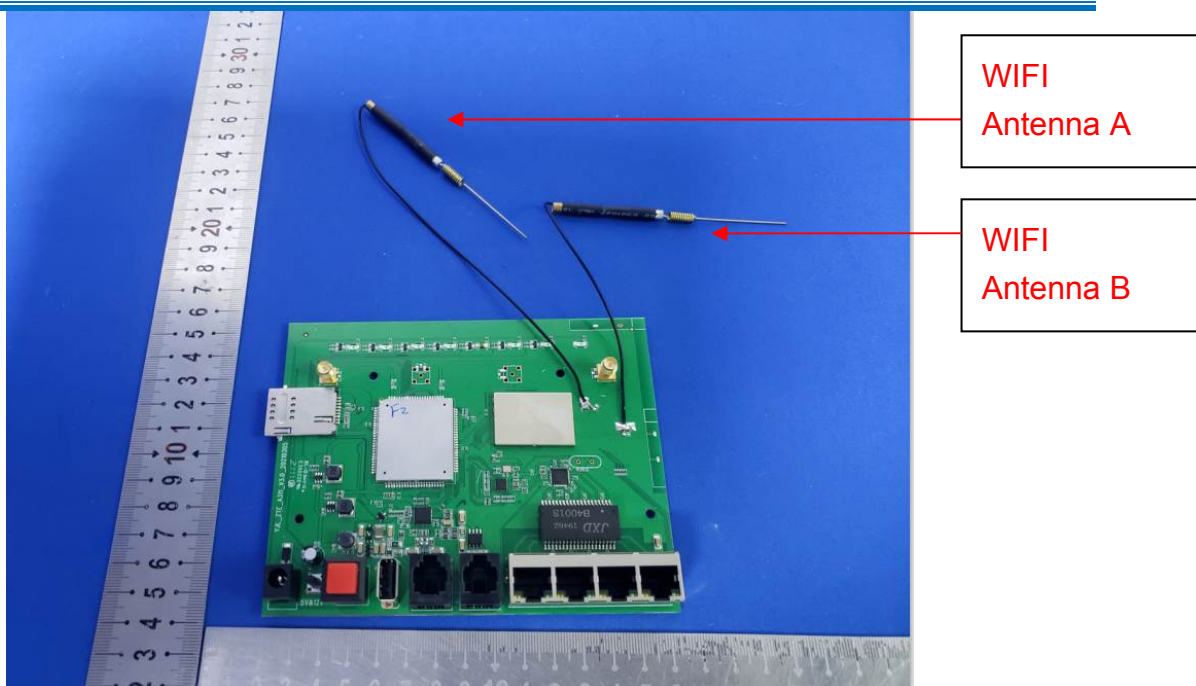


7 Photographs - EUT Constructional Details

A311-ZEV







THE END