



FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

TEXTURED METAL TASK TABLE LAMP WITH WIRELESS CHARGING

MODEL NUMBER: TL1058

FCC ID: 2AZGPTL1058

REPORT NUMBER: 4789814649-2-1

ISSUE DATE: March 11, 2021

Prepared for

CALLTON LIGHTING CO.,LTD

**No.56,168Ind.Park, JIngMei Management Zone, Dongkeng Town, Dongguan City,
Guangdong Province, China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	03/11/2021	Initial Issue	



Summary of Test Results		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC 15.207	PASS
Radiated Emission Test	FCC 15.209	PASS
20dB Bandwidth	FCC 15.215	PASS
This test report is only published to and used by the applicant, and it is not for evidence purpose in China.		



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY.....	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>7</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>7</i>
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	<i>8</i>
5.2. <i>TEST MODE.....</i>	<i>8</i>
5.3. <i>ACCESSORY</i>	<i>9</i>
5.4. <i>MEASURING INSTRUMENT LIST.....</i>	<i>10</i>
6. 20dB BANDWIDTH TEST	11
7. RADIATED EMISSION TEST	13
7.1. <i>SPURIOUS EMISSIONS BELOW 30 MHz.....</i>	<i>17</i>
7.2. <i>SPURIOUS EMISSIONS 30 MHz ~ 1 GHz</i>	<i>20</i>
8. AC POWER LINE CONDUCTED EMISSIONS	22



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: CALLTON LIGHTING CO.,LTD
Address: No.56,168Ind.Park, JingMei Management Zone, Dongkeng Town,
Dongguan City, Guangdong Province, China

Manufacturer Information

Company Name: CALLTON LIGHTING CO.,LTD
Address: No.56,168Ind.Park, JingMei Management Zone, Dongkeng Town,
Dongguan City, Guangdong Province, China

EUT Information

EUT Name: TEXTURED METAL TASK TABLE LAMP WITH WIRELESS
CHARGING
Model: TL1058
Brand: /
Sample Received Date: February 3, 2021
Sample Status: Normal
Sample ID: 3645294
Date of Tested: February 8, 2021 ~ March 4, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:

Denny Huang
Project Engineer

Checked By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC CFR 47 Part 2, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 15, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction Emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
DTS and 99% Occupied Bandwidth	±0.0196%
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	TEXTURED METAL TASK TABLE LAMP WITH WIRELESS CHARGING	
EUT Description	TEXTURED METAL TASK TABLE LAMP WITH WIRELESS CHARGING	
Model	TL1058	
Product Description	Operation Frequency	110 ~ 205 kHz
Rated Output Power	10 W	
Antenna type	Coil	
Ratings	AC 120 V, 60 Hz	

5.2. TEST MODE

Test Mode	Description
Mode 1	Charging with 10 W wireless charging load (Full Load)
Mode 2	Charging with 10 W wireless charging load (Half Load)
Mode 3	Charging with 10 W wireless charging load (No Load)

Note: All the modes had been tested, but only the worst data was recorded in the report.



5.3. ACCESSORY

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Series No.
1	Wireless charger RX artificial load	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
/	/	/	/	/	/


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT support wireless charging.

SETUP DIAGRAM FOR TEST

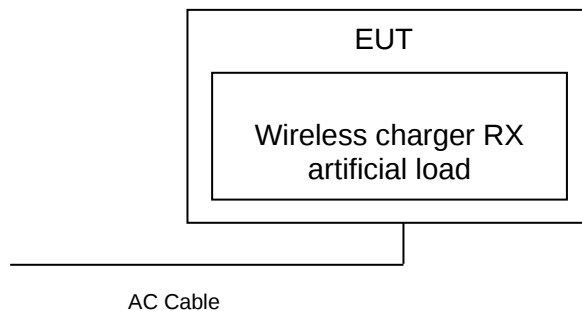

5.4. MEASURING INSTRUMENT LIST

Conducted Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date	
EMI Test Receiver	R&S	ESR3	101961	Nov. 12, 2020	Nov. 11, 2021	
Two-Line V-Network	R&S	ENV216	101983	Nov. 12, 2020	Nov. 11, 2021	
Software						
Description			Manufacturer	Name	Version	
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1	
Radiated Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date	
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Nov. 12, 2020	Nov. 11, 2021	
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Aug. 11, 2018	Aug. 10, 2021	
Preamplifier	HP	8447D	2944A09099	Nov. 12, 2020	Nov. 11, 2021	
Loop antenna	Schwarzbeck	1519B	00008	Jan.17, 2019	Jan.17,2022	
Preamplifier	TDK	PA-02-001-3000	TRS-305-00067	Nov.12,2020	Nov.11,2021	
Software						
Description			Manufacturer	Name	Version	
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1	
Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Spectrum Analyzer	Keysight	N9030A	MY55410512	Nov.20,2020	Nov.19,2021



6. 20dB BANDWIDTH TEST

LIMITS

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.215, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	1% to 5% of the occupied bandwidth
VBW	approximately 3×RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 99%/20 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP




TEST ENVIRONMENT

Temperature	25.2 °C	Relative Humidity	59.3 %
Atmosphere Pressure	101 kPa	Test Voltage	AC120 V,60 Hz

**RESULTS**

Frequency (KHz)	20dB Bandwidth (Hz)	99% Bandwidth (Hz)
113.5	8	20

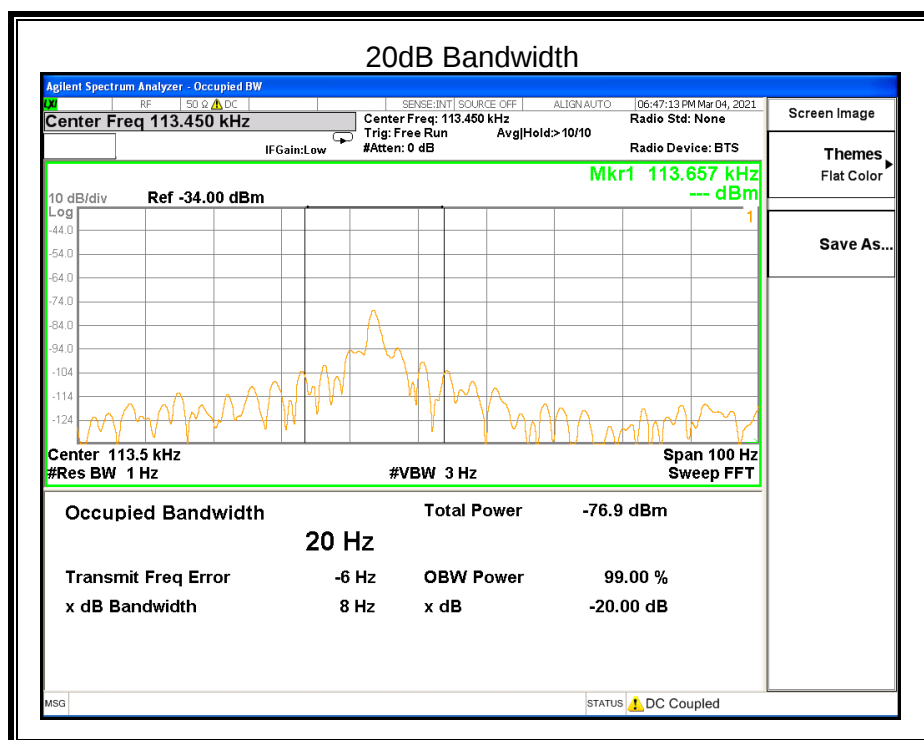

7. RADIATED EMISSION TEST

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.


Radiated emissions limits for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

TEST SETUP AND PROCEDURE

Below 30 MHz

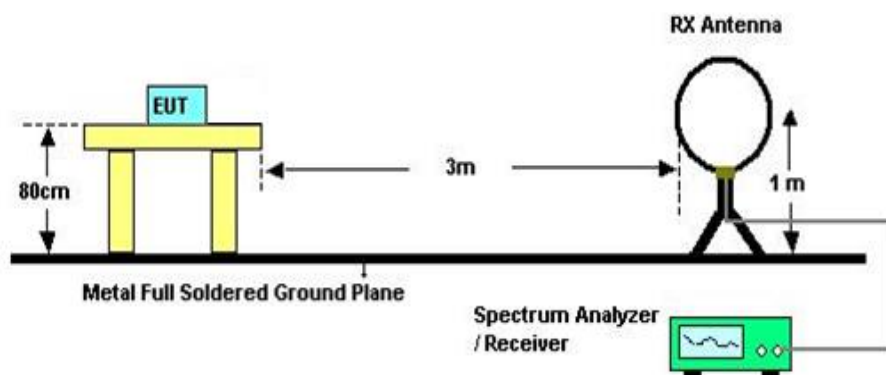


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz

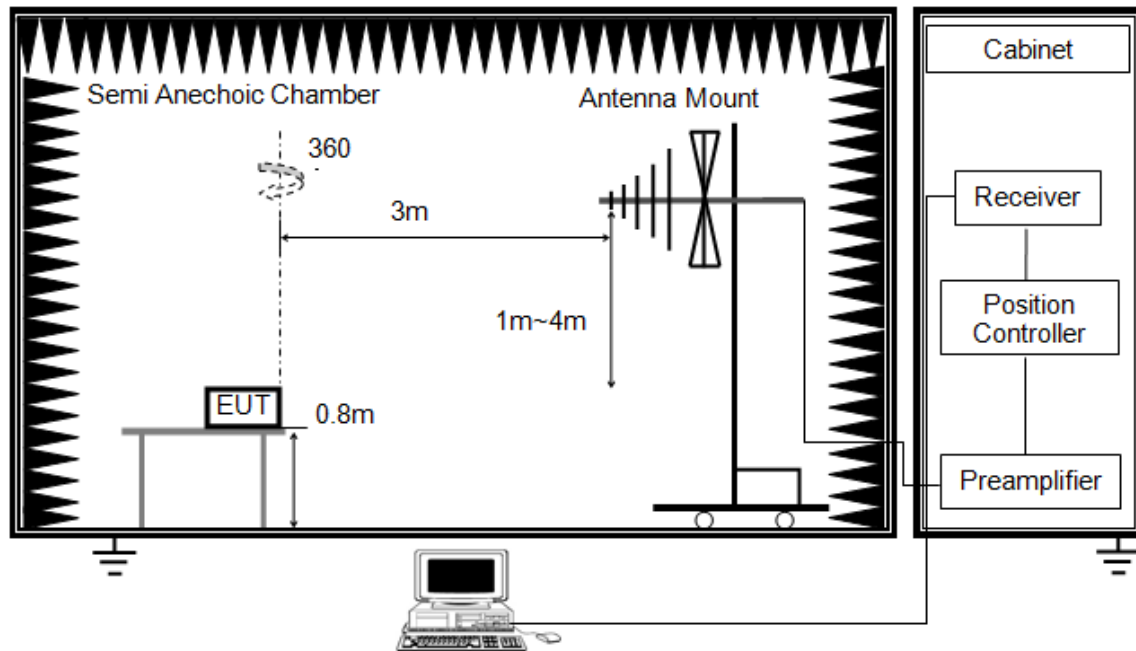

The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.



TEST ENVIRONMENT

Temperature	22.9 °C	Relative Humidity	65.0 %
Atmosphere Pressure	101 kPa	Test Voltage	AC120 V,60 Hz


RESULTS



7.1. SPURIOUS EMISSIONS BELOW 30 MHz

FCC PART 15C BELOW 30MHz SPURIOUS EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

9 kHz ~ 150 kHz

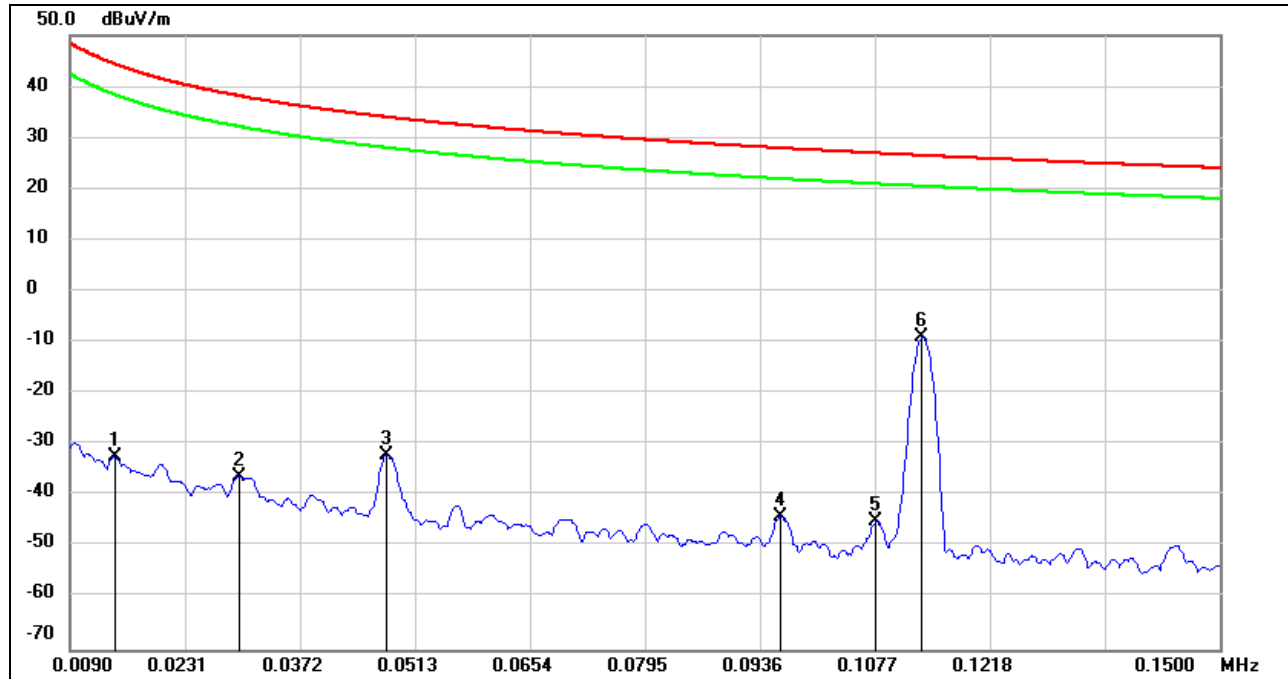

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Result (dBuA/m)	Limit (dBuV/m)	Limit (dBuA/m)	Margin (dB)	Remark
1	0.0144	68.92	-101.32	-32.4	-83.9	44.43	-7.07	-76.83	peak
2	0.0297	64.94	-101.11	-36.17	-87.67	38.15	-13.35	-74.32	peak
3	0.0478	69.38	-101.35	-31.97	-83.47	34.01	-17.49	-65.98	peak
4	0.0961	57.21	-101.22	-44.01	-95.51	27.95	-23.55	-71.96	peak
5	0.1078	56.31	-101.37	-45.06	-96.56	26.95	-24.55	-72.01	peak
6	0.1135	92.39	-101.45	-9.06	-60.56	26.51	-24.99	-35.57	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

4. The test was performed at 3 m test site, but we added the corresponding factor to extrapolated the result to the specified distance according to FCC 15.31(f)(2).

5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}(120\pi) = \text{dBuV/m} - 51.5$.

150 kHz ~ 490 kHz

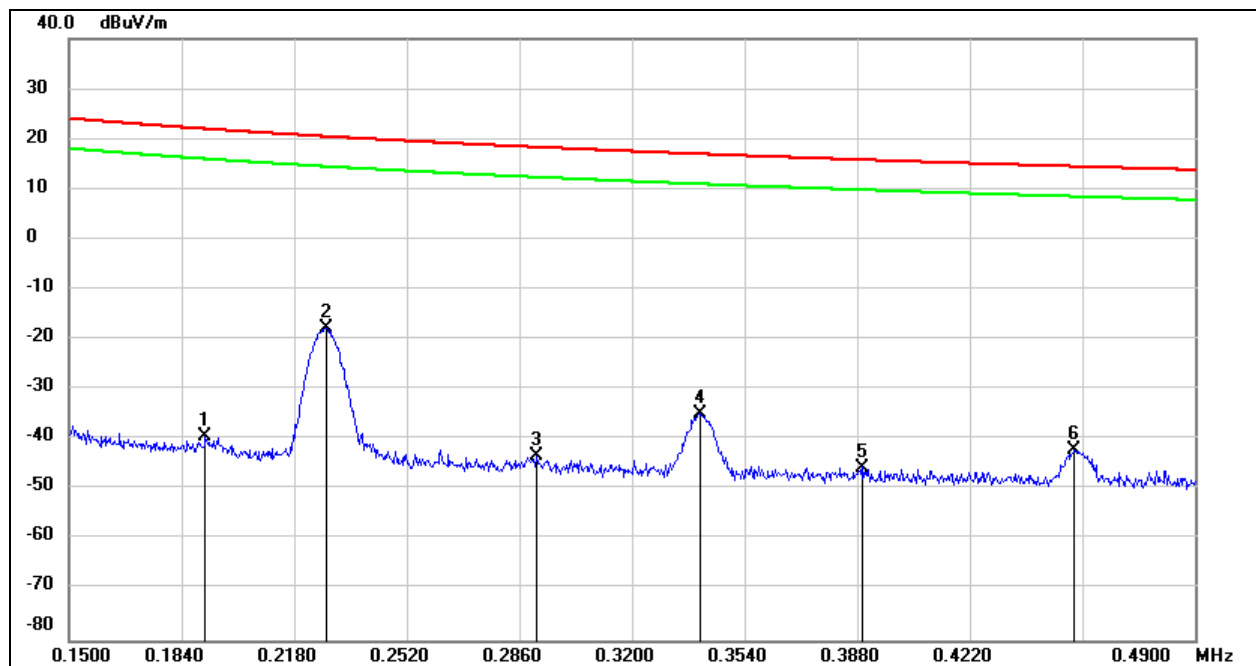

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Result (dBuA/m)	Limit (dBuV/m)	Limit (dBuA/m)	Margin (dB)	Remark
1	0.1911	62.5	-101.85	-39.35	-90.85	21.98	-29.52	-61.33	peak
2	0.2279	84.16	-101.81	-17.65	-69.15	20.45	-31.05	-38.1	peak
3	0.2911	58.54	-101.77	-43.23	-94.73	18.32	-33.18	-61.55	peak
4	0.3404	66.98	-101.76	-34.78	-86.28	16.96	-34.54	-51.74	peak
5	0.3897	56.24	-101.74	-45.5	-97.00	15.79	-35.71	-61.29	peak
6	0.4536	59.64	-101.72	-42.08	-93.58	14.47	-37.03	-56.55	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

4. The test was performed at 3 m test site, but we added the corresponding factor to extrapolated the result to the specified distance according to FCC 15.31(f)(2).

5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}(120\pi) = \text{dBuV/m} - 51.5$.

490 kHz ~ 30 MHz

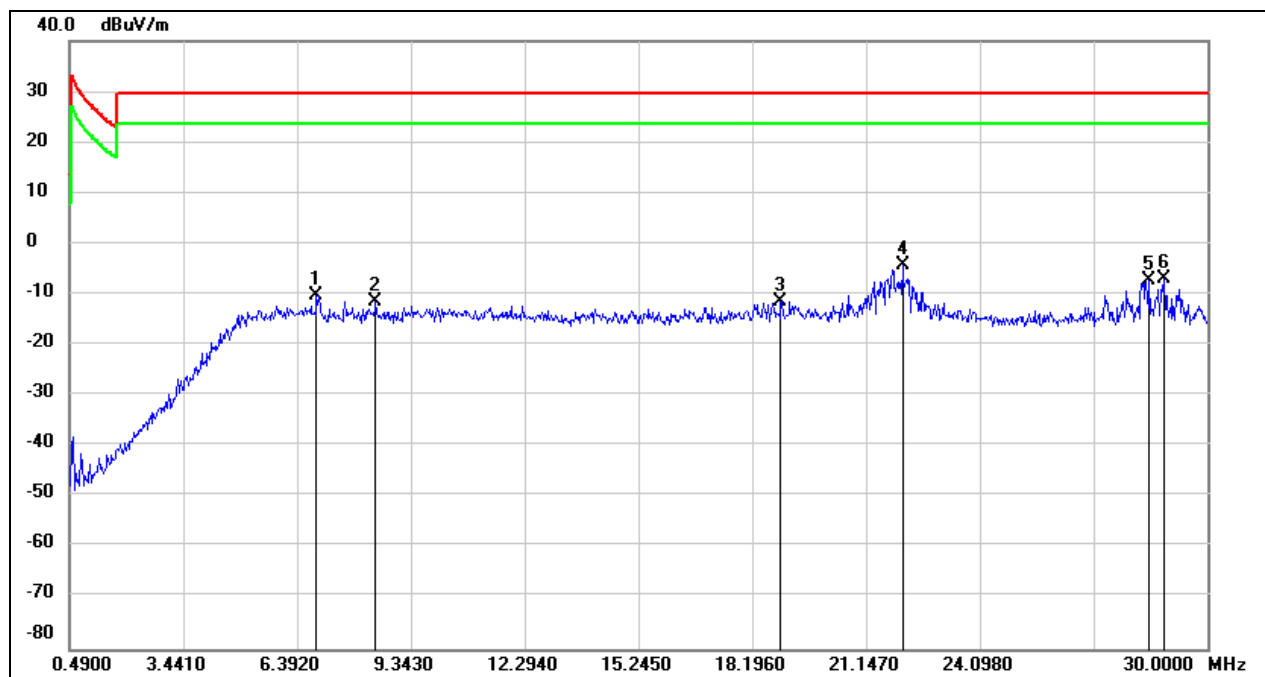

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Result (dBuA/m)	Limit (dBuV/m)	Limit (dBuA/m)	Margin (dB)	Remark
1	6.8937	51.33	-61.65	-10.32	-61.82	29.54	-21.96	-39.86	peak
2	8.4282	49.84	-61.42	-11.58	-63.08	29.54	-21.96	-41.12	peak
3	18.9337	49.78	-61.18	-11.4	-62.9	29.54	-21.96	-40.94	peak
4	22.0912	56.66	-61.04	-4.38	-55.88	29.54	-21.96	-33.92	peak
5	28.495	53.52	-60.75	-7.23	-58.73	29.54	-21.96	-36.77	peak
6	28.8786	53.73	-60.73	-7	-58.5	29.54	-21.96	-36.54	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.


3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

4. The test was performed at 3 m test site, but we added the corresponding factor to extrapolated the result to the specified distance according to FCC 15.31(f)(2).

5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}(120\pi) = \text{dBuV/m} - 51.5$.

7.2. SPURIOUS EMISSIONS 30 MHz ~ 1 GHz

FCC PART15C SPURIOUS EMISSIONS (HORIZONTAL)

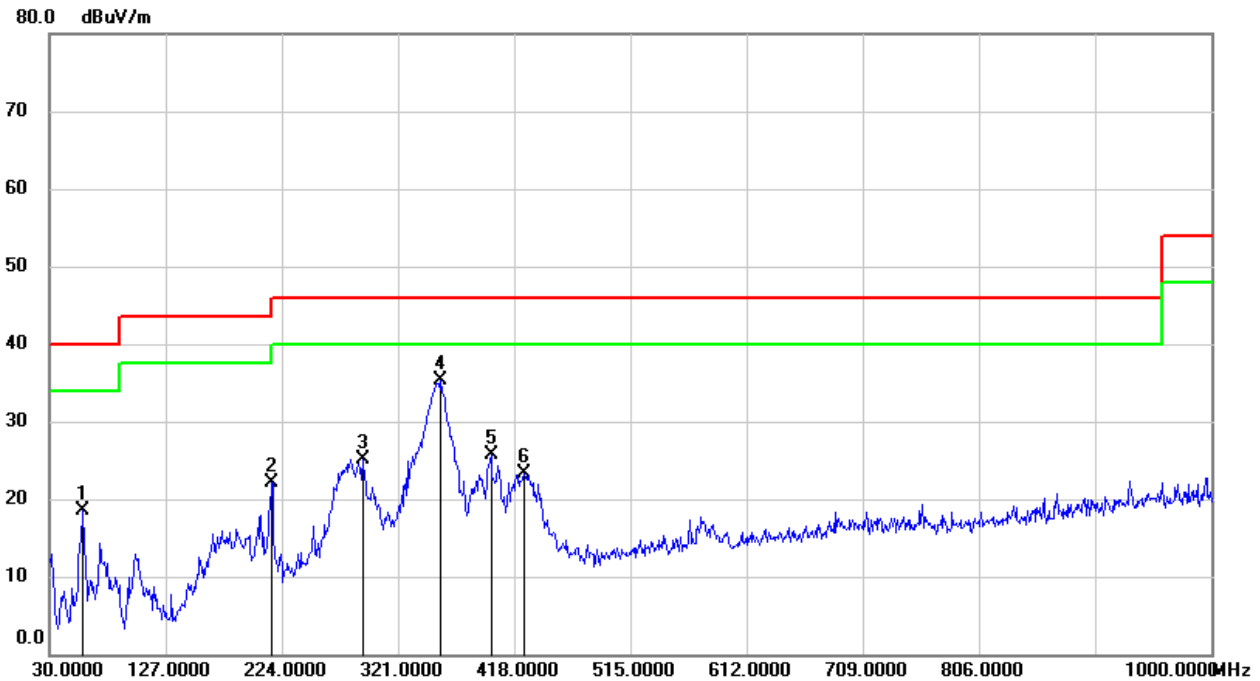


Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

4. All the noise are created from the digital circuit. It is not created by wireless charging circuit.

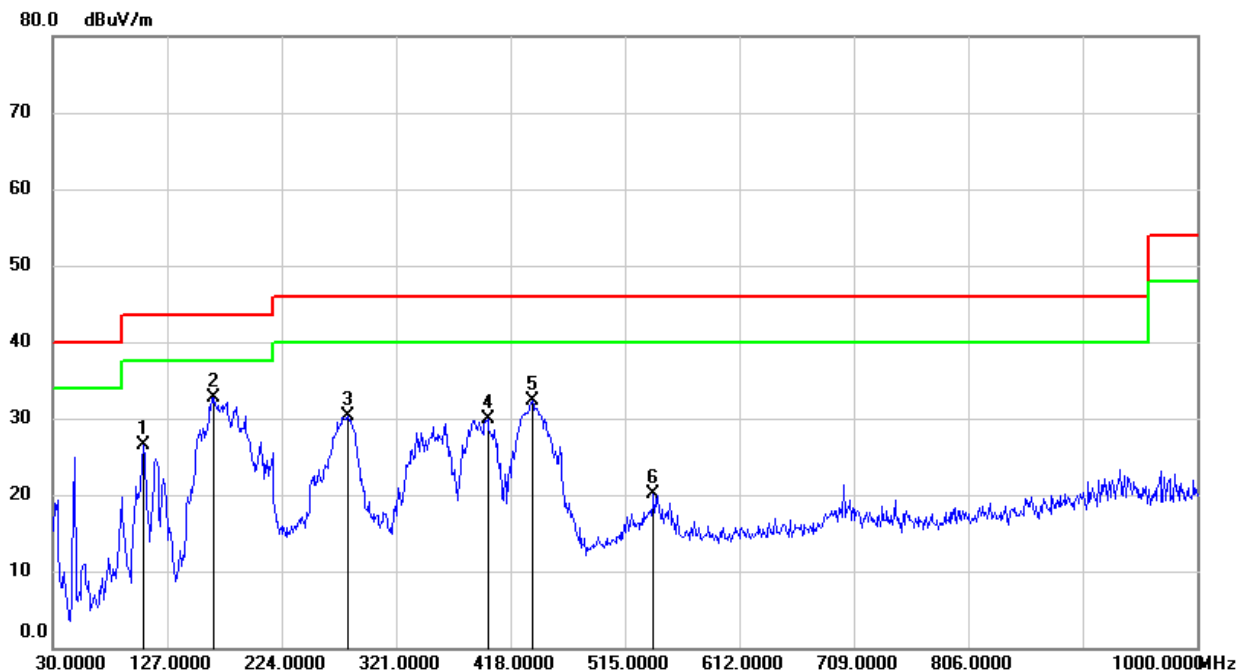**FCC PART15C SPURIOUS EMISSIONS (VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	106.6300	47.10	-20.65	26.45	43.50	-17.05	QP
2	165.8000	50.31	-17.51	32.80	43.50	-10.70	QP
3	280.2600	46.95	-16.66	30.29	46.00	-15.71	QP
4	398.6000	43.35	-13.37	29.98	46.00	-16.02	QP
5	436.4300	44.84	-12.63	32.21	46.00	-13.79	QP
6	539.2500	30.65	-10.51	20.14	46.00	-25.86	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

4. All the noise are created from the digital circuit. It is not created by wireless charging circuit.

8. AC POWER LINE CONDUCTED EMISSIONS


LIMITS

Please refer to CFR 47 FCC §15.207 (a)

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

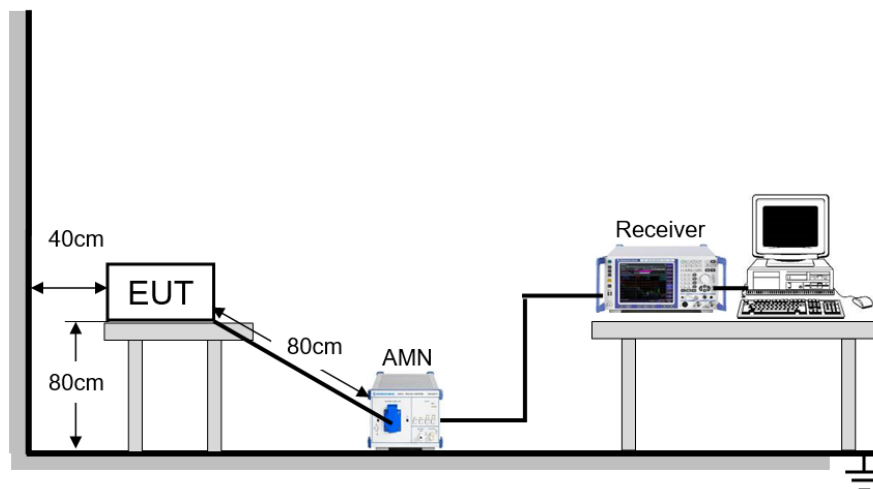


The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	23.9 °C	Relative Humidity	54.1 %
Atmosphere Pressure	101 kPa	Test Voltage	AC120 V,60 Hz

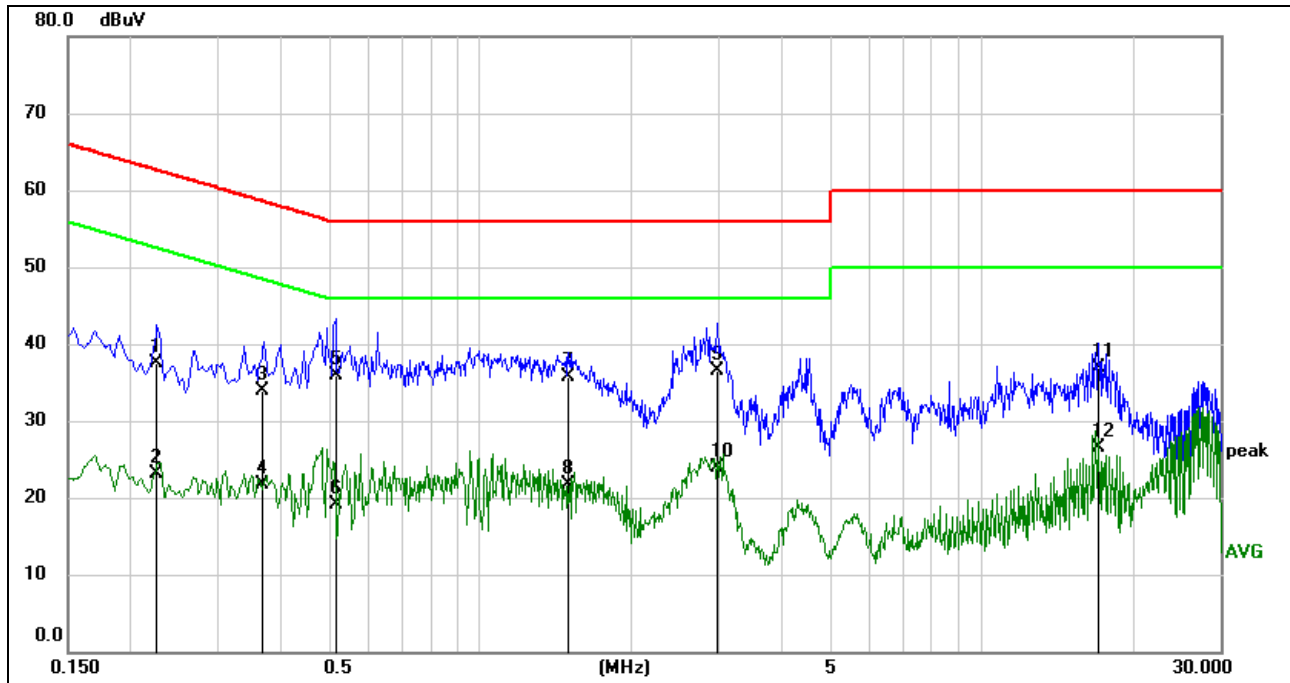**RESULTS****LINE L1 RESULTS**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2252	27.93	9.59	37.52	62.62	-25.10	QP
2	0.2252	13.51	9.59	23.10	52.62	-29.52	AVG
3	0.3658	24.22	9.59	33.81	58.60	-24.79	QP
4	0.3658	12.05	9.59	21.64	48.60	-26.96	AVG
5	0.5138	26.38	9.60	35.98	56.00	-20.02	QP
6	0.5138	9.42	9.60	19.02	46.00	-26.98	AVG
7	1.5025	26.17	9.62	35.79	56.00	-20.21	QP
8	1.5025	12.13	9.62	21.75	46.00	-24.25	AVG
9	2.9705	26.92	9.62	36.54	56.00	-19.46	QP
10	2.9705	14.32	9.62	23.94	46.00	-22.06	AVG
11	17.1055	27.22	9.72	36.94	60.00	-23.06	QP
12	17.1055	16.81	9.72	26.53	50.00	-23.47	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz-150 kHz), 9 kHz (150 kHz-30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

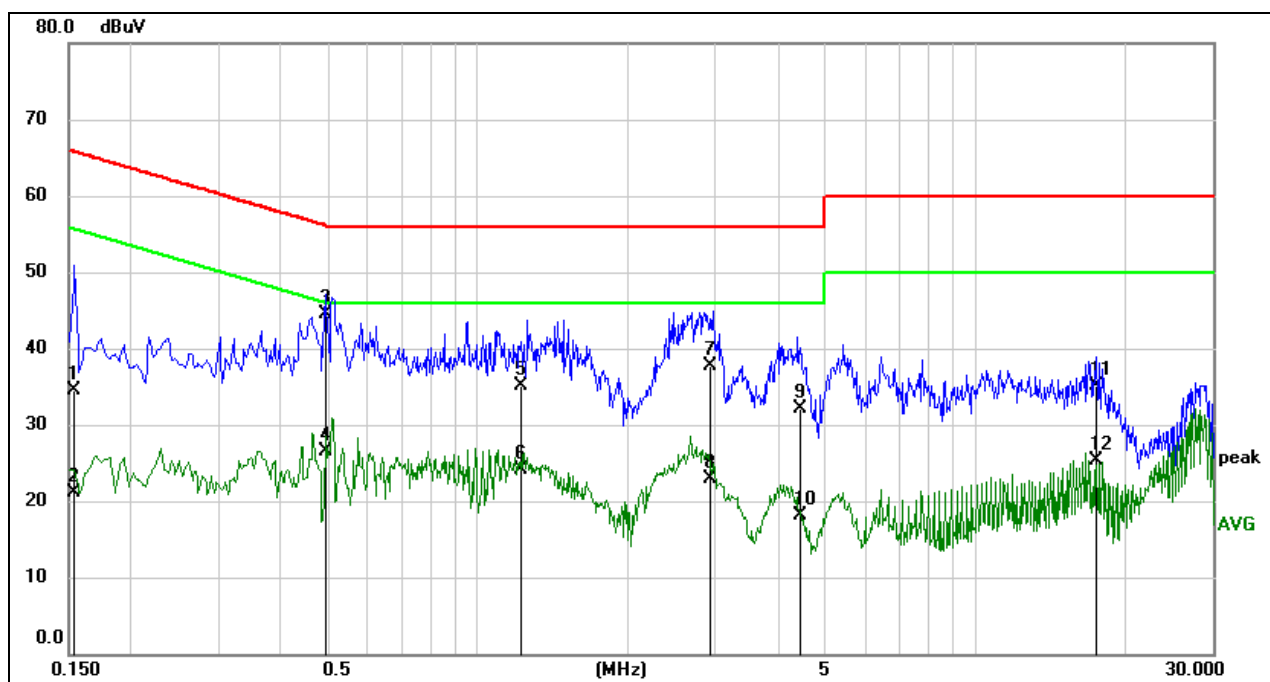**LINE N RESULTS**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1534	24.98	9.59	34.57	65.81	-31.24	QP
2	0.1534	11.52	9.59	21.11	55.81	-34.70	AVG
3	0.4944	34.82	9.60	44.42	56.09	-11.67	QP
4	0.4944	16.99	9.60	26.59	46.09	-19.50	AVG
5	1.2214	25.49	9.61	35.10	56.00	-20.90	QP
6	1.2214	14.53	9.61	24.14	46.00	-21.86	AVG
7	2.9280	28.18	9.62	37.80	56.00	-18.20	QP
8	2.9280	13.28	9.62	22.90	46.00	-23.10	AVG
9	4.4135	22.54	9.61	32.15	56.00	-23.85	QP
10	4.4135	8.54	9.61	18.15	46.00	-27.85	AVG
11	17.5421	25.49	9.69	35.18	60.00	-24.82	QP
12	17.5421	15.64	9.69	25.33	50.00	-24.67	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz-150 kHz), 9 kHz (150 kHz-30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

END OF REPORT