

TEST REPORT

Applicant: ShenZhen Shi ShenYuanGuang KeJi YouXian GongSi

Address of Applicant: 02, No.46, Zone 2, Dunbei New Vil, Hualian Community, Hua Lian She Qu, Long Hua Jie Dao, Long Hua Qu,Shenzhen, CN

Manufacturer/Factory: ShenZhen Shi ShenYuanGuang KeJi YouXian GongSi

Address of Manufacturer/Factory: 02, No.46, Zone 2, Dunbei New Vil, Hualian Community, Hua Lian She Qu, Long Hua Jie Dao, Long Hua Qu,Shenzhen, CN

Equipment Under Test (EUT)

Product Name: Remote control

Model No.: S120A

Serial No.: See page 5 for details

Trade Name:  TOVEENEN

FCC ID: 2AZHY-S120A

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.231

Date of sample receipt: Mar.30,2021

Date of Test: Mar.30,2021-Apr.09,2021

Date of report issued: Apr.09,2021

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Robinson Luo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
01	Apr.09,2021	Original

Prepared By:




Date:

Apr.09,2021

Project Engineer

Check By:



Date:

Apr.09,2021

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	6
5.3 DESCRIPTION OF SUPPORT UNITS	6
5.4 TEST FACILITY	6
5.5 TEST LOCATION	6
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA	9
7.1 ANTENNA REQUIREMENT	9
7.2 RADIATED EMISSION METHOD.....	10
7.3 20dB OCCUPY BANDWIDTH	14
7.4 DWELL TIME	15
7.5 DUTY CYCLE	16
8 TEST SETUP PHOTO	20
9 EUT CONSTRUCTIONAL DETAILS.....	20

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203	Pass
Conduction Emission	15.207	N/A
Field strength of the Fundamental Signal	15.231 (b)	Pass
Spurious Emissions	15.231 (b)/15.209	Pass
20dB Bandwidth	15.231 (c)	Pass
Dwell Time	15.231 (a)(1)	Pass

Pass: The EUT complies with the essential requirements in the standard.

N/A: Not applicable.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Remote control
Model No.:	S120A
Test Model No:	R120AAA, R120BBB, S1235A, S120A-M, R120AAA-M, R120BBB-M, S1235A-M, S120B, S120V, R120V, T120A, P120A, T120V, P120V, T120B, P120B, S12A, S12B, R12A, R12B, S12V, R12V, T12A, P12A, T12B, P12B, T12V, P12V, SW120A, RW120A, SK120A, SW120B, RW120B, SK120B, SW12A, RW12A, SK12A
Trade Name:	 TOVEENEN
Test sample(s) ID:	GTSL202104000054-1 (Engineer sample) GTSL202104000054-2 (Normal sample)
Operation Frequency:	314.93MHz
Channel Number	1
Modulation technology:	ASK
Antenna Type:	Telescopic Antenna
Antenna gain:	0dBi
Power supply:	DC 12.0V From Battery

5.2 Test mode

Transmitting mode	Keep the EUT in transmitting mode.
-------------------	------------------------------------

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which only the worst case was shown in this test report and defined as follows:

	Axis	X	Y	Z
314.93MHz	Field Strength(dBuV/m)	72.57	69.58	68.17

5.3 Description of Support Units

None.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. No.123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China Tel: 0755-27798480 Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

Conducted:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021



7 Test results and Measurement Data

7.1 Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
<i>The antenna is Telescopic Antenna, the best case gain of the antenna is 0dBi, reference to the appendix II for details</i>	

7.2 Radiated Emission Method

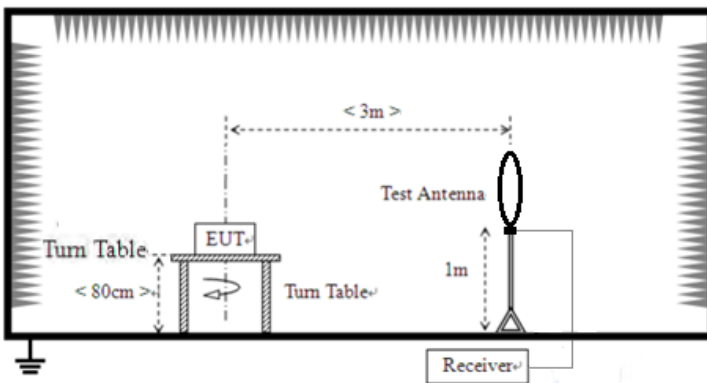Test Requirement:	FCC Part15 C Section 15.231 (b)& Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 6000MHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	314.93MHz	95.62		Peak Value	
		75.62		Average Value	
Limit: (Spurious Emissions)	Fundamental Frequency (MHz)		Field Strength of fundamental (microvolts/meter)		Field Strength of Unwanted Emissions (microvolts/meter)
	40.66-40.70		2250		225
	70-130		1250		125
	130-174		1250 to 3750		125 to 1,375**
	174-260		3750		375
	260-470		3750 to 12500 **		375 to 1250**
	Above 470		12500		1250
	Frequency (MHz)		Class B(dBuV/m @3m)		
			Peak	Average	
	Above 1000		74	54	
	Or The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level whichever limit permits higher field strength.				
Test setup:	Below 30MHz				
					

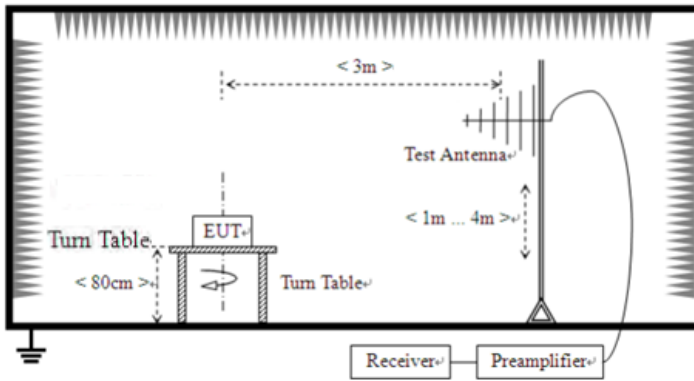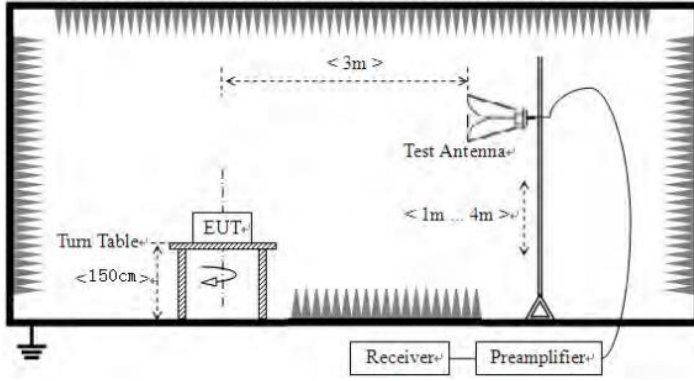	 Above 1GHz 					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	50%	Press.:	1 010mbar
Test voltage:	DC 12.0V					
Test results:	Pass					

Measurement data:

The emissions from 30MHz to 5GHz are measured peak and average level, below 1 GHz measured QP level, detailed test data please see below. Besides, we tested 3 directions and recorded the worst data.


Emission Styles	Frequency (MHz)	Reading (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Direction (H/V)
Fundamental	314.93	72.57	95.62	23.05	PK	H
Spurious	466.53	36.24	46.00	9.76	PK	H
Harmonics	629.86	55.11	75.62	20.51	PK	H
Harmonics	944.79	53.58	75.62	22.04	PK	H
--	--	--	--	--	--	--
Fundamental	314.93	69.03	95.62	26.59	PK	V
Spurious	466.53	36.57	46.00	9.43	PK	V
Harmonics	629.86	55.09	75.62	20.53	PK	V
Harmonics	944.79	53.31	75.62	22.31	PK	V
--	--	--	--	--	--	--

Emission Styles	Frequency (MHz)	PK Level (dBuV/m)	AV Factor (dB/m)	AV Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Direction (H/V)
Fundamental	314.93	72.57	-8.55	64.02	75.62	11.60	H
Harmonics	629.86	55.11	-8.55	46.56	55.62	9.06	H
Harmonics	944.79	53.58	-8.55	45.03	55.62	10.59	H
--	--	--	--	--	--	--	--
Fundamental	314.93	69.03	-8.55	60.48	75.62	15.14	V
Harmonics	629.86	55.09	-8.55	46.54	55.62	9.08	V
Harmonics	944.79	53.31	-8.55	44.76	55.62	10.86	V
--	--	--	--	--	--	--	--

Note:

1. AV Level (dBuV/m)= PK Level (dBuV/m)+ AV Factor(dB)
2. AV Factor=20*log(Duty Cycle)=20*log(0.373)=-8.55

7.3 20dB Occupy Bandwidth

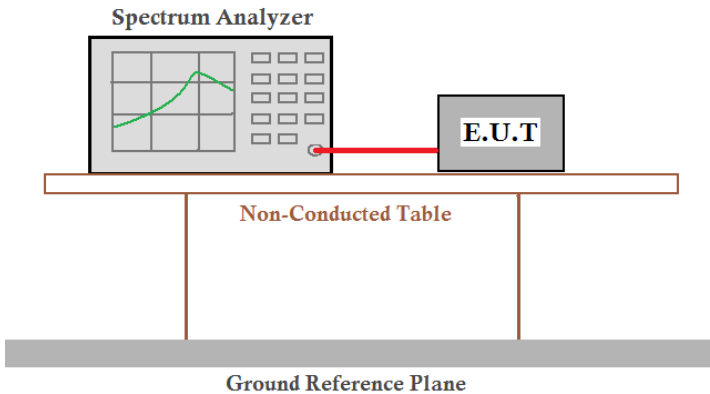
Test Requirement:	FCC Part15 C Section 15.231 (c)				
Test Method:	ANSI C63.10:2013				
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.				
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test environment:	Temp.:	24 °C	Humid.:	52%	Press.: 1 010mbar
Test voltage:	DC 12.0V				
Test results:	Pass				

Measurement Data

Test Frequency (MHz)	20dB bandwidth (kHz)	Limit (MHz)	Result
314.93	0.1233	0.7873	Pass

Note: Limit= Fundamental frequency×0.25%
 $314.93 \times 0.25\% = 0.7873\text{MHz}$

Test plot as follows:

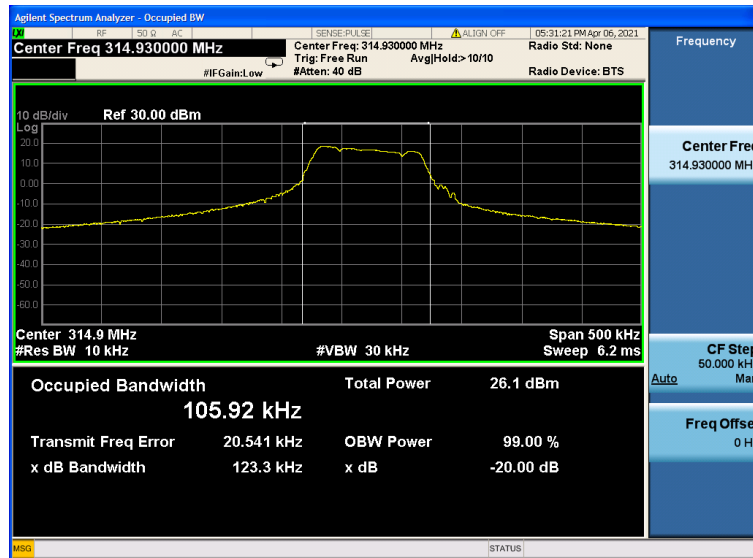


7.4 Dwell Time

Test Requirement:	FCC Part15 C Section 15.231 (a)1					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=1000KHz, VBW=1000KHz, span=0Hz, detector: Peak					
Limit:	Not more than 5 seconds					
Test setup:	Spectrum Analyzer E.U.T. Non-Conducted Table Ground Reference Plane					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	24 °C	Humid.:	52%	Press.:	1 010mbar
Test voltage:	DC 12.0V					
Test results:	Pass					

Measurement data:

Frequency (MHz)	Duration of each TX (second)	Limit (second)	Result
314.93	0.140	<5.0	Pass

Test plot as follows:

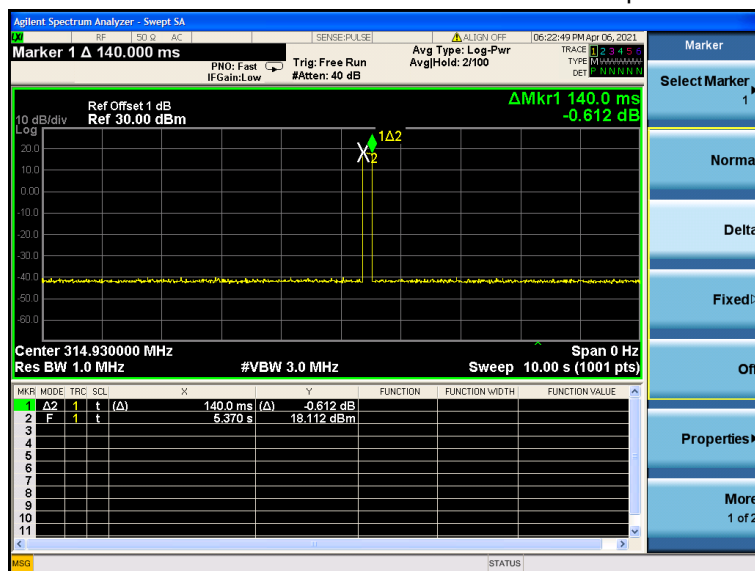

7.5 Duty Cycle

Test Requirement:	FCC Part15 C Section 15.231					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=100KHz, VBW=300KHz, span=0Hz, detector: Peak					
Limit:	No dedicated limit specified in the Rules.					
Test Procedure:	1. Place the EUT on the table and set it in transmitting mode. 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. 3. Set centre frequency of spectrum analyzer=operating frequency. 4. Set the spectrum analyzer as RBW=100kHz, VBW=100KHz, Span=0Hz, Adjust Sweep=100ms to obtain the “worst-case” pulse on time 5. Repeat above procedures until all frequency measured was complete.					
Test setup:	The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	24 °C	Humid.:	52%	Press.:	1 010mbar
Test voltage:	DC 12.0V					
Test results:	Pass					

Measurement data:

Calculate Formula: Duty cycle factor = $20 \log(\text{Duty cycle})$
Duty cycle = on time / 0.1 seconds or period, whichever is less


Test data:

In a transmit cycle 49.5ms period found burst 25pcs, the Duty Cycle can calculate as below:


Duty Cycle = $(1.150 \times 12 + 0.360 \times 13) / 49.5 = (13.8 + 4.68) / 49.5 = 0.373$

AV Factor = $20 \times \log(\text{Duty Cycle}) = 20 \times \log(0.373) = -8.55$


Test plot as follows:

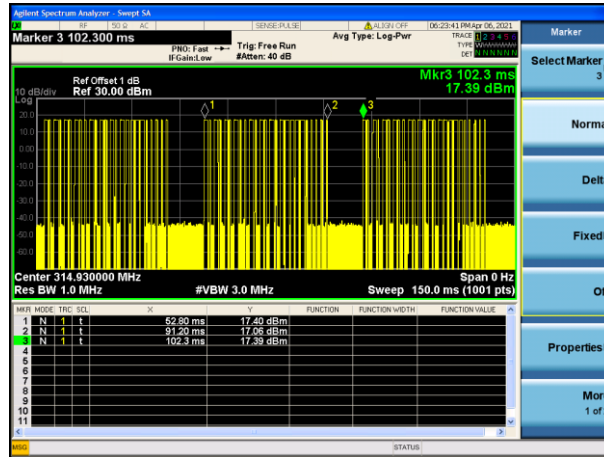


(Transmit cycle 49.5ms)

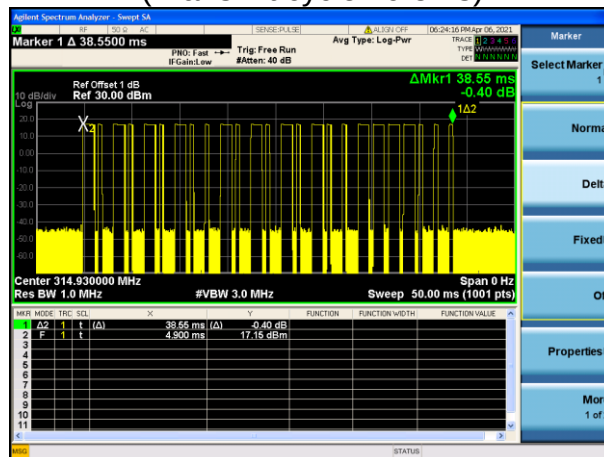

(Total Bursts in a transmit cycle 25pcs)

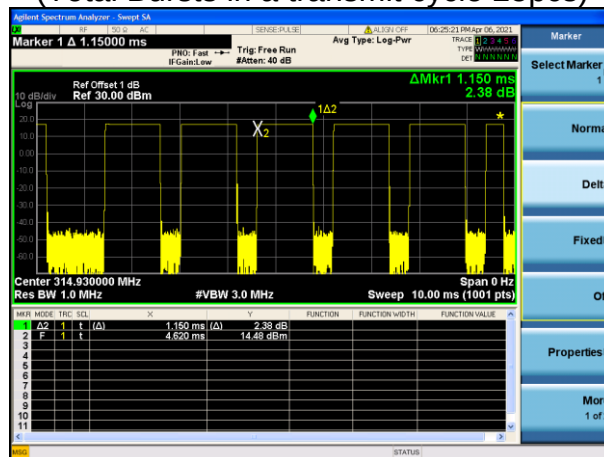

(Time per burst: 1.150ms*12pcs)

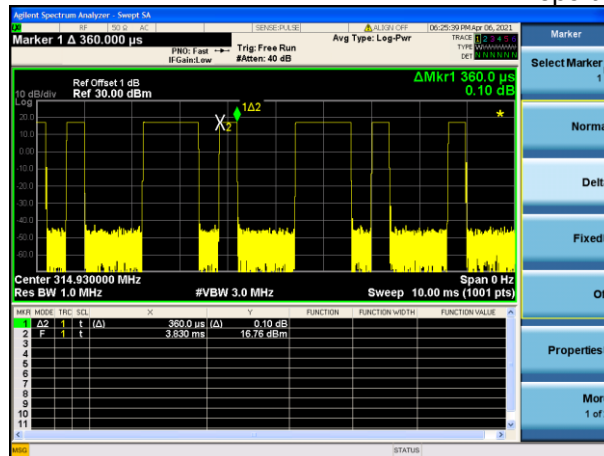

(Time per burst: 0.360ms*13pcs)

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

----- End -----