

FCC RF Test Report

Report No.: JYTSZ-R12-2500375

Applicant: Zhuhai Jinhong Technology Co., LTD

Address of Applicant: room R07-06, 2nd floor, 4th building, number 2007 Mingzhunan road, Zhuhai City, Guangdong Province, China

Equipment Under Test (EUT)

Product Name: WiFi HaLow Bridge

Model No.: AH9066P, AH9066D, RR9066D, RR9066P

Trade Mark: N/A

FCC ID: 2AZIK-AH9066P

Applicable Standards: FCC CFR Title 47 Part 15C (\$15.247)

Date of Sample Receipt: 25 Mar., 2025

Date of Test: 26 Mar., to 29 Apr., 2025

Date of Report Issued: 30 Apr., 2025

Test Result: PASS

Project by: _____

Date: _____

30 Apr., 2025

Reviewed by: _____

Date: _____

30 Apr., 2025

Approved by: _____

Date: _____

30 Apr., 2025

Manager



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	30 Apr., 2025	Original

2 Contents

	Page
Cover Page	1
1 Version	2
2 Contents.....	3
3 General Information.....	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode and Test Environment	5
3.4 Description of Test Auxiliary Equipment	5
3.5 Measurement Uncertainty	5
3.6 Additions to, Deviations, or Exclusions from the Method	5
3.7 Laboratory Facility	6
3.8 Laboratory Location.....	6
3.9 Test Instruments List	6
4 Measurement Setup and Procedure	8
4.1 Test Channel	8
4.2 Test Setup	9
4.3 Test Procedure	11
5 Test Results.....	12
5.1 Summary	12
5.1.1 Clause and Data Summary.....	12
5.1.2 Test Limit.....	13
5.2 Antenna requirement.....	14
5.3 AC Power Line Conducted Emission	15
5.4 Emissions in Restricted Frequency Bands.....	17
5.5 Emissions in Non-restricted Frequency Bands	33

3 General Information

3.1 Client Information

Applicant:	Zhuhai Jinhong Technology Co., LTD
Address:	room R07-06,2nd floor, 4th building, number 2007 Mingzhunan road, Zhuhai City, Guangdong Province, China
Manufacturer/Factory:	Zhuhai Jinhong Technology Co., LTD
Address:	room R07-06,2nd floor, 4th building, number 2007 Mingzhunan road, Zhuhai City, Guangdong Province, China

3.2 General Description of E.U.T.

Product Name:	WiFi HaLow Bridge
Model No.:	AH9066P, AH9066D, RR9066D, RR9066P
Operation Frequency:	902 MHz - 928 MHz
Channel Numbers:	24(AH 1M), 11(AH 2M), 6(AH 4M), 3(AH 8M)
Channel Separation:	1MHz(AH 1M), 2MHz (AH 2M), 4MHz (AH 4M) , 8MHz (AH 8M)
Modulation Technology:	OFDM-BPSK, QPSK, 16QAM, 64QAM
Antenna Type:	External Rod Antenna
Antenna Gain:	2.82dBi (declare by applicant)
Antenna transmit mode:	SISO (1TX, 1RX)
AC adapter:	Model No.: GA-1201000 Input: AC100-240V, 50/60Hz 0.6A Output: DC 12.0V, 1000mA
Test Sample Condition:	The test samples were provided in good working order with no visible defects.
Remark:	AH9066P, AH9066D, RR9066D, RR9066P were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.

3.3 Test Mode and Test Environment

Test Mode:	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
Per-scan all kind of data rate, the follow list were the worst case:	
Mode	Data rate
AH 1M	0.65Mbps
AH 2M	0.65Mbps
AH 4M	0.65Mbps
AH 8M	0.65Mbps
Remark:	
- For AC power line conducted emission and radiated spurious emission (below 1GHz), pre-scan all data speed, found AH 1M was worse case mode. The report only reflects the test data of worst mode. - Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report.	
Operating Environment:	
Temperature:	15°C ~ 35°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	12.0Vdc
Test Engineer:	Logan Li (Conducted measurement) Robin Gu (Radiated measurement)

3.4 Description of Test Auxiliary Equipment

The EUT has been tested as an independent unit.

3.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	±3.0 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.4 dB
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	±4.6 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	±5.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m SAC)	±4.5 dB
Radiated Emission (6GHz ~ 18GHz) (3m SAC)	4.7 dB
Radiated Emission (18GHz ~ 40GHz) (3m SAC)	5.34 dB
Radiated Emission (30MHz ~ 1GHz) (3m FAR)	3.39 dB
Radiated Emission (1GHz ~ 18GHz) (3m FAR)	5.15 dB
Radiated Emission (18GHz ~ 40GHz) (3m FAR)	5.30 dB
Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.	

3.6 Additions to, Deviations, or Exclusions from the Method

No

3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.9 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2026
Loop Antenna	Schwarzbeck	FMZB 1519 B	WXJ002-4	01-03-2025	01-02-2026
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	01-03-2025	01-02-2026
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	01-03-2025	01-02-2026
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-25-2024	12-24-2025
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	12-16-2024	12-15-2025
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	12-16-2024	12-15-2025
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-16-2024	12-15-2025
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	12-16-2024	12-15-2025
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-16-2024	12-15-2025
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ004-2	09-09-2024	09-08-2025
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-15-2025	01-14-2026
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-15-2025	01-14-2026
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG001-7	01-15-2025	01-14-2026
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Radiated Emission(3m FAR):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m FAR	YUNYI	9m*6m*6m	WXJ097	06-15-2023	06-14-2028
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ097-2	07-01-2024	06-30-2025
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	07-01-2024	06-30-2027
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ097-3	06-16-2024	06-15-2025
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	12-25-2024	12-24-2025
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-25-2024	12-24-2025
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-6	12-25-2024	12-24-2025
Pre-amplifier (30MHz ~ 1GHz)	YUNYI	PAM-310N	WXJ097-5	04-24-2024	04-23-2025
				04-21-2025	04-20-2026
Pre-amplifier (1GHz ~ 18GHz)	YUNYI	PAM-118N	WXJ097-6	04-24-2024	04-23-2025
				04-21-2025	04-20-2026
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-16-2024	12-15-2025
EMI Test Receiver	Rohde & Schwarz	ESCI3	WXJ003	12-16-2024	12-15-2025
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-16-2024	12-15-2025
Spectrum Analyzer	KEYSIGHT	N9020B	WXJ081-1	06-11-2024	06-10-2025
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-13M	WXG097-1	07-30-2024	07-29-2025
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG097-2	07-30-2024	07-29-2025
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG097-3	07-30-2024	07-29-2025
High Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Low Band Reject Filter Group	Tonscend	JS0806-F	WXJ097-4	N/A	
Test Software	Tonscend	TS+	Version: 5.0.0		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	06-11-2024	06-10-2025
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	12-17-2024	12-16-2025
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	12-17-2024	12-16-2025
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	01-15-2025	01-14-2026
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	
Test Software	AUDIX	E3	Version: 6.110919b		

Conducted Method:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Keysight	N9010B	WXJ004-3	09-10-2024	09-09-2025
Temperature Humidity Chamber	ZHONG ZHI	CZ-A-80D	WXJ032-3	12-17-2024	12-16-2026
Power Detector Box	MWRFTTEST	MW100-PSB	WXJ007-4	09-10-2024	09-09-2025
DC Power Supply	Keysight	E3642A	WXJ025-2	N/A	
RF Control Unit	MWRFTTEST	MW100-RFCB	WXG006	N/A	
Test Software	MWRFTTEST	MTS 8310	Version: 2.0.0.0		

4 Measurement Setup and Procedure


4.1 Test Channel

According to ANSI C63.10-2013 chapter 5.6.1 Table 4 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

AH 1M		
Lowest channel	Middle channel	Highest channel
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
903.5	914.5	926.5
AH 2M		
Lowest channel	Middle channel	Highest channel
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
905	915	925
AH 4M		
Lowest channel	Middle channel	Highest channel
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
906	914	926
AH 8M		
Lowest channel	Middle channel	Highest channel
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
908	916	924

4.2 Test Setup


1) Conducted emission measurement:

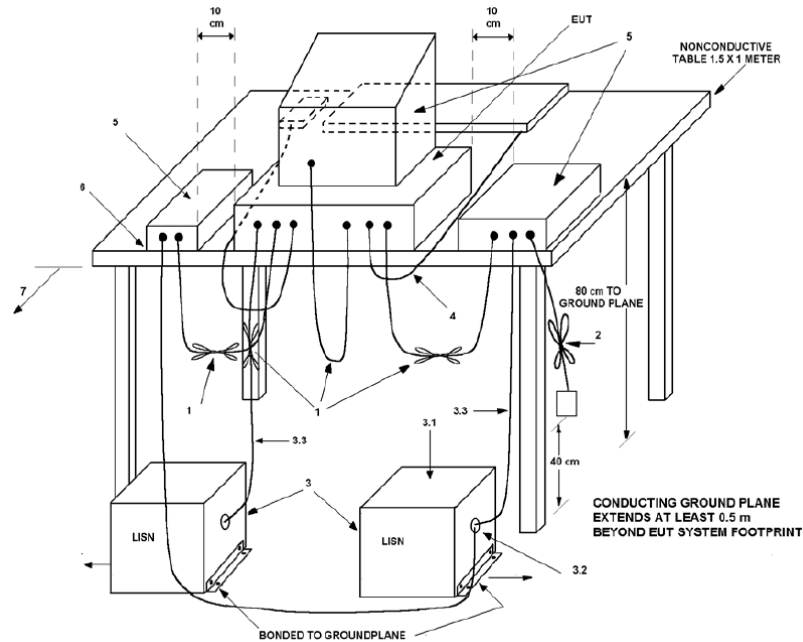


Note: The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.

2) Radiated emission measurement:

Below 1GHz (3m SAC)

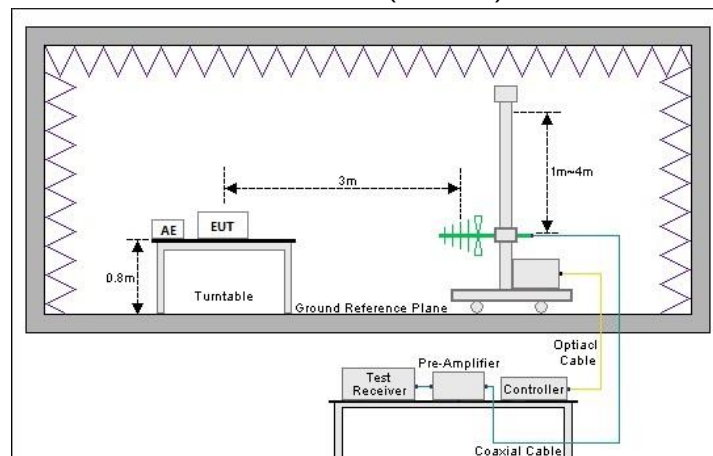

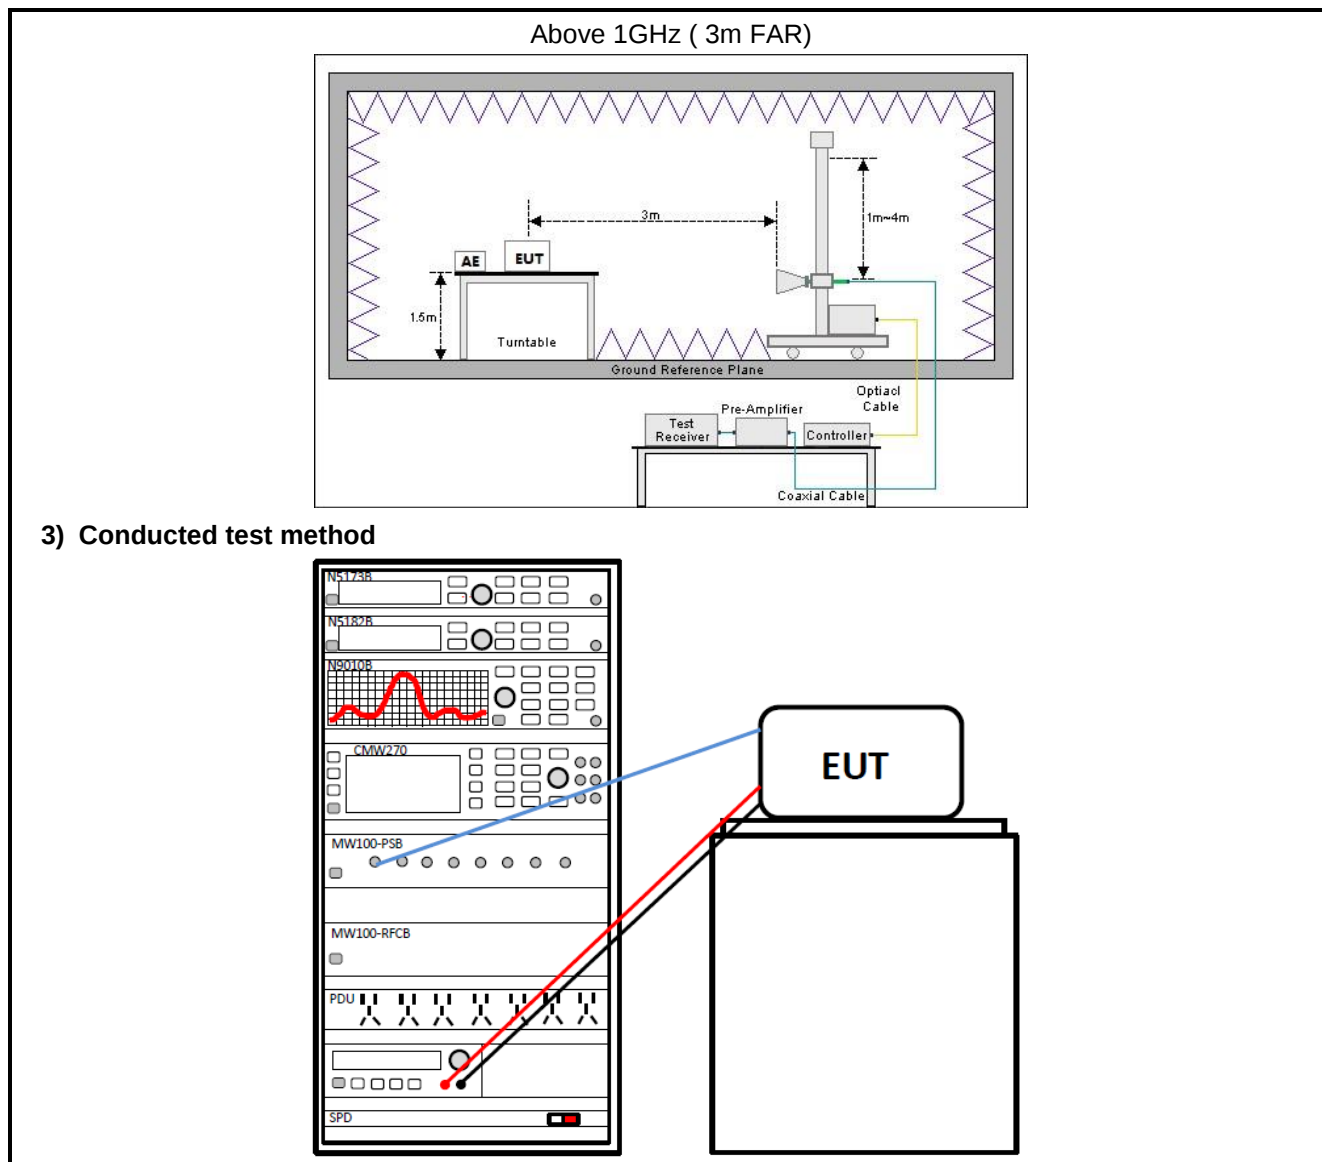

4.3 Test Procedure

Test method	Test step
Conducted emission	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
Radiated emission	For below 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m . 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	1. The BLE antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

5 Test Results

5.1 Summary

5.1.1 Clause and Data Summary

Test items	Standard clause	Test data	Result
Antenna Requirement	15.203 15.247 (b)(4)	See Section 5.2	Pass
AC Power Line Conducted Emission	15.207	See Section 5.3	Pass
Conducted Output Power	15.247 (b)(3)	Appendix A – AH 1M Appendix A – AH 2M Appendix A – AH 4M Appendix A – AH 8M	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Appendix A – AH 1M Appendix A – AH 2M Appendix A – AH 4M Appendix A – AH 8M	Pass
Power Spectral Density	15.247 (e)	Appendix A – AH 1M Appendix A – AH 2M Appendix A – AH 4M Appendix A – AH 8M	Pass
Band-edge Emission Conduction Spurious Emission	15.247 (d)	Appendix A – AH 1M Appendix A – AH 2M Appendix A – AH 4M Appendix A – AH 8M	Pass
Emissions in Restricted Frequency Bands	15.205 15.247 (d)	See Section 5.4	Pass
Emissions in Non-restricted Frequency Bands	15.209 15.247(d)	See Section 5.5	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by “RF Output Power” and other conduction measurement items is 0.5dB (provided by the customer).			
Test Method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02		

5.1.2 Test Limit


Test items	Limit																														
AC Power Line Conducted Emission	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>Quasi-Peak</th><th>Average</th></tr><tr><td>0.15 – 0.5</td><td>66 to 56 Note 1</td><td>56 to 46 Note 1</td></tr><tr><td>0.5 – 5</td><td>56</td><td>46</td></tr><tr><td>5 – 30</td><td>60</td><td>50</td></tr></table> Note 1: The limit level in dBµV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.	Frequency (MHz)	Limit (dBµV)		Quasi-Peak	Average	0.15 – 0.5	66 to 56 Note 1	56 to 46 Note 1	0.5 – 5	56	46	5 – 30	60	50																
Frequency (MHz)	Limit (dBµV)																														
	Quasi-Peak	Average																													
0.15 – 0.5	66 to 56 Note 1	56 to 46 Note 1																													
0.5 – 5	56	46																													
5 – 30	60	50																													
Conducted Output Power	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.																														
6dB Emission Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.																														
99% Occupied Bandwidth	N/A																														
Power Spectral Density	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.																														
Band-edge Emission Conduction Spurious Emission	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																														
Emissions in Restricted Frequency Bands Emissions in Non-restricted Frequency Bands	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBµV/m)</th><th rowspan="2">Detector</th></tr><tr><th>@ 3m</th><th>@ 10m</th></tr><tr><td>30 – 88</td><td>40.0</td><td>30.0</td><td>Quasi-peak</td></tr><tr><td>88 – 216</td><td>43.5</td><td>33.5</td><td>Quasi-peak</td></tr><tr><td>216 – 960</td><td>46.0</td><td>36.0</td><td>Quasi-peak</td></tr><tr><td>960 – 1000</td><td>54.0</td><td>44.0</td><td>Quasi-peak</td></tr></table> Note: The more stringent limit applies at transition frequencies. <table><tr><th rowspan="2">Frequency</th><th colspan="2">Limit (dBµV/m) @ 3m</th></tr><tr><th>Average</th><th>Peake</th></tr><tr><td>Above 1 GHz</td><td>54.0</td><td>74.0</td></tr></table> Note: The measurement bandwidth shall be 1 MHz or greater.	Frequency (MHz)	Limit (dBµV/m)		Detector	@ 3m	@ 10m	30 – 88	40.0	30.0	Quasi-peak	88 – 216	43.5	33.5	Quasi-peak	216 – 960	46.0	36.0	Quasi-peak	960 – 1000	54.0	44.0	Quasi-peak	Frequency	Limit (dBµV/m) @ 3m		Average	Peake	Above 1 GHz	54.0	74.0
Frequency (MHz)	Limit (dBµV/m)		Detector																												
	@ 3m	@ 10m																													
30 – 88	40.0	30.0	Quasi-peak																												
88 – 216	43.5	33.5	Quasi-peak																												
216 – 960	46.0	36.0	Quasi-peak																												
960 – 1000	54.0	44.0	Quasi-peak																												
Frequency	Limit (dBµV/m) @ 3m																														
	Average	Peake																													
Above 1 GHz	54.0	74.0																													

5.2 Antenna requirement

Standard requirement:	FCC Part 15 C Section 15.203 /247(b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
E.U.T Antenna:	
The antenna is an External Rod Antenna which cannot replace by end-user, the best case gain of the antenna is 2.82 dBi. See product internal photos for details.	

5.3 AC Power Line Conducted Emission

Product name:	WiFi HaLow Bridge	Product model:	AH9066P
Test by:	Kiran Zeng	Test mode:	AH Mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

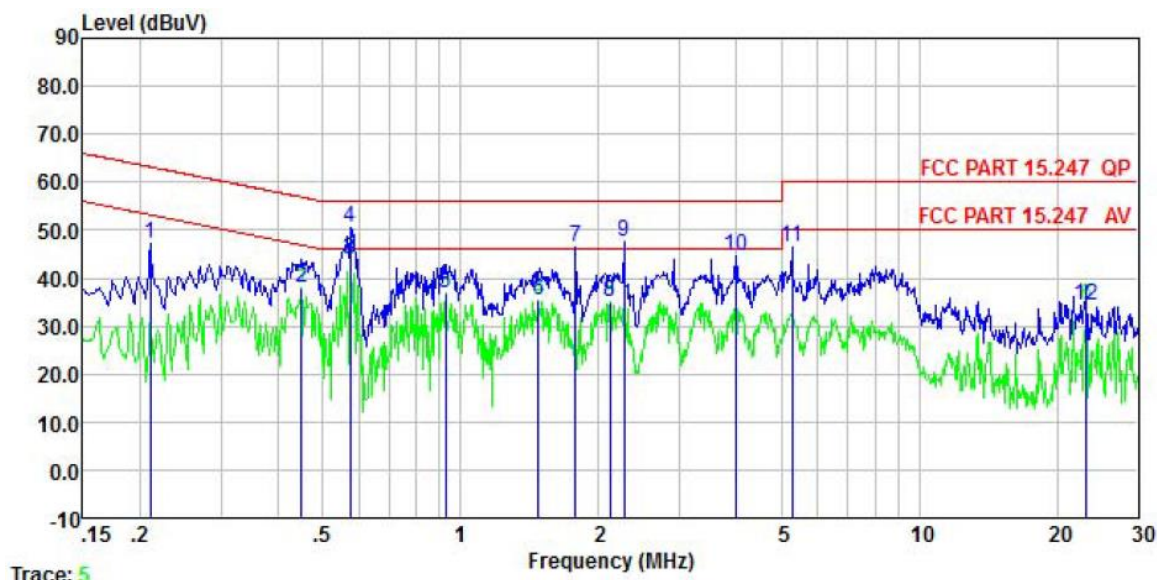


Trace: 5

	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.211	27.04	10.10	0.00	9.88	0.03	47.05	63.18	-16.13	QP
2	0.449	17.99	10.13	0.00	9.88	0.03	38.03	46.89	-8.86	Average
3	0.573	23.74	10.19	0.00	9.88	0.02	43.83	46.00	-2.17	Average
4	0.573	30.53	10.19	0.00	9.88	0.02	50.62	56.00	-5.38	QP
5	0.928	16.92	10.17	0.00	9.88	0.04	37.01	46.00	-8.99	Average
6	1.480	15.33	10.14	0.00	9.88	0.14	35.49	46.00	-10.51	Average
7	1.781	26.45	10.12	0.00	9.88	0.18	46.63	56.00	-9.37	QP
8	2.121	14.95	10.13	0.00	9.88	0.19	35.15	46.00	-10.85	Average
9	2.273	27.21	10.16	0.00	9.88	0.17	47.42	56.00	-8.58	QP
10	3.985	24.61	10.11	0.00	9.89	0.08	44.69	56.00	-11.31	QP
11	5.277	26.00	10.32	0.00	9.89	0.09	46.30	60.00	-13.70	QP
12	23.140	13.69	10.36	0.00	9.99	0.17	34.21	50.00	-15.79	Average

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	WiFi HaLow Bridge	Product model:	AH9066P
Test by:	Kiran Zeng	Test mode:	AH Mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

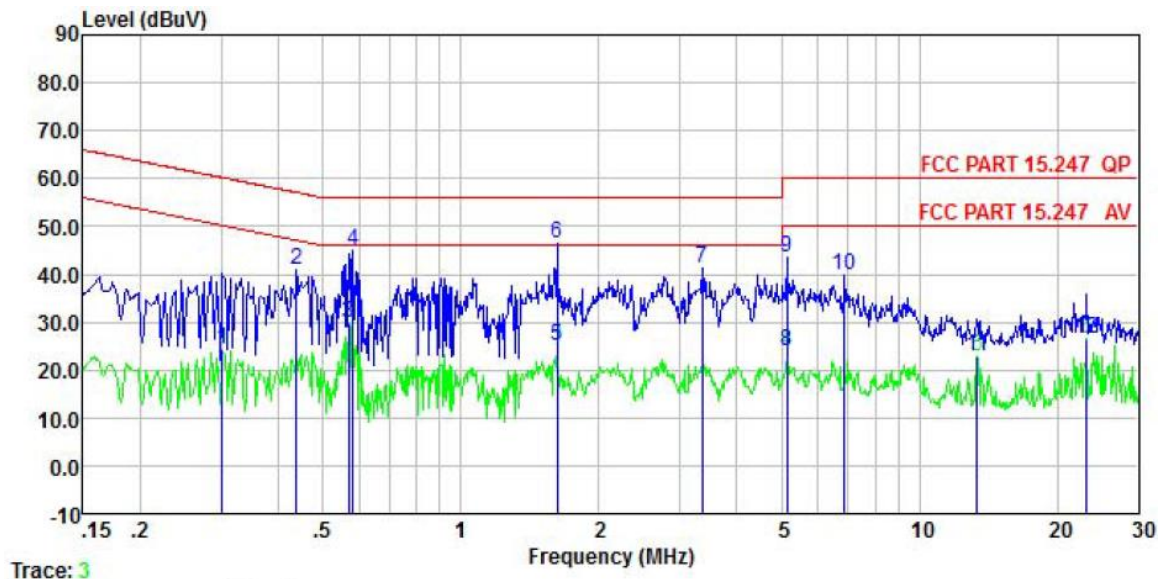


	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.302	4.39	10.14	0.00	9.88	0.03	24.44	50.19	-25.75	Average
2	0.437	20.79	10.14	0.00	9.88	0.03	40.84	57.11	-16.27	QP
3	0.570	9.81	10.27	0.00	9.88	0.02	29.98	46.00	-16.02	Average
4	0.582	24.94	10.28	0.00	9.88	0.02	45.12	56.00	-10.88	QP
5	1.619	4.58	10.27	0.00	9.88	0.16	24.89	46.00	-21.11	Average
6	1.619	26.30	10.27	0.00	9.88	0.16	46.61	56.00	-9.39	QP
7	3.364	21.00	10.20	0.00	9.89	0.07	41.16	56.00	-14.84	QP
8	5.139	3.76	10.21	0.00	9.89	0.09	23.95	50.00	-26.05	Average
9	5.139	23.26	10.21	0.00	9.89	0.09	43.45	60.00	-16.55	QP
10	6.878	19.59	10.29	0.00	9.90	0.10	39.88	60.00	-20.12	QP
11	13.337	2.18	10.51	0.00	9.92	0.11	22.72	50.00	-27.28	Average
12	23.140	5.93	10.56	0.00	9.99	0.17	26.65	50.00	-23.35	Average

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

5.4 Emissions in Restricted Frequency Bands

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 1M
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

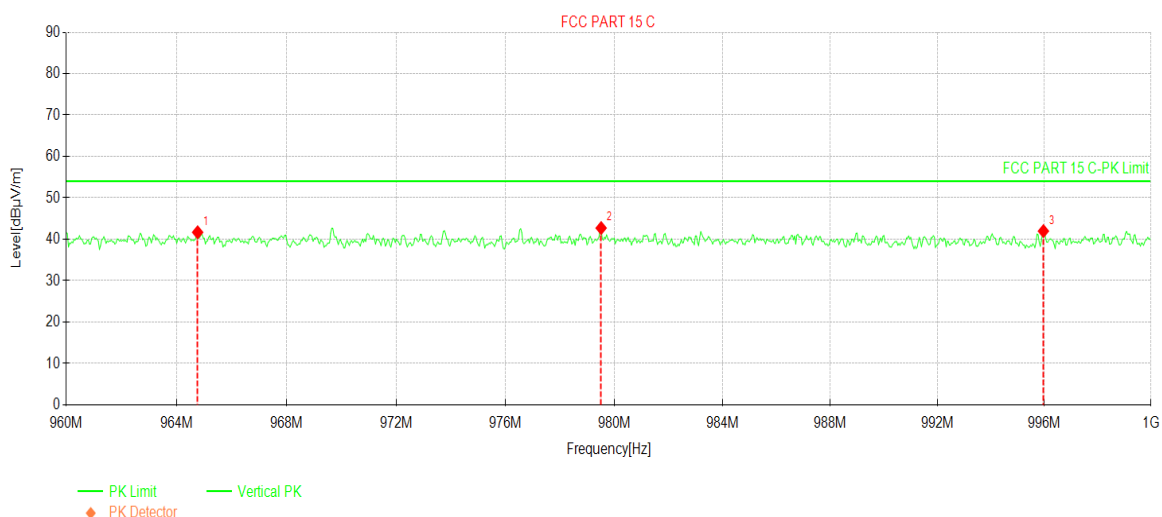


Suspected Data List

NO.	Freq. [MHz]	Reading[dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	964.7600	14.79	26.90	41.69	54.00	12.31	PK	Vertical
2	979.5200	15.60	27.11	42.71	54.00	11.29	PK	Vertical
3	995.9600	14.91	27.07	41.98	54.00	12.02	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 1M
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

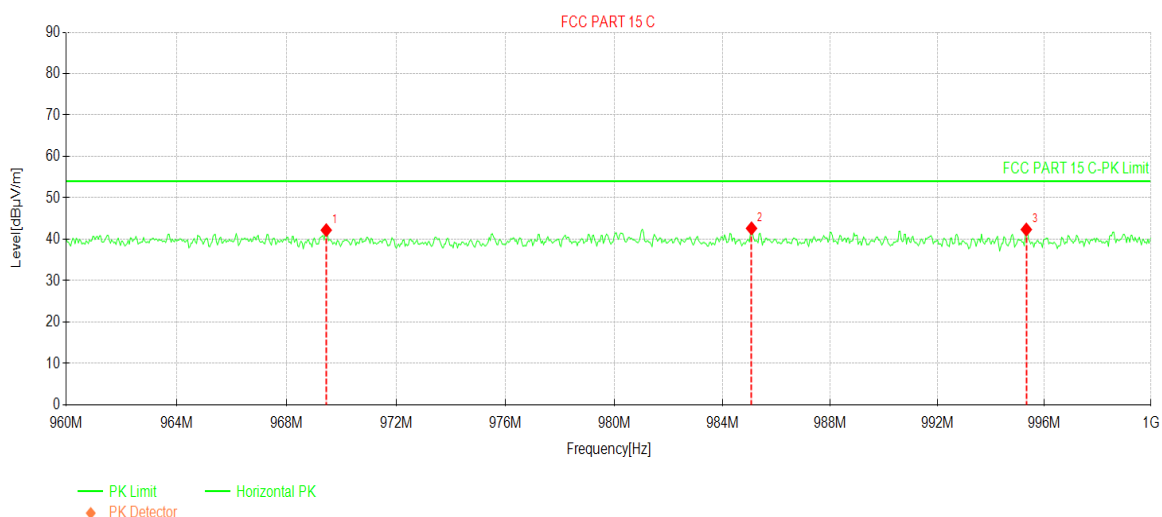


Suspected Data List

NO.	Freq. [MHz]	Reading[dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	969.4400	15.20	27.01	42.21	54.00	11.79	PK	Horizontal
2	985.0800	15.42	27.21	42.63	54.00	11.37	PK	Horizontal
3	995.3200	15.28	27.07	42.35	54.00	11.65	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 1M
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

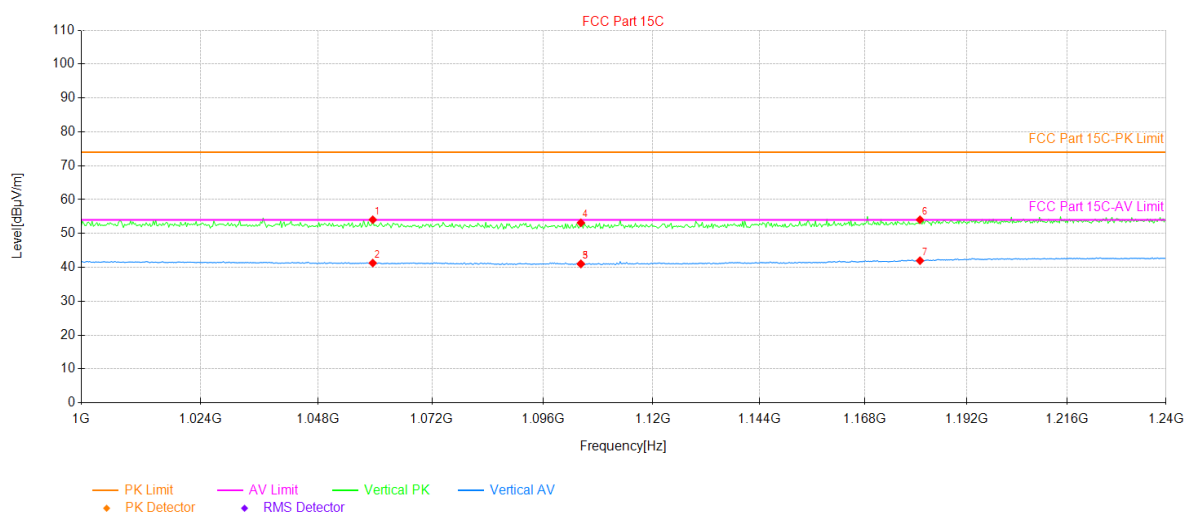


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	1059.52	23.84	30.22	54.06	74.00	19.94	96	PK	PASS	Vertical
2	1059.52	11.06	30.22	41.28	54.00	12.72	114	AV	PASS	Vertical
3	1104.16	10.86	30.17	41.03	54.00	12.97	214	AV	PASS	Vertical
4	1104.16	22.98	30.17	53.15	74.00	20.85	334	PK	PASS	Vertical
5	1104.16	10.86	30.17	41.03	54.00	12.97	214	AV	PASS	Vertical
6	1180.96	22.73	31.32	54.05	74.00	19.95	4	PK	PASS	Vertical
7	1180.96	10.66	31.32	41.98	54.00	12.02	320	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 1M
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

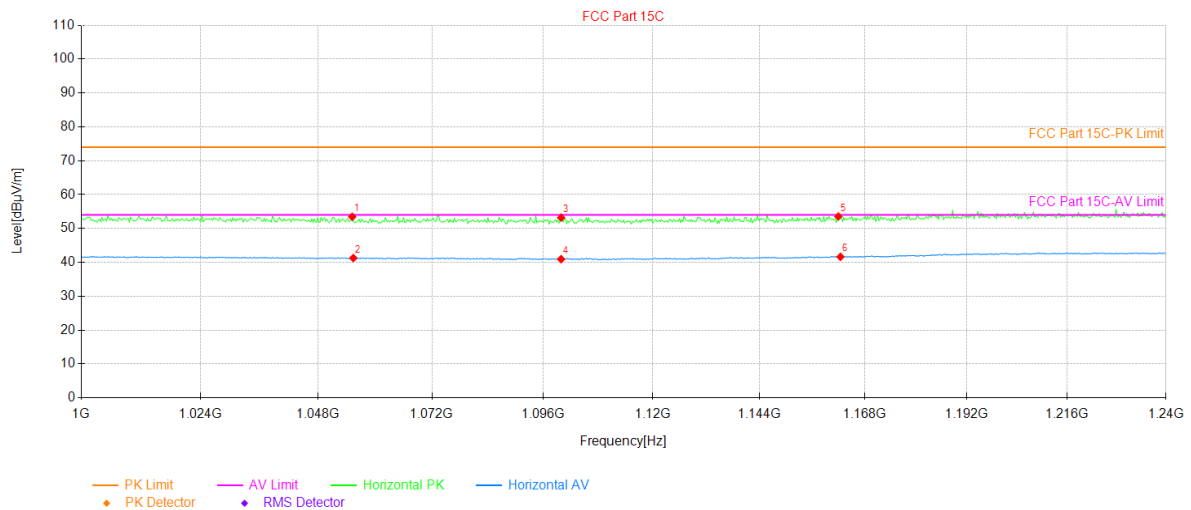


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	1055.20	23.22	30.23	53.45	74.00	20.55	84	PK	PASS	Horizontal
2	1055.44	11.06	30.23	41.29	54.00	12.71	2	AV	PASS	Horizontal
3	1099.84	23.09	30.11	53.20	74.00	20.80	130	PK	PASS	Horizontal
4	1099.84	10.84	30.11	40.95	54.00	13.05	360	AV	PASS	Horizontal
5	1162.00	22.53	31.01	53.54	74.00	20.46	162	PK	PASS	Horizontal
6	1162.48	10.61	31.02	41.63	54.00	12.37	322	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 2M
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

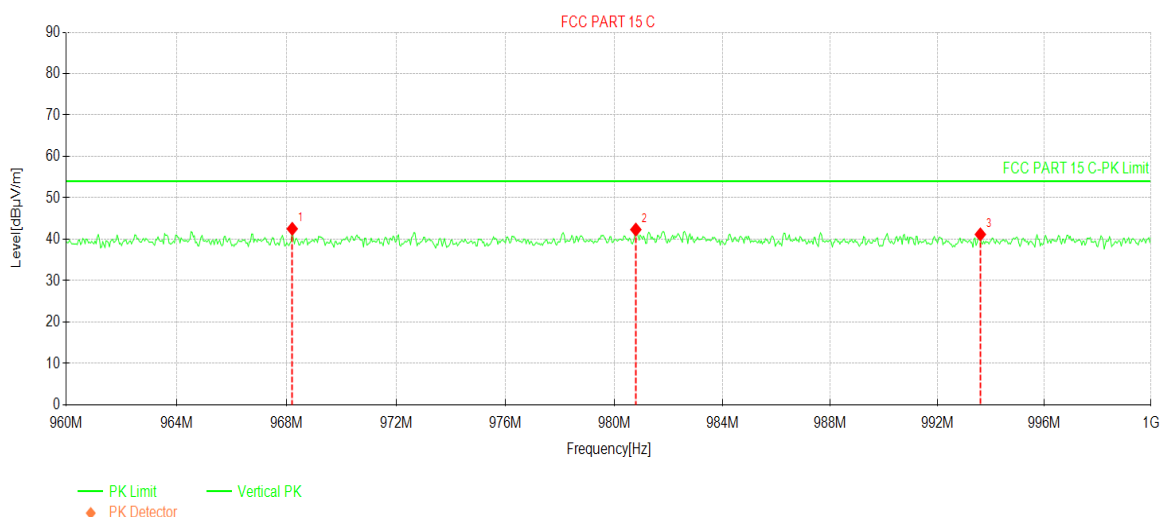


Suspected Data List

NO.	Freq. [MHz]	Reading[dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	968.2000	15.54	26.98	42.52	54.00	11.48	PK	Vertical
2	980.8000	15.20	27.13	42.33	54.00	11.67	PK	Vertical
3	993.6000	14.07	27.11	41.18	54.00	12.82	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 2M
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

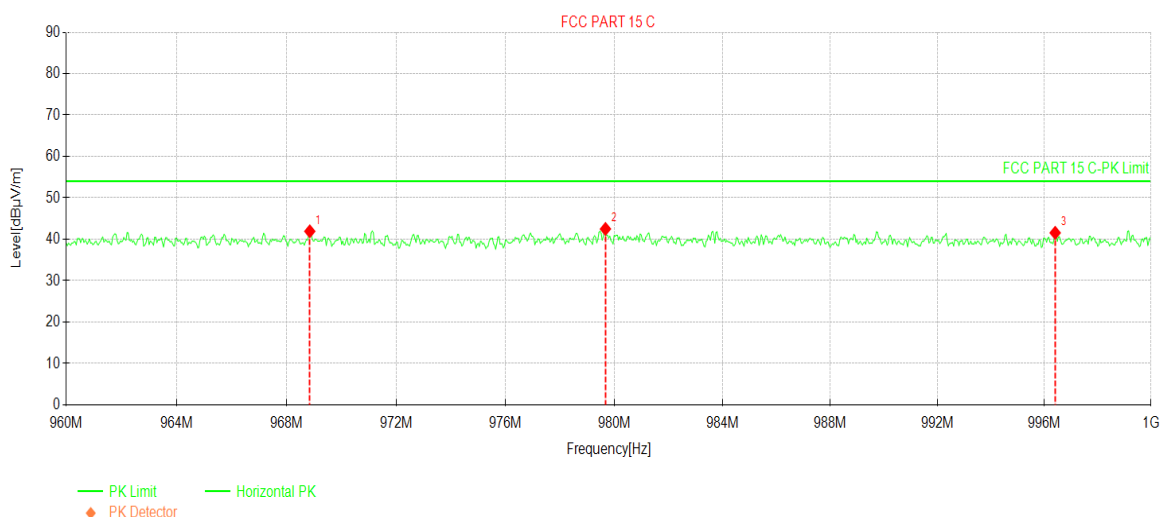


Suspected Data List

NO.	Freq. [MHz]	Reading[dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	968.8400	14.93	26.99	41.92	54.00	12.08	PK	Horizontal
2	979.6800	15.38	27.11	42.49	54.00	11.51	PK	Horizontal
3	996.4000	14.48	27.07	41.55	54.00	12.45	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 2M
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

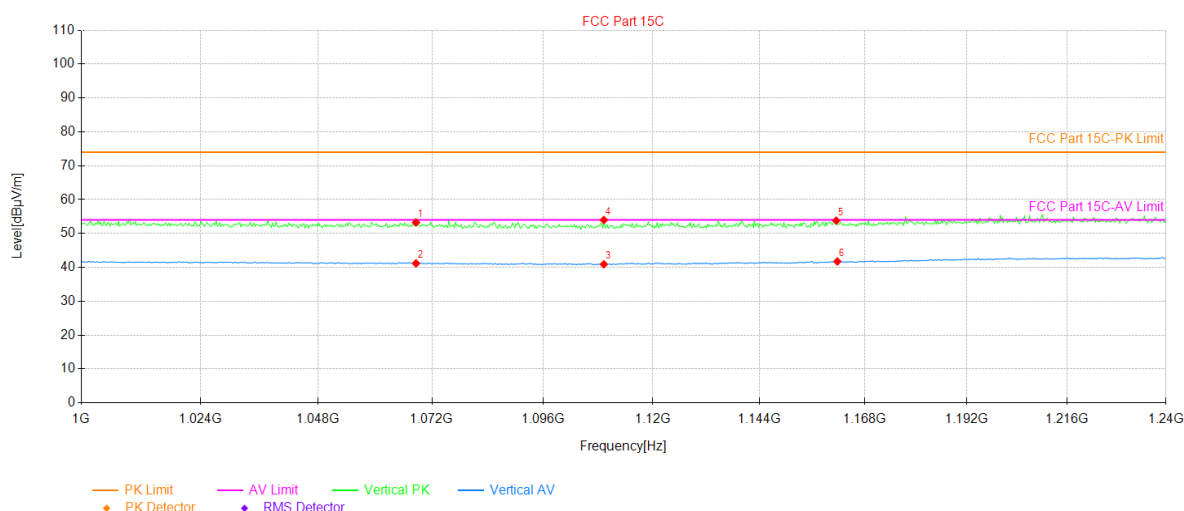


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	1068.64	23.06	30.20	53.26	74.00	20.74	253	PK	PASS	Vertical
2	1068.64	10.98	30.20	41.18	54.00	12.82	56	AV	PASS	Vertical
3	1109.20	10.67	30.24	40.91	54.00	13.09	356	AV	PASS	Vertical
4	1109.20	23.74	30.24	53.98	74.00	20.02	253	PK	PASS	Vertical
5	1161.52	22.78	31.00	53.78	74.00	20.22	140	PK	PASS	Vertical
6	1161.76	10.74	31.01	41.75	54.00	12.25	289	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 2M
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

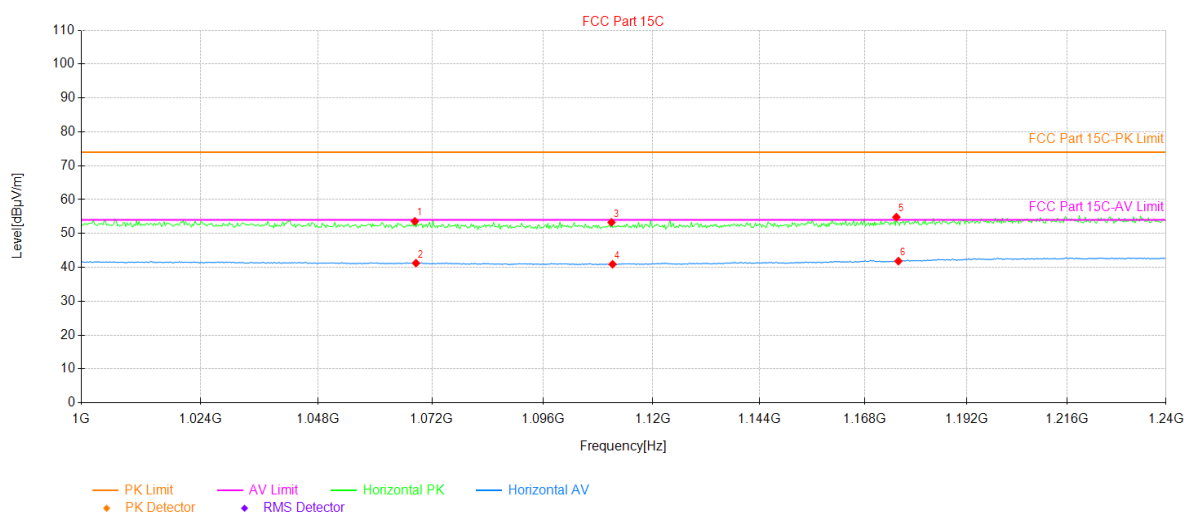


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	1068.40	23.38	30.20	53.58	74.00	20.42	66	PK	PASS	Horizontal
2	1068.64	11.06	30.20	41.26	54.00	12.74	142	AV	PASS	Horizontal
3	1110.88	23.01	30.27	53.28	74.00	20.72	170	PK	PASS	Horizontal
4	1111.12	10.66	30.27	40.93	54.00	13.07	246	AV	PASS	Horizontal
5	1175.44	23.60	31.23	54.83	74.00	19.17	360	PK	PASS	Horizontal
6	1175.92	10.61	31.23	41.84	54.00	12.16	116	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 4M
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

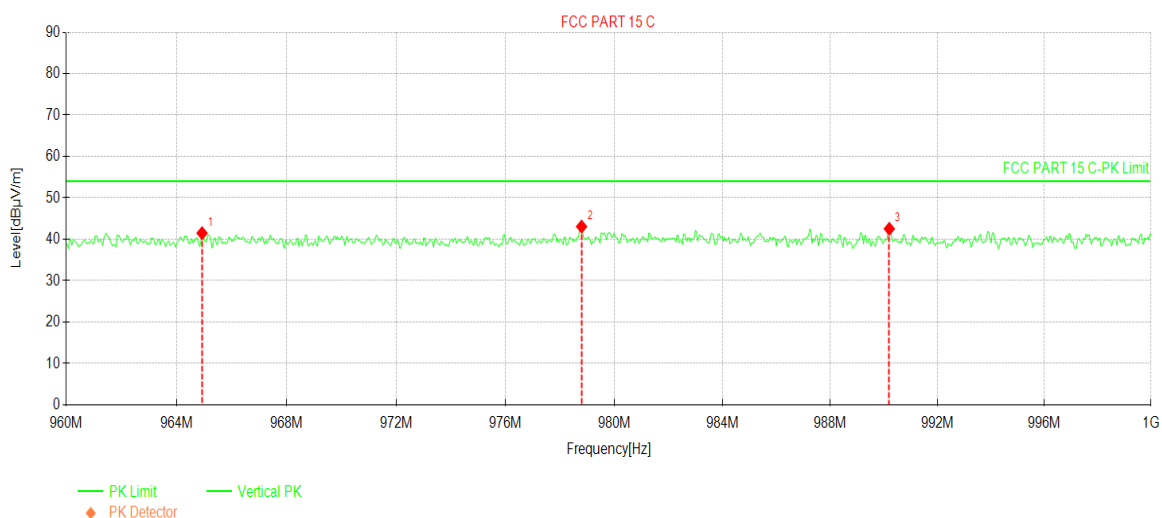


Suspected Data List

NO.	Freq. [MHz]	Reading[dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	964.9200	14.59	26.90	41.49	54.00	12.51	PK	Vertical
2	978.8000	15.97	27.09	43.06	54.00	10.94	PK	Vertical
3	990.2000	15.33	27.20	42.53	54.00	11.47	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 4M
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

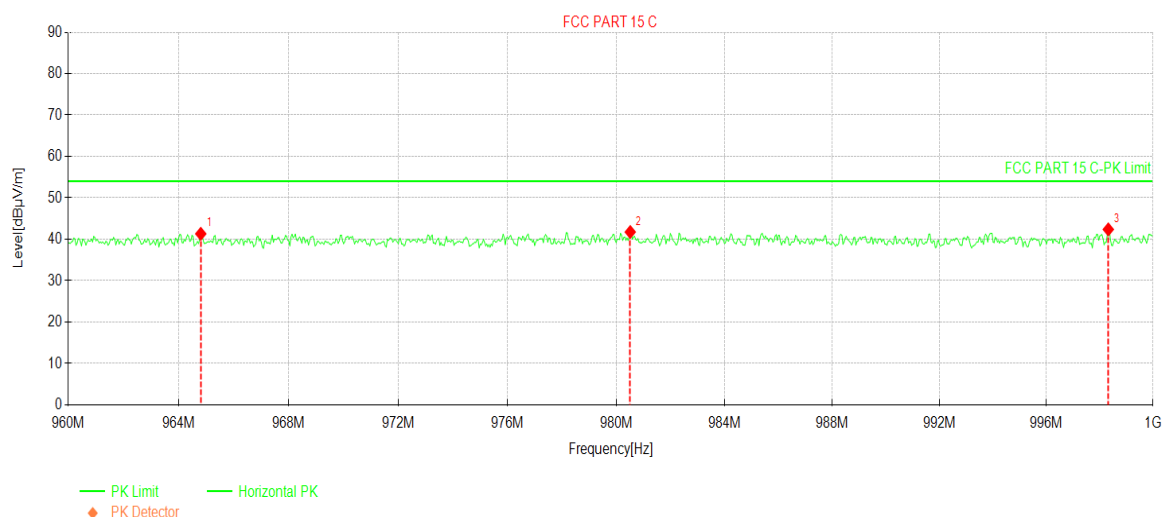


Suspected Data List

NO.	Freq. [MHz]	Reading[dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	964.8000	14.42	26.90	41.32	54.00	12.68	PK	Horizontal
2	980.5200	14.62	27.13	41.75	54.00	12.25	PK	Horizontal
3	998.3200	15.33	27.05	42.38	54.00	11.62	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 4M
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

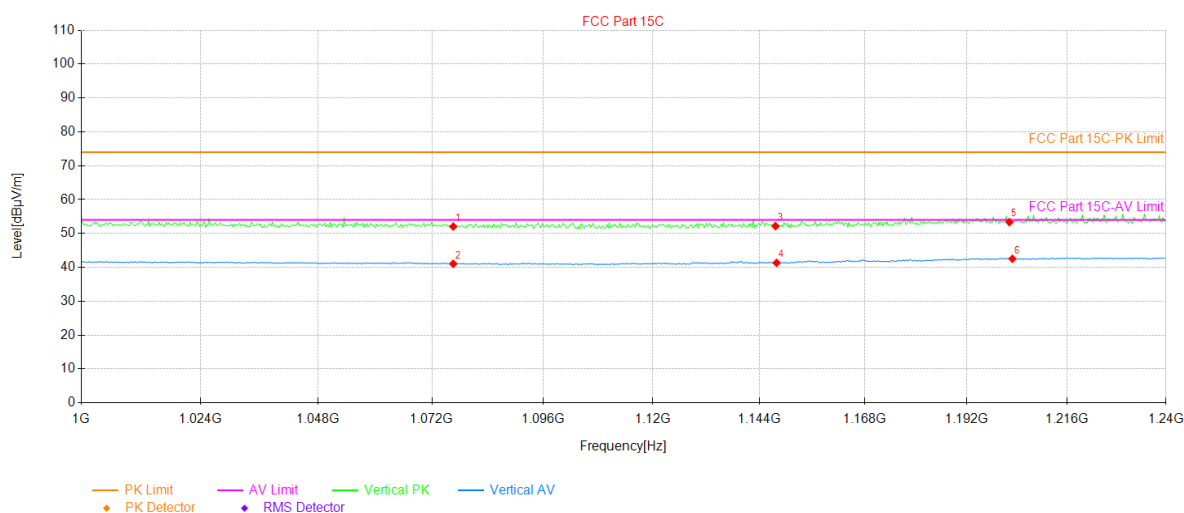


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	1076.56	21.86	30.18	52.04	74.00	21.96	284	PK	PASS	Vertical
2	1076.56	10.88	30.18	41.06	54.00	12.94	164	AV	PASS	Vertical
3	1147.60	21.38	30.79	52.17	74.00	21.83	174	PK	PASS	Vertical
4	1147.84	10.55	30.79	41.34	54.00	12.66	266	AV	PASS	Vertical
5	1202.08	21.75	31.60	53.35	74.00	20.65	224	PK	PASS	Vertical
6	1202.80	10.95	31.59	42.54	54.00	11.46	57	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 4M
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

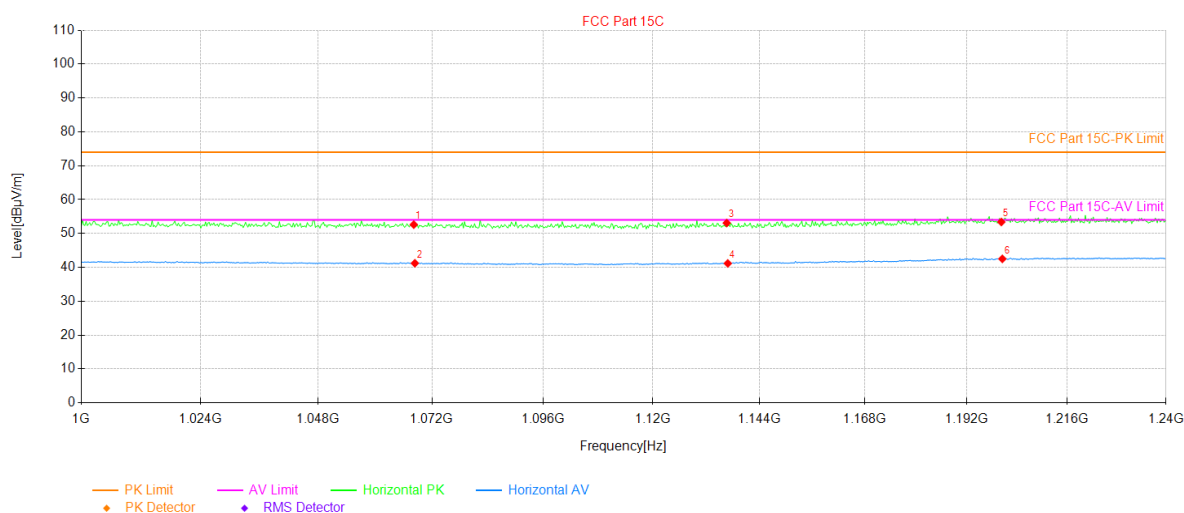


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	1068.16	22.41	30.20	52.61	74.00	21.39	339	PK	PASS	Horizontal
2	1068.40	11.02	30.20	41.22	54.00	12.78	34	AV	PASS	Horizontal
3	1136.56	22.44	30.65	53.09	74.00	20.91	293	PK	PASS	Horizontal
4	1136.80	10.52	30.65	41.17	54.00	12.83	279	AV	PASS	Horizontal
5	1200.16	21.77	31.62	53.39	74.00	20.61	148	PK	PASS	Horizontal
6	1200.40	10.89	31.62	42.51	54.00	11.49	75	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 8M
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

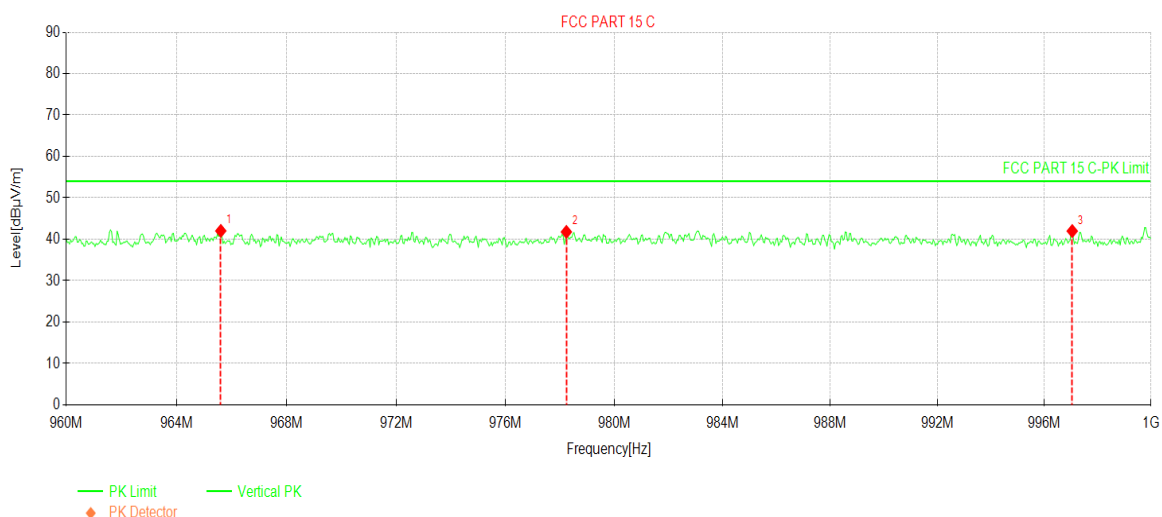


Suspected Data List

NO.	Freq. [MHz]	Reading[dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	965.6000	15.11	26.91	42.02	54.00	11.98	PK	Vertical
2	978.2400	14.69	27.08	41.77	54.00	12.23	PK	Vertical
3	997.0400	14.93	27.06	41.99	54.00	12.01	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 8M
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

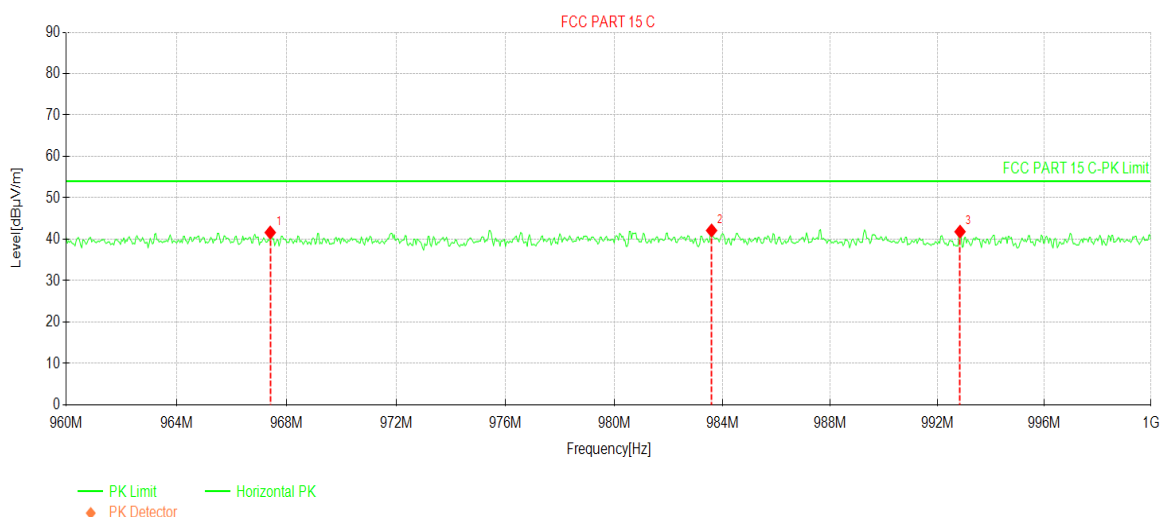


Suspected Data List

NO.	Freq. [MHz]	Reading[dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	967.4000	14.67	26.96	41.63	54.00	12.37	PK	Horizontal
2	983.6000	14.93	27.19	42.12	54.00	11.88	PK	Horizontal
3	992.8400	14.70	27.13	41.83	54.00	12.17	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 8M
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

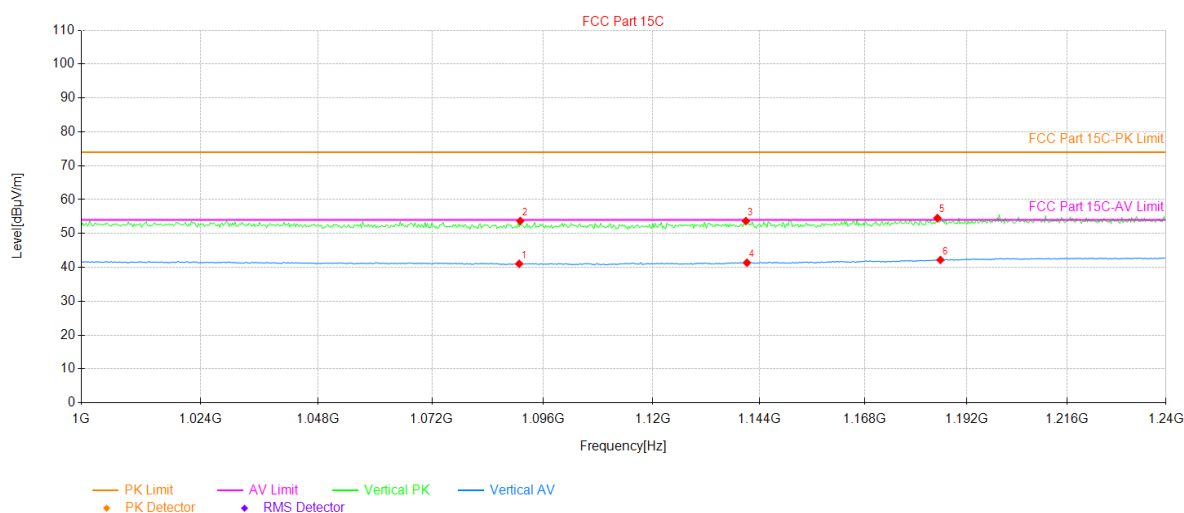


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	1090.72	10.91	30.14	41.05	54.00	12.95	334	AV	PASS	Vertical
2	1090.96	23.57	30.13	53.70	74.00	20.30	153	PK	PASS	Vertical
3	1140.88	22.95	30.71	53.66	74.00	20.34	2	PK	PASS	Vertical
4	1141.12	10.66	30.71	41.37	54.00	12.63	144	AV	PASS	Vertical
5	1185.04	23.18	31.38	54.56	74.00	19.44	280	PK	PASS	Vertical
6	1185.76	10.80	31.39	42.19	54.00	11.81	62	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Robin Gu	Test mode:	AH 8M
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

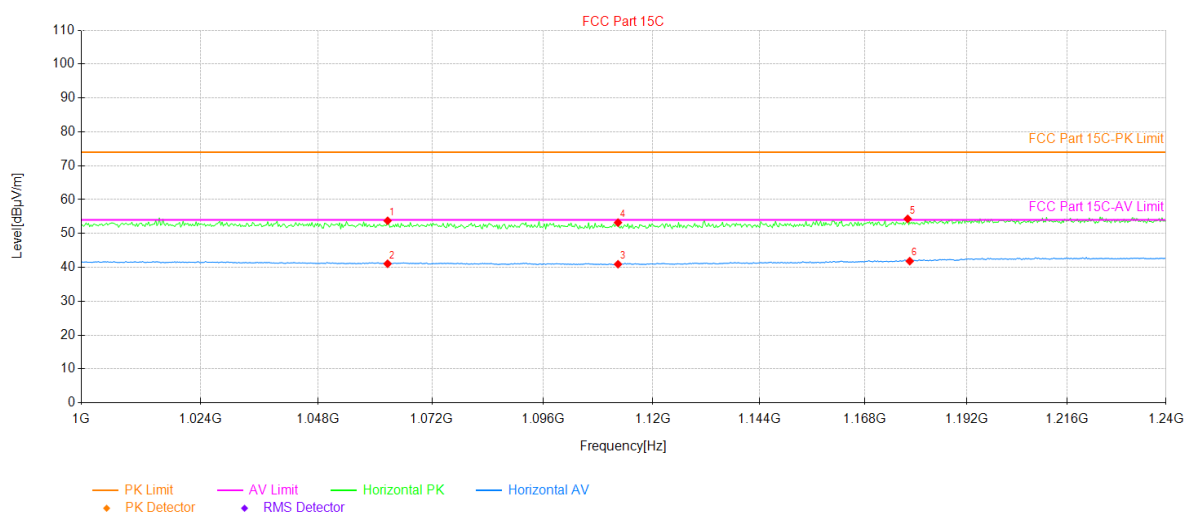

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	1062.64	23.54	30.21	53.75	74.00	20.25	4	PK	PASS	Horizontal
2	1062.64	10.86	30.21	41.07	54.00	12.93	156	AV	PASS	Horizontal
3	1112.32	10.64	30.29	40.93	54.00	13.07	31	AV	PASS	Horizontal
4	1112.32	22.91	30.29	53.20	74.00	20.80	31	PK	PASS	Horizontal
5	1178.08	23.04	31.27	54.31	74.00	19.69	128	PK	PASS	Horizontal
6	1178.56	10.55	31.28	41.83	54.00	12.17	106	AV	PASS	Horizontal


Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

5.5 Emissions in Non-restricted Frequency Bands

Below 1GHz:

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Kiran Zeng	Test mode:	AH 1M
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

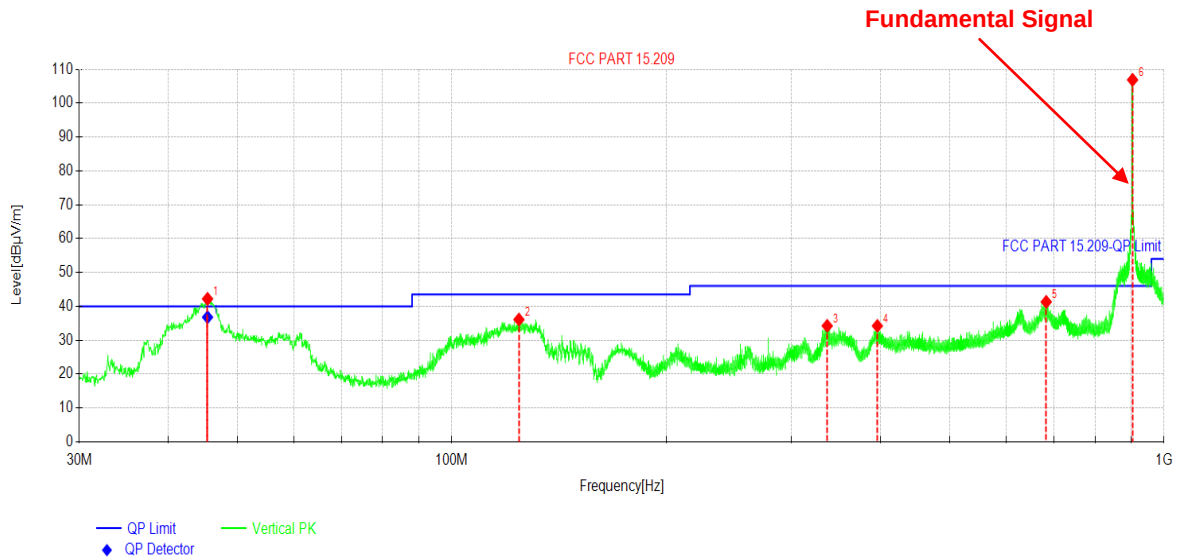

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	45.4238	54.64	-12.43	42.21	40.00	-2.21	PK	Vertical
2	124.288	53.07	-16.96	36.11	43.50	7.39	PK	Vertical
3	336.680	45.84	-11.60	34.24	46.00	11.76	PK	Vertical
4	395.950	44.78	-10.55	34.23	46.00	11.77	PK	Vertical
5	683.473	46.73	-5.41	41.32	46.00	4.68	PK	Vertical
6	903.577	109.15	-2.28	106.87	46.00	-60.87	PK	Vertical


Final Data List

NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Angle [°]	Verdict
1	45.4238	49.23	-12.43	36.80	40.00	3.20	279	PASS

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Kiran Zeng	Test mode:	AH 1M
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

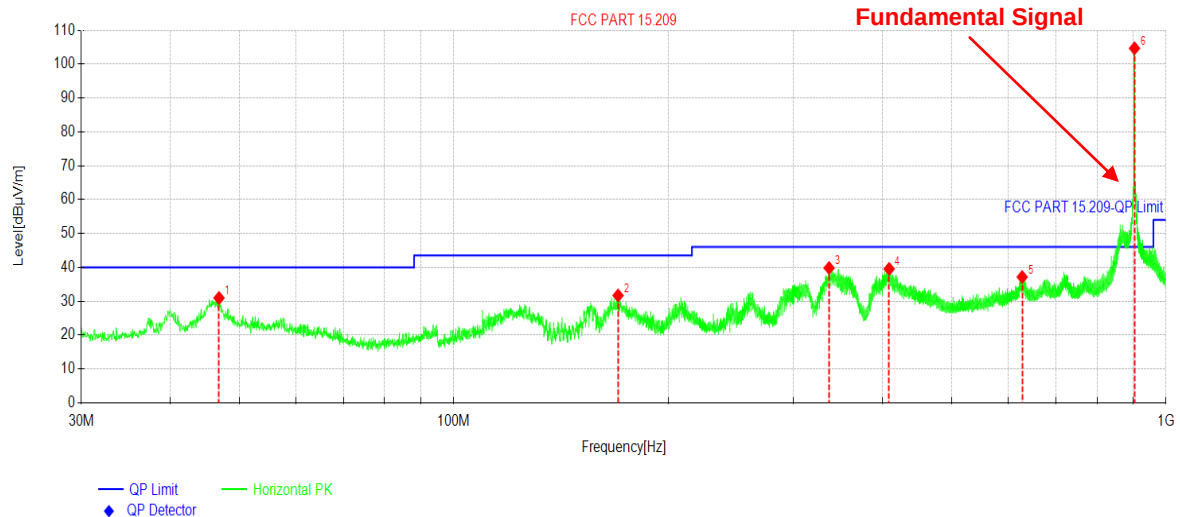


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	46.8303	43.39	-12.43	30.96	40.00	9.04	PK	Horizontal
2	170.123	48.90	-17.20	31.70	43.50	11.80	PK	Horizontal
3	336.535	51.44	-11.61	39.83	46.00	6.17	PK	Horizontal
4	408.658	49.84	-10.30	39.54	46.00	6.46	PK	Horizontal
5	628.228	43.17	-6.02	37.15	46.00	8.85	PK	Horizontal
6	903.237	106.94	-2.28	104.66	46.00	-58.66	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Kiran Zeng	Test mode:	AH 2M
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

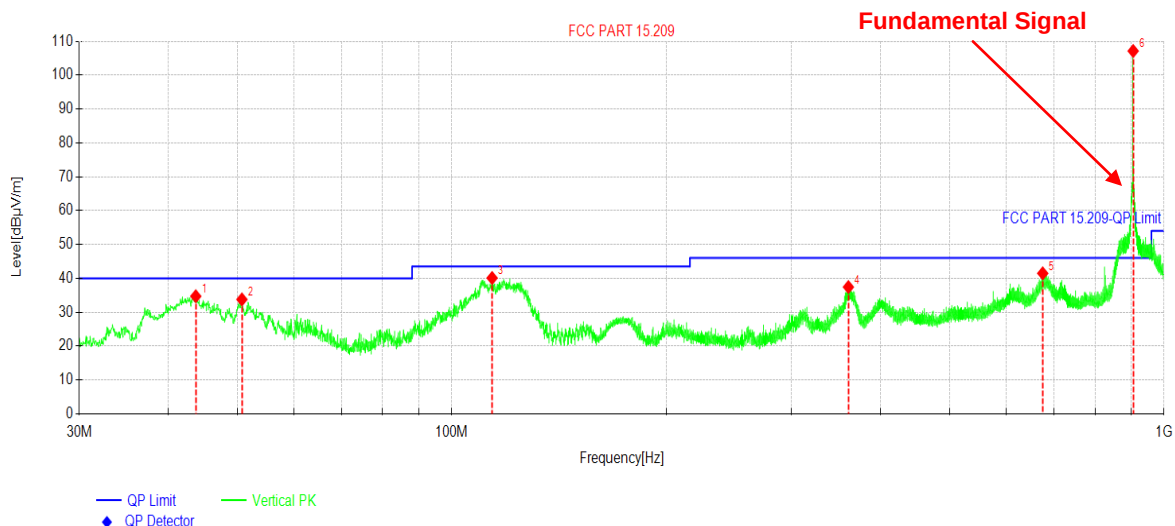


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	43.7262	47.30	-12.57	34.73	40.00	5.27	PK	Vertical
2	50.7590	46.20	-12.41	33.79	40.00	6.21	PK	Vertical
3	113.957	55.19	-15.08	40.11	43.50	3.39	PK	Vertical
4	360.544	48.72	-11.28	37.44	46.00	8.56	PK	Vertical
5	675.712	46.93	-5.45	41.48	46.00	4.52	PK	Vertical
6	905.323	109.42	-2.30	107.12	46.00	-61.12	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Kiran Zeng	Test mode:	AH 2M
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

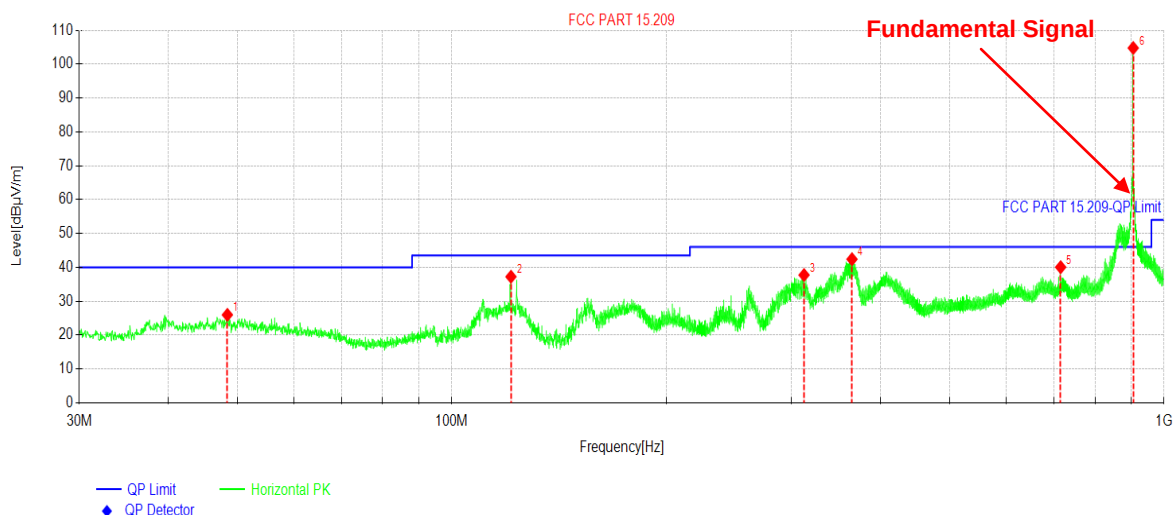


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	48.4309	38.41	-12.42	25.99	40.00	14.01	PK	Horizontal
2	121.136	53.60	-16.35	37.25	43.50	6.25	PK	Horizontal
3	312.381	50.29	-12.54	37.75	46.00	8.25	PK	Horizontal
4	364.763	53.65	-11.24	42.41	46.00	3.59	PK	Horizontal
5	716.066	44.87	-4.82	40.05	46.00	5.95	PK	Horizontal
6	905.323	107.07	-2.30	104.77	46.00	-58.77	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Kiran Zeng	Test mode:	AH 4M
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

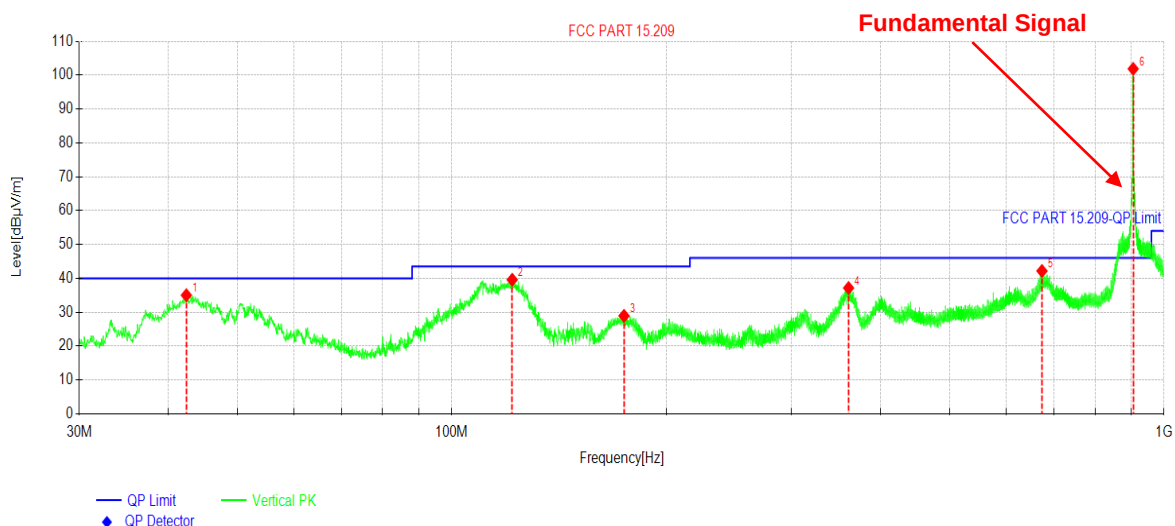


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	42.4166	47.78	-12.76	35.02	40.00	4.98	PK	Vertical
2	121.621	56.09	-16.49	39.60	43.50	3.90	PK	Vertical
3	174.537	45.86	-16.93	28.93	43.50	14.57	PK	Vertical
4	360.738	48.45	-11.28	37.17	46.00	8.83	PK	Vertical
5	674.063	47.68	-5.49	42.19	46.00	3.81	PK	Vertical
6	905.226	104.16	-2.30	101.86	46.00	-55.86	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Kiran Zeng	Test mode:	AH 4M
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

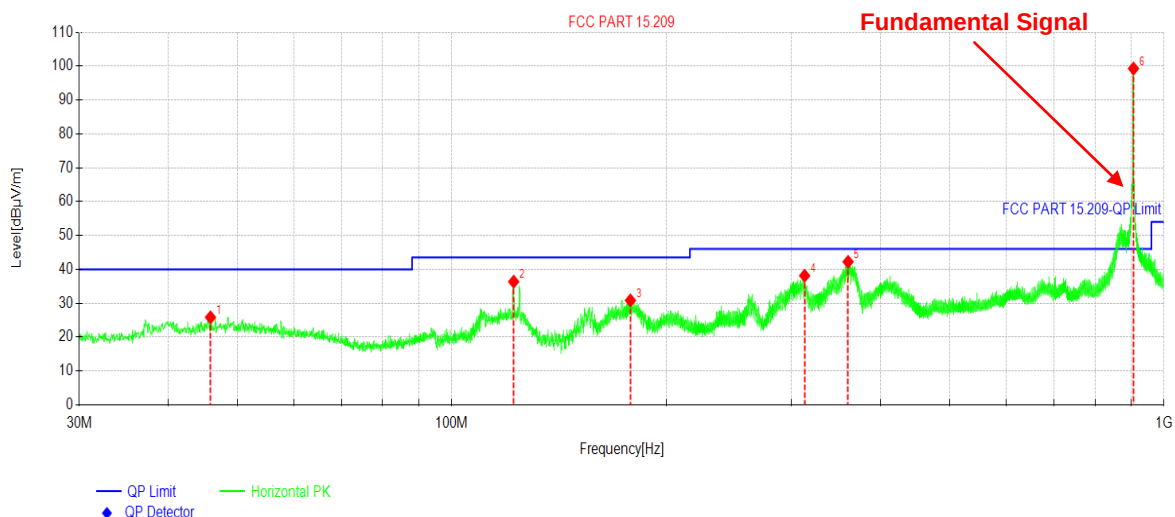


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	45.8603	38.27	-12.43	25.84	40.00	14.16	PK	Horizontal
2	122.203	53.00	-16.63	36.37	43.50	7.13	PK	Horizontal
3	178.223	47.69	-16.84	30.85	43.50	12.65	PK	Horizontal
4	312.963	50.67	-12.54	38.13	46.00	7.87	PK	Horizontal
5	360.156	53.52	-11.29	42.23	46.00	3.77	PK	Horizontal
6	906.196	101.60	-2.32	99.28	46.00	-53.28	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Kiran Zeng	Test mode:	AH 8M
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

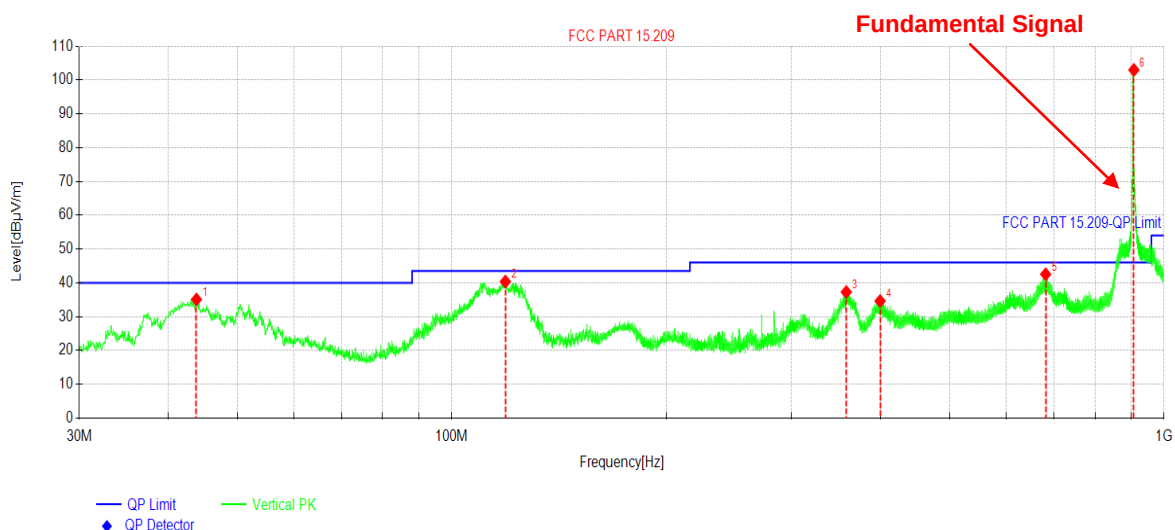


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	43.8232	47.65	-12.56	35.09	40.00	4.91	PK	Vertical
2	118.953	56.40	-16.02	40.38	43.50	3.12	PK	Vertical
3	358.070	48.55	-11.27	37.28	46.00	8.72	PK	Vertical
4	399.443	45.01	-10.39	34.62	46.00	11.38	PK	Vertical
5	682.163	47.96	-5.41	42.55	46.00	3.45	PK	Vertical
6	907.214	105.33	-2.34	102.99	46.00	-56.99	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	WiFi HaLow Bridge	Product Model:	AH9066P
Test By:	Kiran Zeng	Test mode:	AH 8M
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

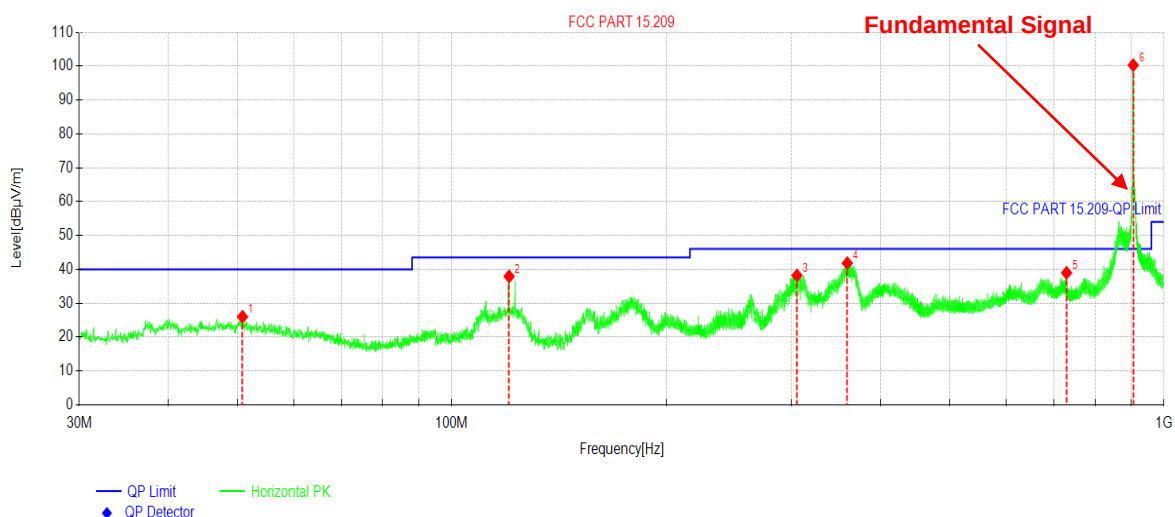

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	50.8560	38.43	-12.41	26.02	40.00	13.98	PK	Horizontal
2	120.408	54.19	-16.26	37.93	43.50	5.57	PK	Horizontal
3	305.299	50.88	-12.68	38.20	46.00	7.80	PK	Horizontal
4	359.234	53.11	-11.28	41.83	46.00	4.17	PK	Horizontal
5	729.841	43.60	-4.63	38.97	46.00	7.03	PK	Horizontal
6	905.371	102.58	-2.30	100.28	46.00	-54.28	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

Tx (1M)						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1806.63	79.09	-22.42	56.67	74.00	17.33	Vertical
1806.63	84.32	-22.42	61.90	74.00	12.10	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1806.63	64.04	-22.42	41.62	54.00	12.38	Vertical
1806.63	70.48	-22.42	48.06	54.00	5.94	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1829.00	79.08	-22.42	56.66	74.00	17.34	Vertical
1829.00	84.33	-22.42	61.91	74.00	12.09	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1829.00	64.03	-22.42	41.61	54.00	12.39	Vertical
1829.00	70.52	-22.42	48.10	54.00	5.90	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1853.00	79.03	-22.42	56.61	74.00	17.39	Vertical
1853.00	84.34	-22.42	61.92	74.00	12.08	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1853.00	64.05	-22.42	41.63	54.00	12.37	Vertical
1853.00	70.46	-22.42	48.04	54.00	5.96	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Tx (2M)						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1810.00	86.66	-22.41	64.25	74.00	9.75	Vertical
1810.00	78.36	-22.41	55.95	74.00	18.05	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1810.00	71.52	-22.41	49.11	54.00	4.89	Vertical
1810.00	62.71	-22.41	40.30	54.00	13.70	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1830.00	86.65	-22.41	64.24	74.00	9.76	Vertical
1830.00	78.34	-22.41	55.93	74.00	18.07	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1830.00	71.55	-22.41	49.14	54.00	4.86	Vertical
1830.00	62.76	-22.41	40.35	54.00	13.65	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1850.00	86.67	-22.41	64.26	74.00	9.74	Vertical
1850.00	78.38	-22.41	55.97	74.00	18.03	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1850.00	71.54	-22.41	49.13	54.00	4.87	Vertical
1850.00	62.75	-22.41	40.34	54.00	13.66	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Tx (4M)						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1812.00	82.10	-22.41	59.69	74.00	14.31	Vertical
1812.00	72.98	-22.41	50.57	74.00	23.43	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1812.00	67.45	-22.41	45.04	54.00	8.96	Vertical
1812.00	59.26	-22.41	36.85	54.00	17.15	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1828.00	82.14	-22.41	59.73	74.00	14.27	Vertical
1828.00	72.93	-22.41	50.52	74.00	23.48	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1828.00	67.45	-22.41	45.04	54.00	8.96	Vertical
1828.00	59.25	-22.41	36.84	54.00	17.16	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1852.00	82.13	-22.41	59.72	74.00	14.28	Vertical
1852.00	72.94	-22.41	50.53	74.00	23.47	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1852.00	67.45	-22.41	45.04	54.00	8.96	Vertical
1852.00	59.23	-22.41	36.82	54.00	17.18	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Tx (8M)						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1816.00	79.04	-22.40	56.64	74.00	17.36	Vertical
1814.50	72.13	-22.41	49.72	74.00	24.28	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1815.63	66.12	-22.40	43.72	54.00	10.28	Vertical
1815.63	58.60	-22.40	36.20	54.00	17.80	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1832.00	79.03	-22.40	56.63	74.00	17.37	Vertical
1832.00	72.14	-22.41	49.73	74.00	24.27	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1832.00	66.13	-22.40	43.73	54.00	10.27	Vertical
1832.00	58.61	-22.40	36.21	54.00	17.79	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1848.00	79.05	-22.40	56.65	74.00	17.35	Vertical
1848.00	72.15	-22.41	49.74	74.00	24.26	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
1848.00	66.17	-22.40	43.77	54.00	10.23	Vertical
1848.00	58.67	-22.40	36.27	54.00	17.73	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

-----End of report-----