

# FCC TEST REPORT

Client Name : Shanghai MEMS Electronic Technology Co.,Ltd

Address : 2F, building 1, No. 268 Yuanqu Road, Jiading District,  
Shanghai, China

Product Name : tire pressure monitoring sensor

Date : May 14, 2021



**Shenzhen Anbotech Compliance Laboratory Limited**



# Contents

|                                                |    |
|------------------------------------------------|----|
| 1. General Information.....                    | 4  |
| 1.1. Client Information.....                   | 4  |
| 1.2. Description of Device (EUT).....          | 4  |
| 1.3. Auxiliary Equipment Used During Test..... | 5  |
| 1.4. Description of Test Modes.....            | 5  |
| 1.5. List of Channels.....                     | 6  |
| 1.6. Description of Test Setup.....            | 7  |
| 1.7. Test Equipment List.....                  | 8  |
| 1.8. Description of Test Facility.....         | 9  |
| 2. Summary of Test Results.....                | 10 |
| 3. Conducted Emission Test.....                | 11 |
| 3.1. Test Standard and Limit.....              | 11 |
| 3.2. Test Setup.....                           | 11 |
| 3.3. Test Procedure.....                       | 11 |
| 3.4. Test Data.....                            | 12 |
| 4. Radiated Emission and Band Edge.....        | 13 |
| 4.1. Test Standard and Limit.....              | 13 |
| 4.2. Test Setup.....                           | 14 |
| 4.3. Test Procedure.....                       | 15 |
| 4.4. Test Data.....                            | 16 |
| 5. 20DB Occupy Bandwidth Test.....             | 24 |
| 5.1. Test Standard and Limit.....              | 24 |
| 5.2. Test Setup.....                           | 24 |
| 5.3. Test Procedure.....                       | 24 |
| 5.4. Test Data.....                            | 24 |
| 6. Dwell Time Test.....                        | 28 |
| 6.1. Test Standard and Limit.....              | 28 |
| 6.2. Test Setup.....                           | 28 |
| 6.3. Test Procedure.....                       | 28 |
| 6.4. Test Data.....                            | 28 |
| 7. Antenna Requirement.....                    | 31 |
| 7.1. Test Standard and Requirement.....        | 31 |
| 7.2. Antenna Connected Construction.....       | 31 |
| APPENDIX I -- TEST SETUP PHOTOGRAPH.....       | 32 |
| APPENDIX II -- EXTERNAL PHOTOGRAPH.....        | 33 |
| APPENDIX III -- INTERNAL PHOTOGRAPH.....       | 36 |



# TEST REPORT

Applicant : Shanghai MEMS Electronic Technology Co.,Ltd  
Manufacturer : Shanghai MEMS Electronic Technology Co.,Ltd  
Product Name : tire pressure monitoring sensor  
Model No. : 16011  
Trade Mark : N.A.  
Rating(s) : Input: DC 3V, 210mAh battery inside

**Test Standard(s) : FCC Part15 Subpart C, Section 15.231**

**Test Method(s) : ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

Mar. 23, 2021

Date of Test

Mar. 23~May 08, 2021

Prepared by



(Ella Liang)

Approved & Authorized Signer



(Kingkong Jin)

## 1. General Information

### 1.1. Client Information

|              |   |                                                                        |
|--------------|---|------------------------------------------------------------------------|
| Applicant    | : | Shanghai MEMS Electronic Technology Co.,Ltd                            |
| Address      | : | 2F, building 1, No. 268 Yuanqu Road, Jiading District, Shanghai, China |
| Manufacturer | : | Shanghai MEMS Electronic Technology Co.,Ltd                            |
| Address      | : | 2F, building 1, No. 268 Yuanqu Road, Jiading District, Shanghai, China |
| Factory      | : | Shanghai MEMS Electronic Technology Co.,Ltd                            |
| Address      | : | 2F, building 1, No. 268 Yuanqu Road, Jiading District, Shanghai, China |

### 1.2. Description of Device (EUT)

|                                                                                                                                    |                      |                                                 |
|------------------------------------------------------------------------------------------------------------------------------------|----------------------|-------------------------------------------------|
| Product Name                                                                                                                       | :                    | tire pressure monitoring sensor                 |
| Model No.                                                                                                                          | :                    | 16011                                           |
| Trade Mark                                                                                                                         | :                    | N.A.                                            |
| Test Power Supply                                                                                                                  | :                    | DC 3V Battery inside                            |
| Test Sample No.                                                                                                                    | :                    | 1-2-1(Normal Sample), 1-2-2(Engineering Sample) |
| Product Description                                                                                                                | Operation Frequency: | 315 MHz, 433.92 MHz                             |
|                                                                                                                                    | Number of Channel:   | FSK: 2 Channels<br>ASK: 2 Channels              |
|                                                                                                                                    | Modulation Type:     | FSK, ASK                                        |
|                                                                                                                                    | Antenna Type:        | Monopole Antenna                                |
|                                                                                                                                    | Antenna Gain(Peak):  | 1 dBi                                           |
| <b>Remark:</b> 1)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. |                      |                                                 |

### 1.3. Auxiliary Equipment Used During Test

|     |   |  |
|-----|---|--|
| N/A | : |  |
|-----|---|--|

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Modulation Type | Frequency  |
|--------------|-----------------|------------|
| TX Mode      | FSK             | 315 MHz    |
| TX Mode      | FSK             | 433.92 MHz |
| TX Mode      | ASK             | 315 MHz    |
| TX Mode      | ASK             | 433.92 MHz |

| For Radiated Emission |                 |            |
|-----------------------|-----------------|------------|
| Final Test Mode       | Modulation Type | Frequency  |
| TX Mode               | FSK             | 315 MHz    |
| TX Mode               | FSK             | 433.92 MHz |
| TX Mode               | ASK             | 315 MHz    |
| TX Mode               | ASK             | 433.92 MHz |

**Note:**


1. During the test, the EUT was keeping continuous transmission.

**1.5. List of Channels**

| Mode    | Modulation Type | Frequency  |
|---------|-----------------|------------|
| TX Mode | FSK             | 315 MHz    |
| TX Mode | FSK             | 433.92 MHz |
| TX Mode | ASK             | 315 MHz    |
| TX Mode | ASK             | 433.92 MHz |



## 1.6. Description of Test Setup

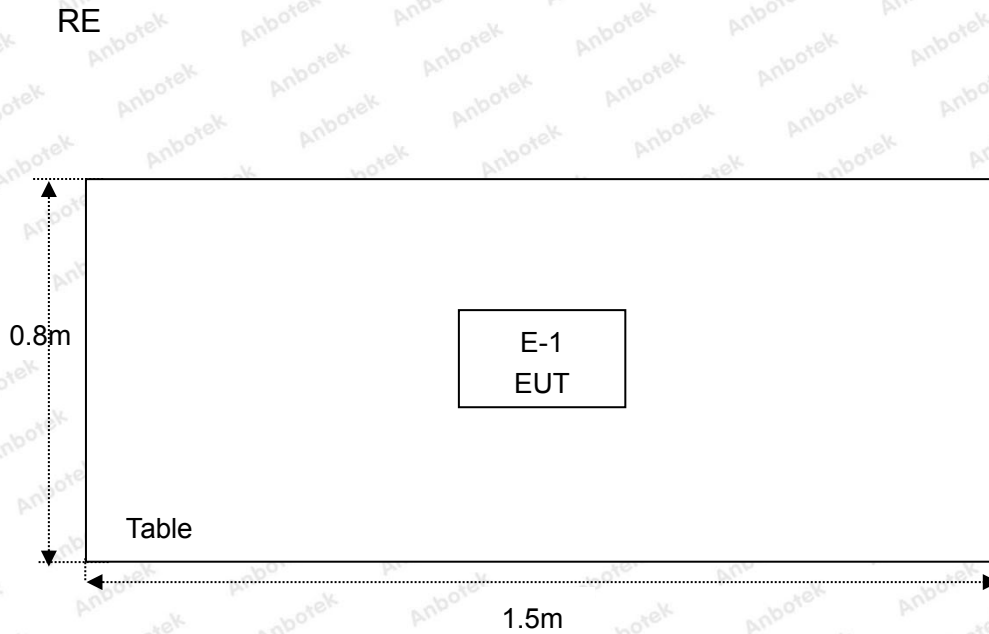

## 1.7. Test Equipment List

| Item | Equipment                                   | Manufacturer               | Model No.        | Serial No.    | Last Cal.     | Cal. Interval |
|------|---------------------------------------------|----------------------------|------------------|---------------|---------------|---------------|
| 1.   | L.I.S.N.<br>Artificial Mains<br>Network     | Rohde & Schwarz            | ENV216           | 100055        | Oct. 26, 2020 | 1 Year        |
| 2.   | EMI Test Receiver                           | Rohde & Schwarz            | ESCI             | 100627        | Oct. 26, 2020 | 1 Year        |
| 3.   | EMI Test Receiver                           | Rohde & Schwarz            | ESR26            | 101481        | Oct. 26, 2020 | 1 Year        |
| 4.   | RF Switching Unit                           | Compliance<br>Direction    | RSU-M2           | 38303         | Oct. 26, 2020 | 1 Year        |
| 5.   | MAX Spectrum<br>Analysis                    | Agilent                    | N9020A           | MY51170037    | Oct. 26, 2020 | 1 Year        |
| 6.   | Preamplifier                                | SKET Electronic            | BK1G18G30<br>D   | KD17503       | Oct. 26, 2020 | 1 Year        |
| 7.   | Double Ridged Horn<br>Antenna               | Instruments<br>corporation | GTH-0118         | 351600        | Nov. 02, 2020 | 2 Year        |
| 8.   | Bilog Broadband<br>Antenna                  | Schwarzbeck                | VULB9163         | VULB 9163-289 | Nov. 02, 2020 | 2 Year        |
| 9.   | Loop Antenna                                | Schwarzbeck                | FMZB1519B        | 00053         | Nov. 02, 2020 | 2 Year        |
| 10.  | Horn Antenna                                | A-INFO                     | LB-180400-<br>KF | J211060628    | Nov. 02, 2020 | 2 Year        |
| 11.  | Pre-amplifier                               | SONOMA                     | 310N             | 186860        | Oct. 26, 2020 | 1 Year        |
| 12.  | EMI Test Software<br>EZ-EMC                 | SHURPLE                    | N/A              | N/A           | N/A           | N/A           |
| 13.  | RF Test Control<br>System                   | YIHENG                     | YH3000           | 2017430       | Oct. 26, 2020 | 1 Year        |
| 14.  | Power Sensor                                | DAER                       | RPR3006W         | 15I00041SN045 | Oct. 26, 2020 | 1 Year        |
| 15.  | Power Sensor                                | DAER                       | RPR3006W         | 15I00041SN046 | Oct. 26, 2020 | 1 Year        |
| 16.  | MXA Spectrum<br>Analysis                    | Agilent                    | N9020A           | MY51170037    | Oct. 26, 2020 | 1 Year        |
| 17.  | MXG RF Vector<br>Signal Generator           | Agilent                    | N5182A           | MY48180656    | Oct. 26, 2020 | 1 Year        |
| 18.  | Signal Generator                            | Agilent                    | E4421B           | MY41000743    | Oct. 26, 2020 | 1 Year        |
| 19.  | DC Power Supply                             | IVYTECH                    | IV3605           | 1804D360510   | Oct. 26, 2020 | 1 Year        |
| 20.  | Constant<br>Temperature<br>Humidity Chamber | ZHONGJIAN                  | ZJ-KHWS80<br>B   | N/A           | Oct. 26, 2020 | 1 Year        |



## 1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC-Registration No.: 184111**

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

### **ISED-Registration No.: 8058A-1**

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

### **Test Location**

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China. 518102



## 2. Summary of Test Results

| Standard Section                                            | Test Item               | Result |
|-------------------------------------------------------------|-------------------------|--------|
| 15.203                                                      | Antenna Requirement     | PASS   |
| 15.207                                                      | Conducted Emission      | N/A    |
| 15.205/15.209/15.231(b)                                     | Spurious Emission       | PASS   |
| 15.231(c)                                                   | 20dB Occupied Bandwidth | PASS   |
| 15.231(a)                                                   | Dwell time              | PASS   |
| <b>Remark:</b> "N/A" is an abbreviation for Not Applicable. |                         |        |




### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

| Test Standard | FCC Part15 Section 15.207 |                                |               |
|---------------|---------------------------|--------------------------------|---------------|
| Test Limit    | Frequency                 | Maximum RF Line Voltage (dBuV) |               |
|               |                           | Quasi-peak Level               | Average Level |
|               | 150kHz~500kHz             | 66 ~ 56 *                      | 56 ~ 46 *     |
|               | 500kHz~5MHz               | 56                             | 46            |
|               | 5MHz~30MHz                | 60                             | 50            |

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
(2) The lower limit shall apply at the transition frequency.

#### 3.2. Test Setup

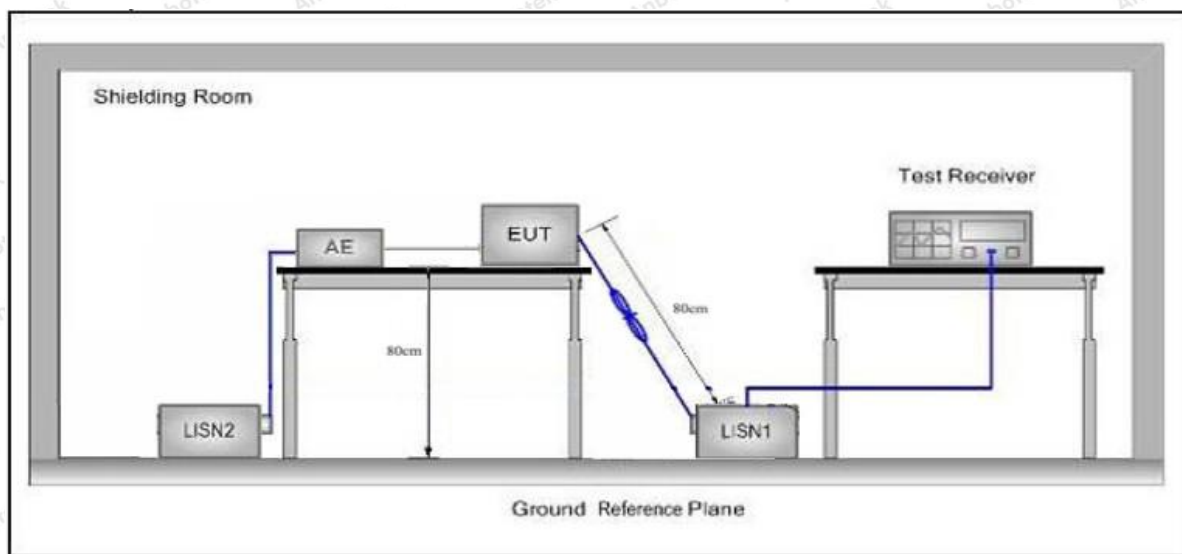

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test CAR REMOTE (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 3.4. Test Data

Not Applicable.

The EUT is powered by battery, so there is no need for conducted emission test.



## 4. Radiated Emission and Band Edge

### 4.1. Test Standard and Limit

| Test Standard | FCC Part15 C Section 15.209, 15.205 and 15.231(b) |                                  |                |            |                          |
|---------------|---------------------------------------------------|----------------------------------|----------------|------------|--------------------------|
| Test Limit    | Frequency (MHz)                                   | Field strength (microvolt/meter) | Limit (dBuV/m) | Remark     | Measurement distance (m) |
|               | 0.009MHz~0.490MHz                                 | 2400/F(kHz)                      | -              | -          | 300                      |
|               | 0.490MHz-1.705MHz                                 | 24000/F(kHz)                     | -              | -          | 30                       |
|               | 1.705MHz-30MHz                                    | 30                               | -              | -          | 30                       |
|               | 30MHz~88MHz                                       | 100                              | 40.0           | Quasi-peak | 3                        |
|               | 88MHz~216MHz                                      | 150                              | 43.5           | Quasi-peak | 3                        |
|               | 216MHz~960MHz                                     | 200                              | 46.0           | Quasi-peak | 3                        |
|               | 960MHz~1000MHz                                    | 500                              | 54.0           | Quasi-peak | 3                        |
|               | Above 1000MHz                                     | 500                              | 54.0           | Average    | 3                        |
|               |                                                   | -                                | 74.0           | Peak       | 3                        |

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

the formulas for calculating the maximum permitted fundamental field strengths are as follows:

for the band 260-470 MHz,  $\mu\text{V/m}$  at 3 meters =  $41.6667(F) - 7083.3333$ .

The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level

Emission Level (dBuV/m)=20log Emission Level( $\mu\text{V/m}$ )

The field strength of emission limits have been calculated in below table:

| Fundamental Frequency (MHz) | Field Strength of Fundamental (dBuV/m)@3m |
|-----------------------------|-------------------------------------------|
| 315                         | 75.62 (AVG)                               |
| 315                         | 95.62 (Peak)                              |
| 433.92                      | 80.82 (AVG)                               |
| 433.92                      | 100.82 (Peak)                             |

## 4.2. Test Setup

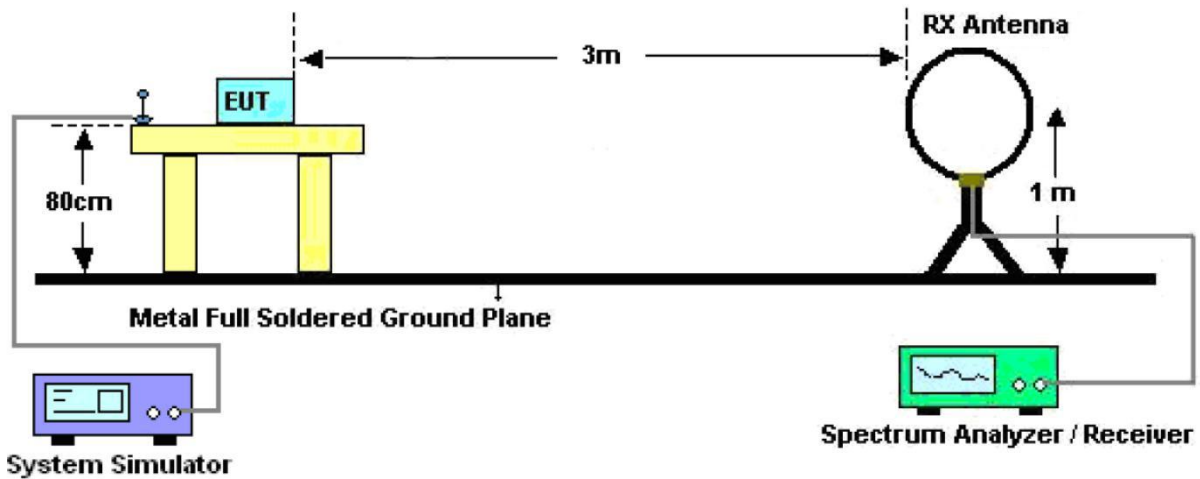


Figure 1. Below 30MHz

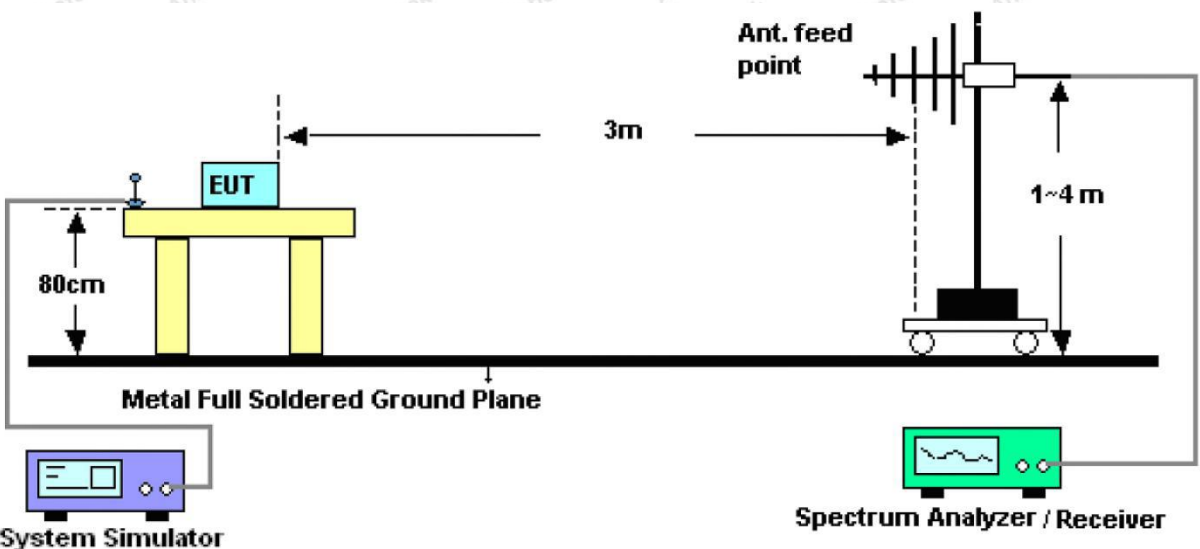


Figure 2. 30MHz to 1GHz

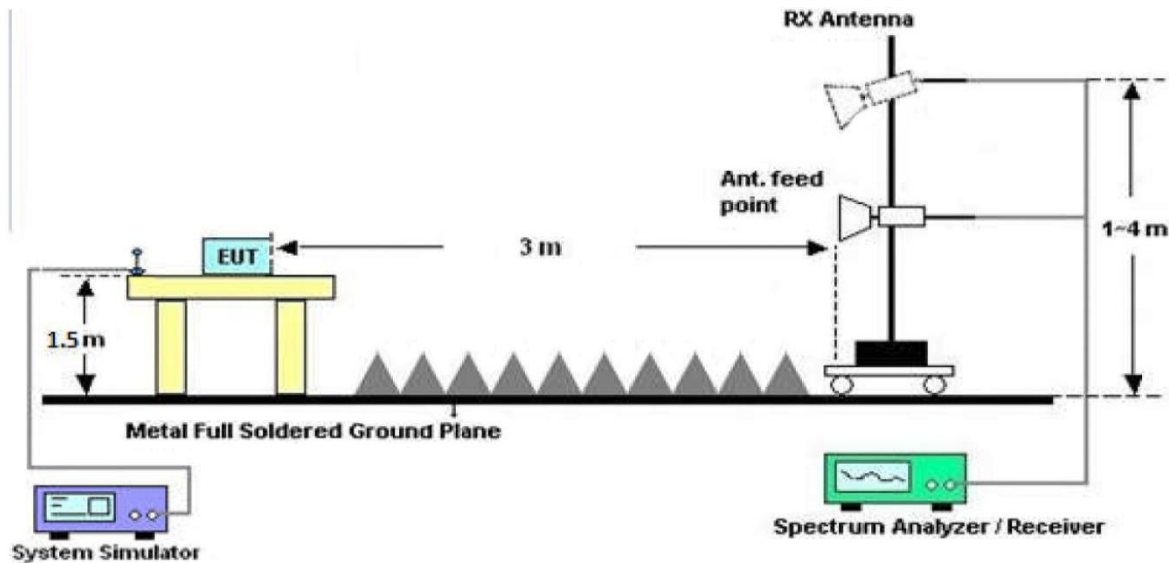


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

#### 4.4. Test Data

##### PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.


The test results of 9kHz-30MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.




## Test Results (30~1000MHz)

Test Mode: FSK 315MHz  
Power Source: DC 3V battery inside  
Polarization: Horizontal  
Temp.(°C)/Hum.(%RH): 22.5°C/50%RH  
Note:

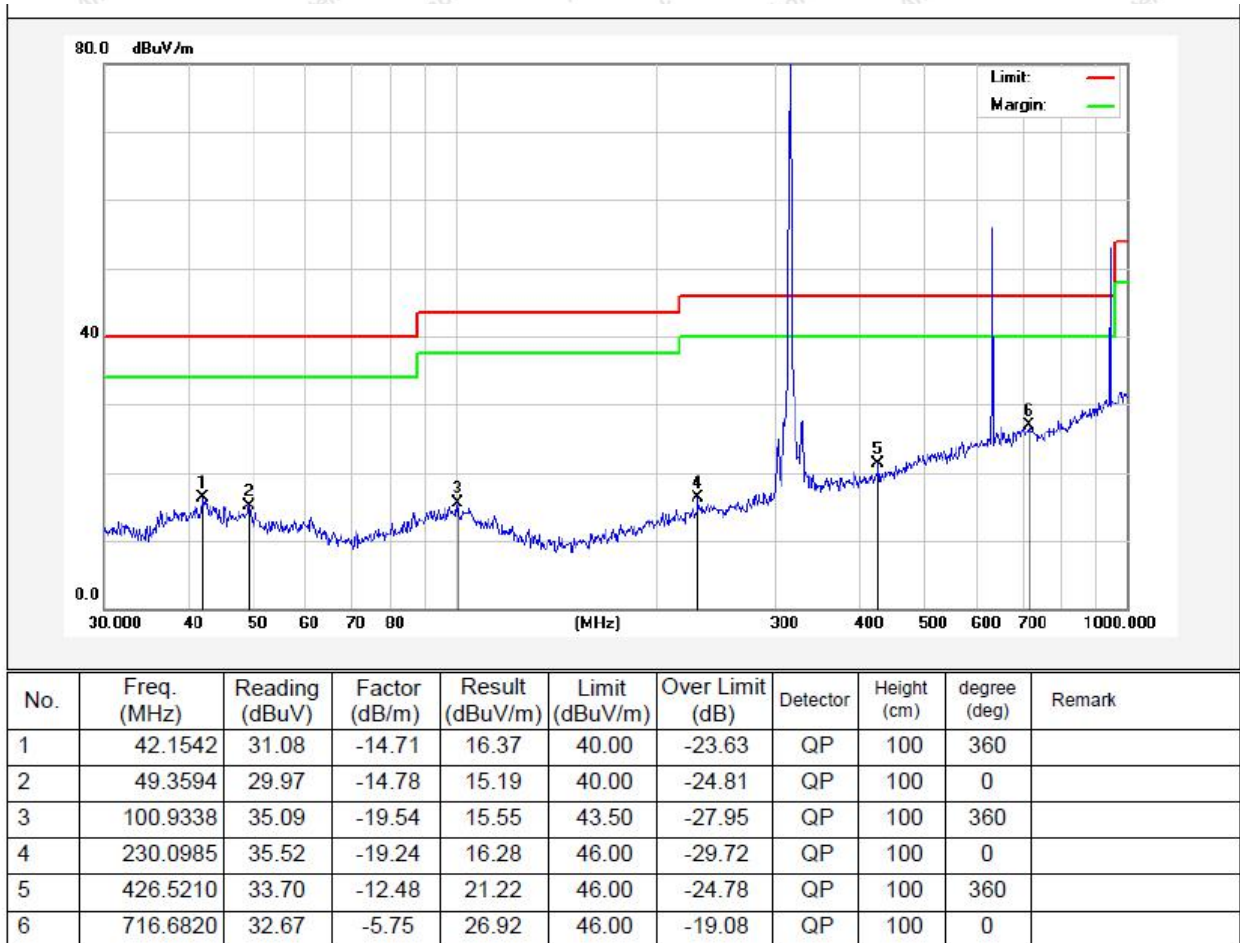

## Test Results (30~1000MHz)

Test Mode: FSK 315MHz  
Power Source: DC 3V battery inside  
Polarization: Vertical  
Temp.(°C)/Hum.(%RH): 22.5°C/50%RH  
Note:

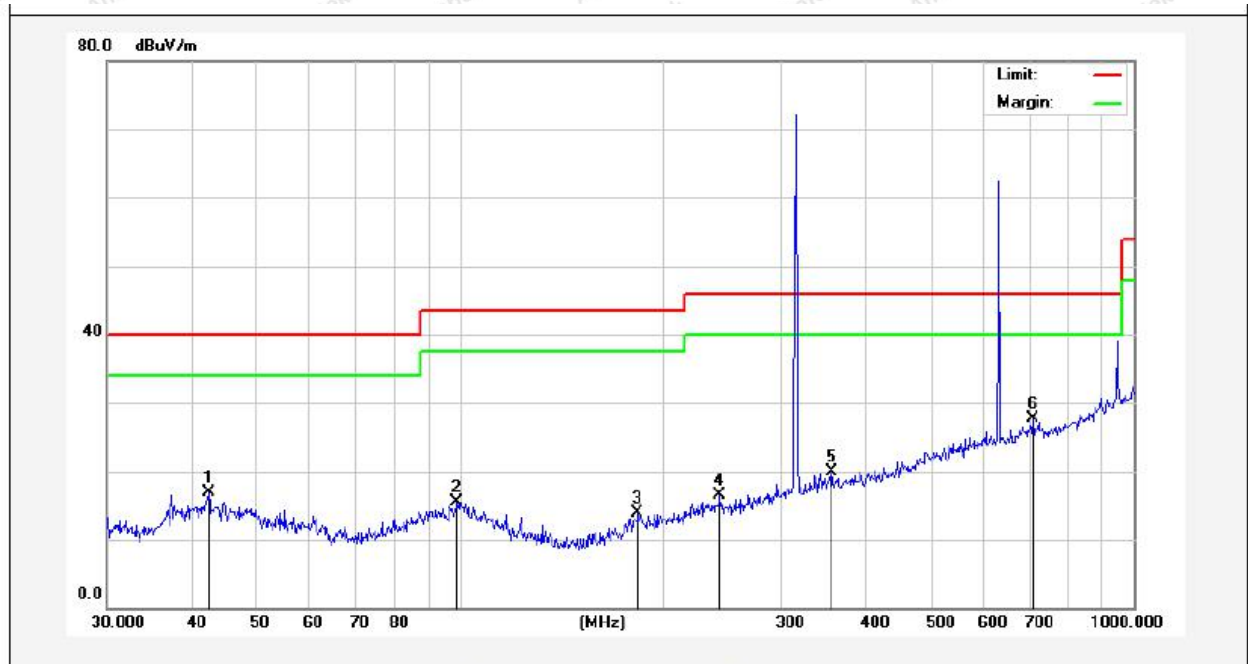

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1   | 42.4508     | 30.84          | -13.84        | 17.00           | 40.00          | -23.00          | QP       | 100         | 360          |        |
| 2   | 99.1795     | 30.22          | -14.78        | 15.44           | 43.50          | -28.06          | QP       | 100         | 0            |        |
| 3   | 183.8438    | 32.01          | -18.05        | 13.96           | 43.50          | -29.54          | QP       | 100         | 360          |        |
| 4   | 243.3771    | 32.10          | -15.53        | 16.57           | 46.00          | -29.43          | QP       | 100         | 0            |        |
| 5   | 356.6757    | 31.84          | -11.90        | 19.94           | 46.00          | -26.06          | QP       | 100         | 360          |        |
| 6   | 709.1823    | 33.49          | -5.86         | 27.63           | 46.00          | -18.37          | QP       | 100         | 0            |        |

Remark:

1. Results = Reading + Cable Loss +Ant Factor –Amplifier



## Test Results (Fundamental)

| Modulation Type | Freq.  | Antenna | Reading  | Cable Loss | Ant Factor | Amplifier | Duty cycle Factor | Results  | Limits   | Det. |
|-----------------|--------|---------|----------|------------|------------|-----------|-------------------|----------|----------|------|
|                 | (MHz)  | Pol.    | (dBuV/m) | (dB)       | (dB)       | (dB)      | (dB)              | (dBuV/m) | (dBuV/m) | Mode |
| FSK             | 315.00 | H       | 108.64   | 1.52       | 12.53      | 31.33     | --                | 91.36    | 95.62    | PK   |
|                 | 315.00 | H       | 108.64   | 1.52       | 12.53      | 31.33     | -21.36            | 70.00    | 75.62    | AV   |
|                 | 315.00 | V       | 89.52    | 1.52       | 12.53      | 31.33     | --                | 72.24    | 95.62    | PK   |
|                 | 315.00 | V       | 89.52    | 1.52       | 12.53      | 31.33     | -21.36            | 50.88    | 75.62    | AV   |
| FSK             | 433.92 | H       | 93.64    | 1.52       | 12.64      | 31.45     | -                 | 76.35    | 100.82   | PK   |
|                 | 433.92 | H       | 93.64    | 1.52       | 12.64      | 31.45     | -20.02            | 56.33    | 80.82    | AV   |
|                 | 433.92 | V       | 68.94    | 1.52       | 12.64      | 31.45     | -                 | 51.65    | 100.82   | PK   |
|                 | 433.92 | V       | 68.94    | 1.52       | 12.64      | 31.45     | -20.02            | 31.63    | 80.82    | AV   |
| ASK             | 315.00 | H       | 94.56    | 1.52       | 12.53      | 31.33     | --                | 77.28    | 95.62    | PK   |
|                 | 315.00 | H       | 94.56    | 1.52       | 12.53      | 31.33     | -10.83            | 66.45    | 75.62    | AV   |
|                 | 315.00 | V       | 77.82    | 1.52       | 12.53      | 31.33     | --                | 60.54    | 95.62    | PK   |
|                 | 315.00 | V       | 77.82    | 1.52       | 12.53      | 31.33     | -10.83            | 49.71    | 75.62    | AV   |
| ASK             | 433.92 | H       | 98.46    | 1.52       | 12.64      | 31.45     | -                 | 81.17    | 100.82   | PK   |
|                 | 433.92 | H       | 98.46    | 1.52       | 12.64      | 31.45     | -10.68            | 70.49    | 80.82    | AV   |
|                 | 433.92 | V       | 95.48    | 1.52       | 12.64      | 31.45     | -                 | 78.19    | 100.82   | PK   |
|                 | 433.92 | V       | 95.48    | 1.52       | 12.64      | 31.45     | -10.68            | 67.51    | 80.82    | AV   |

Remark:

1. Result = Reading + Cable Loss + Ant Factor – Amplifier + Duty cycle Factor
2. Pulse Desensitization Correction Factor

| Modulation Type | Freq.<br>(MHz) | Pulse Width (ms) | 2/Pulse Width (kHz) |
|-----------------|----------------|------------------|---------------------|
| FSK             | 315            | 8.550            | 0.23                |
| FSK             | 433.92         | 9.800            | 0.20                |
| ASK             | 315            | 28.75            | 0.07                |
| ASK             | 433.92         | 29.25            | 0.07                |

RBW(1000kHz) &gt; 2/Pulse Width

Therefore PDCF is not needed.

3. AV = PEAK + Duty Cycle Factor



## 4. Duty Cycle Factor


| Modulation Type | Freq. (MHz) | T on1 (ms) | N1 | T on(ms) | T period(ms) | Duty Cycle | Duty Cycle Factor |
|-----------------|-------------|------------|----|----------|--------------|------------|-------------------|
| FSK             | 315         | 8.550      | 1  | 8.550    | 100          | 8.55%      | -21.36            |
| FSK             | 433.92      | 9.800      | 1  | 9.800    | 98.20        | 9.98%      | -20.02            |
| ASK             | 315         | 28.75      | 1  | 28.75    | 100          | 28.75%     | -10.83            |
| ASK             | 433.92      | 29.25      | 1  | 29.25    | 100          | 29.25%     | -10.68            |

$T_{on} = T_{on1} \times N1$


$Duty\ Cycle = T_{on} / T_{period}$

$Duty\ Cycle\ Factor = 20 \times \lg(Duty\ Cycle)$


FSK 315MHz-T on1

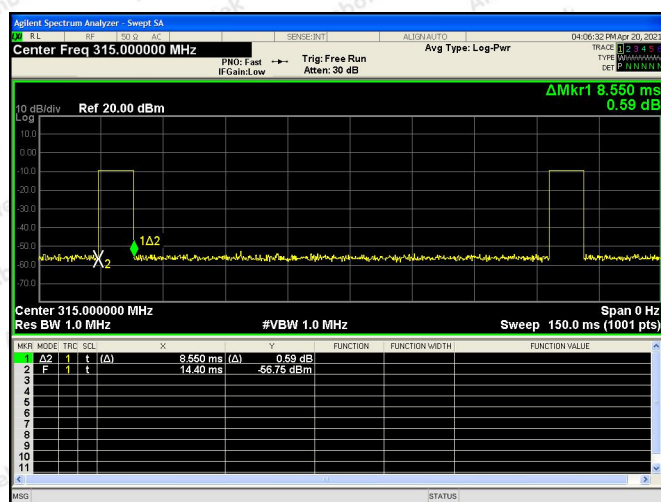


FSK 315MHz-T period

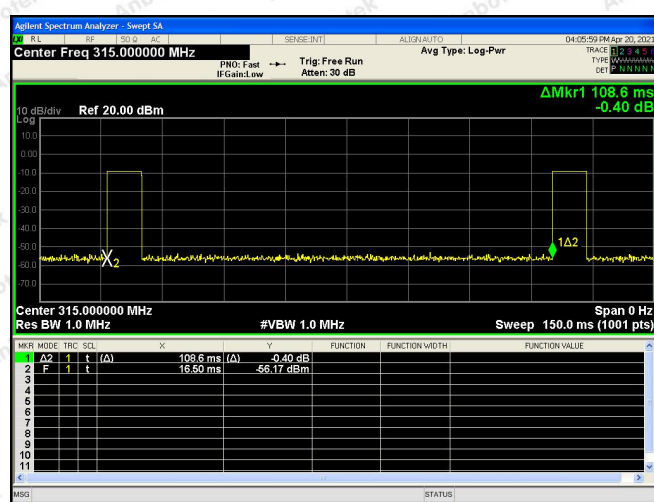

FSK 433.92MHz-T on1

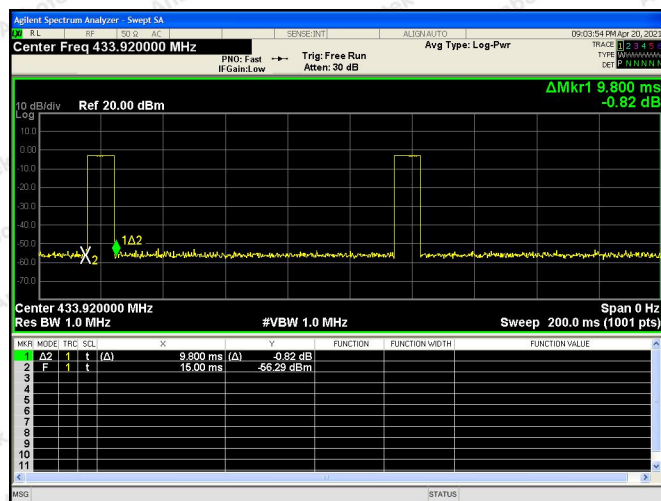

FSK 433.92MHz-T period

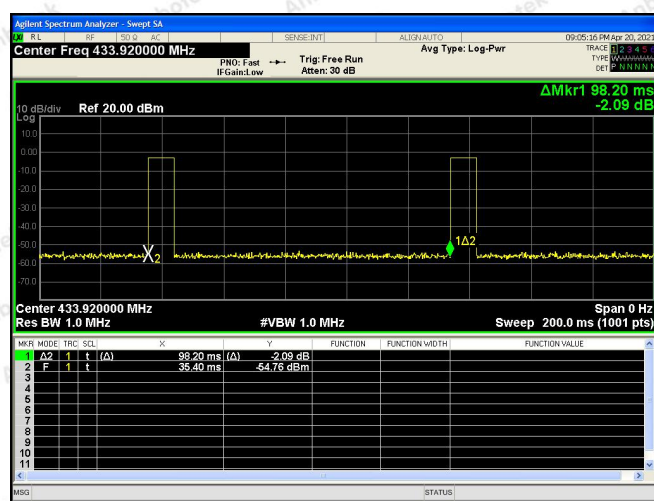


Report No.: 18220WC10052701

FCC ID: 2AZVG-16011

Page 21 of 39



ASK 315MHz-T on1

ASK 315MHz-T period

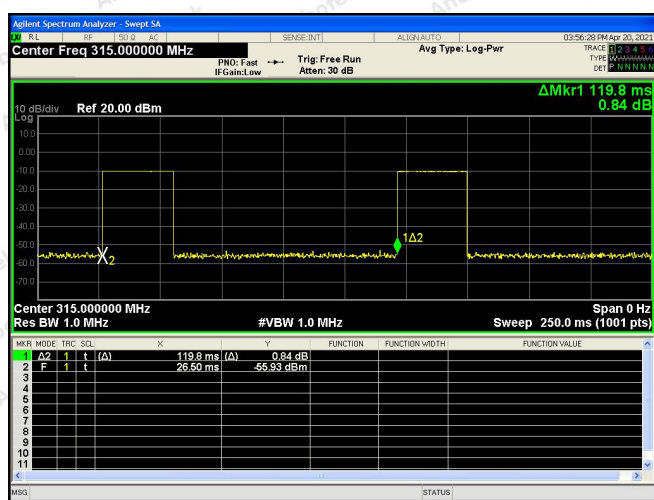

ASK 433.92MHz-T on1

ASK 433.92MHz-T period

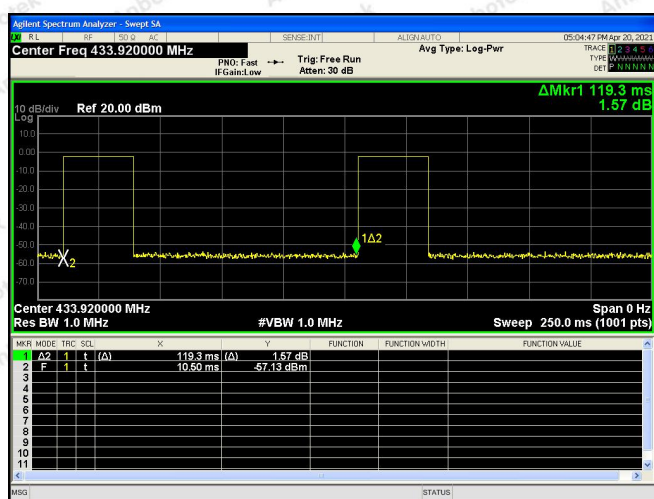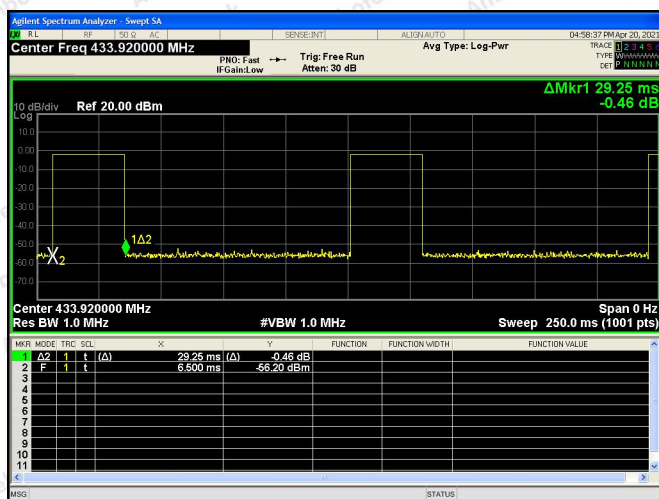

**Test Results (Harmonics Emissions+Radiated Emissions from 1G-5G)****FSK 315MHz**

| Frequency | Antenna | Reading  | Cable Loss | Ant Factor | Amplifier | Duty cycle Factor | Results  | Limits   | Det  |
|-----------|---------|----------|------------|------------|-----------|-------------------|----------|----------|------|
| (MHz)     | Pol.    | (dBuV/m) | (dB)       | (dB)       | (dB)      | (dB)              | (dBuV/m) | (dBuV/m) | Mode |
| 630.00    | H       | 71.64    | 1.92       | 12.58      | 31.42     | --                | 54.72    | 75.62    | PK   |
| 630.00    | H       | 71.64    | 1.92       | 12.58      | 31.42     | -21.36            | 33.36    | 55.62    | AV   |
| 630.00    | V       | 79.64    | 1.92       | 12.58      | 31.42     | --                | 62.72    | 75.62    | PK   |
| 630.00    | V       | 79.64    | 1.92       | 12.58      | 31.42     | -21.36            | 41.36    | 55.62    | AV   |
| 945.00    | H       | 64.82    | 2.38       | 18.56      | 31.95     | --                | 53.81    | 74.00    | PK   |
| 945.00    | H       | 64.82    | 2.38       | 18.56      | 31.95     | -21.36            | 32.45    | 54.00    | AV   |
| 945.00    | V       | 50.64    | 2.38       | 18.56      | 31.95     | --                | 39.63    | 74.00    | PK   |
| 945.00    | V       | 50.64    | 2.38       | 18.56      | 31.95     | -21.36            | 18.27    | 54.00    | AV   |
| 1260.00   | H       | 53.17    | 2.38       | 21.43      | 32.45     | --                | 44.53    | 74.00    | PK   |
| 1260.00   | H       | 53.17    | 2.38       | 21.43      | 32.45     | -21.36            | 23.17    | 54.00    | AV   |
| 1260.00   | V       | 52.19    | 2.38       | 18.56      | 32.45     | --                | 40.68    | 74.00    | PK   |
| 1260.00   | V       | 52.19    | 2.38       | 18.56      | 32.45     | -21.36            | 19.32    | 54.00    | AV   |

**FSK 433.92MHz**

| Frequency | Antenna | Reading  | Cable Loss | Ant Factor | Amplifier | Duty cycle Factor | Results  | Limits   | Det  |
|-----------|---------|----------|------------|------------|-----------|-------------------|----------|----------|------|
| (MHz)     | Pol.    | (dBuV/m) | (dB)       | (dB)       | (dB)      | (dB)              | (dBuV/m) | (dBuV/m) | Mode |
| 867.84    | H       | 74.67    | 1.92       | 12.71      | 31.72     | -                 | 57.58    | 80.82    | PK   |
| 867.84    | H       | 74.67    | 1.92       | 12.71      | 31.72     | -20.02            | 37.56    | 60.82    | AV   |
| 867.84    | V       | 59.29    | 1.92       | 12.71      | 31.72     | -                 | 42.20    | 80.82    | PK   |
| 867.84    | V       | 59.29    | 1.92       | 12.71      | 31.72     | -20.02            | 22.18    | 60.82    | AV   |
| 1301.76   | H       | 52.34    | 2.38       | 21.43      | 32.45     | -                 | 43.70    | 74       | PK   |
| 1301.76   | H       | 52.34    | 2.38       | 21.43      | 32.45     | -20.02            | 23.68    | 54       | AV   |
| 1301.76   | V       | 51.67    | 2.38       | 18.56      | 32.45     | -                 | 40.16    | 74       | PK   |
| 1301.76   | V       | 51.67    | 2.38       | 18.56      | 32.45     | -20.02            | 20.14    | 54       | AV   |



## ASK 315MHz

| Frequency | Antenna | Reading  | Cable Loss | Ant Factor | Amplifier | Duty cycle Factor | Results  | Limits   | Det  |
|-----------|---------|----------|------------|------------|-----------|-------------------|----------|----------|------|
| (MHz)     | Pol.    | (dBuV/m) | (dB)       | (dB)       | (dB)      | (dB)              | (dBuV/m) | (dBuV/m) | Mode |
| 630.00    | H       | 73.64    | 1.92       | 12.58      | 31.42     | --                | 56.72    | 75.62    | PK   |
| 630.00    | H       | 73.64    | 1.92       | 12.58      | 31.42     | -10.83            | 45.89    | 55.62    | AV   |
| 630.00    | V       | 74.27    | 1.92       | 12.58      | 31.42     | --                | 57.35    | 75.62    | PK   |
| 630.00    | V       | 74.27    | 1.92       | 12.58      | 31.42     | -10.83            | 46.52    | 55.62    | AV   |
| 945.00    | H       | 63.48    | 2.38       | 18.56      | 31.95     | --                | 52.47    | 74.00    | PK   |
| 945.00    | H       | 63.48    | 2.38       | 18.56      | 31.95     | -10.83            | 41.64    | 54.00    | AV   |
| 945.00    | V       | 53.42    | 2.38       | 18.56      | 31.95     | --                | 42.41    | 74.00    | PK   |
| 945.00    | V       | 53.42    | 2.38       | 18.56      | 31.95     | -10.83            | 31.58    | 54.00    | AV   |
| 1260.00   | H       | 50.72    | 2.38       | 21.43      | 32.45     | --                | 42.08    | 74.00    | PK   |
| 1260.00   | H       | 50.72    | 2.38       | 21.43      | 32.45     | -10.83            | 31.25    | 54.00    | AV   |
| 1260.00   | V       | 52.18    | 2.38       | 18.56      | 32.45     | --                | 40.67    | 74.00    | PK   |
| 1260.00   | V       | 52.18    | 2.38       | 18.56      | 32.45     | -10.83            | 29.84    | 54.00    | AV   |

## ASK 433.92MHz

| Frequency | Antenna | Reading  | Cable Loss | Ant Factor | Amplifier | Duty cycle Factor | Results  | Limits   | Det  |
|-----------|---------|----------|------------|------------|-----------|-------------------|----------|----------|------|
| (MHz)     | Pol.    | (dBuV/m) | (dB)       | (dB)       | (dB)      | (dB)              | (dBuV/m) | (dBuV/m) | Mode |
| 867.84    | H       | 86.79    | 1.92       | 12.71      | 31.72     | -                 | 69.70    | 80.82    | PK   |
| 867.84    | H       | 86.79    | 1.92       | 12.71      | 31.72     | -10.68            | 59.02    | 60.82    | AV   |
| 867.84    | V       | 87.93    | 1.92       | 12.71      | 31.72     | -                 | 70.84    | 80.82    | PK   |
| 867.84    | V       | 87.93    | 1.92       | 12.71      | 31.72     | -10.68            | 60.16    | 60.82    | AV   |
| 1301.76   | H       | 63.24    | 2.38       | 21.43      | 32.45     | -                 | 54.60    | 74       | PK   |
| 1301.76   | H       | 63.24    | 2.38       | 21.43      | 32.45     | -10.68            | 43.92    | 54       | AV   |
| 1301.76   | V       | 62.47    | 2.38       | 18.56      | 32.45     | -                 | 50.96    | 74       | PK   |
| 1301.76   | V       | 62.47    | 2.38       | 18.56      | 32.45     | -10.68            | 40.28    | 54       | AV   |

## Remark:


1. Result = Reading + Cable Loss + Ant Factor - Amplifier + Duty cycle Factor

## 5. 20DB Occupy Bandwidth Test

### 5.1. Test Standard and Limit

|               |                                                                                                                                                                                                                                                                                                                                                           |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Standard | FCC Part15 C Section 15.231 (c)                                                                                                                                                                                                                                                                                                                           |
| Test Limit    | According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. For devices operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier. |

### 5.2. Test Setup



### 5.3. Test Procedure

1. Place the EUT on the table and set it in the continuously transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:  
RBW = 30kHz, VBW $\geq$ 3\*RBW =100kHz,  
Span= 1MHz  
Detector= Peak  
Trace mode= Max hold.  
Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

### 5.4. Test Data

|              |                        |
|--------------|------------------------|
| Test Item    | : 20dB Bandwidth       |
| Test Voltage | : DC 3V Battery inside |
| Test Result  | : PASS                 |

|             |                             |
|-------------|-----------------------------|
| Test Mode   | : Continuously transmitting |
| Temperature | : 22.7℃                     |
| Humidity    | : 55%RH                     |




| Mode    | Freq.<br>(MHz) | Modulation<br>Type | 20DB<br>Bandwidth<br>(kHz) | Limit<br>(kHz) | Results |
|---------|----------------|--------------------|----------------------------|----------------|---------|
| TX Mode | 315            | FSK                | 122.0                      | $\leq 787.5$   | PASS    |
| TX Mode | 433.92         | FSK                | 185.2                      | $\leq 1084.8$  | PASS    |
| TX Mode | 315            | ASK                | 124.0                      | $\leq 787.5$   | PASS    |
| TX Mode | 433.92         | ASK                | 145.9                      | $\leq 1084.8$  | PASS    |


Note: Limit=0.0025\*Freq.




## FSK 315 MHz

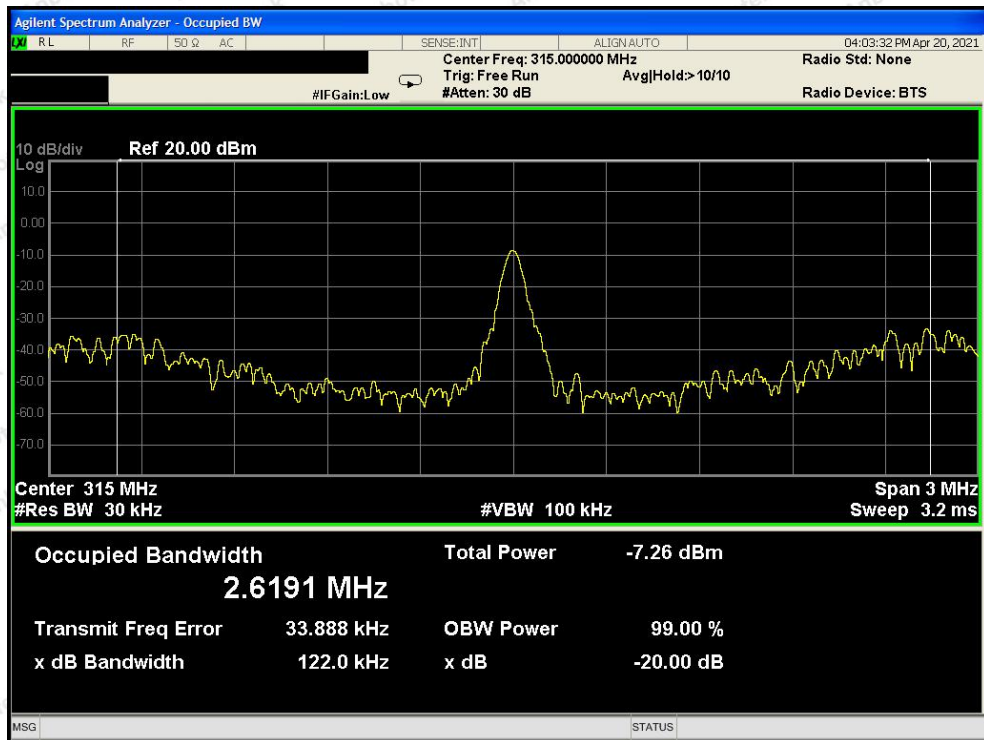


## FSK 433.92 MHz

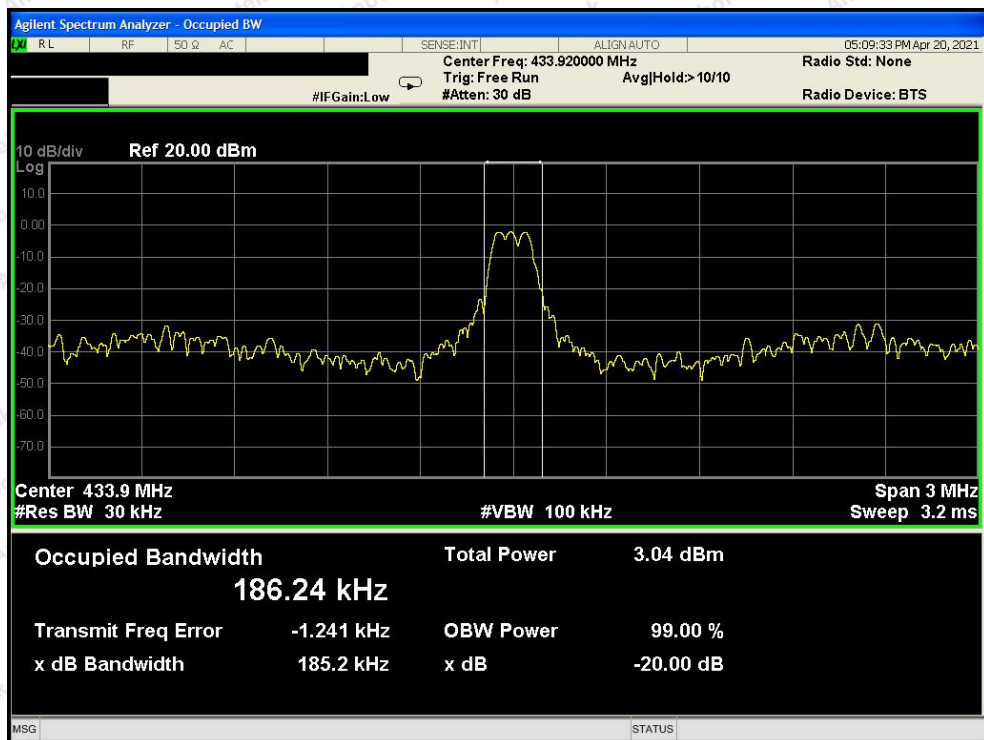

## ASK 315 MHz

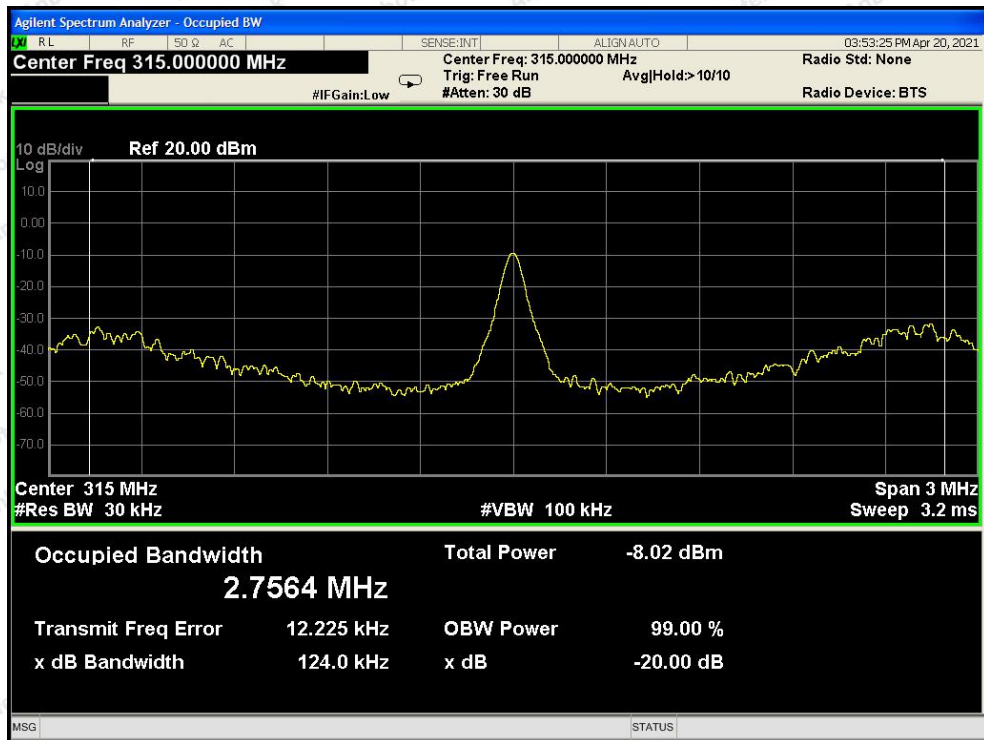

## ASK 433.92 MHz

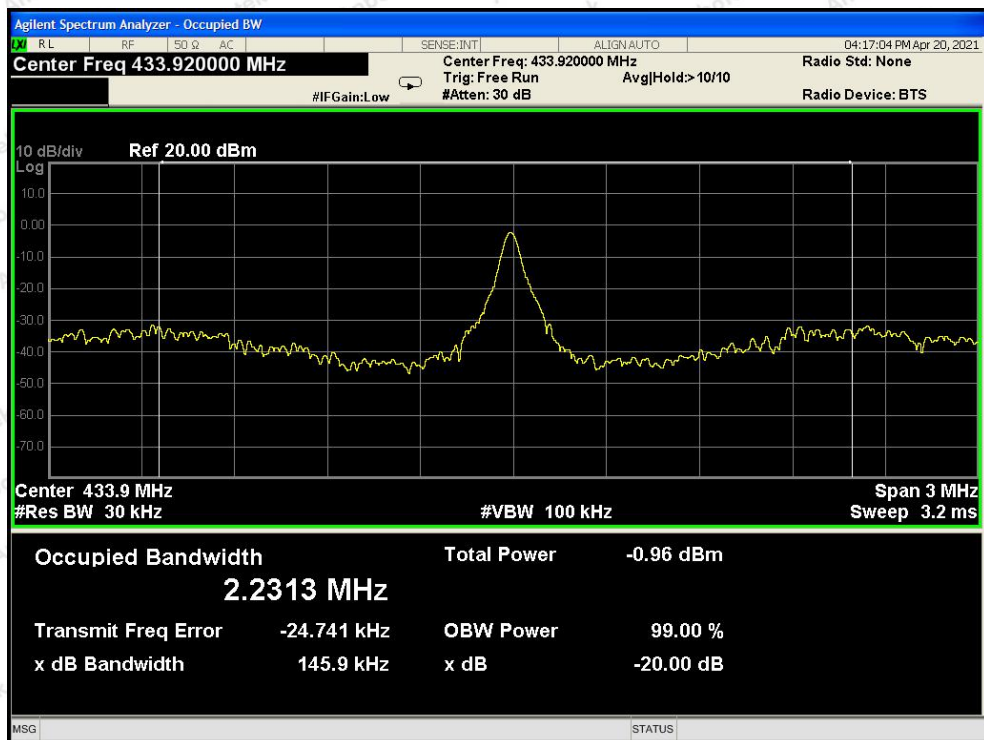


## 6. Dwell Time Test

### 6.1. Test Standard and Limit

|               |                                                                                                                                                                                               |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Standard | FCC Part 15.231(a)(1)                                                                                                                                                                         |
| Test Limit    | According to FCC Part 15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released |

### 6.2. Test Setup



### 6.3. Test Procedure

1. Place the EUT on the table and set it in continuously transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as  
RBW=1000kHz, VBW= 1000 kHz, Span= 0Hz, Sweep Time= 20 Seconds.
3. Record the Delta mark time.

### 6.4. Test Data


Test Item : Dwell Time  
 Test Voltage : DC 3V Battery inside  
 Test Result : PASS

Test Mode : Continuously transmitting  
 Temperature : 22.7℃  
 Humidity : 55%RH


| Mode    | Freq. (MHz) | Modulation Type | Transmitting time(s) | Limit(s) | Results |
|---------|-------------|-----------------|----------------------|----------|---------|
| TX Mode | 315         | FSK             | 1.700                | ≤5       | PASS    |
| TX Mode | 433.92      | FSK             | 1.500                | ≤5       | PASS    |
| TX Mode | 315         | ASK             | 5.000                | ≤5       | PASS    |
| TX Mode | 433.92      | ASK             | 5.000                | ≤5       | PASS    |

Please refer the following plot.


## FSK 315 MHz

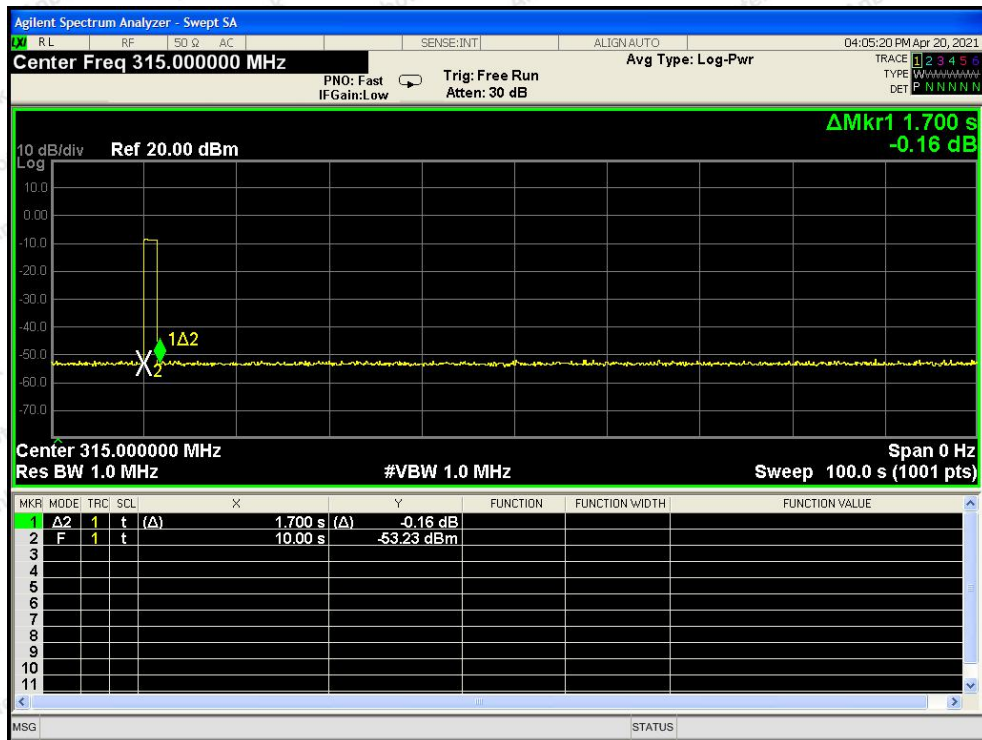


## FSK 433.92 MHz

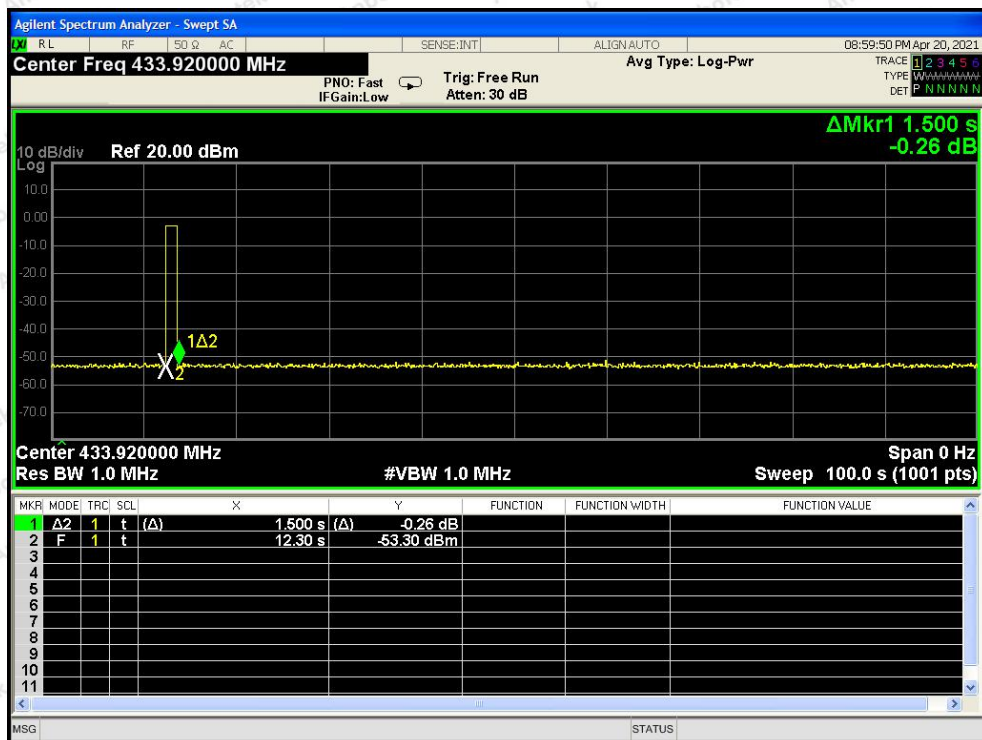

## ASK 315 MHz

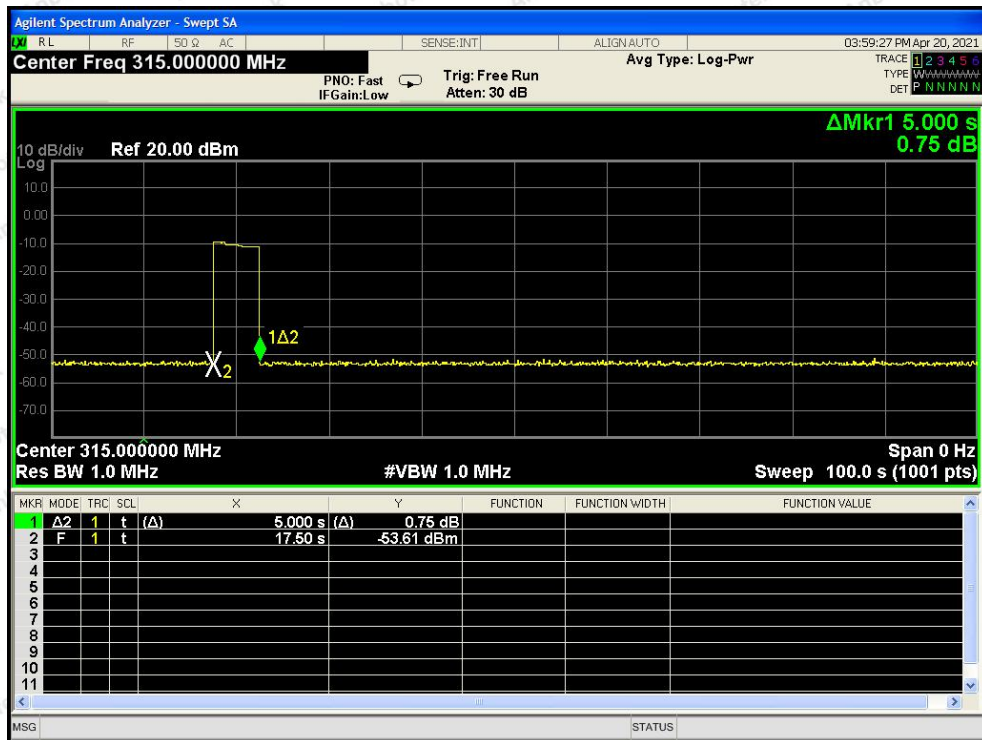

## ASK 433.92 MHz

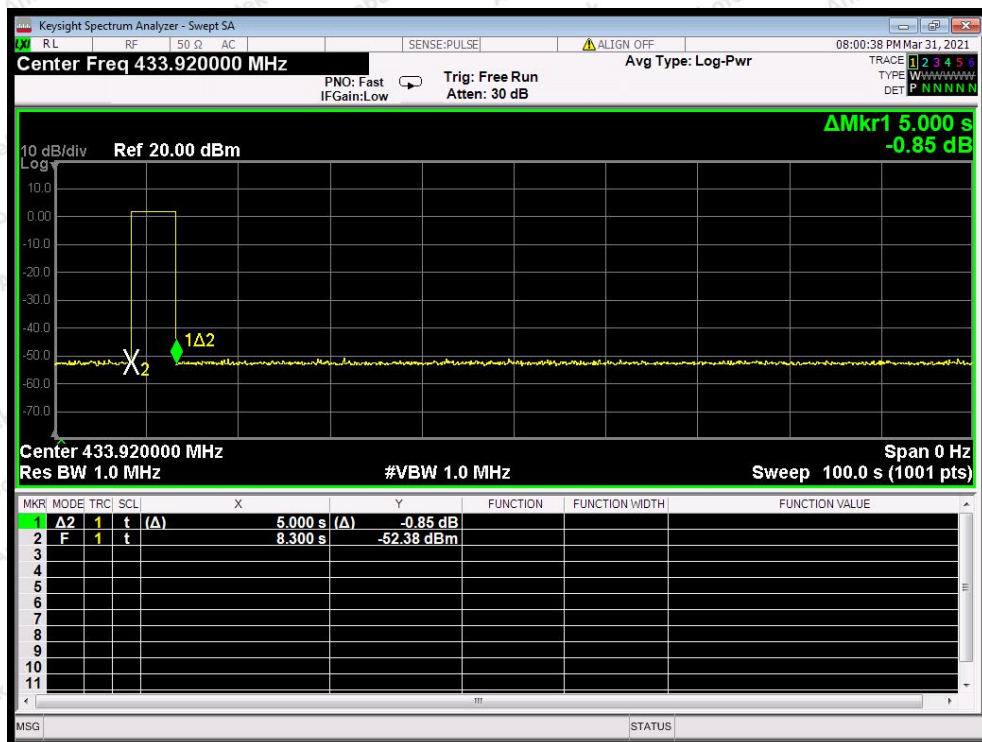


## 7. Antenna Requirement

### 7.1. Test Standard and Requirement

| Test Standard | FCC Part15 Section 15.203                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Requirement   | <p>1) 15.203 requirement:<br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <p>1) Antenna must be permanently attached to device.</p> <p>2) The antenna must use a unique type of connector to attach to the device.</p> <p>3) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.</p> |

### 7.2. Antenna Connected Construction

The antenna is a Monopole Antenna which permanently attached, and the best case gain of the antenna is 1 dBi. It complies with the standard requirement.

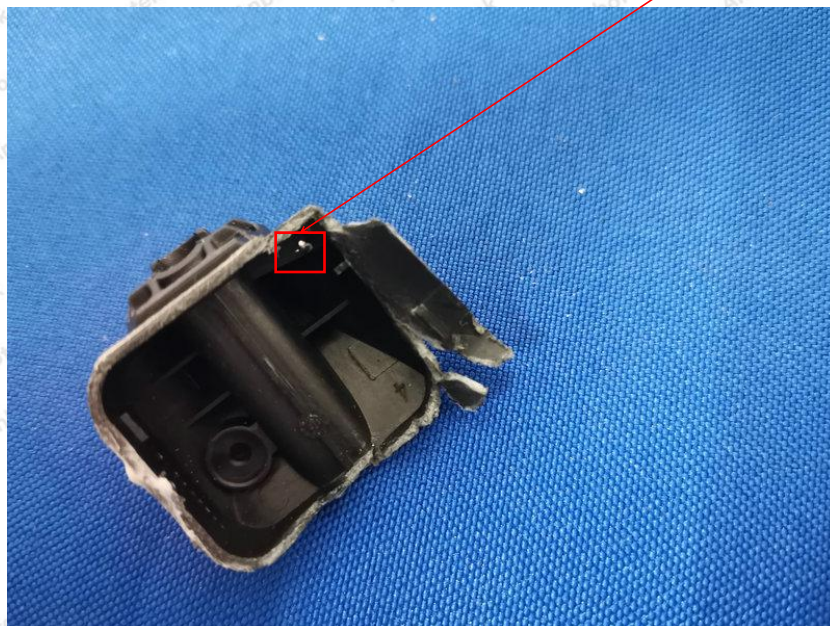

Antenna

## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Radiation Emission Test






**APPENDIX II -- EXTERNAL PHOTOGRAPH**






**APPENDIX III -- INTERNAL PHOTOGRAPH**

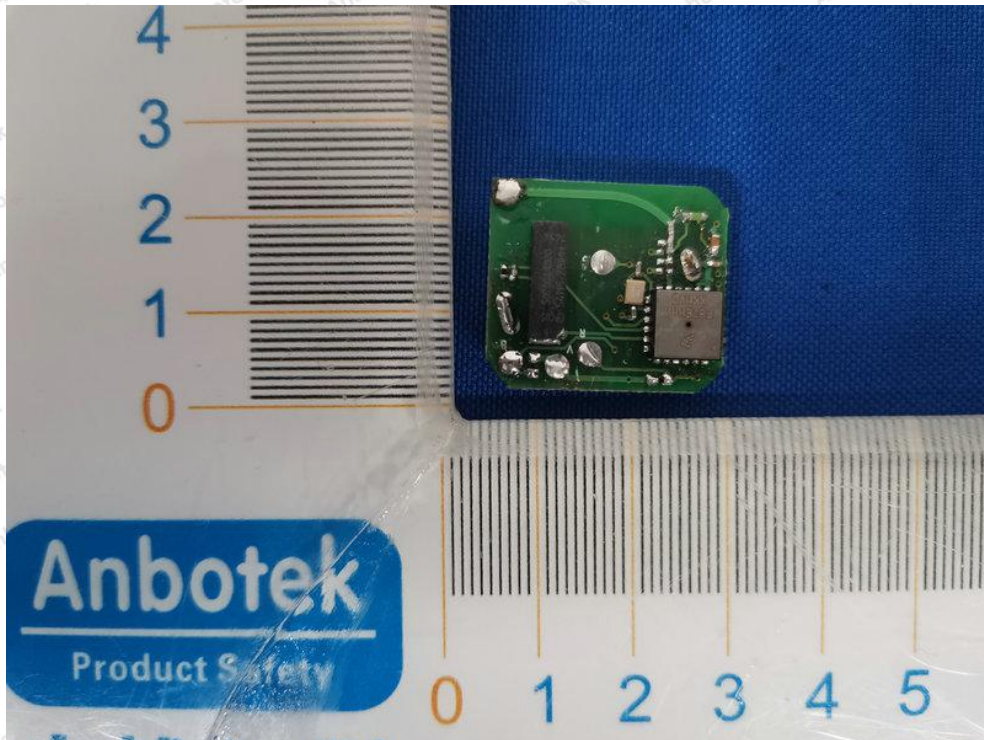

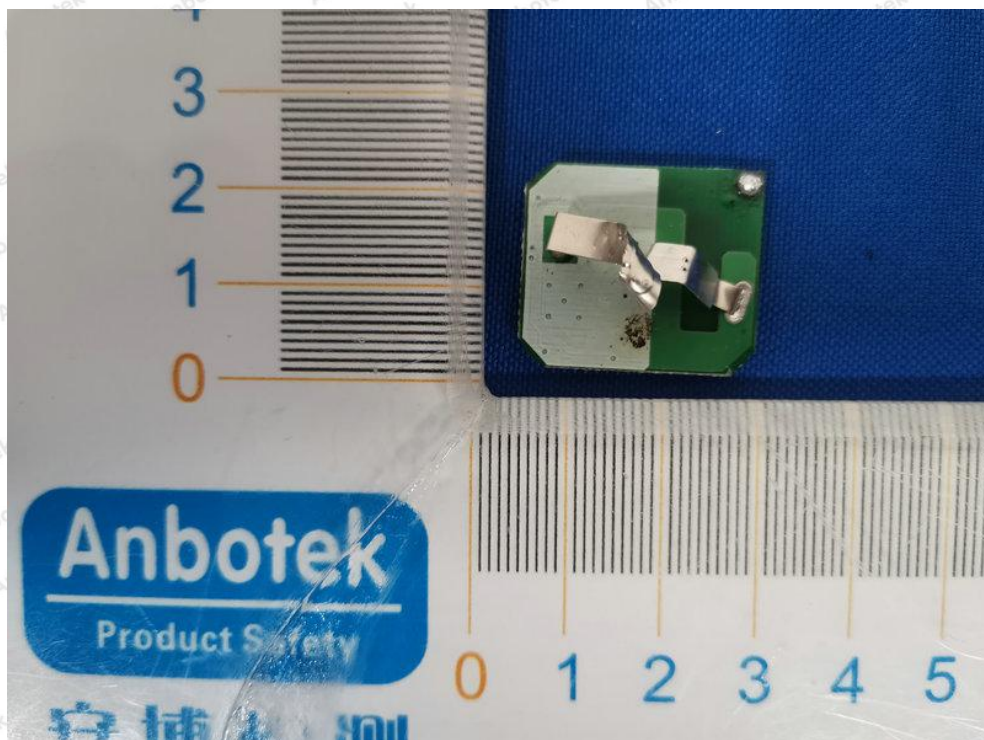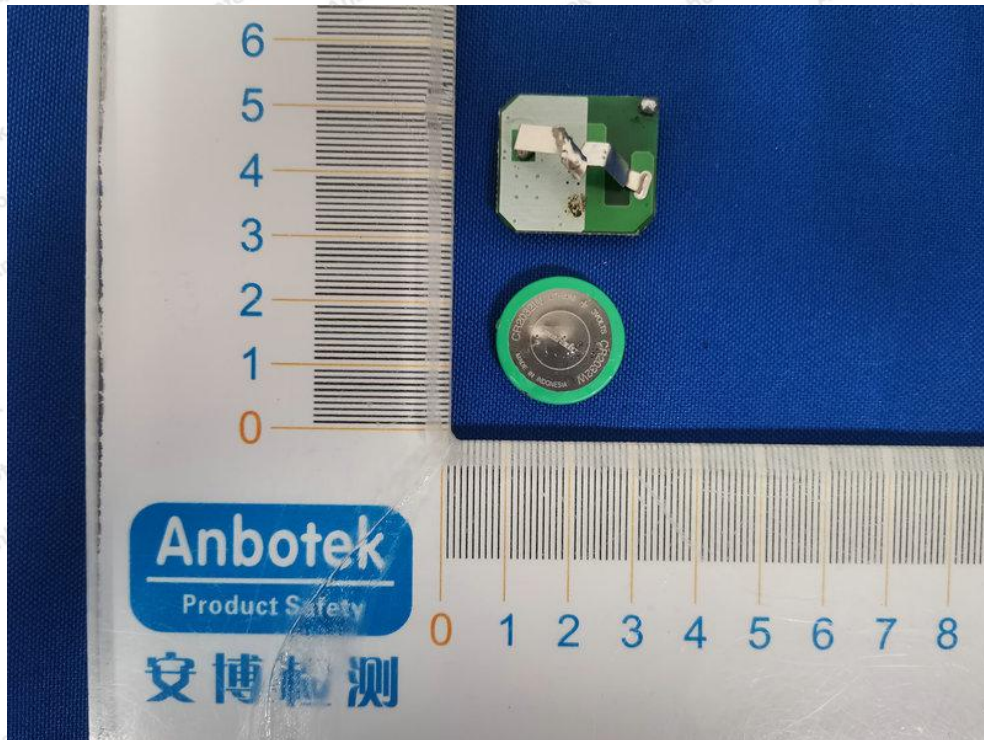

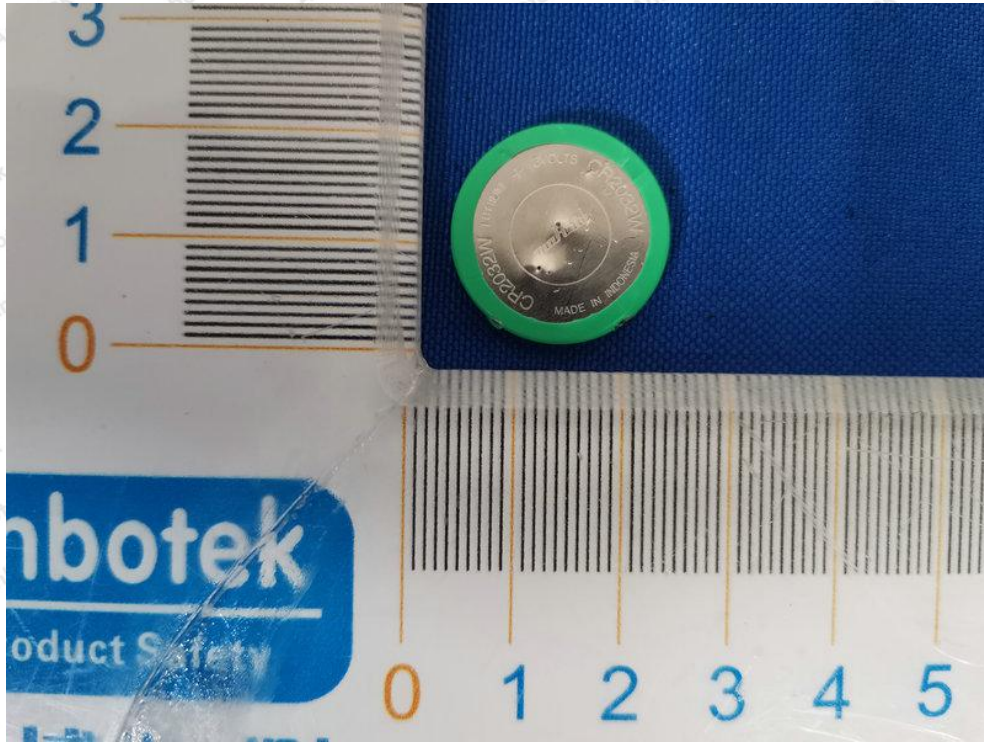

----- End of Report -----

**Shenzhen Anbotech Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com

**Code: AB-RF-05-a**



Hotline

400-003-0500

www.anbotech.com