

## 10. 20 DB BANDWIDTH

### 10.1 Block Diagram Of Test Setup



### 10.2 Limit

N/A


### 10.3 Test procedure

1. Set RBW = 30kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. .


## 10.4 Test Result

Temperature :	26°C	Relative Humidity :	54%
Test Voltage :	DC 3.7V	Remark	N/A

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	0.950
GFSK	Middle	0.950
GFSK	High	0.952
Pi/4 DQPSK	Low	1.297
Pi/4 DQPSK	Middle	1.295
Pi/4 DQPSK	High	1.274
8DPSK	Low	1.250
8DPSK	Middle	1.252
8DPSK	High	1.257

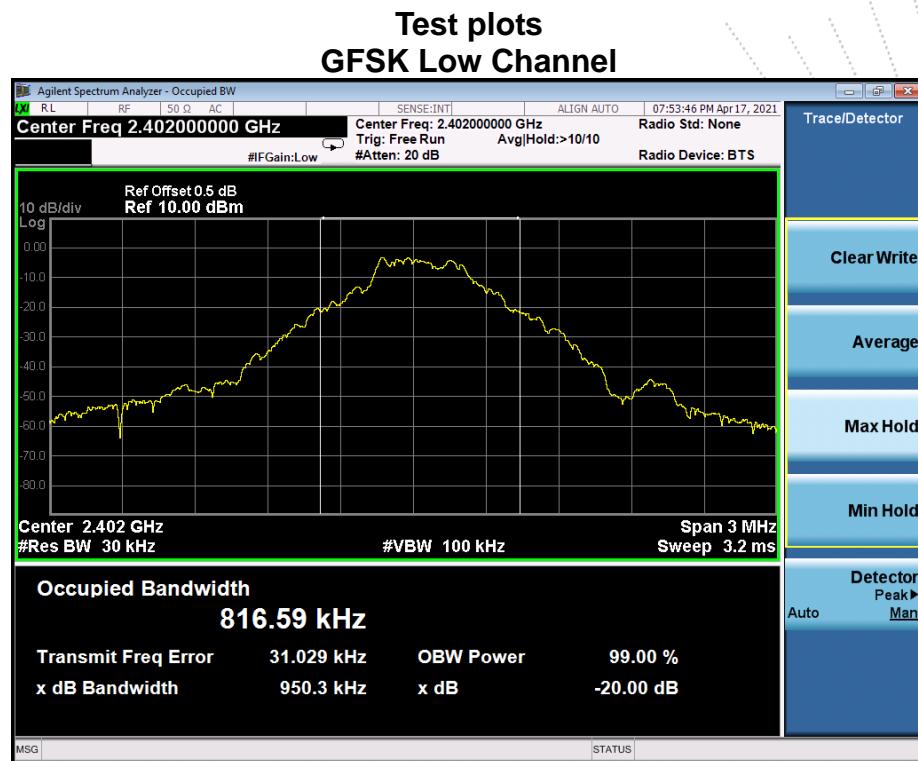


### GFSK Middle Channel

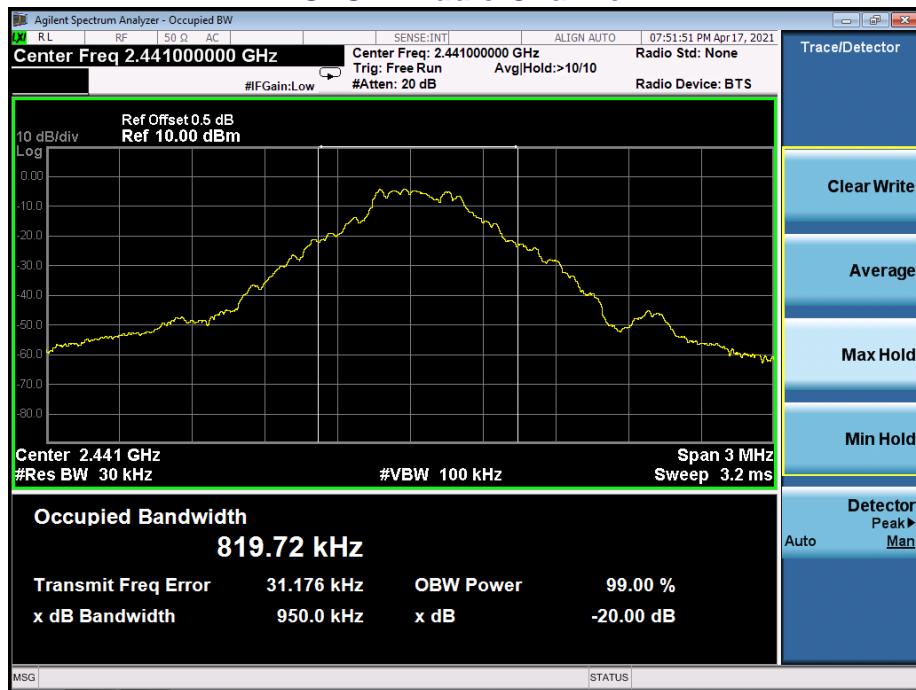

### GFSK High Channel




### Pi/4 DQPSK Low Channel

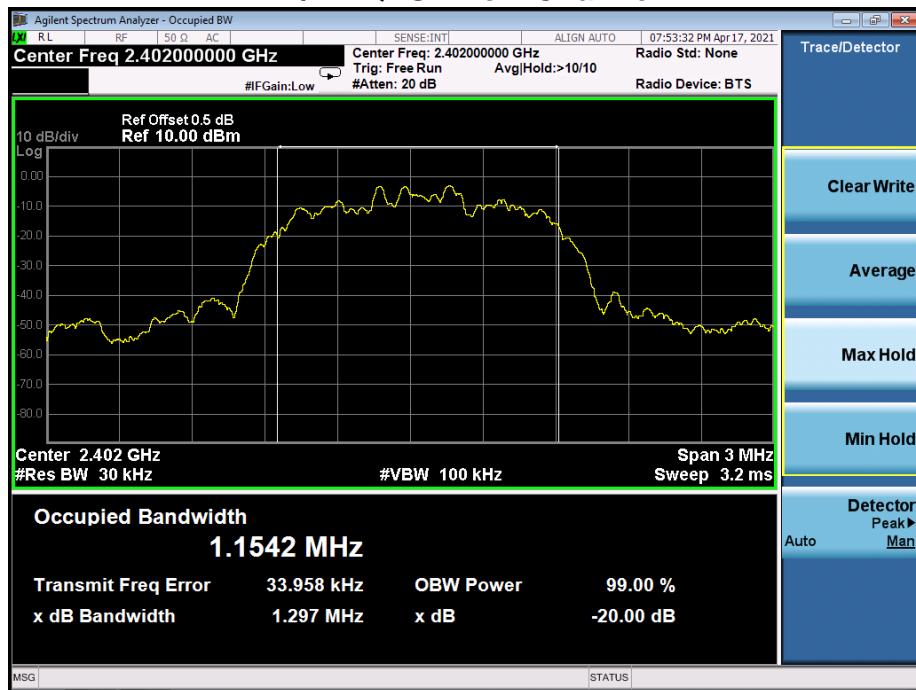


### Pi/4 DQPSK Middle Channel



### Pi/4 DQPSK High Channel

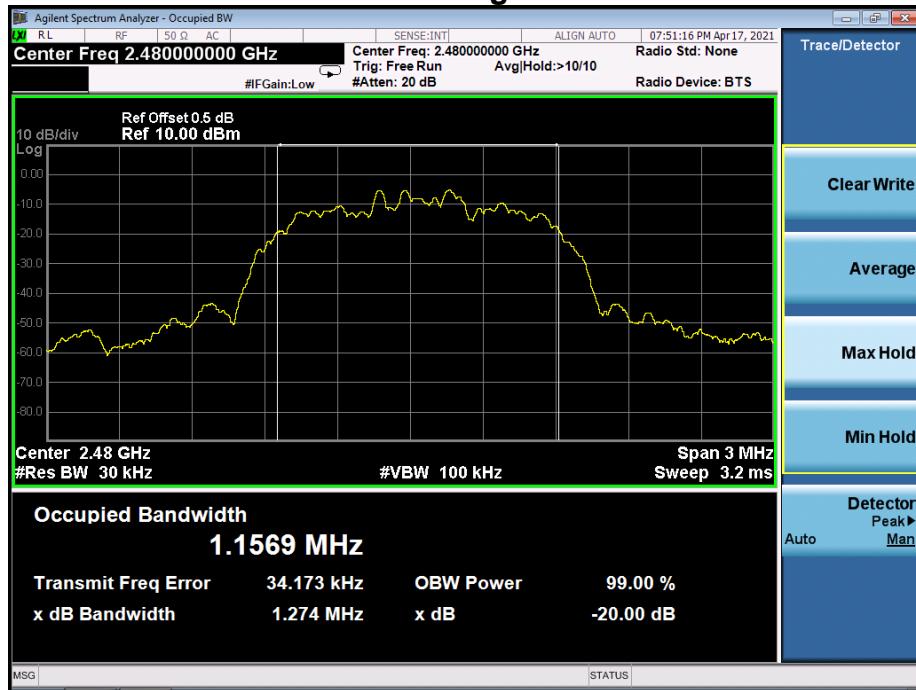


### 8DPSK Low Channel

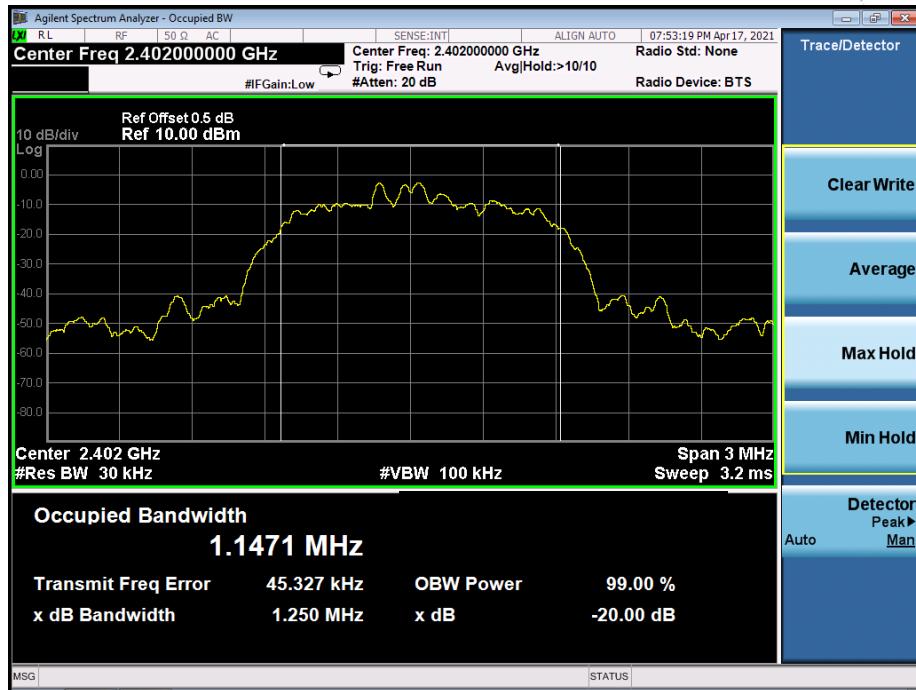

### 8DPSK Middle Channel



### 8DPSK High Channel

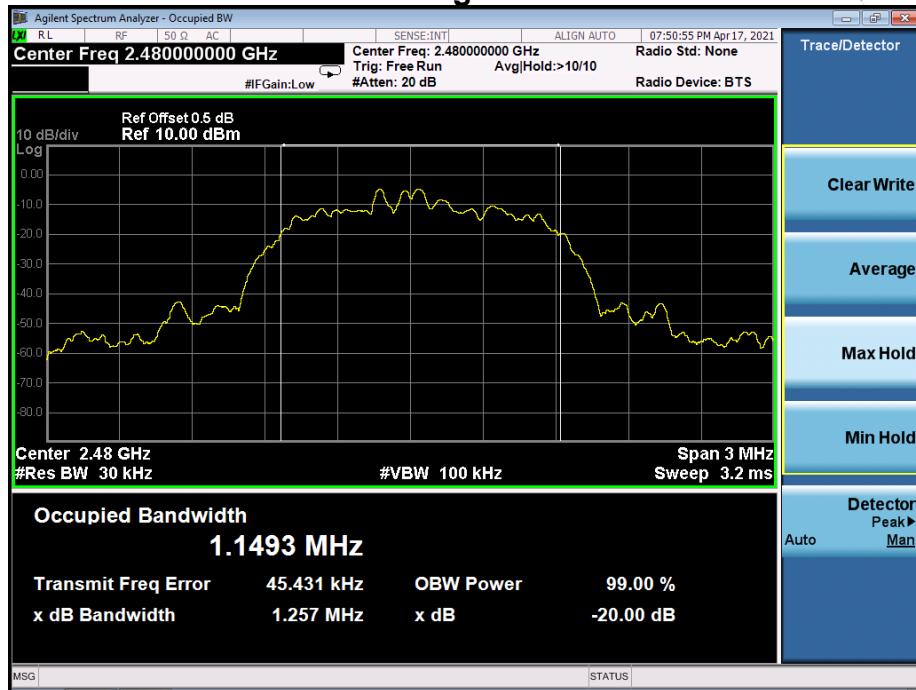

## 11. MAXIMUM PEAK OUTPUT POWER

### 11.1 Block Diagram Of Test Setup



### 11.2 Limit

FCC Part15 (15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	0.125 watt or 21dBm	2400-2483.5	PASS


### 11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


## 11.4 Test Result

Temperature :	26°C	Relative Humidity :	54%
Test Voltage :	DC 3.7V	Remark:	N/A

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	-0.831	21
GFSK	Middle	-1.601	21
GFSK	High	-2.713	21
Pi/4 DQPSK	Low	1.619	21
Pi/4 DQPSK	Middle	0.780	21
Pi/4 DQPSK	High	-0.375	21
8DPSK	Low	2.329	21
8DPSK	Middle	1.458	21
8DPSK	High	0.292	21

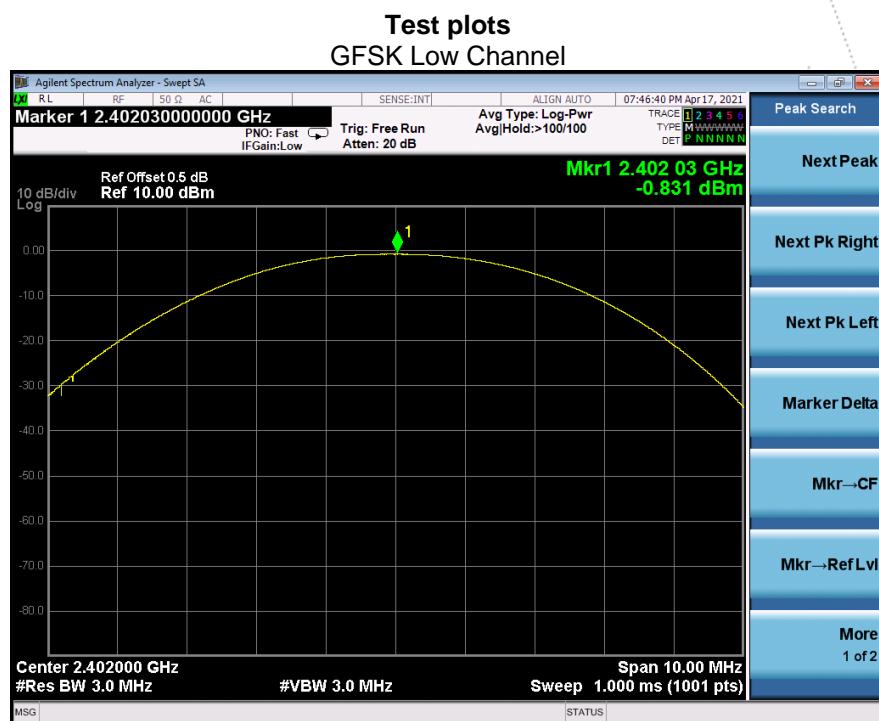


### GFSK Middle Channel

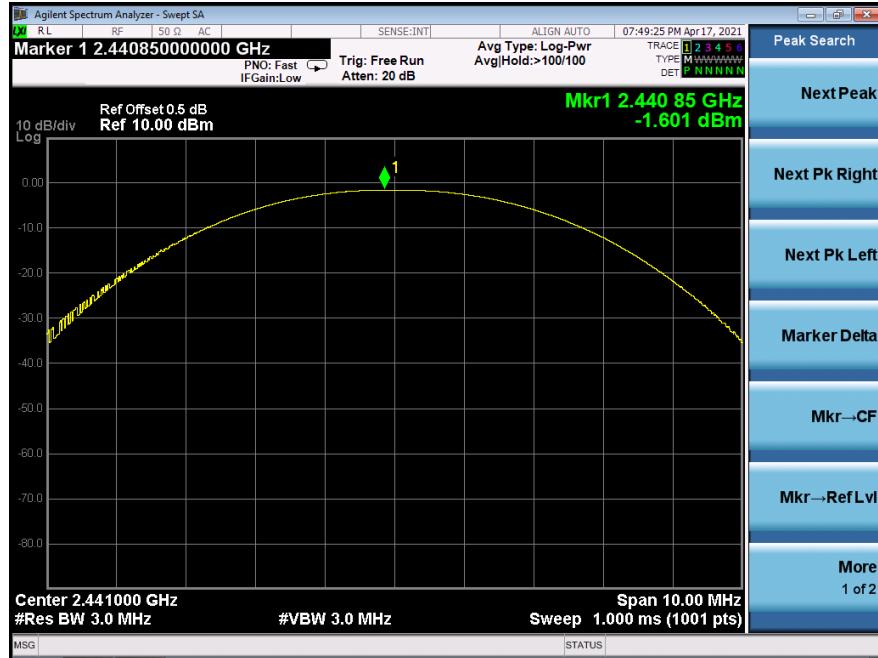


### GFSK High Channel



## Pi/4 DQPSK Low Channel

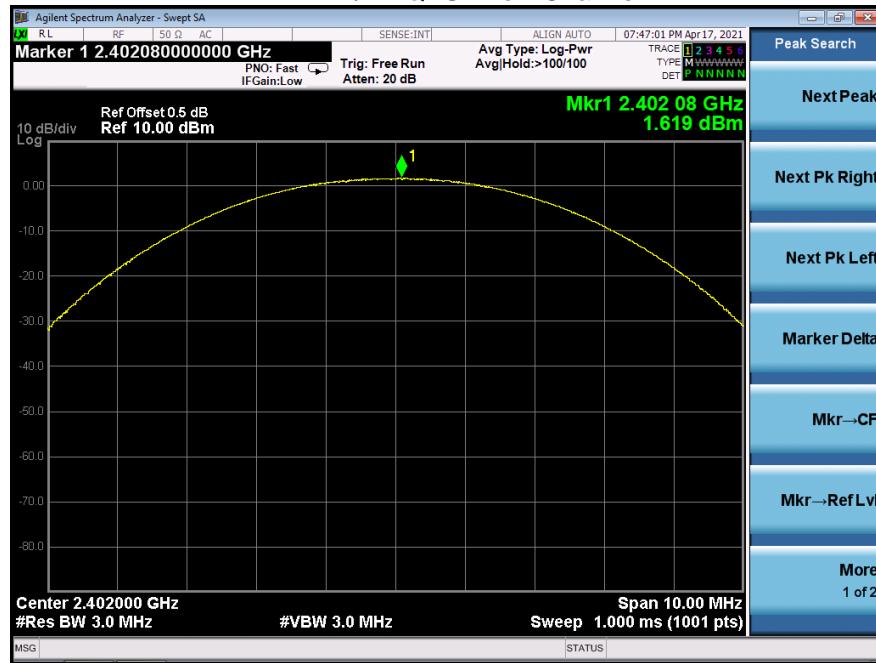


## Pi/4 DQPSK Middle Channel

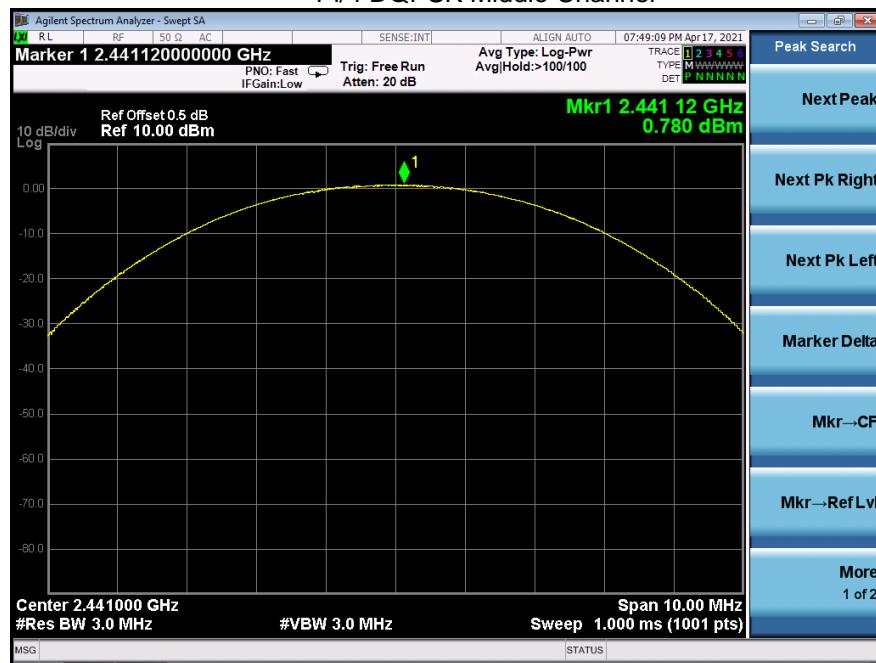


## Pi/4 DQPSK High Channel




## 8DPSK Low Channel

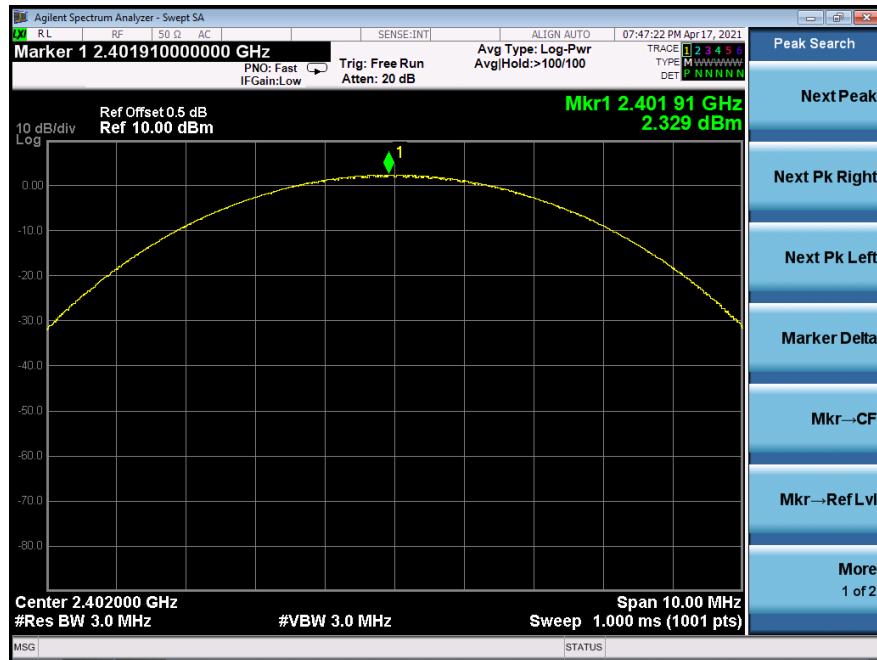

## 8DPSK Middle Channel

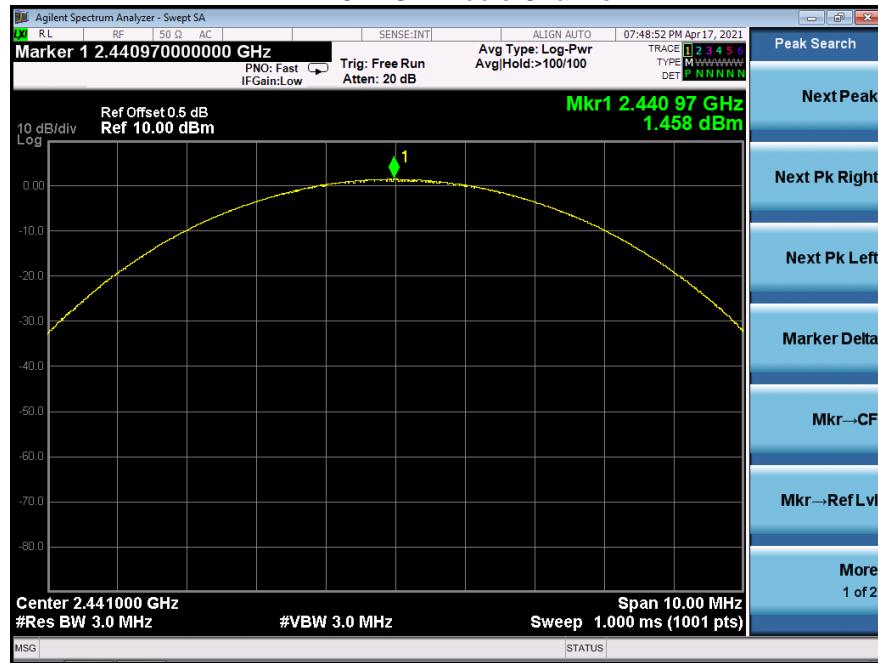

## 8DPSK High Channel

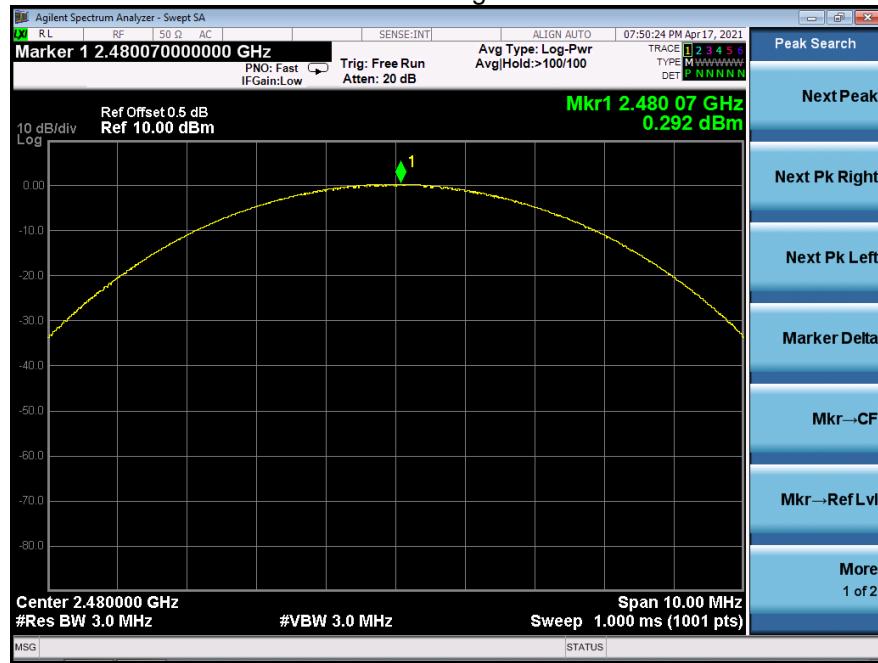

## 12. HOPPING CHANNEL SEPARATION

### 12.1 Block Diagram Of Test Setup



### 12.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

### 12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

## 12.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.000	0.633	PASS
GFSK	Middle	1.000	0.633	PASS
GFSK	High	1.000	0.635	PASS
Pi/4 DQPSK	Low	0.998	0.865	PASS
Pi/4 DQPSK	Middle	1.004	0.863	PASS
Pi/4 DQPSK	High	1.000	0.849	PASS
8DPSK	Low	1.000	0.833	PASS
8DPSK	Middle	0.998	0.835	PASS
8DPSK	High	1.002	0.838	PASS

**Test plots**  
GFSK Low Channel




### GFSK Middle Channel



### GFSK High Channel



## Pi/4 DQPSK Low Channel

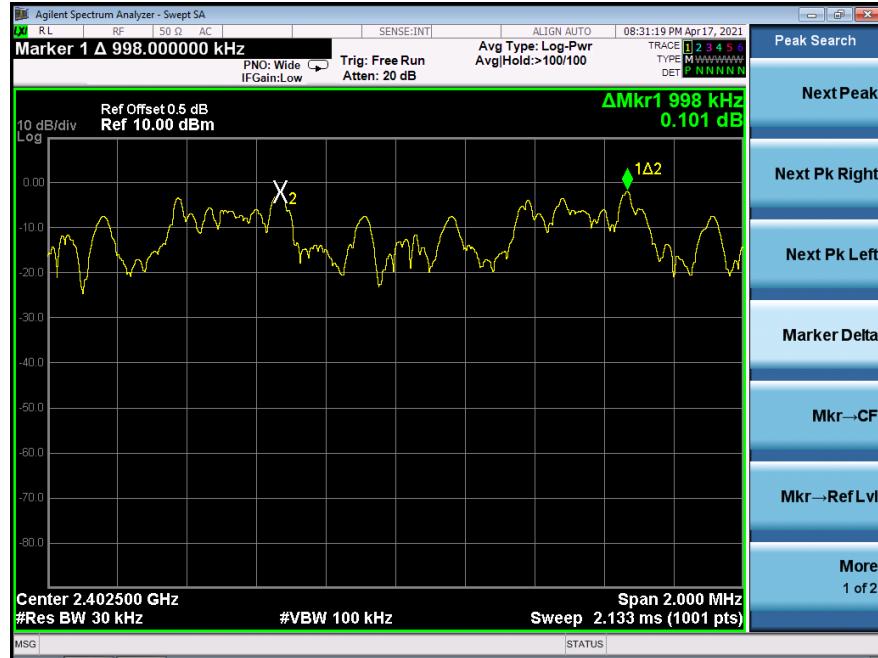

## Pi/4 DQPSK Middle Channel



## Pi/4 DQPSK High Channel



## 8DPSK Low Channel



### 8DPSK Middle Channel



### 8DPSK High Channel



## 13. NUMBER OF HOPPING FREQUENCY

### 13.1 Block Diagram Of Test Setup



### 13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


## 13.4 Test Result

## Test Plots:


79 Channels in total  
GFSK



## Pi/4 DQPSK

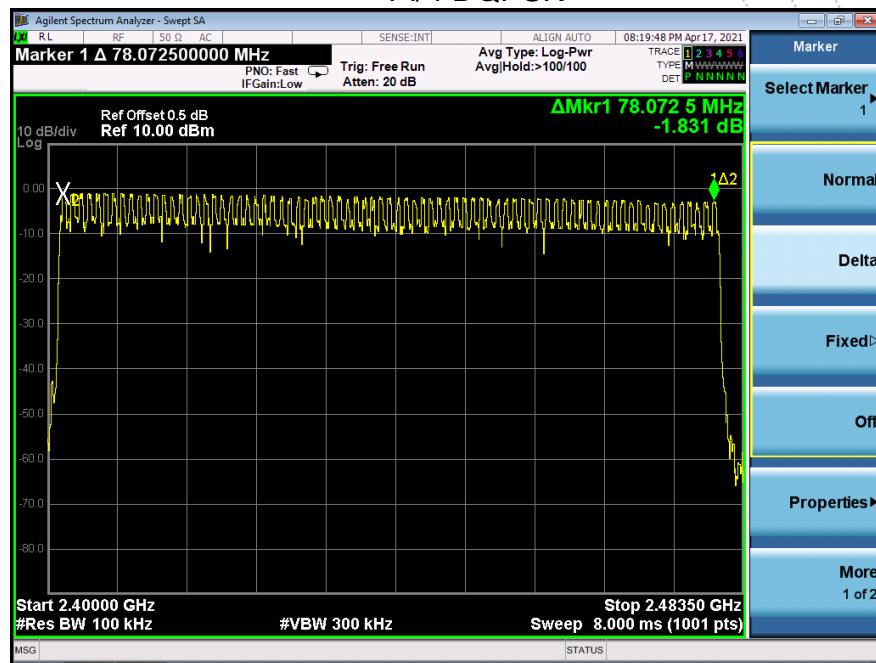

### 8DPSK

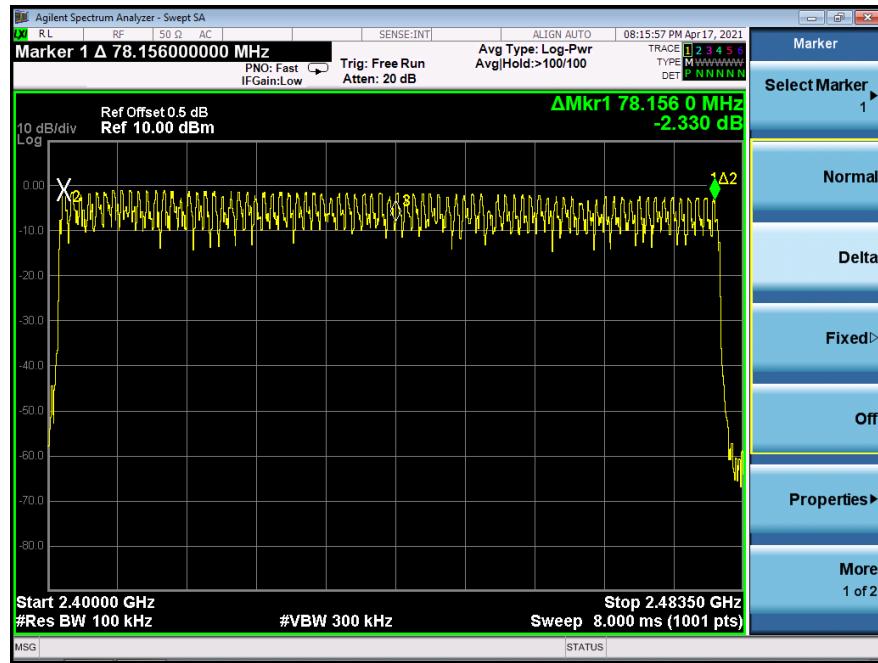

## 14. DWELL TIME

### 14.1 Block Diagram Of Test Setup



### 14.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 14.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate, modulation format, etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

## 14.4 Test Result

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5:  $1600/79/6 * 0.4 * 79 * (\text{MkrDelta})/1000$

DH3:  $1600/79/4 * 0.4 * 79 * (\text{MkrDelta})/1000$


DH1:  $1600/79/2 * 0.4 * 79 * (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.


Modulation	Channel Data	Packet	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	Middle	DH1	0.406	0.130	0.4
		DH3	1.674	0.268	0.4
		DH5	2.920	0.311	0.4
Pi/4DQPSK	Middle	2DH1	0.416	0.133	0.4
		2DH3	1.686	0.270	0.4
		2DH5	2.930	0.313	0.4
8DPSK	Middle	3DH1	0.420	0.134	0.4
		3DH3	1.680	0.269	0.4
		3DH5	2.930	0.313	0.4

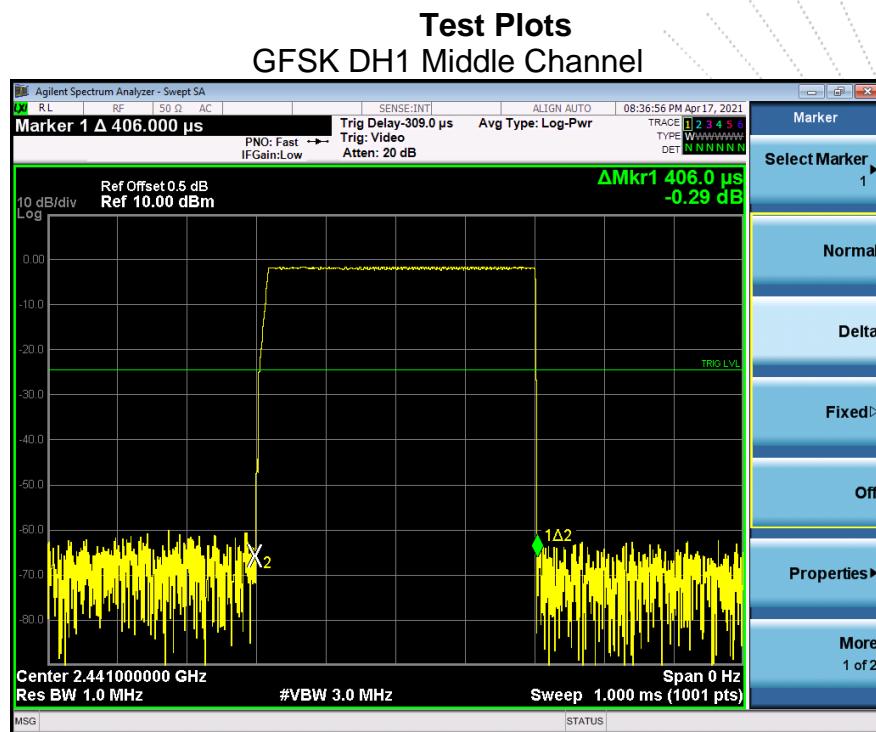


### GFSK DH3 Middle Channel

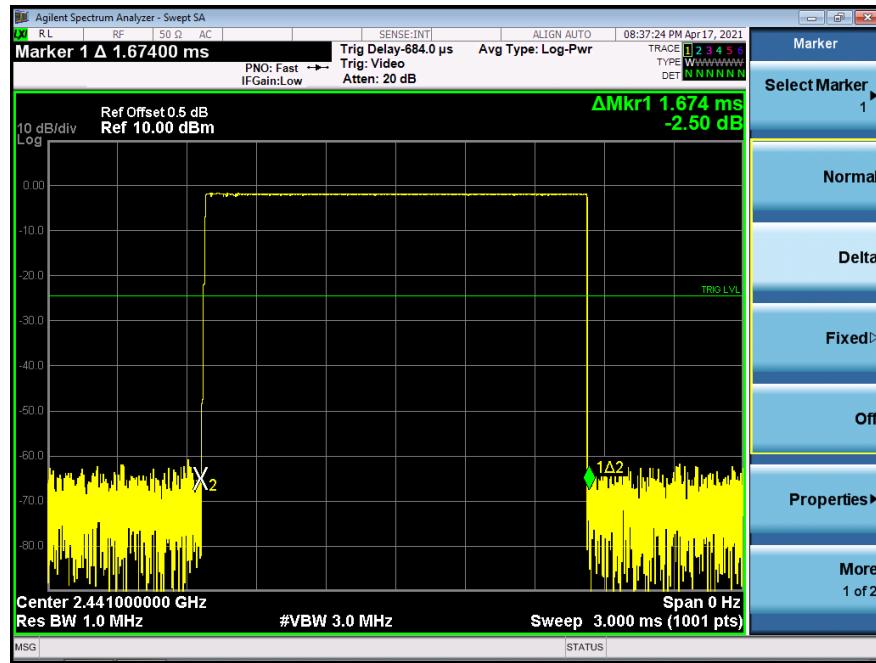


### GFSK DH5 High Middle Channel

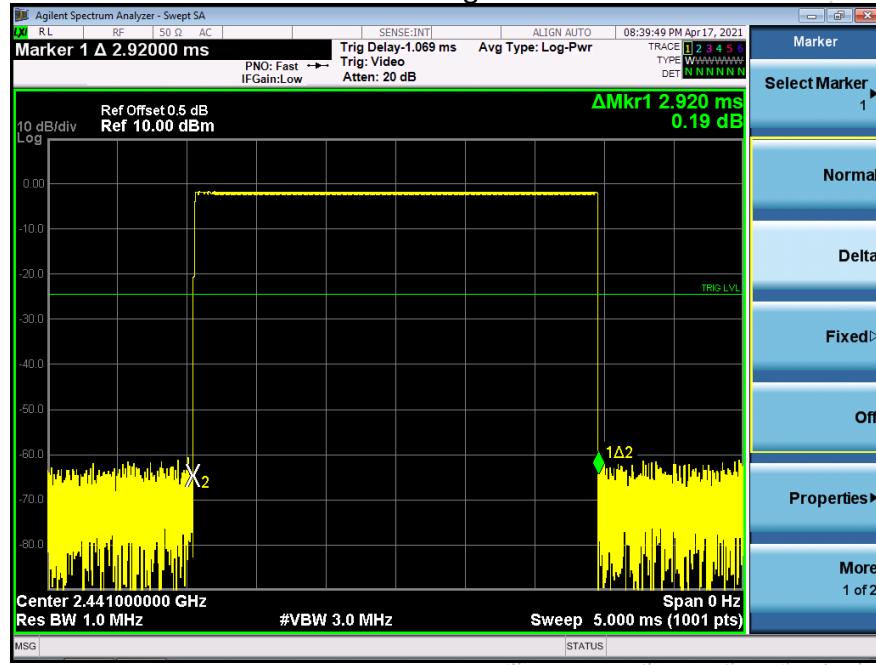


## Pi/4DQPSK DH1 Middle Channel

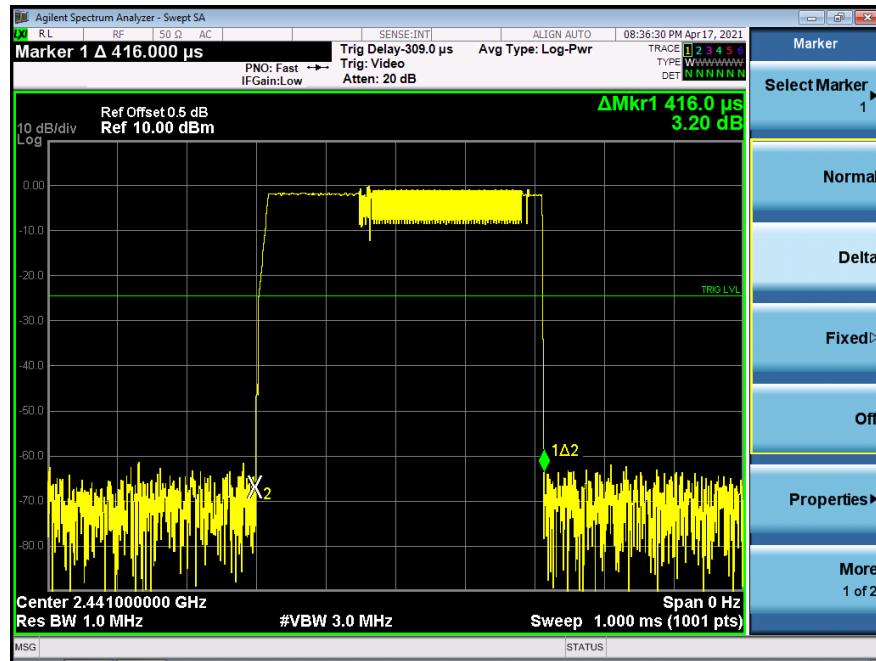


## Pi/4DQPSK DH3 Middle Channel

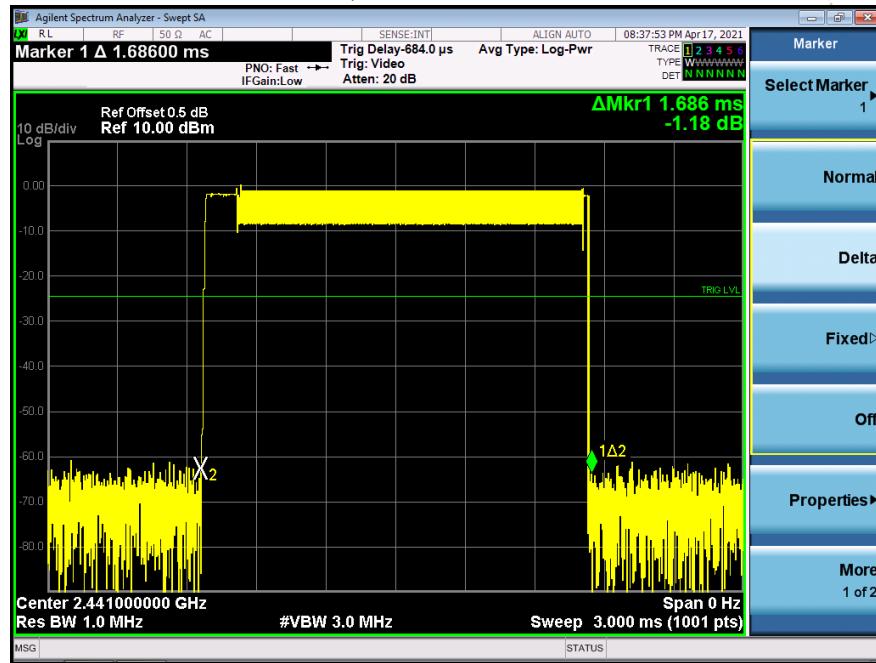


## Pi/4DQPSK DH5 Middle Channel

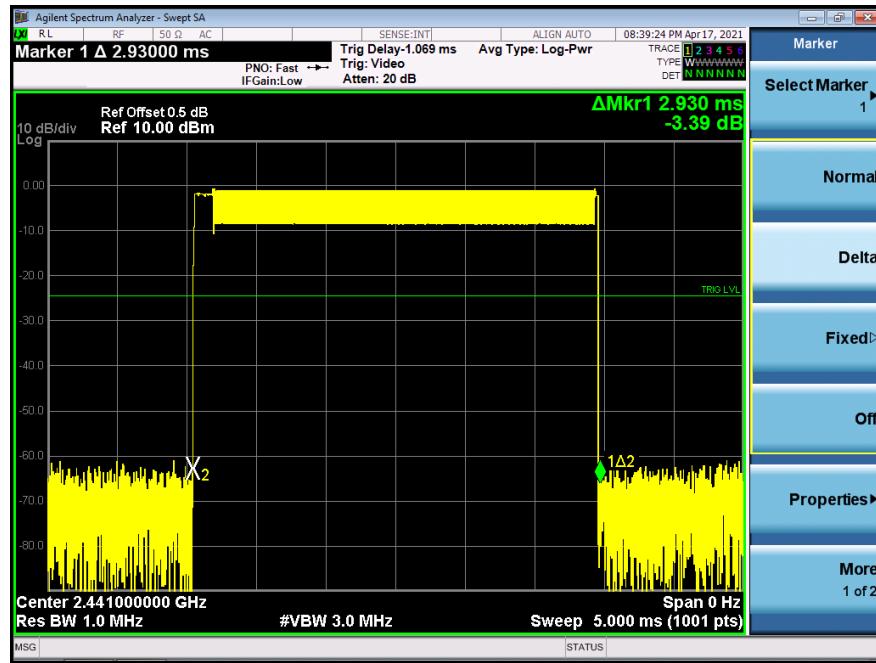


## 8DPSK DH1 Middle Channel

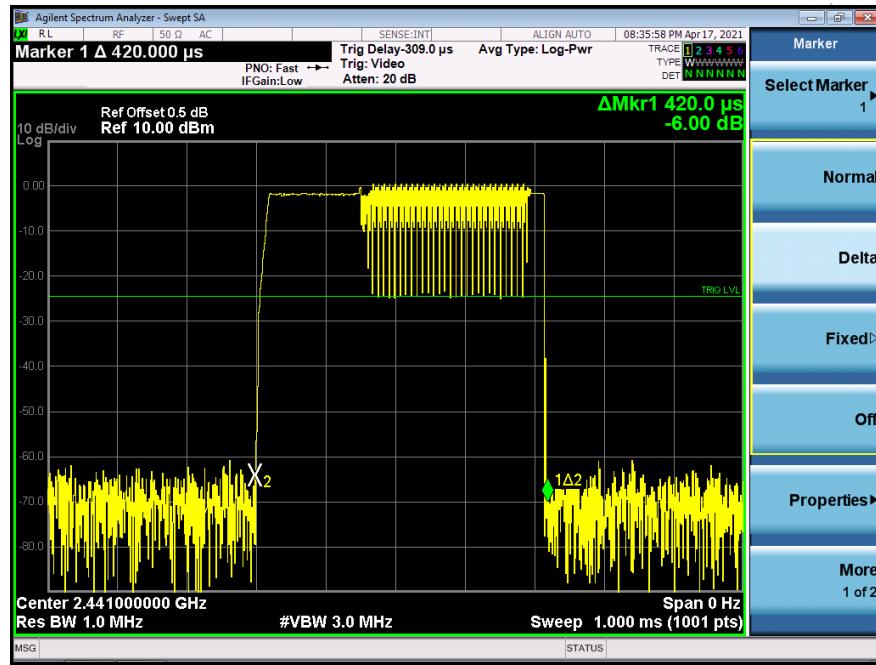

## 8DPSK DH3 Middle Channel

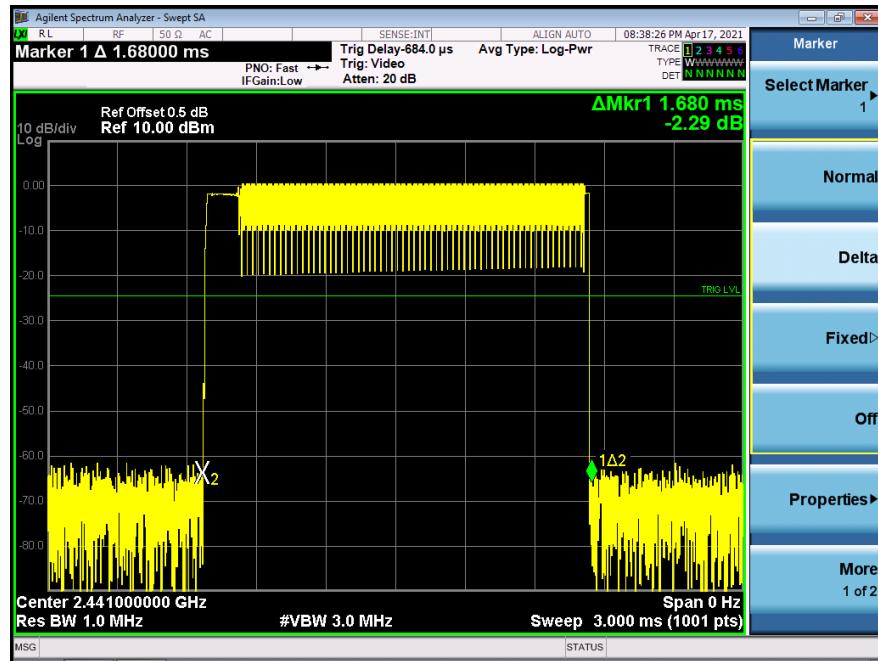

## 8DPSK DH5 Middle Channel

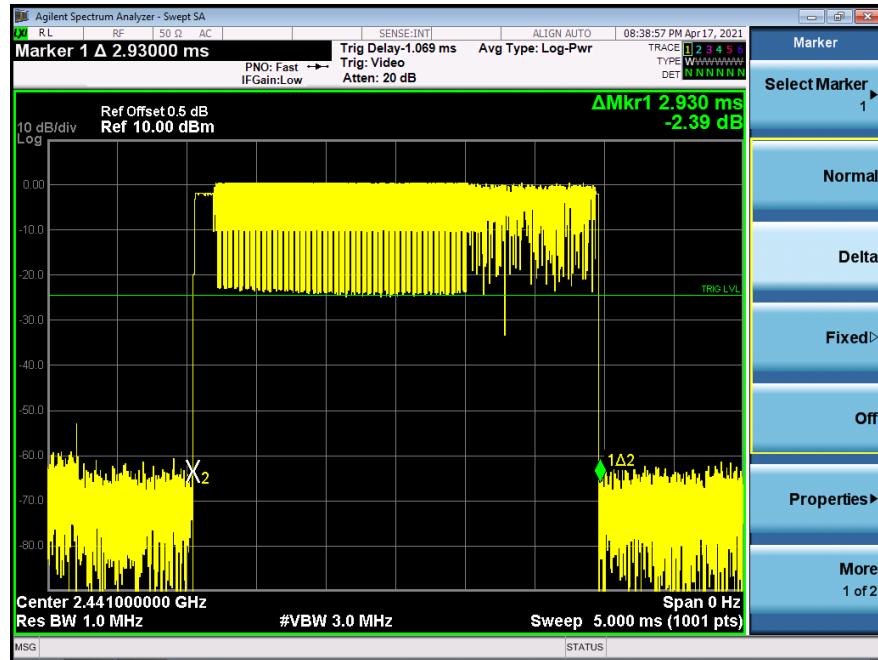


## 15. ANTENNA REQUIREMENT

### 15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 15.2 Test Result

The EUT antenna is PCB antenna, The antenna gain is 0dBi, fulfill the requirement of this section.

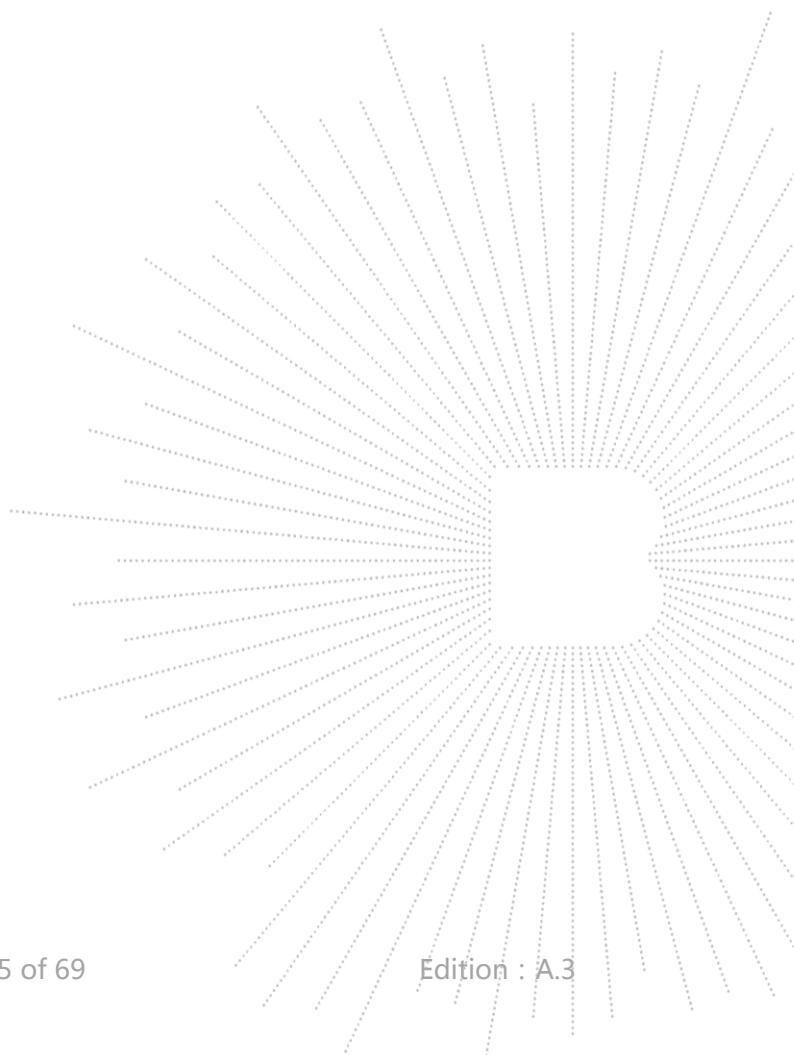

## 16. EUT PHOTOGRAPHS

**EUT Photo 1****EUT Photo 2**



## 17. EUT TEST SETUP PHOTOGRAPHS

### Conducted emissions



### Radiated Measurement Photos



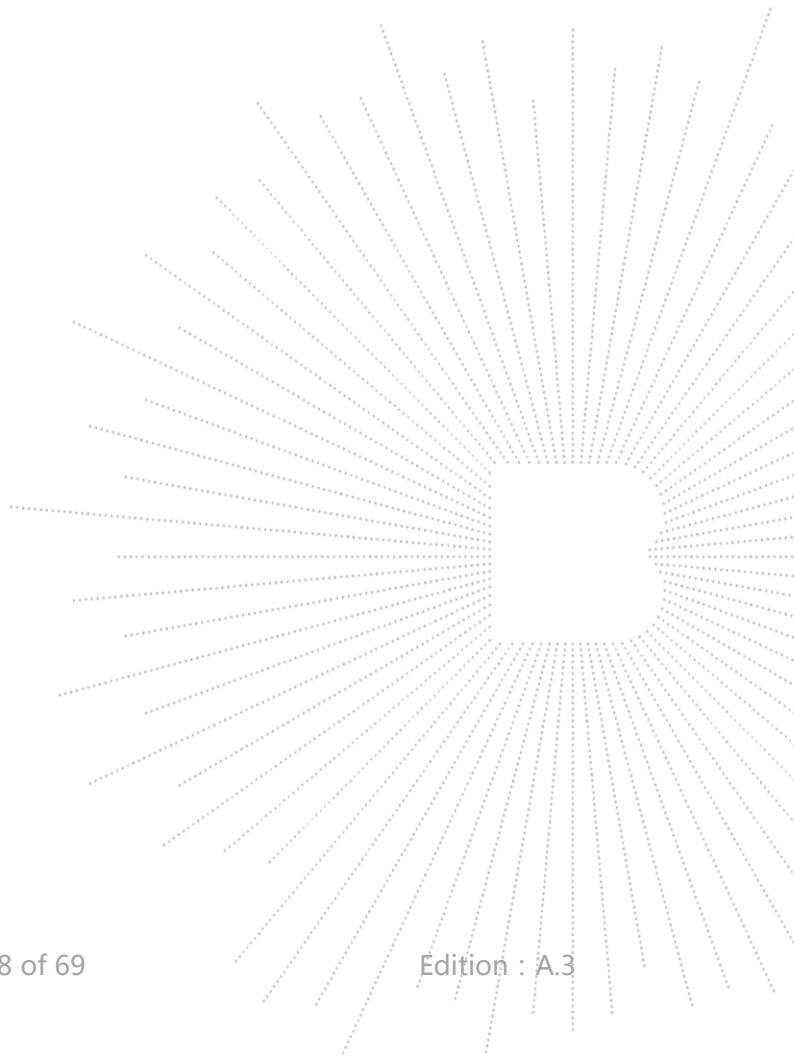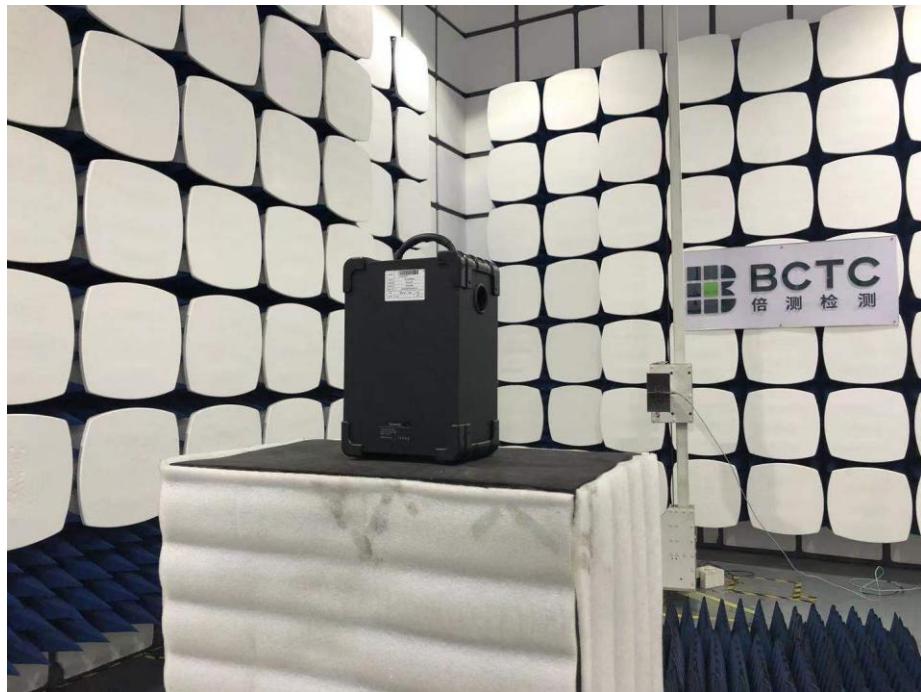

## STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P.C.: 518103

FAX : 0755-33229357

Internet : <http://www.bctc-lab.com>

E-Mail : [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

\*\*\*\*\* END \*\*\*\*\*