



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 17159  
 Tel: +82-31-323-6008 Fax: +82-31-323-6010  
<http://www.ltalab.com>

Dates of Tests: December 21, 2022 ~ April 27, 2023  
 Test Report S/N: LR500112304F  
 Test Site : LTA CO., LTD.

## CERTIFICATION OF COMPLIANCE

FCC ID.

**2BA2CIC-AD**

APPLICANT

**Good Doctors Co., Ltd.**

<b>Equipment Class</b>	:	<b>Digital Transmission System (DTS)</b>
<b>Manufacturing Description</b>	:	<b>Air Direct</b>
<b>Manufacturer</b>	:	<b>Good Doctors Co., Ltd.</b>
<b>Model name</b>	:	<b>IC-AD</b>
<b>Contains</b>	:	<b>2AL6KBL-M8821CS1</b>
<b>Test Device Serial No.:</b>	:	<b>Identical prototype</b>
<b>Rule Part(s)</b>	:	<b>FCC Part 15.247 Subpart C ; ANSI C63.10 - 2013</b>
<b>Frequency Range</b>	:	<b>2412 MHz ~ 2472 MHz - 802.11b/g/n20</b> <b>2422 MHz ~ 2462 MHz - 802.11n40</b> <b>5180 MHz ~ 5240 MHz - 802.11a/n20/n40/ac20/ac40/ac80</b> <b>5745 MHz ~ 5825 MHz - 802.11a/n20/n40/ac20/ac40/ac80</b>
<b>Max. Output Power</b>	:	<b>0.0396 W</b>
<b>Data of issue</b>	:	<b>April 28, 2023</b>

This test report is issued under the authority of:

The test was supervised by:

Ja-Beom Koo, Manager

Eun-Hwan Jung, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

NVLAP LAB Code.: 200723-0

## **TABLE OF CONTENTS**

1. GENERAL INFORMATION	-----	3
2. INFORMATION ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 TECHNICAL CHARACTERISTICS TEST	-----	6
3.2.1 RADIATED SPURIOUS EMISSIONS	-----	6
APPENDIX		
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	12

## 1. General information

### **1-1 Test Performed**

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 17159  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### **1-2 Accredited agencies**

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2023-09-28	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2024-03-25	FCC CAB
VCCI	JAPAN	C-4948,	2023-09-10	VCCI registration
VCCI	JAPAN	T-2416,	2023-09-10	VCCI registration
VCCI	JAPAN	R-4483(10 m),	2023-08-15	VCCI registration
VCCI	JAPAN	G-847	2023-12-13	VCCI registration
IC	CANADA	5799A-1	2023-10-18	IC filing

## 2. Information about test item

## **2-1 Client & Manufacturer**

Client Company name : Good Doctors Co., Ltd.  
#208, B-dong, 283 Bupyeong-daero, Bupyeong-gu  
Address : (Woolim Lions Valley ,Cheongchoen-dong) Incheon, 21315, Republic of Korea  
Tel / Fax : TEL No : +82-32-424-6325 / FAX No : +82-32-424-6326  
Manufacturer : Good Doctors Co., Ltd.  
#208, B-dong, 283 Bupyeong-daero, Bupyeong-gu  
Address : (Woolim Lions Valley ,Cheongchoen-dong) Incheon, 21315, Republic of Korea  
Tel / Fax : TEL No : +82-32-424-6325 / FAX No : +82-32-424-6326

## **2-2 Equipment Under Test (EUT)**

Model name	:	IC-AD
Serial number	:	Identical prototype
Date of receipt	:	December 21, 2022
EUT condition	:	Pre-production, not damaged
Antenna type	:	Ceramic Antenna (Max Gain : 2.7 dBi) 2412 MHz ~ 2472 MHz - 802.11b/g/n20 2422 MHz ~ 2462 MHz - 802.11n40
Frequency Range	:	5180 MHz ~ 5240 MHz - 802.11a/n20/n40/ac20/ac40/ac80 5745 MHz ~ 5825 MHz - 802.11a/n20/n40/ac20/ac40/ac80
Type of Modulation	:	GFSK, CCK, DQPSK, DBPSK for DSSS, 64QAM, 16QAM, QPSK, BPSK for OFDM
Power Source	:	DC 5 V
Test condition	:	This report measures the capabilities of the product's 2.4GHz and 5GHz modules at once. Note that measurements were taken with both functions enabled.

## **2-3Ancillary Equipment**

Equipment	Model No.	Serial No.	Manufacturer
Notebook	-	MS-1736	MSI

### 3. Test Report

#### 3.1 Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	Conducted	N/A <sup>1)</sup>
15.247(b)	Transmitter Peak Output Power		N/A <sup>1)</sup>
15.247(e)	Transmitter Power Spectral Density		N/A <sup>1)</sup>
15.247(d)	Band Edge & Conducted Spurious emission		N/A <sup>1)</sup>
15.407(a)(3)	26 dB Bandwidth		N/A <sup>1)</sup>
15.407(a)(3)	Transmitter Peak Output Power		N/A <sup>1)</sup>
15.407(a)(3)	Peak power spectral density		N/A <sup>1)</sup>
15.407(b)(4)	Band Edge & Conducted Spurious emission		N/A <sup>1)</sup>
15.407(e)	6 dB Bandwidth		N/A <sup>1)</sup>
15.209	Transmitter emission	Radiated	C
15.207	AC Conducted Emissions	Conducted	N/A <sup>1)</sup>
15.203	Antenna requirement	-	C

N/A<sup>1)</sup> : The product replaces this test with a certificate using an authenticated module.

Contains Module : 2AL6KBL-M8821CS1

The above equipment was tested by LTA Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247. The test results of this report relate only to the tested sample identified in this report.

The tests were performed according to the method of measurements prescribed in KDB No.558074.

→ Antenna Requirement

Good Doctors Co., Ltd.. FCC ID: 2BA2CIC-AD unit complies with the requirement of §15.203.  
The antenna type is Chip Antenna

### 3.2 Technical Characteristics Test

### 3.2.1 Radiated Spurious Emissions

## Procedure:

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defined in ANSI C63.10-2013.

The EUT is placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10<sup>th</sup> harmonic.

$$\text{RBW} = 120 \text{ kHz} \text{ ( } 30 \text{ MHz } \sim 1 \text{ GHz) } \quad \text{VBW} \geq \text{RBW}$$

$$\equiv 1 \text{ MHz } \text{ ( } 1 \text{ GHz } \sim 10^{\text{th}} \text{ harmonic) }$$

Trace = max hold


Detector function = peak



Sweep = auto

Duty cycle : 98.89 %

The EUT configured to transmit continuously ( $D \geq 98\%$ )/ Duty Factor = 0

below 30 MHz

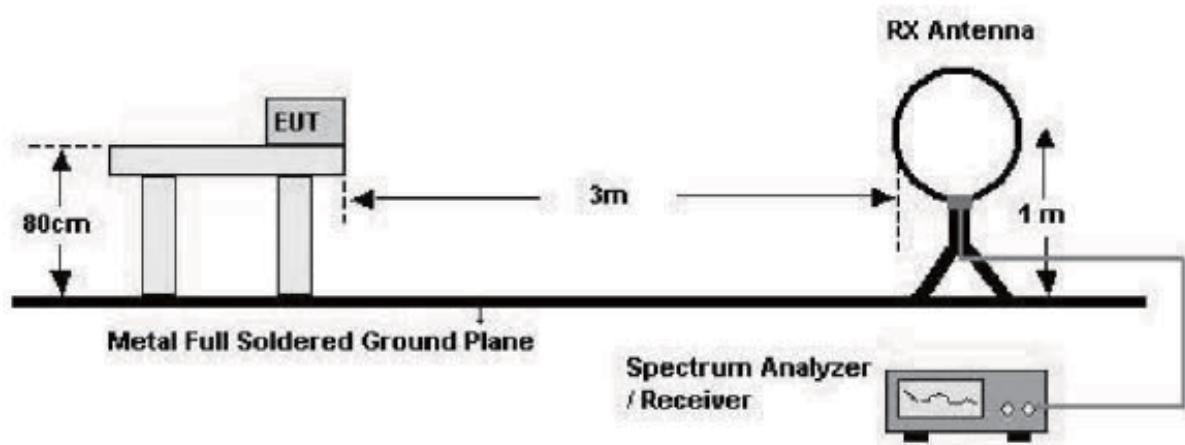

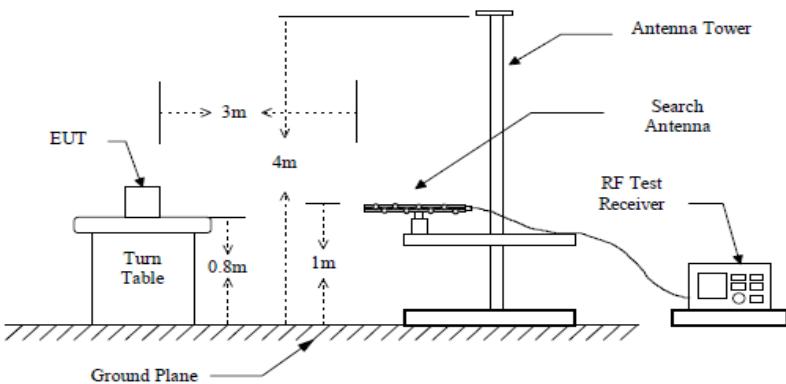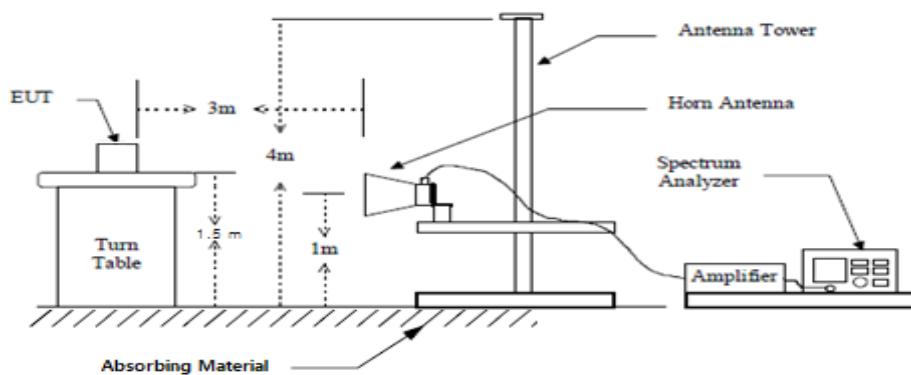
**below 1 GHz (30 MHz to 1 GHz)****above 1 GHz****Measurement Data: Complies**

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30MHz.
- The test results for the worst of the various operating modes are presented in accordance with 6.3.4 of ANSI C63.10.
- Checked with a red circle is the fundamental frequency.
- At the request of the applicant, measurements of derived model products are also attached.

**Minimum Standard: FCC Part 15.209(a)**


<b>Frequency (MHz)</b>	<b>Limit (uV/m) @ 3 m</b>
0.009 ~ 0.490	2400/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

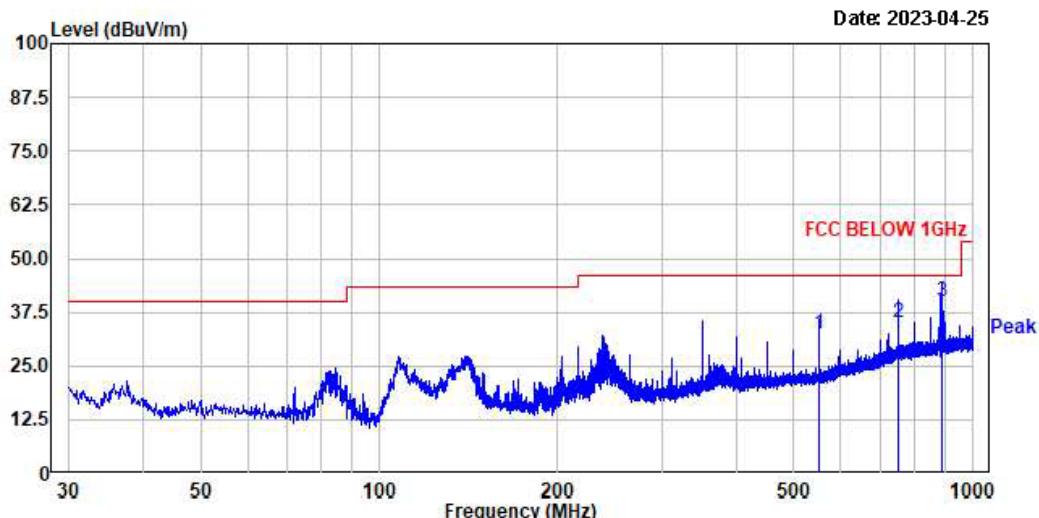Radiated Emissions(WLAN 2.4 GHz, 5GHz)


No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB $\mu$ V	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm	deg	
1.	550.04	37.60	-5.29	32.31	46.00	13.69	-----	-----	horizontal
2.	749.98	34.60	0.40	35.00	46.00	11.00	-----	-----	horizontal
3.	887.97	37.70	2.12	39.82	46.00	6.18	-----	-----	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

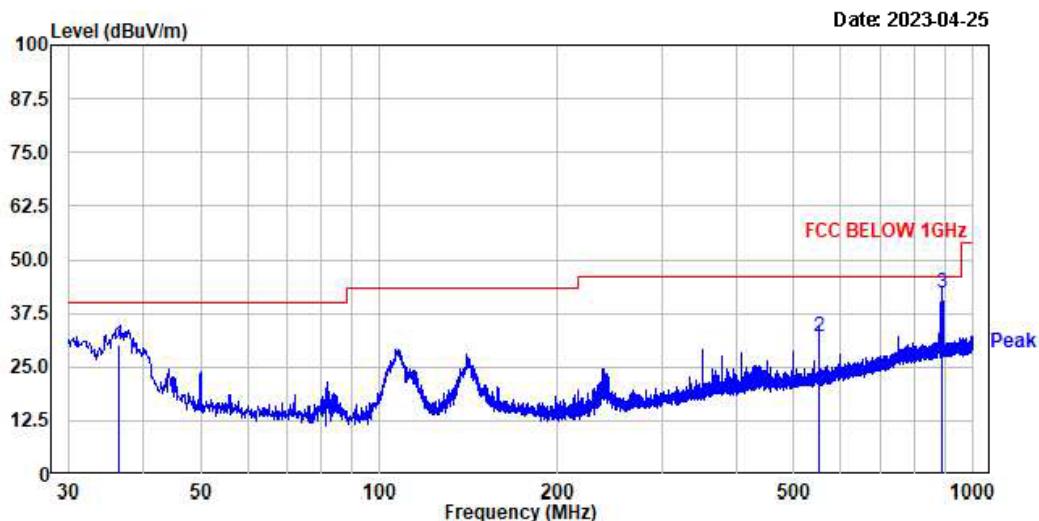


No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB $\mu$ V	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm	deg	
1.	36.43	44.10	-13.78	30.32	40.00	9.68	-----	-----	vertical
2.	550.04	37.60	-5.59	32.01	46.00	13.99	-----	-----	vertical
3.	888.09	40.80	1.46	42.26	46.00	3.74	-----	-----	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

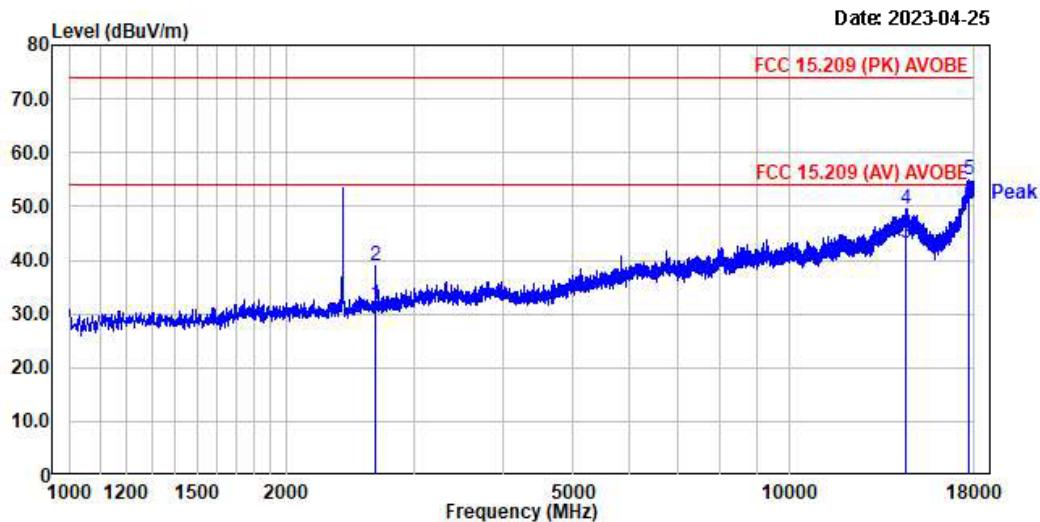


No.	Freq	RD		RD		C.F	Result	Result	Limit		Limit		Margin	Margin	Height	Angle	Polarity
		PK	AV	PK	AV				PK	AV	PK	AV					
2.	2659.63	42.00	34.90	-3.05	38.95	31.85	74.00	54.00	35.05	22.15	100	186	horizontal				
4.	14519.25	30.60	24.10	18.96	49.56	43.06	74.00	54.00	24.44	10.94	100	0	horizontal				
5.	17734.38	30.79	24.08	54.87	-----	74.00	-----	19.13	-----	100	330	horizontal					
6.	17734.38	-----	26.29	24.09	-----	50.38	-----	54.00	-----	3.62	100	330	horizontal				

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

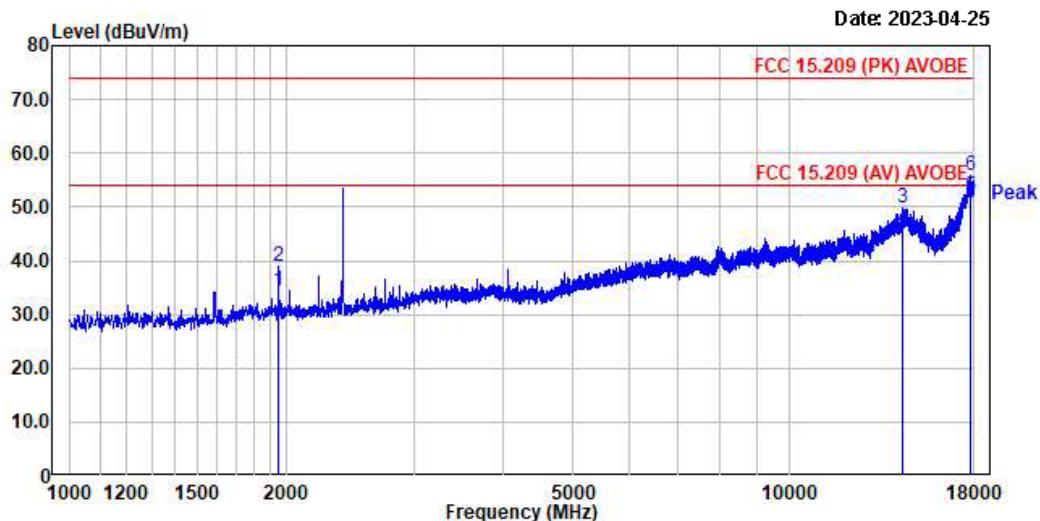


No.	Freq	RD		RD		C.F	Result	Result	Limit		Limit		Margin	Margin	Height	Angle	Polarity
		PK	AV	PK	AV				PK	AV	PK	AV					
2.	1945.63	45.04	40.60	-6.05	38.99	34.55	74.00	54.00	35.01	19.45	100	62	vertical				
3.	14359.88	31.15	-----	18.75	49.90	-----	74.00	-----	24.10	-----	100	109	vertical				
4.	14359.88	-----	27.01	18.75	-----	45.76	-----	54.00	-----	8.24	100	109	vertical				
5.	17847.00	31.35	27.38	24.50	55.85	51.80	74.00	54.00	18.15	2.20	100	0	vertical				

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

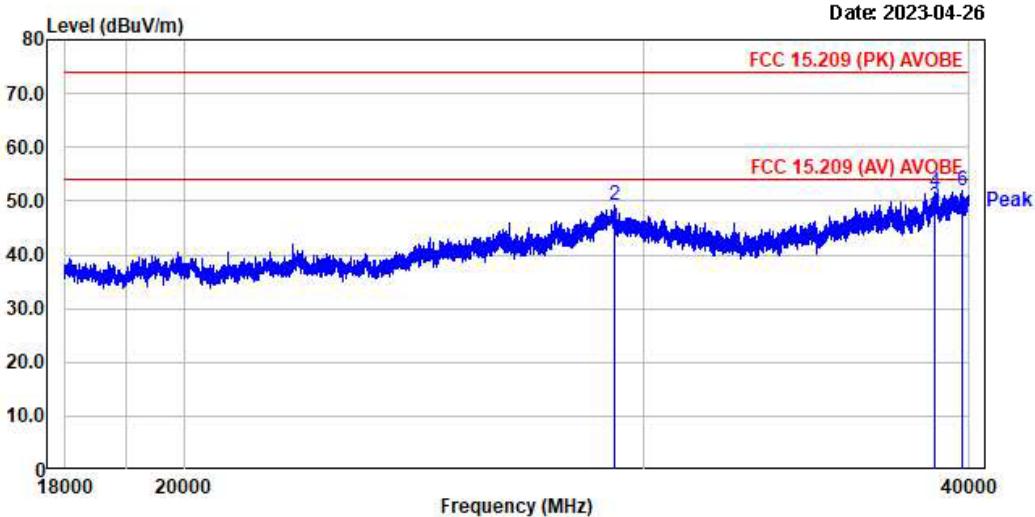

No.	Freq	RD	RD	C.F	Result		Result		Limit		Margin		Margin	Height	Angle	Polarity
					PK	AV	PK	AV	PK	AV	PK	AV				
	MHz	dB $\mu$ V	dB $\mu$ V	dB	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB	dB	cm	deg				
2.	29264.80	24.72	20.61	24.44	49.16	45.05	74.00	54.00	24.84	8.95	100	138	horizontal			
4.	38847.75	27.10	24.31	24.51	51.61	48.82	74.00	54.00	22.39	5.18	100	60	horizontal			
6.	39802.00	25.36	20.40	26.51	51.87	46.91	74.00	54.00	22.13	7.09	100	60	horizontal			

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

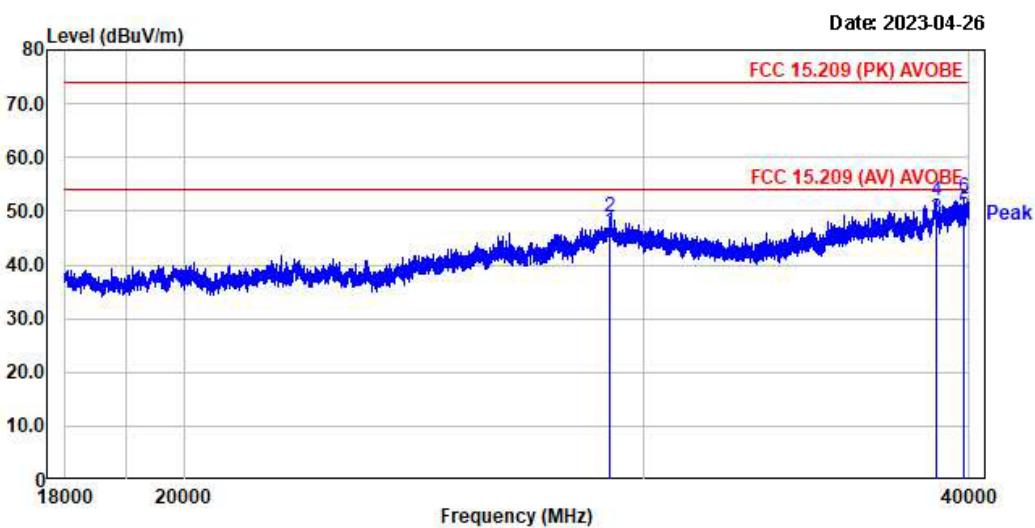

No.	Freq	RD	RD	C.F	Result		Result		Limit		Margin		Margin	Height	Angle	Polarity
					PK	AV	PK	AV	PK	AV	PK	AV				
	MHz	dB $\mu$ V	dB $\mu$ V	dB	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB	dB	cm	deg				
2.	29149.25	24.66	21.88	24.24	48.90	46.84	74.00	54.00	25.10	7.96	100	188	vertical			
4.	38858.75	27.13	23.89	24.69	51.82	48.58	74.00	54.00	22.18	5.42	100	78	vertical			
6.	39832.25	26.05	23.28	26.47	52.52	49.67	74.00	54.00	21.48	4.33	100	267	vertical			

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

**APPENDIX**  
**TEST EQUIPMENT USED FOR TESTS**

	<b>Use</b>	<b>Description</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Manufacturer</b>	<b>Interval</b>	<b>Next Cal. Date</b>
1	■	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2023-09-06
2	■	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2024-03-15
3		SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2024-03-15
4		Attenuator (3 dB)	8491A	37822	HP	1 year	2023-08-30
5		Attenuator (10 dB)	8491A	63196	HP	1 year	2023-08-30
6	■	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2023-08-30
7		RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2023-08-30
8		RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2024-03-15
9	■	Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2024-09-06
10		DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2024-03-18
11		DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2024-03-18
12	■	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2025-03-20
13		Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2024-03-15
14		Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15	■	DC Power Supply	6674A	3637A01657	Agilent	-	-
17	■	Power Meter	EPM-441A	GB32481702	HP	1 year	2024-03-15
18	■	Power Sensor	8481A	3318A94972	HP	1 year	2023-08-30
19		Audio Analyzer	8903B	3729A18901	HP	1 year	2023-08-30
20		Moduleation Analyzer	8901B	3749A05878	HP	1 year	2023-08-30
21		TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2023-08-30
22		Stop Watch	HS-3	812Q08R	CASIO	2 year	2024-03-18
23		LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2023-08-30
24		Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2024-03-15
25		UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2024-03-15
26		Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2024-03-15
27		Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2024-03-15
28		OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2024-03-15
29		Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2024-03-15
30		Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2024-03-15
31	■	Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	2 year	2025-02-26