

TEST REPORT

Applicant Name : SHENZHEN ACTTO ELECTRONICS TECHNOLOGY CO.,LTD
Address : 1206I,Bld4,HuanggangCenter,Century of Excellence Center, Fushan Community, Futian, Shenzhen, China
Report Number : RA230504-23419E-RF-00A
FCC ID: 2BA6I-B605

Test Standard (s)


FCC PART 15.247

Sample Description


Product Type: Actto Curved Bluetooth Keyboard
Model No.: B605, B603
Trade Mark: ACTTO
Date Received: 2023-05-04
Date of Test: 2023-05-06 to 2023-06-13
Report Date: 2023-06-15

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Dave Liang
EMC Engineer

Approved By:

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES	7
EQUIPMENT MODIFICATIONS	7
DUTY CYCLE	7
SUPPORT EQUIPMENT LIST AND DETAILS	10
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS.....	12
TEST EQUIPMENT LIST	13
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE.....	14
APPLICABLE STANDARD	14
TEST RESULT:	14
FCC §15.203-ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a)-AC LINE CONDUCTED EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	17
CALCULATION	17
TEST DATA	17
FCC §15.205, §15.209 & §15.247(d)-RADIATED EMISSIONS	22
APPLICABLE STANDARD	22
EUT SETUP	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	23
TEST PROCEDURE	23
FACTOR & MARGIN CALCULATION	23
TEST DATA	23
FCC §15.247(a) (2)-6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH.....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31
FCC §15.247(b) (3)-MAXIMUM CONDUCTED OUTPUT POWER.....	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37

FCC §15.247(d)-100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
FCC §15.247(e)-POWER SPECTRAL DENSITY	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST DATA	43

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230504-23419E-RF-00A	Original Report	2023-06-15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Actto Curved Bluetooth Keyboard
Tested Model	B605
Multiple Model	B603
Model Difference	Please refer to DOS Letter
Frequency Range	BLE 1M/2M: 2402-2480MHz
Maximum Conducted Peak Output Power	6.71 dBm
Modulation Technique	GFSK
Antenna Specification*	Internal Antenna: -0.58dBi(provided by the applicant)
Voltage Range	DC 3.7V from battery or DC 5V from USB port
Sample number	25D6-1 for B603 25D6-3 for B605 (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	5%	
RF output power, conducted	0.71dB	
Unwanted Emission, conducted	1.6dB	
AC Power Lines Conducted Emissions	2.74dB	
Emissions, Radiated	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
Temperature	1°C	
Humidity	6%	
Supply voltages	0.4%	

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
...
...
...
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

EUT Exercise Software

Software “BK32xx RF Test_V2.1.0”* was used during testing and the power level was 7*.

Special Accessories


N/A


Equipment Modifications

No modification was made to the EUT tested.

Duty Cycle

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T Minimum VBW[kHz]
BLE_1M	Ant1	2402	0.41	0.62	66.13	2.44
		2440	0.41	0.62	66.13	2.44
		2480	0.41	0.62	66.13	2.44
BLE_2M	Ant1	2402	0.23	0.63	36.51	4.35
		2440	0.23	0.63	36.51	4.35
		2480	0.23	0.63	36.51	4.35

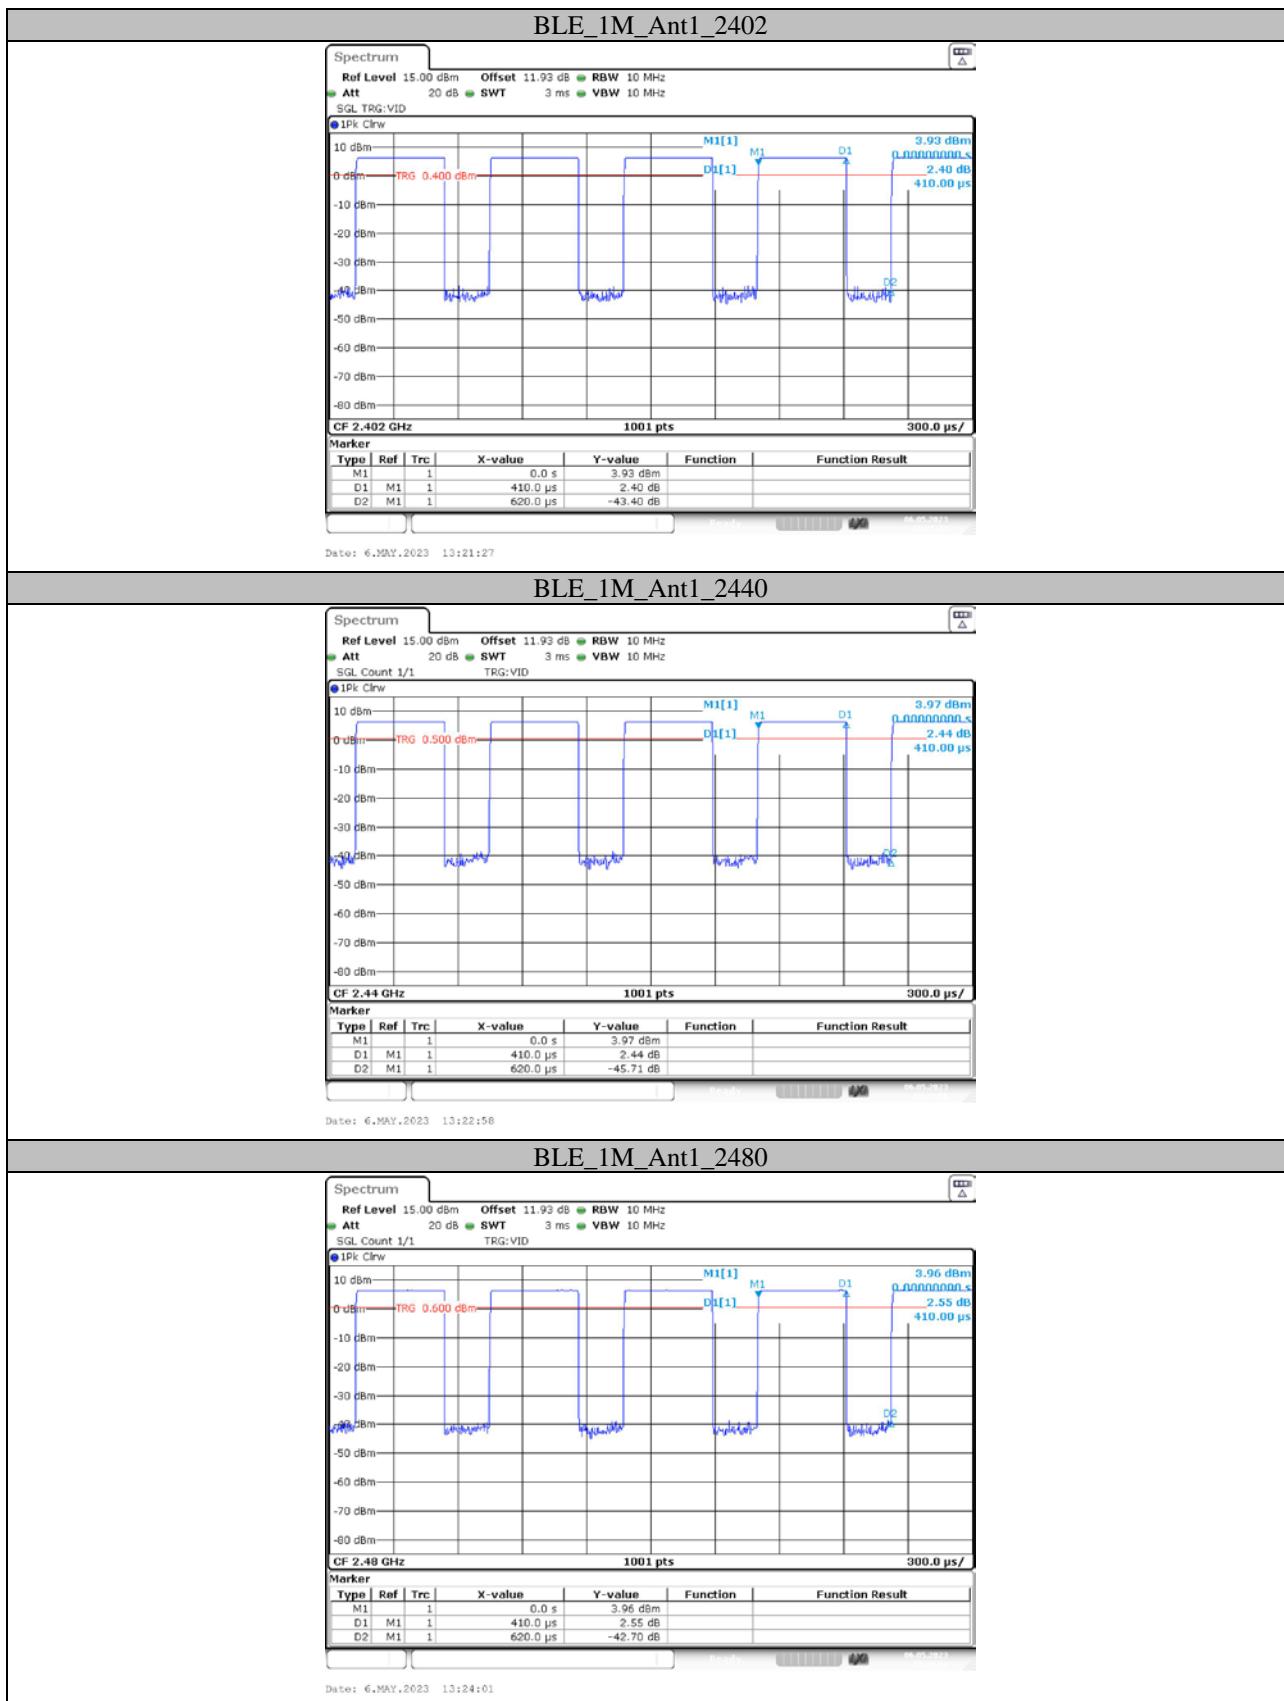

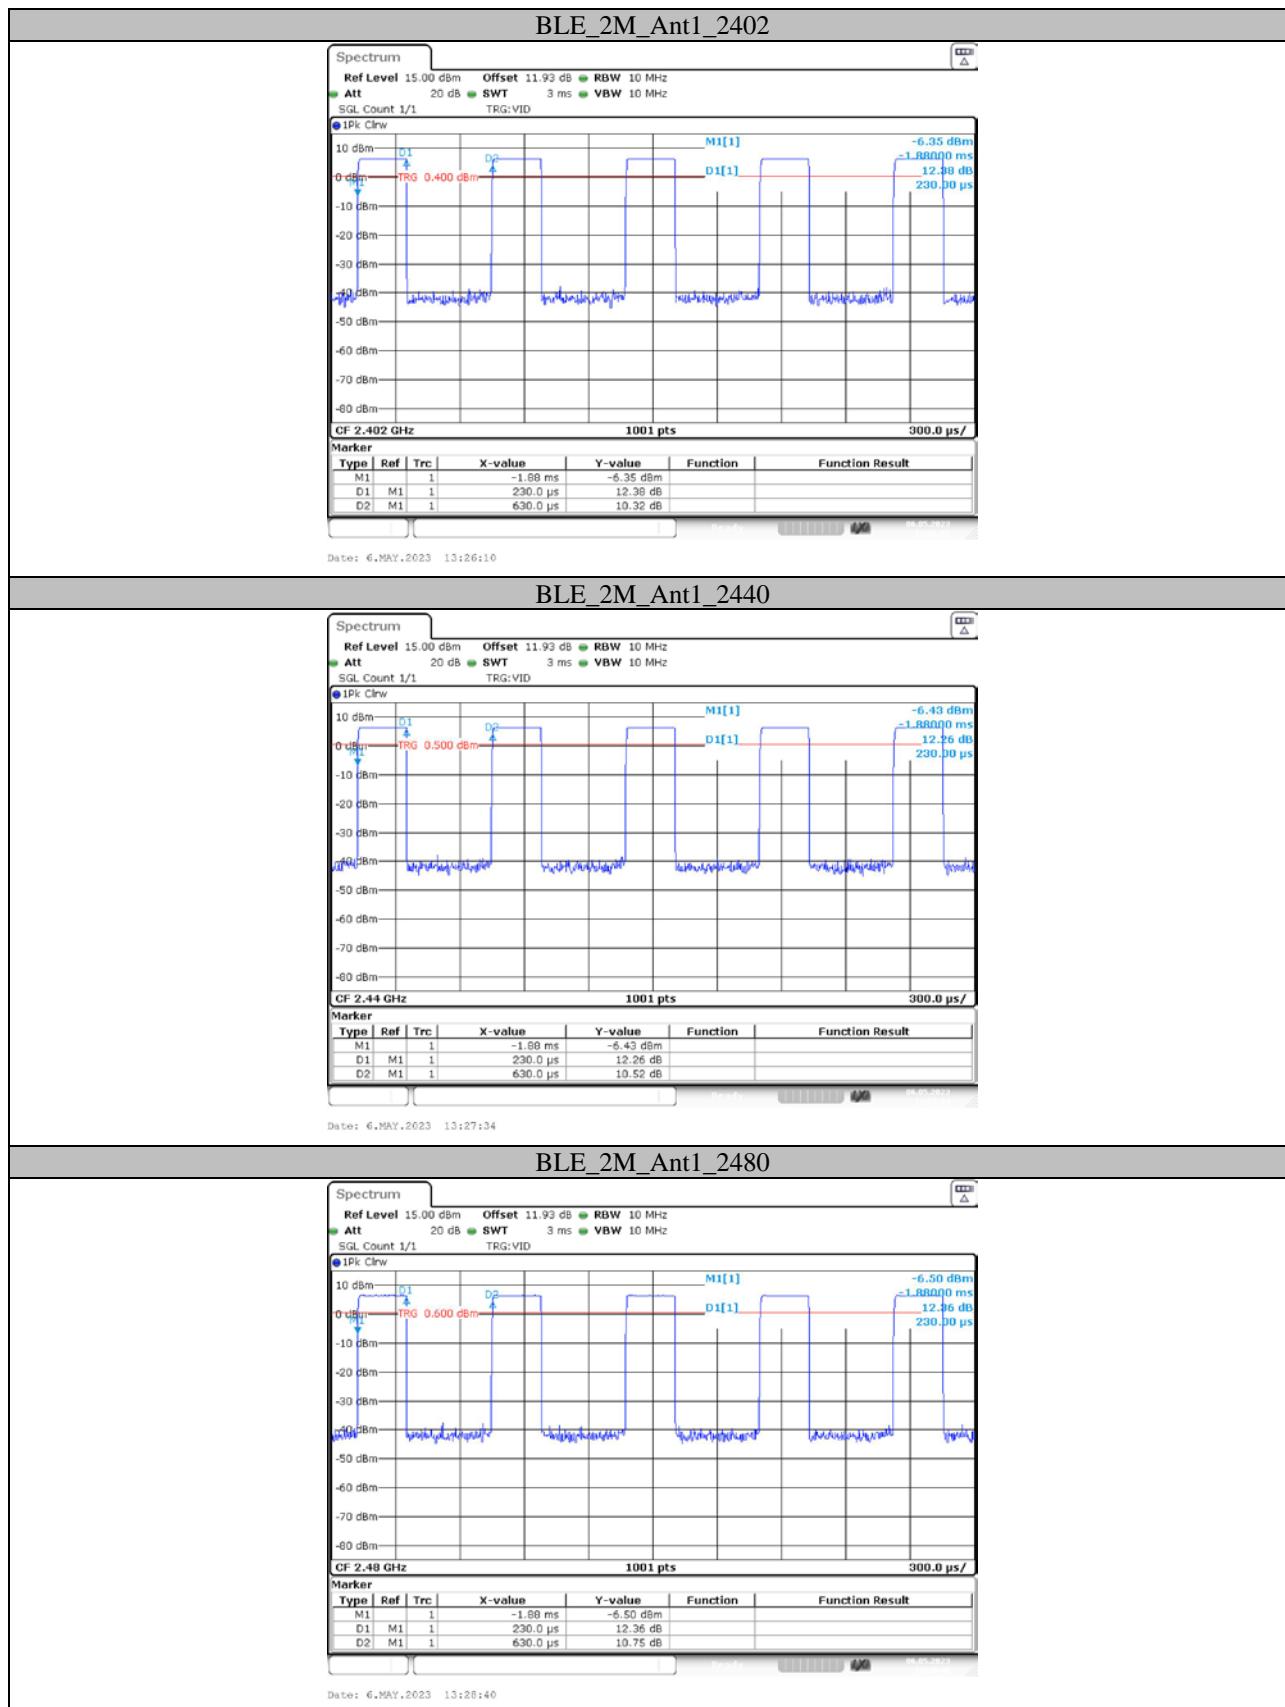

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Xiaomi	Adapter	MDY-11-EB	Unknown

External I/O Cable


Cable Description	Length (m)	From/Port	To
Un-shielding Detachable USB Cable	1.55	Adapter	EUT

Block Diagram of Test Setup

For Conducted Emission:

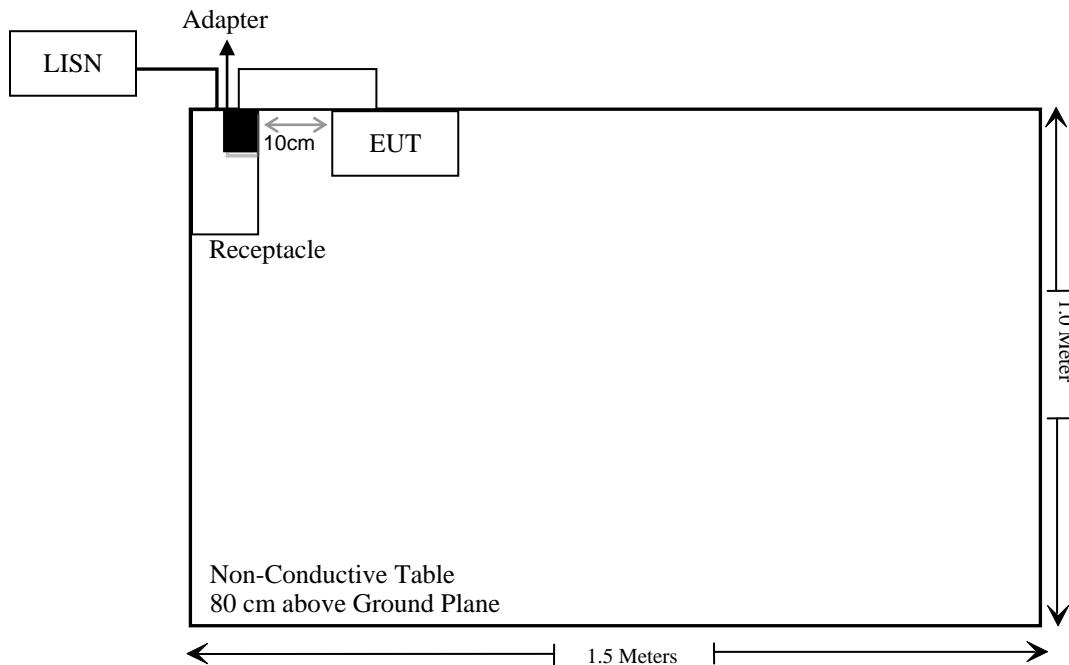

For Radiated Emission:

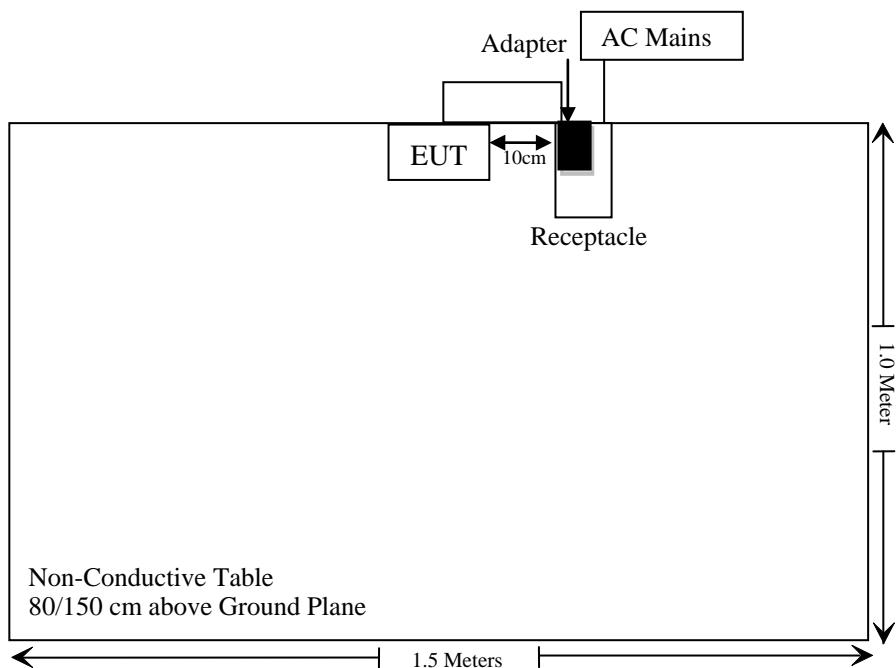

Note: The support table edge was flush with the center of turntable.

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1) §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 191218 (V9)					
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2022/11/30	2025/11/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Radiated Emission Test Software: e3191218 (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2022/11/25	2023/11/24
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2022/11/25	2023/11/24
WEINSCHEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.33	RF-03	Each time	

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE**Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Test Result:**For worst case:**

Mode	Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
		(dBm)	(mW)				
BLE	2402-2480	7.0	5.01	5	1.6	3.0	Yes

Note 1: The tune-up power was declared by the applicant.

Result: No Standalone SAR test is required

FCC §15.203-ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is -0.58dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a)-AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

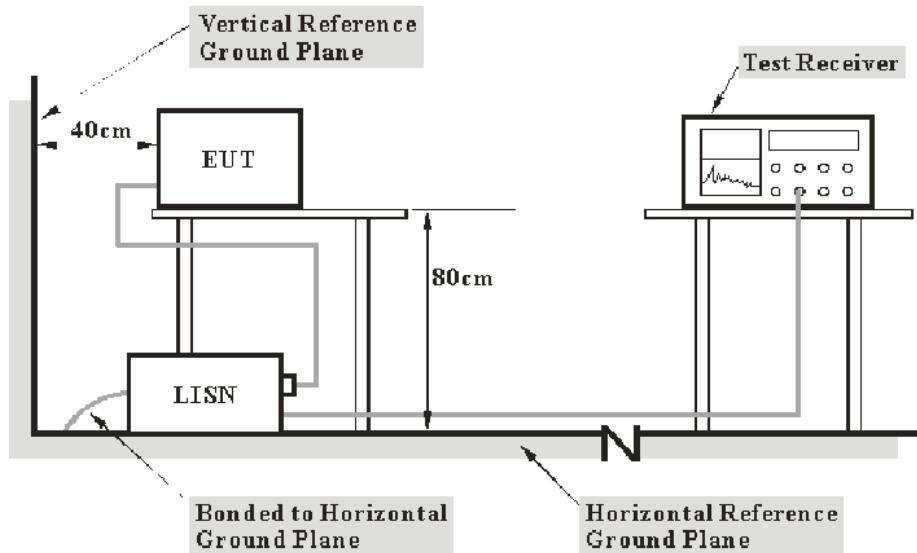

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

Test Data


Environmental Conditions

Temperature:	23 °C
Relative Humidity:	49 %
ATM Pressure:	101.0 kPa

The testing was performed by Jerry Wu on 2023-06-13.


EUT operation mode: Transmitting (worst case BLE 1M, High channel)

Please refer to the below plots:

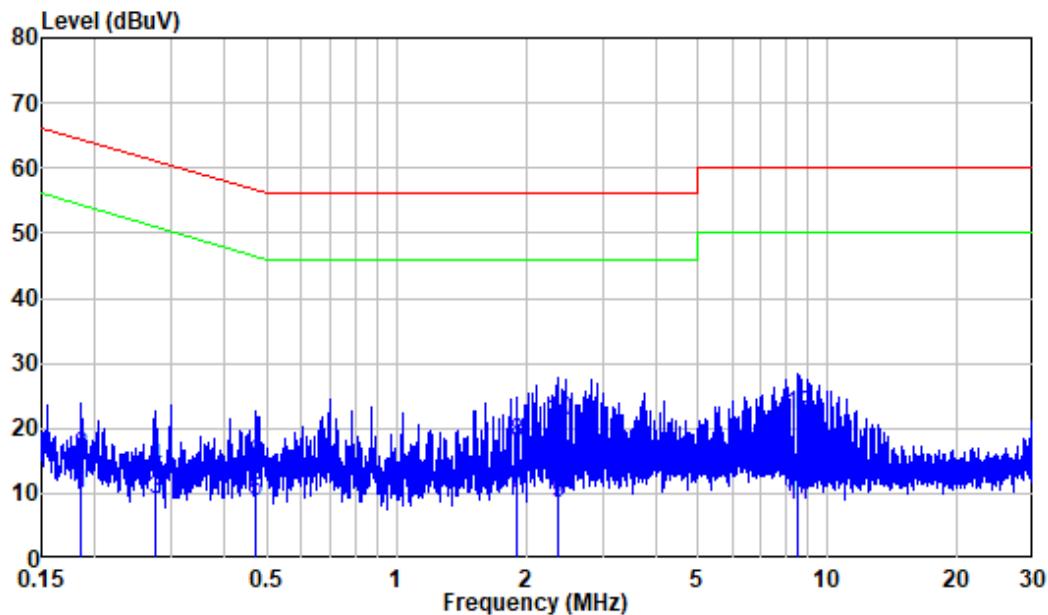For Model B605:**AC 120V/60 Hz, Line**


Site : Shielding Room
Condition: Line
Job No. : RA230504-23419E-RF
Mode : Charging+BT Transmitting
Power : AC 120V 60Hz

Freq	Factor	Read		Limit		Over Line Limit	Remark
		MHz	dB	dBuV	dBuV		
1	0.185	10.31	-0.38	9.93	54.26	-44.33	Average
2	0.185	10.31	5.33	15.64	64.26	-48.62	QP
3	0.276	10.38	-1.24	9.14	50.95	-41.81	Average
4	0.276	10.38	3.50	13.88	60.95	-47.07	QP
5	0.472	10.55	-1.76	8.79	46.48	-37.69	Average
6	0.472	10.55	3.94	14.49	56.48	-41.99	QP
7	1.906	10.40	-0.56	9.84	46.00	-36.16	Average
8	1.906	10.40	7.54	17.94	56.00	-38.06	QP
9	2.369	10.43	-2.08	8.35	46.00	-37.65	Average
10	2.369	10.43	10.63	21.06	56.00	-34.94	QP
11	8.495	10.62	-2.36	8.26	50.00	-41.74	Average
12	8.495	10.62	11.43	22.05	60.00	-37.95	QP

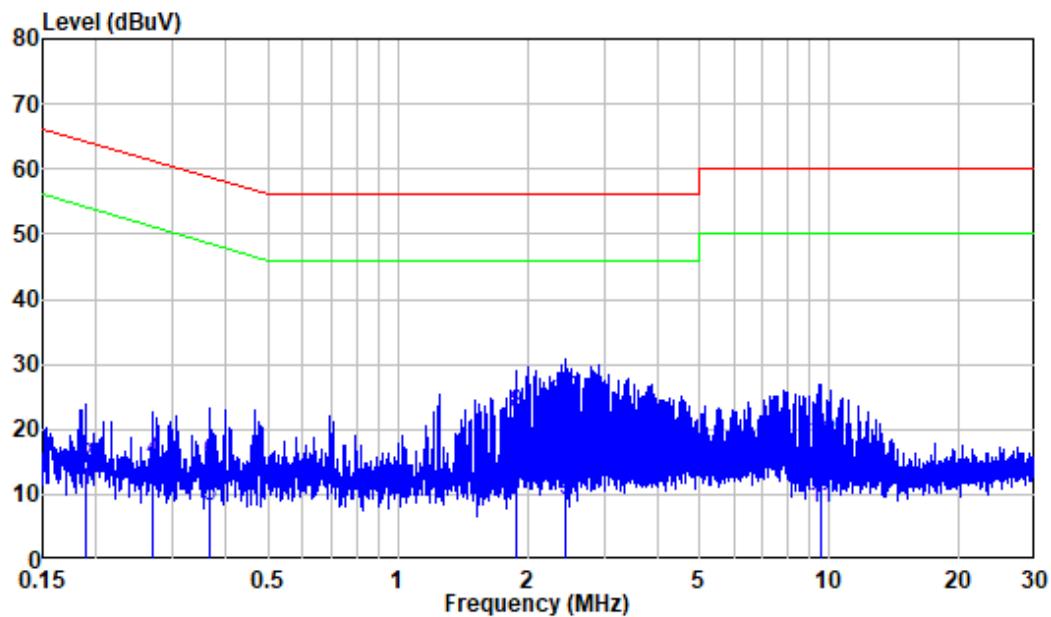AC 120V/60 Hz, Neutral


Site : Shielding Room
Condition: Neutral
Job No. : RA230504-23419E-RF
Mode : Charging+BT Transmitting
Power : AC 120V 60Hz

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.188	10.28	0.28	10.56	54.11 -43.55 Average
2	0.188	10.28	3.85	14.13	64.11 -49.98 QP
3	0.270	10.34	0.42	10.76	51.11 -40.35 Average
4	0.270	10.34	4.62	14.96	61.11 -46.15 QP
5	0.366	10.40	-2.25	8.15	48.60 -40.45 Average
6	0.366	10.40	4.44	14.84	58.60 -43.76 QP
7	1.883	10.48	-1.19	9.29	46.00 -36.71 Average
8	1.883	10.48	12.00	22.48	56.00 -33.52 QP
9	2.456	10.51	-1.59	8.92	46.00 -37.08 Average
10	2.456	10.51	13.98	24.49	56.00 -31.51 QP
11	9.533	10.69	-2.88	7.81	50.00 -42.19 Average
12	9.533	10.69	7.20	17.89	60.00 -42.11 QP

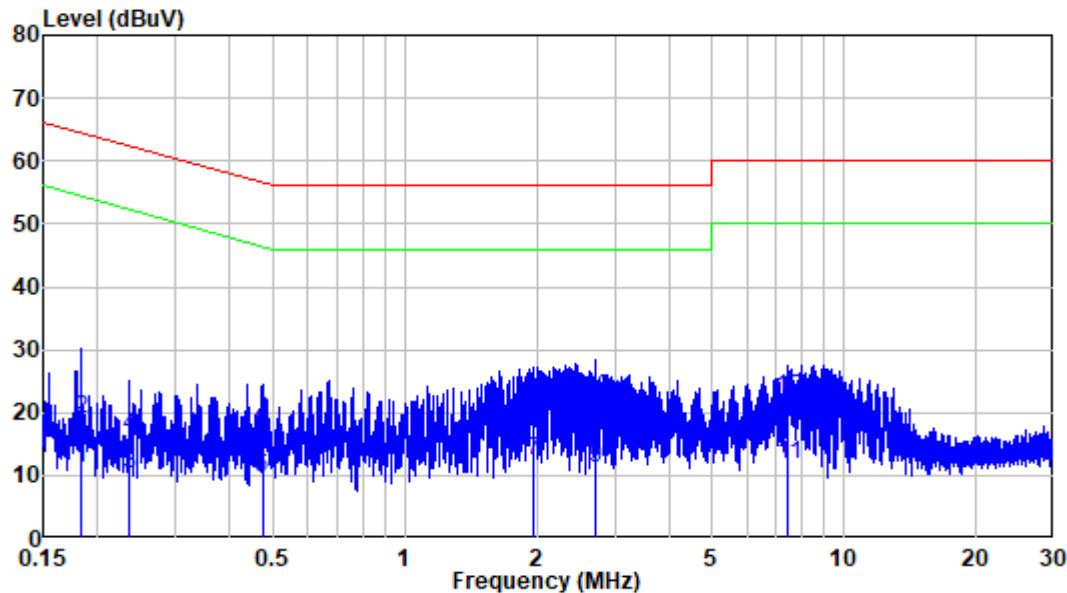For Model B603:**AC 120V/60 Hz, Line**

Site : Shielding Room
Condition: Line
Job No. : RA230504-23419E-RF
Mode : Charging+BT Transmitting
Power : AC 120V 60Hz

Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB	dBuV	dBuV		
1	0.184	10.31	0.72	11.03	54.32	-43.29	Average
2	0.184	10.31	8.65	18.96	64.32	-45.36	QP
3	0.236	10.34	-0.14	10.20	52.24	-42.04	Average
4	0.236	10.34	5.86	16.20	62.24	-46.04	QP
5	0.473	10.55	-0.95	9.60	46.46	-36.86	Average
6	0.473	10.55	6.31	16.86	56.46	-39.60	QP
7	1.954	10.39	1.94	12.33	46.00	-33.67	Average
8	1.954	10.39	11.25	21.64	56.00	-34.36	QP
9	2.714	10.46	0.80	11.26	46.00	-34.74	Average
10	2.714	10.46	11.90	22.36	56.00	-33.64	QP
11	7.456	10.61	1.03	11.64	50.00	-38.36	Average
12	7.456	10.61	11.81	22.42	60.00	-37.58	QP


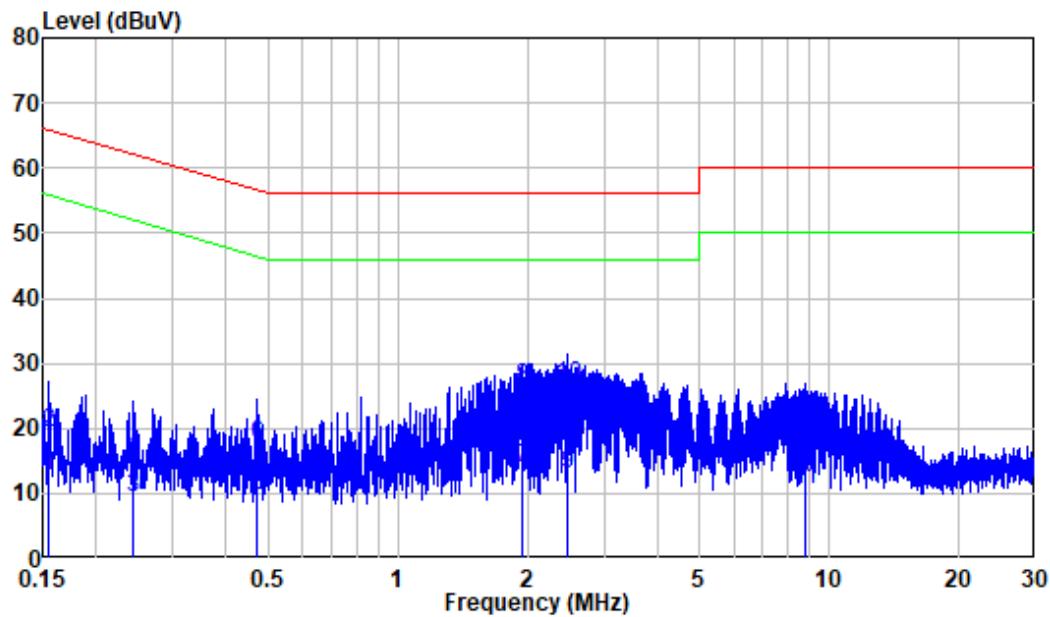
AC 120V/60 Hz, Neutral

Site : Shielding Room
Condition: Neutral
Job No. : RA230504-23419E-RF
Mode : Charging+BT Transmitting
Power : AC 120V 60Hz

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.155	10.28	2.53	12.81	55.71 -42.90 Average
2	0.155	10.28	9.09	19.37	65.71 -46.34 QP
3	0.244	10.32	-0.86	9.46	51.96 -42.50 Average
4	0.244	10.32	5.52	15.84	61.96 -46.12 QP
5	0.471	10.45	-0.68	9.77	46.49 -36.72 Average
6	0.471	10.45	7.00	17.45	56.49 -39.04 QP
7	1.949	10.49	3.48	13.97	46.00 -32.03 Average
8	1.949	10.49	15.68	26.17	56.00 -29.83 QP
9	2.467	10.51	2.49	13.00	46.00 -33.00 Average
10	2.467	10.51	15.97	26.48	56.00 -29.52 QP
11	8.758	10.64	-0.07	10.57	50.00 -39.43 Average
12	8.758	10.64	11.04	21.68	60.00 -38.32 QP

FCC §15.205, §15.209 & §15.247(d)-RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

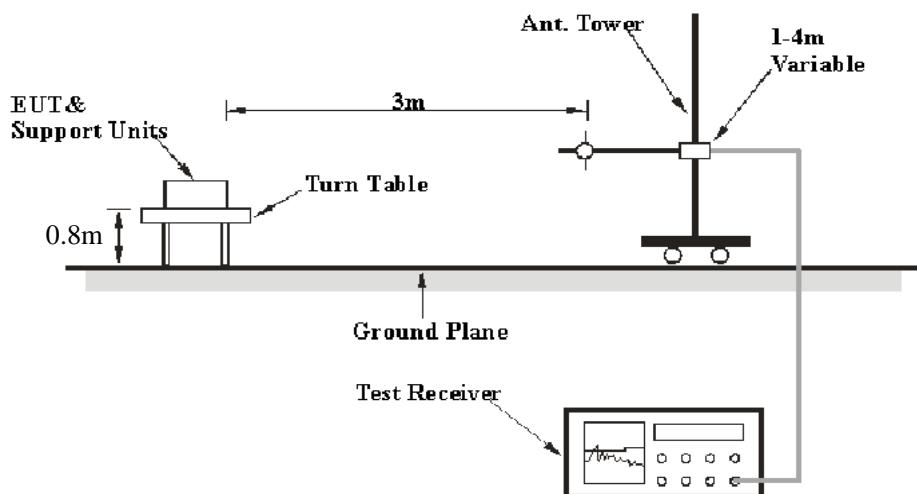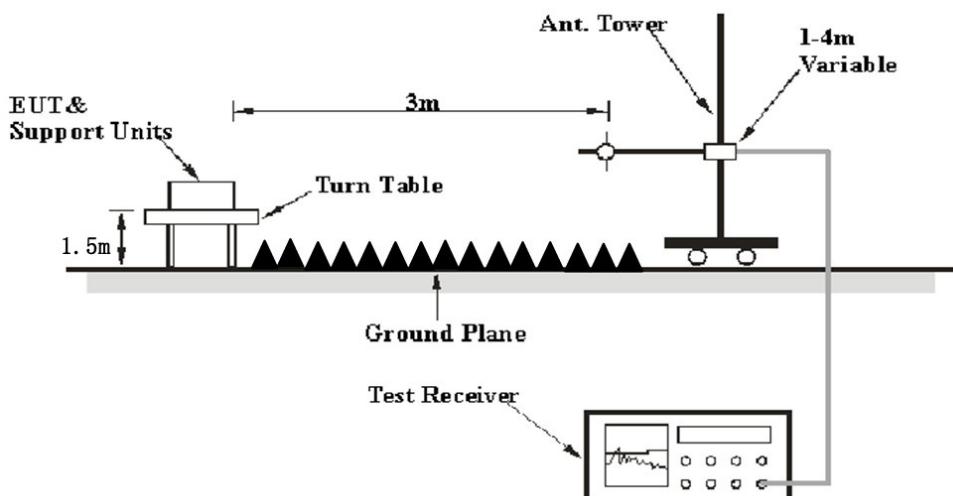EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	>1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP/Average measurement

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	22-24°C
Relative Humidity:	54-56 %
ATM Pressure:	101.0 kPa


The Below 1G testing was performed by Jason Liu on 2023-06-13.

The Above 1G testing was performed by Jeef Huang on 2023-06-07.

EUT operation mode: Charging + BLE Transmitting

(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Please refer to the below plots:

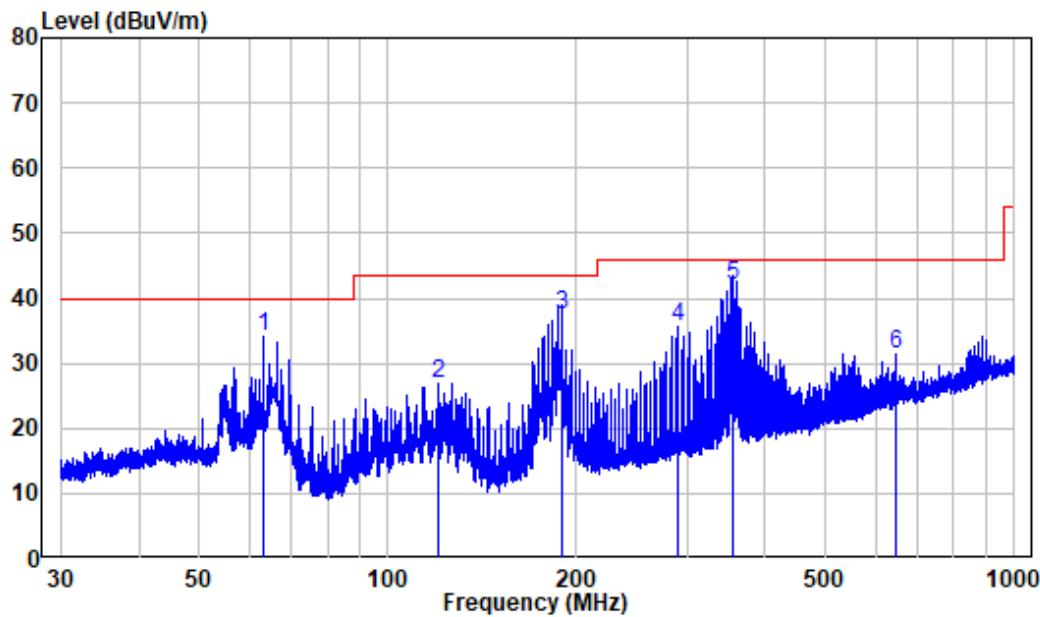Below 1GHz: (worst case for BLE 1M, High channel)**For Model B605:****Horizontal**

Site : chamber


Condition: 3m HORIZONTAL

Job No. : RA230504-23419E-RF

Test Mode: Charging+BT Transmitting

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	63.230	-11.87	45.84	33.97	40.00	-6.03	Peak
2	120.119	-13.55	40.34	26.79	43.50	-16.71	Peak
3	189.739	-11.62	49.20	37.58	43.50	-5.92	QP
4	290.781	-9.30	44.78	35.48	46.00	-10.52	Peak
5	354.183	-7.46	49.50	42.04	46.00	-3.96	QP
6	645.120	-1.88	33.33	31.45	46.00	-14.55	Peak

Vertical

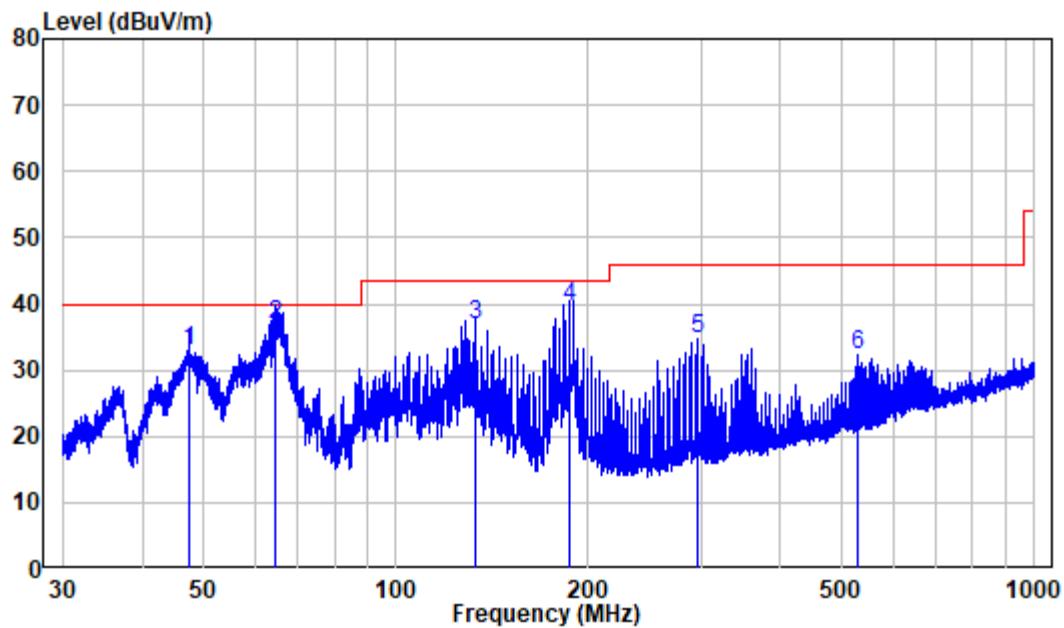


Site : chamber

Condition: 3m VERTICAL

Job No. : RA230504-23419E-RF

Test Mode: Charging+BT Transmitting

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	47.450	-10.00	42.86	32.86	40.00 -7.14 QP
2	64.830	-12.45	49.26	36.81	40.00 -3.19 QP
3	132.860	-14.98	51.95	36.97	43.50 -6.53 QP
4	186.523	-12.00	51.40	39.40	43.50 -4.10 QP
5	297.224	-9.25	44.12	34.87	46.00 -11.13 Peak
6	528.014	-4.48	36.78	32.30	46.00 -13.70 Peak

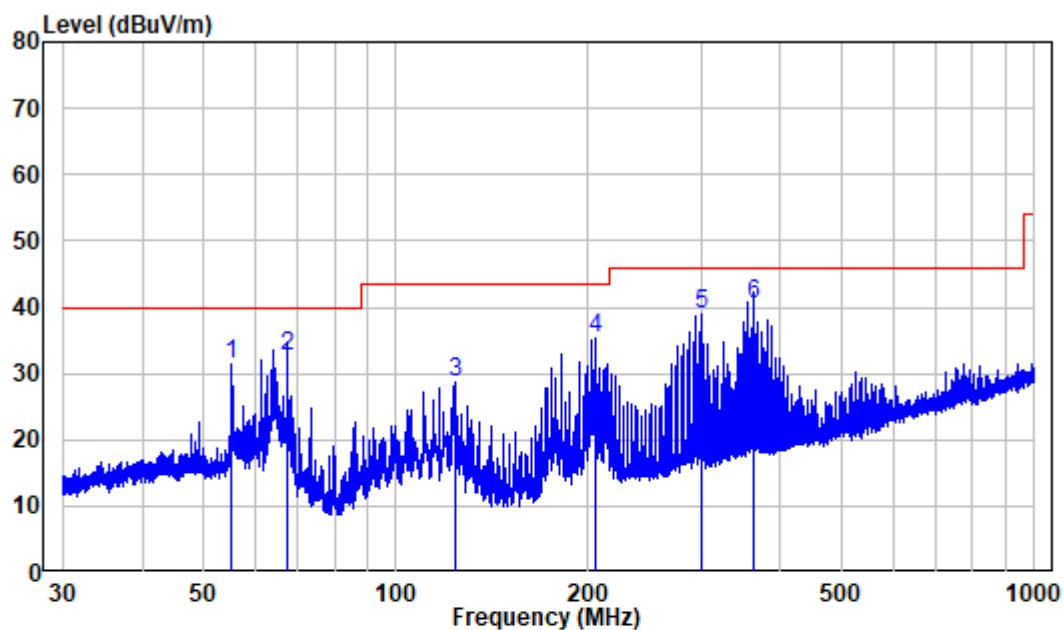For Model B603:**Horizontal**

Site : chamber


Condition: 3m HORIZONTAL

Job No. : RA230504-23419E-RF

Test Mode: Charging+BT Transmitting

Freq	Factor	Read	Limit	Over	Remark		
		Level	Level	Line			
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	55.269	-10.26	41.61	31.35	40.00	-8.65	Peak
2	67.527	-13.62	46.36	32.74	40.00	-7.26	QP
3	123.536	-14.14	42.70	28.56	43.50	-14.94	Peak
4	205.765	-11.84	47.11	35.27	43.50	-8.23	Peak
5	301.026	-9.19	48.12	38.93	46.00	-7.07	Peak
6	362.349	-7.61	48.09	40.48	46.00	-5.52	QP

Vertical

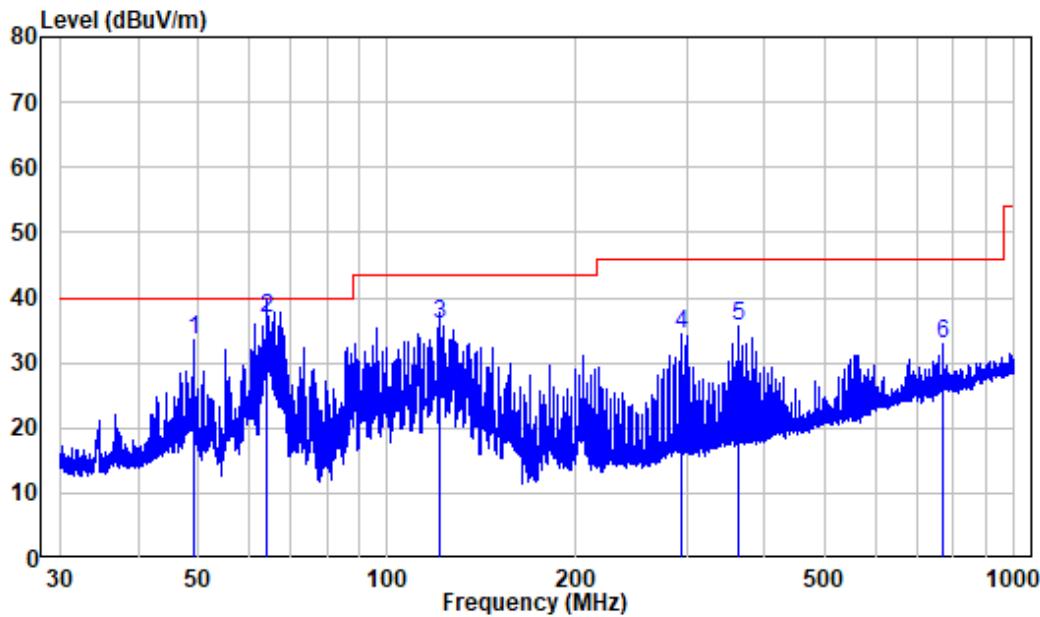

Site : chamber

Condition: 3m VERTICAL

Job No. : RA230504-23419E-RF

Test Mode: Charging+BT Transmitting

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	49.187	-9.95	43.55	33.60	40.00 -6.40 Peak
2	64.292	-12.25	49.09	36.84	40.00 -3.16 QP
3	121.070	-13.74	49.57	35.83	43.50 -7.67 QP
4	294.759	-9.27	43.59	34.32	46.00 -11.68 Peak
5	362.349	-7.61	43.33	35.72	46.00 -10.28 Peak
6	770.773	-0.15	32.97	32.82	46.00 -13.18 Peak

Note: For below 1GHz, when the test result of peak was 6dB below to the limit of QP, just peak value was recorded.

Above 1GHz: (worst case model B605)

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)	
	Reading (dBuV)	PK/AV		Height	Polar					
				(m)	(H/V)					
BLE 1M, Low Channel										
2310	47.09	PK	281	1.1	H	-10.36	36.73	74	-37.27	
2310	46.64	PK	110	1.2	V	-10.36	36.28	74	-37.72	
2390	55.93	PK	272	1.6	H	-10.71	45.22	74	-28.78	
2390	51.52	PK	21	1.4	V	-10.71	40.81	74	-33.19	
4804	58.48	PK	153	2.0	H	-6.11	52.37	74	-21.63	
4804	51.21	PK	196	1.9	V	-6.11	45.1	74	-28.9	
BLE 1M, Middle Channel										
4880	53.79	PK	76	1.9	H	-5.9	47.89	74	-26.11	
4880	50.56	PK	58	2.0	V	-5.9	44.66	74	-29.34	
BLE 1M, High Channel										
2483.5	63.45	PK	231	1.4	H	-10.55	52.9	74	-21.1	
2483.5	51.44	PK	330	1.3	V	-10.55	40.89	74	-33.11	
2500	48.06	PK	304	1.7	H	-10.42	37.64	74	-36.36	
2500	47.13	PK	158	1.6	V	-10.42	36.71	74	-37.29	
4960	50.14	PK	310	2.1	H	-5.47	44.67	74	-29.33	
4960	48.37	PK	253	1.8	V	-5.47	42.9	74	-31.1	
BLE 2M, Low Channel										
2310	47.69	PK	281	1.1	H	-10.36	37.33	74	-36.67	
2310	46.60	PK	110	1.2	V	-10.36	36.24	74	-37.76	
2390	50.87	PK	272	1.6	H	-10.71	40.16	74	-33.84	
2390	51.00	PK	21	1.4	V	-10.71	40.29	74	-33.71	
4804	57.41	PK	153	2.0	H	-6.11	51.3	74	-22.7	
4804	52.25	PK	196	1.9	V	-6.11	46.14	74	-27.86	
BLE 2M, Middle Channel										
4880	53.23	PK	76	1.9	H	-5.9	47.33	74	-26.67	
4880	51.46	PK	58	2.0	V	-5.9	45.56	74	-28.44	
BLE 2M, High Channel										
2483.5	63.14	PK	357	1.9	H	-10.55	52.59	74	-21.41	
2483.5	54.22	PK	330	1.3	V	-10.55	43.67	74	-30.33	
2500	50.14	PK	304	1.7	H	-10.42	39.72	74	-34.28	
2500	49.9	PK	158	1.6	V	-10.42	39.48	74	-34.52	
4960	48.87	PK	310	2.1	H	-5.47	43.4	74	-30.6	
4960	48.08	PK	253	1.8	V	-5.47	42.61	74	-31.39	

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading

Margin = Corrected Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.

For above 1GHz, when the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, just peak value was recorded.


1 GHz - 18 GHz: (Pre-Scan plots)

BLE 1M, Low Channel (worst case)

Horizontal

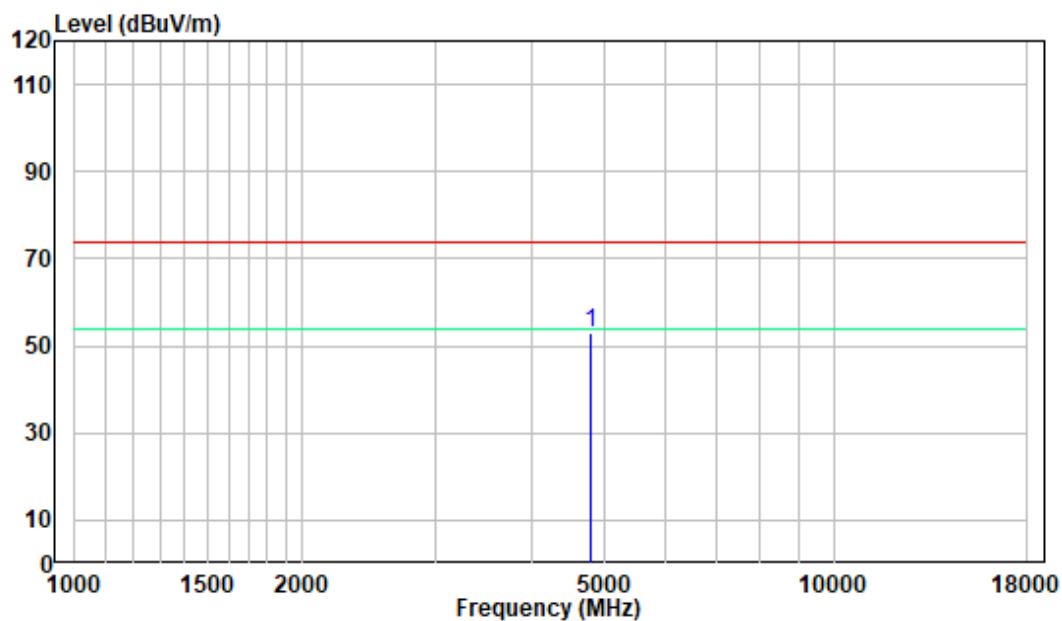


Vertical

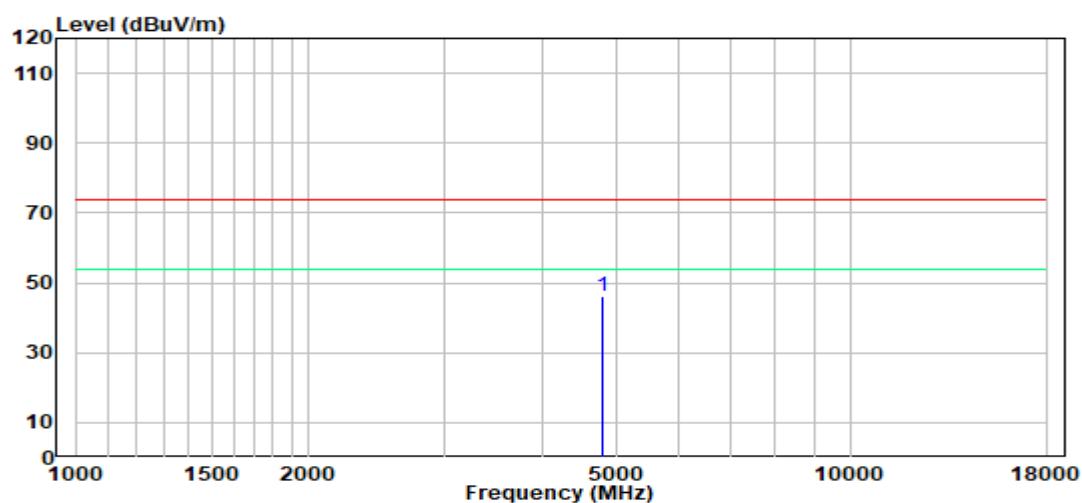


18-25GHz: (Pre-Scan plots)

BLE 1M, Low Channel (worst case)

Horizontal

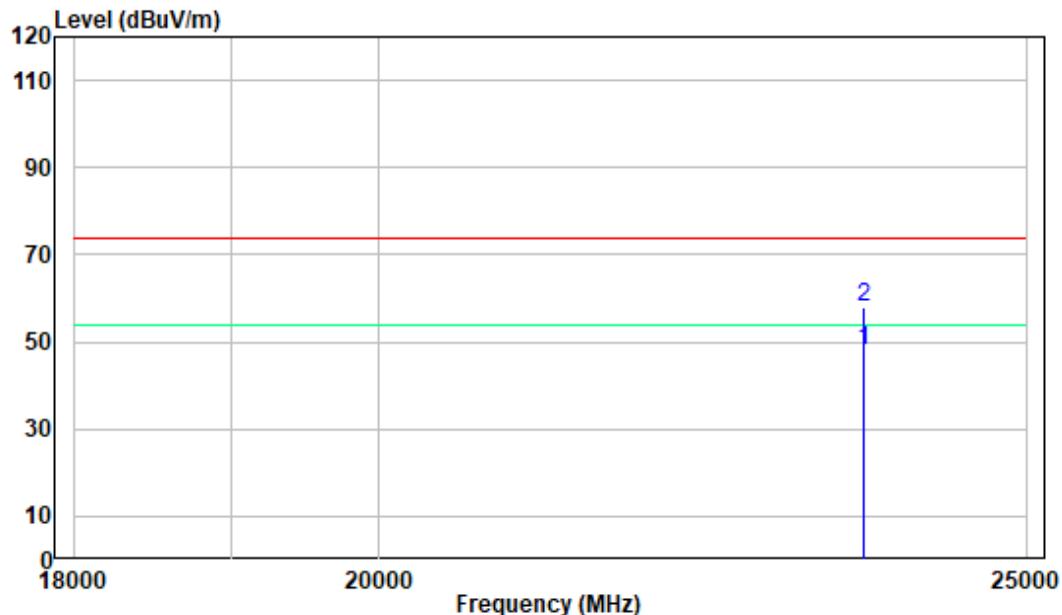

Vertical

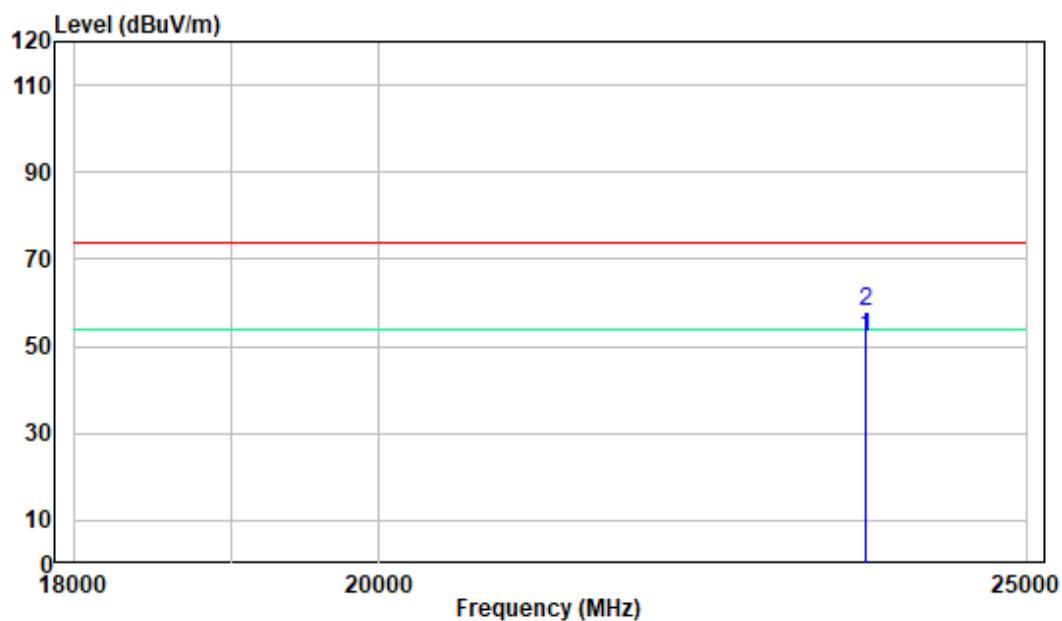

FCC §15.247(a) (2)-6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013, section 11.8 and section 6.9

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

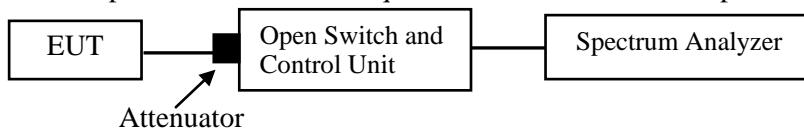

Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	48%
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-05-06.


EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the below tables and plots.

Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.68	0.5	PASS
		2440	0.68	0.5	PASS
		2480	0.72	0.5	PASS
BLE_2M	Ant1	2402	1.14	0.5	PASS
		2440	1.14	0.5	PASS
		2480	1.14	0.5	PASS


Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
BLE_1M	Ant1	2402	1.023	2401.5125	2402.5355	PASS
		2440	1.023	2439.5125	2440.5355	PASS
		2480	1.031	2479.5085	2480.5395	PASS
BLE_2M	Ant1	2402	2.014	2401.0210	2403.0350	PASS
		2440	2.014	2439.0210	2441.0350	PASS
		2480	2.018	2479.0170	2481.0350	PASS


6 dB EMISSION BANDWIDTH

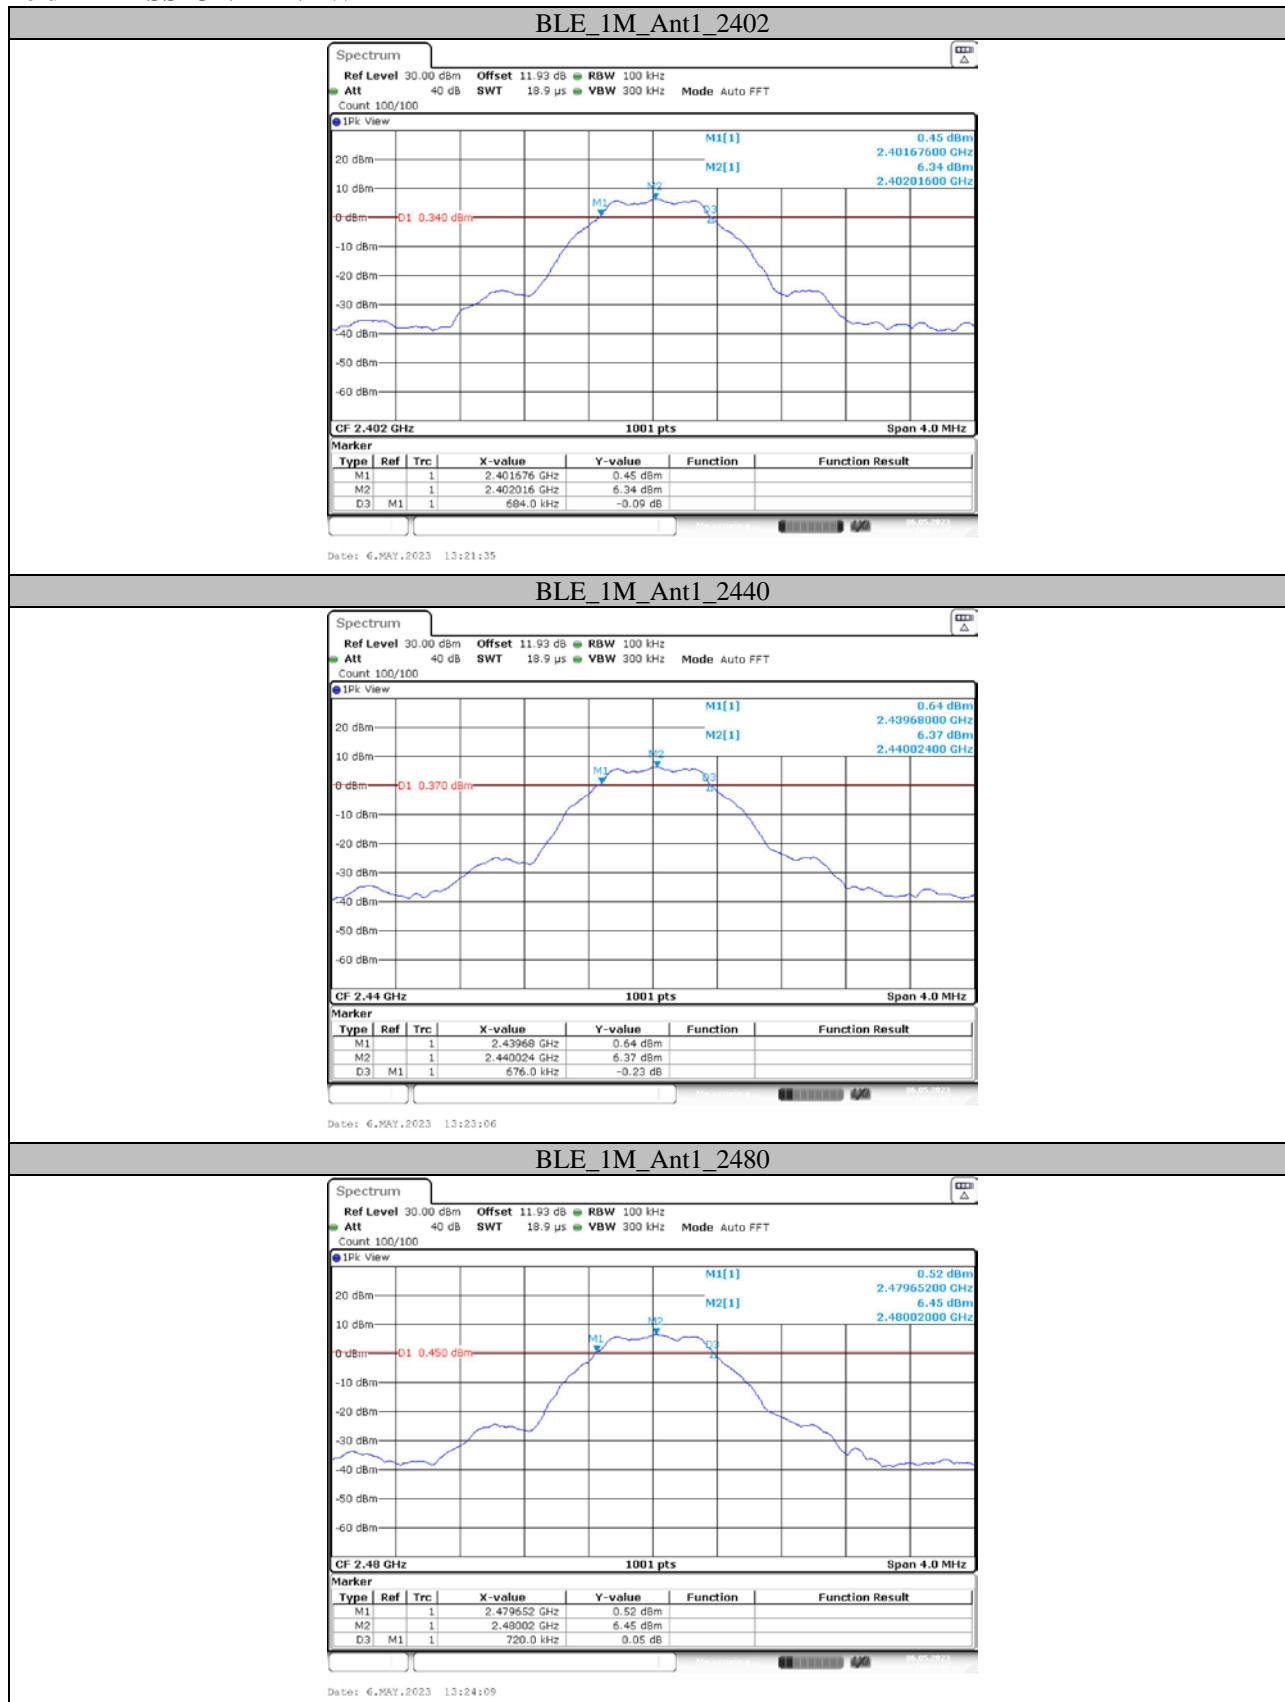

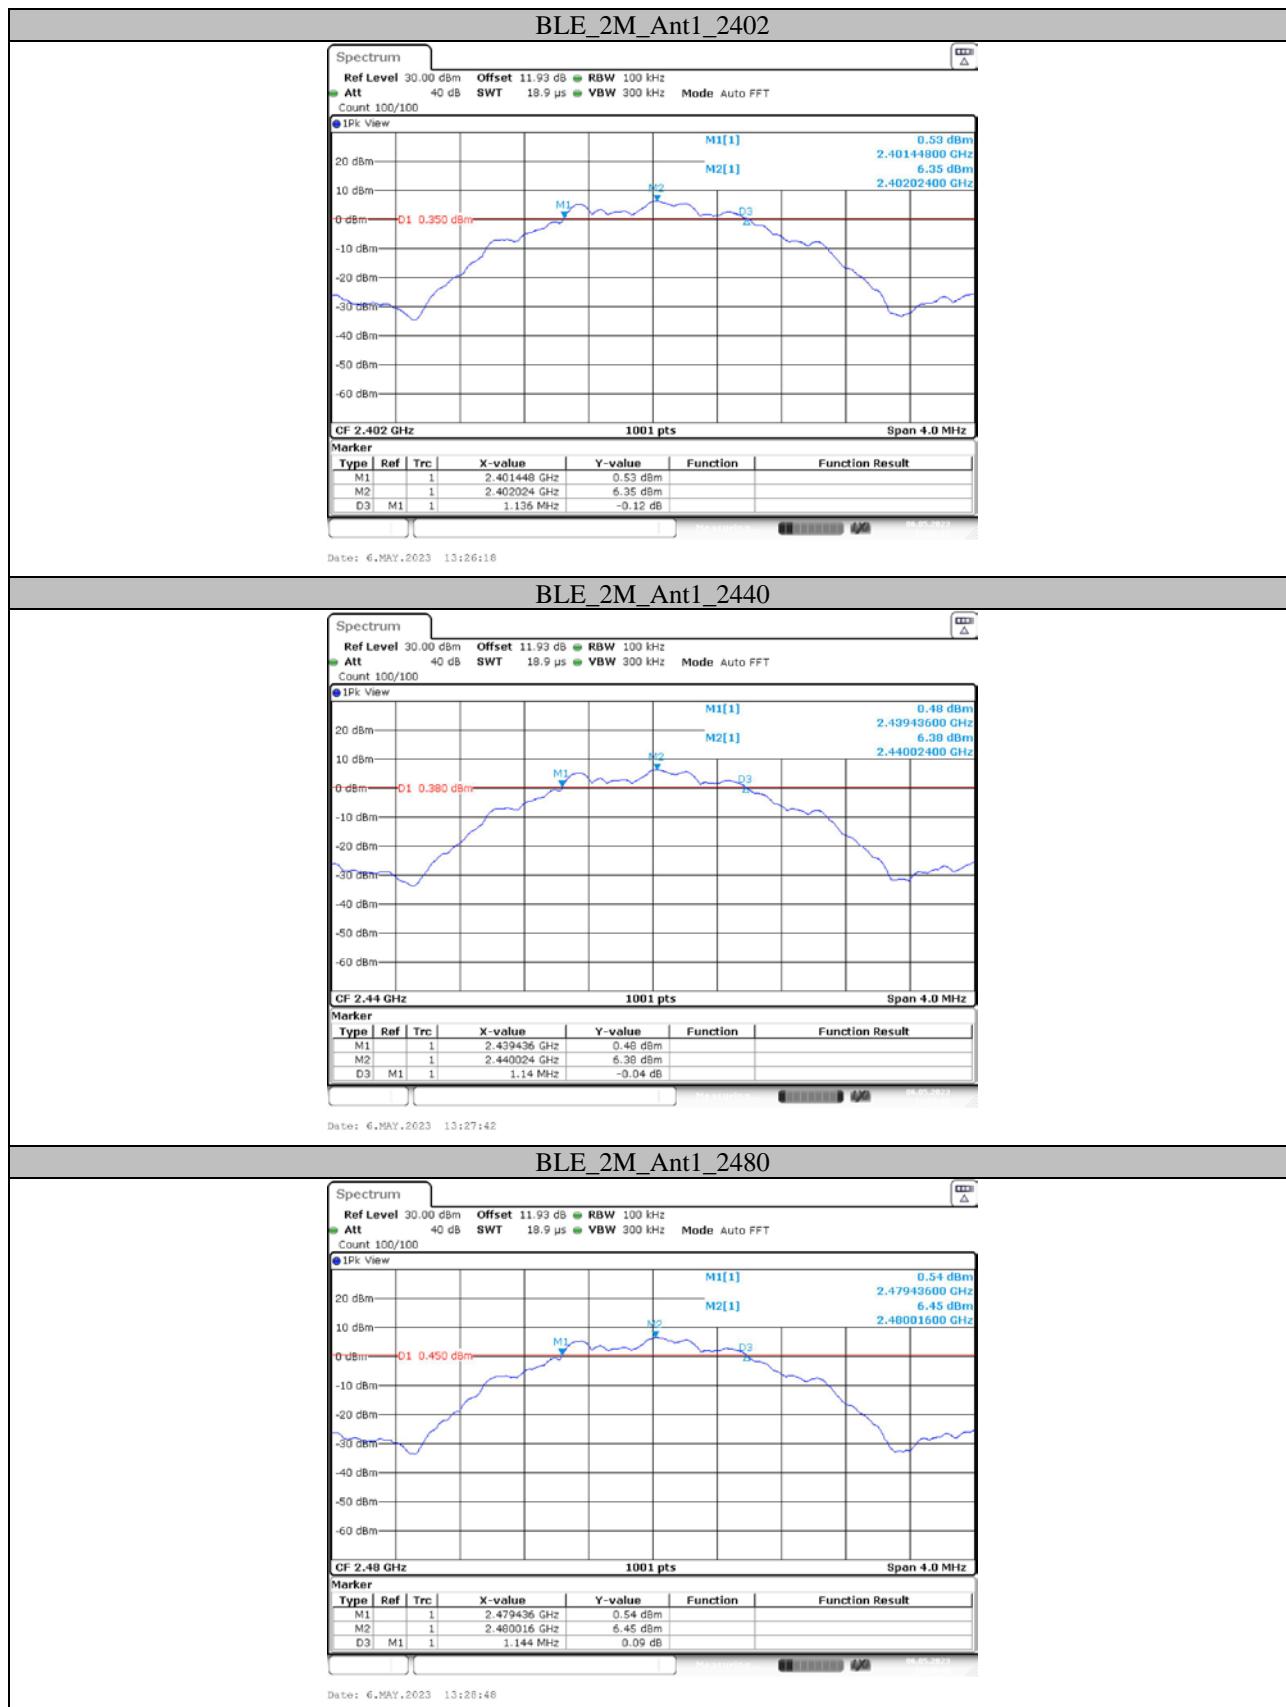

OCCUPIED BANDWIDTH

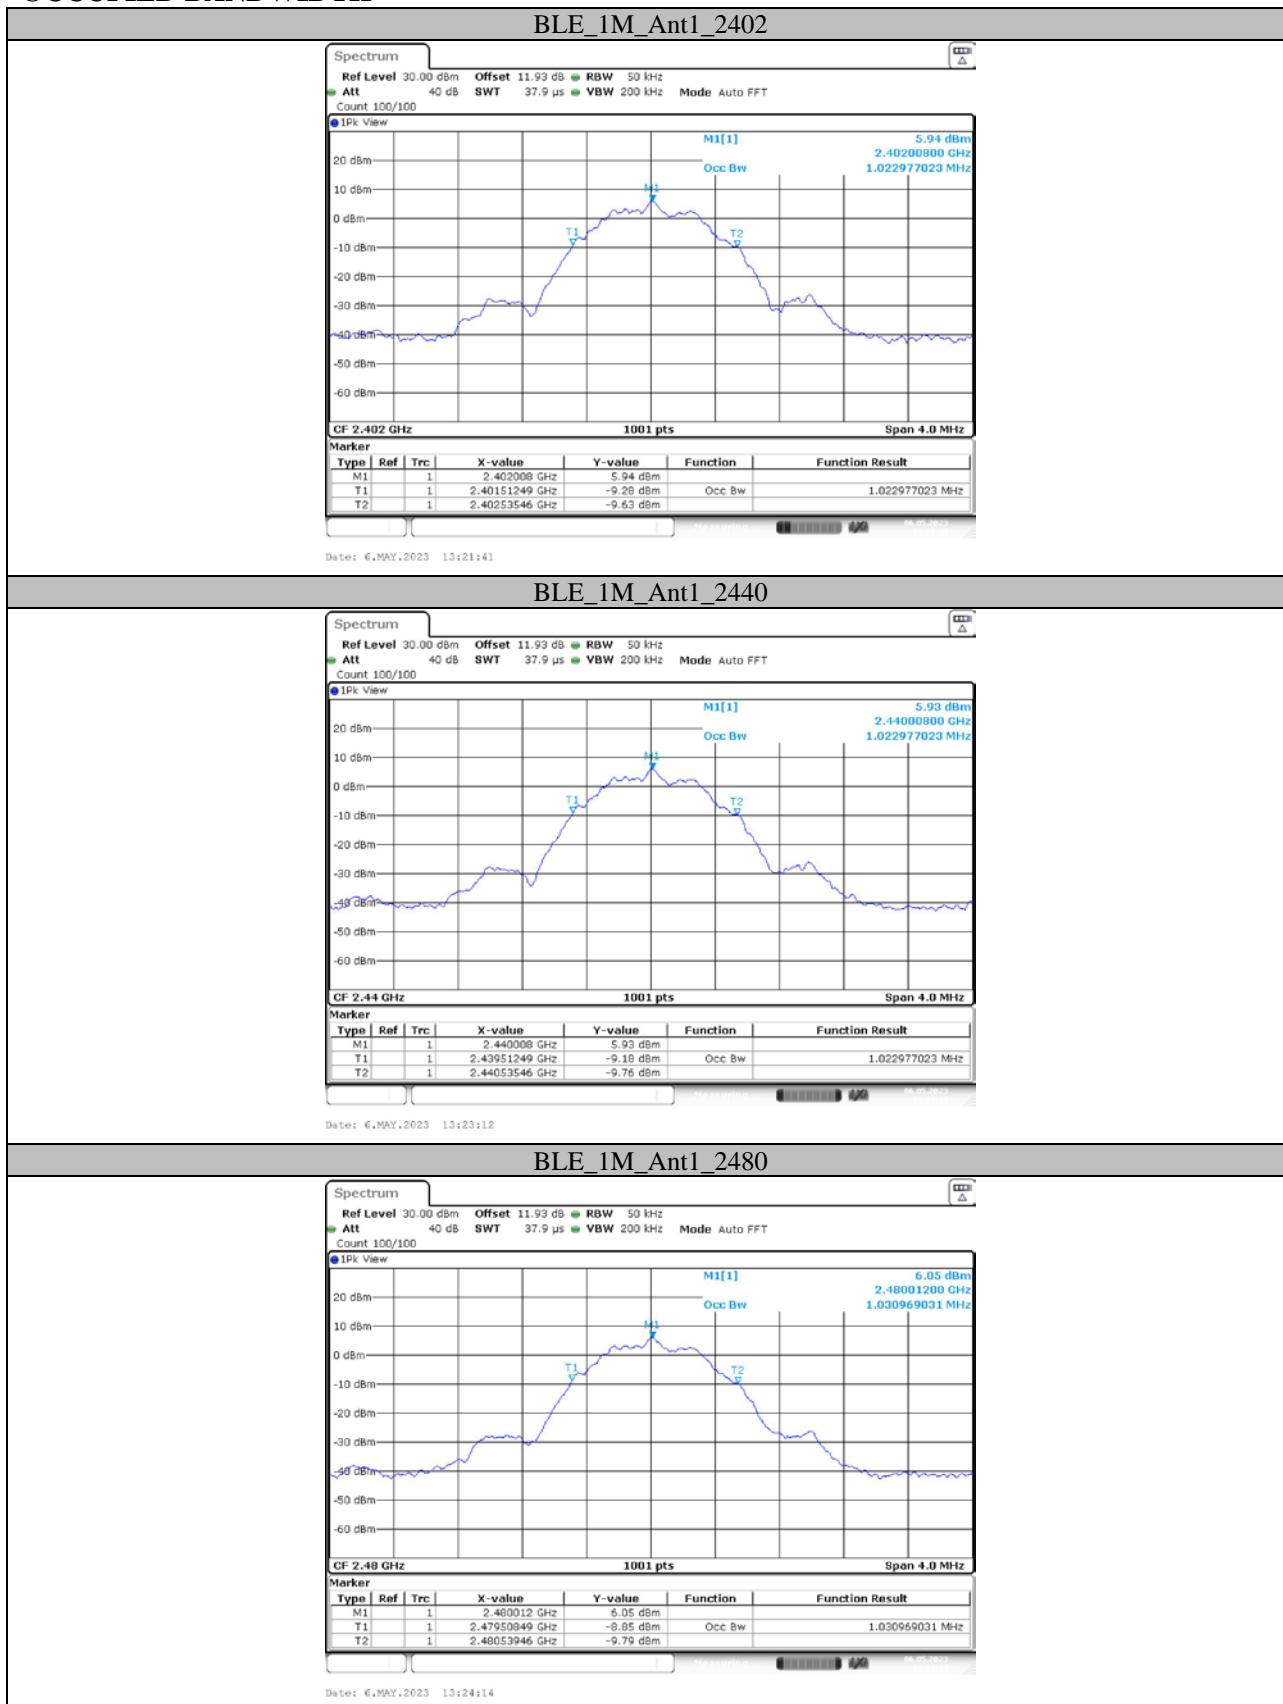

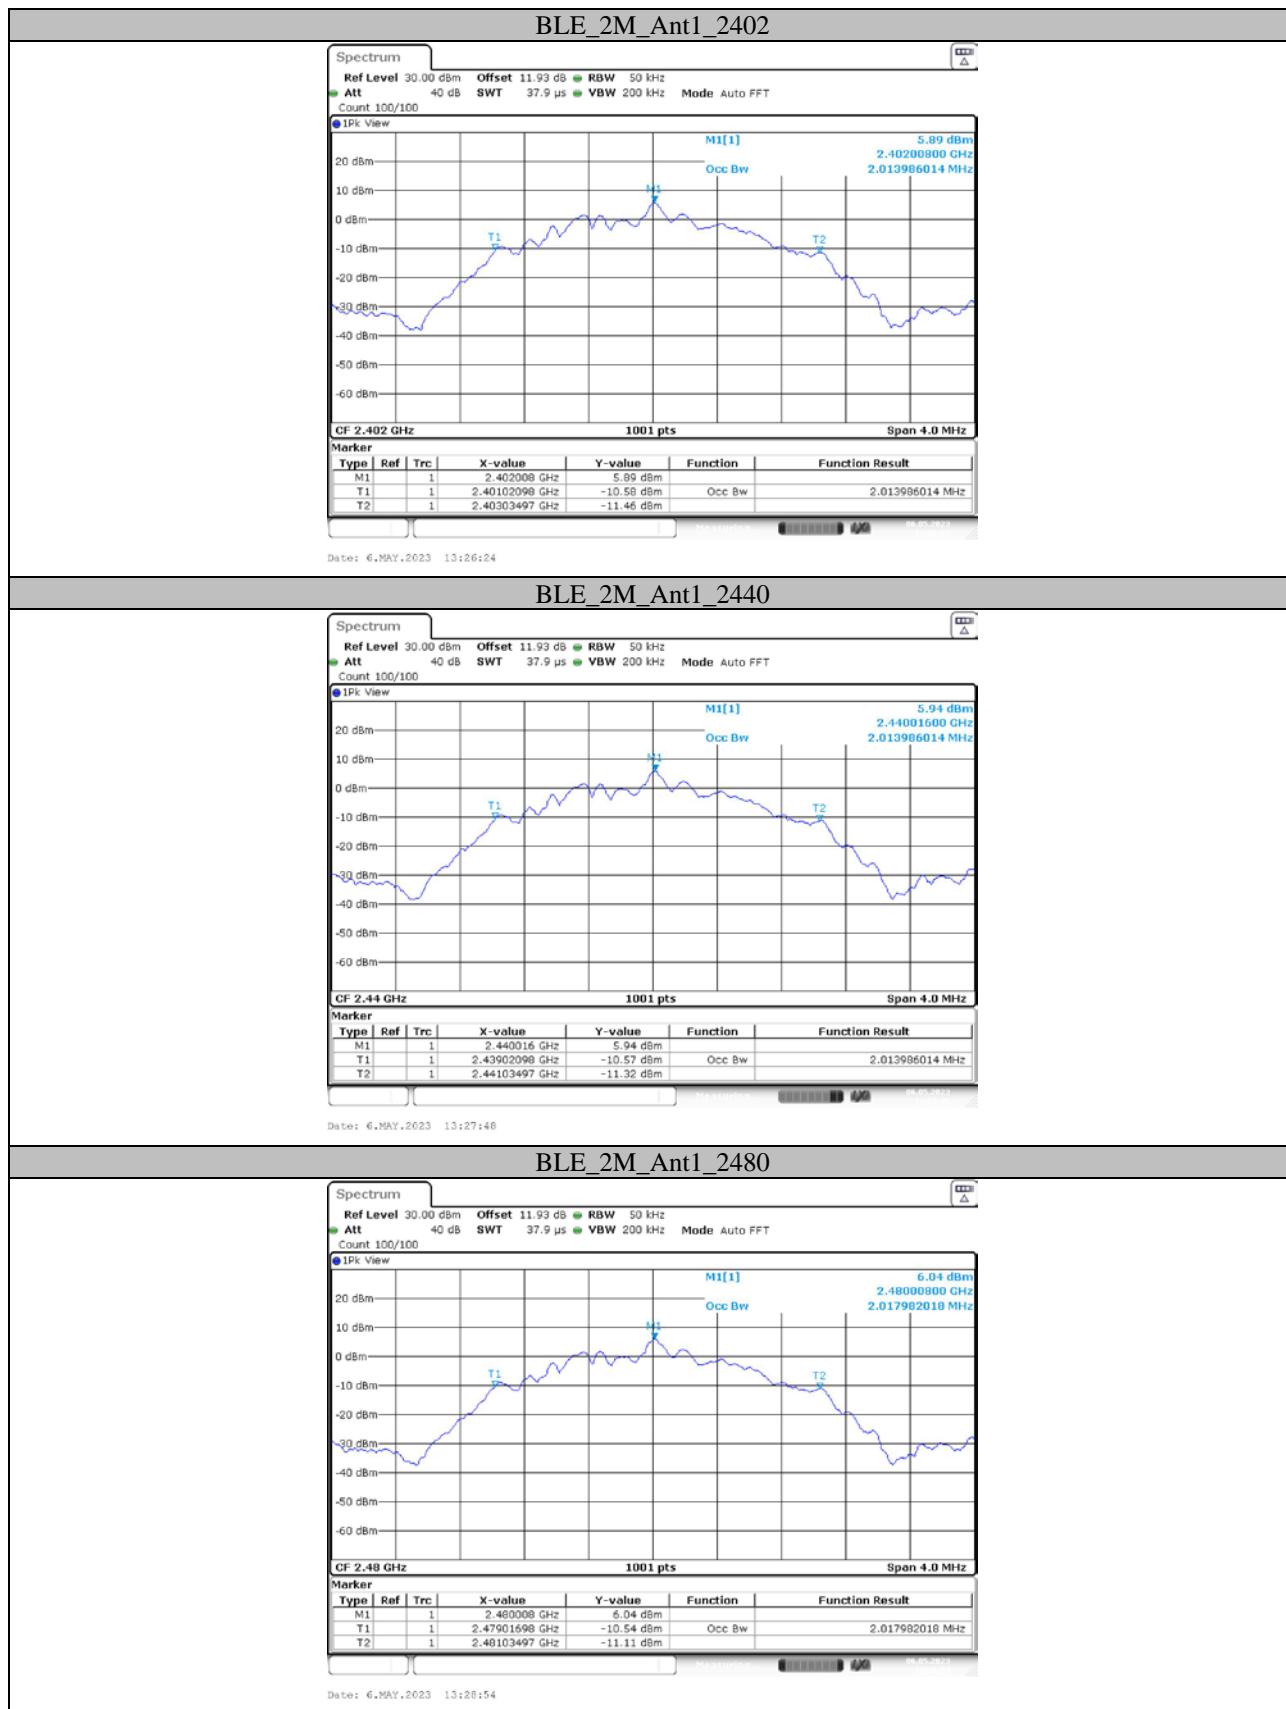

FCC §15.247(b) (3)-MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013, section 11.9.1.1

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

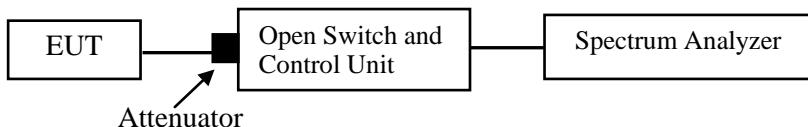

Test Data

Environmental Conditions


Temperature:	24°C
Relative Humidity:	48%
ATM Pressure:	101.0 kPa


The testing was performed by Matt Liang on 2023-05-06.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the below plots.

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	6.58	<=30	PASS
		2440	6.64	<=30	PASS
		2480	6.71	<=30	PASS
BLE_2M	Ant1	2402	6.61	<=30	PASS
		2440	6.64	<=30	PASS
		2480	6.70	<=30	PASS

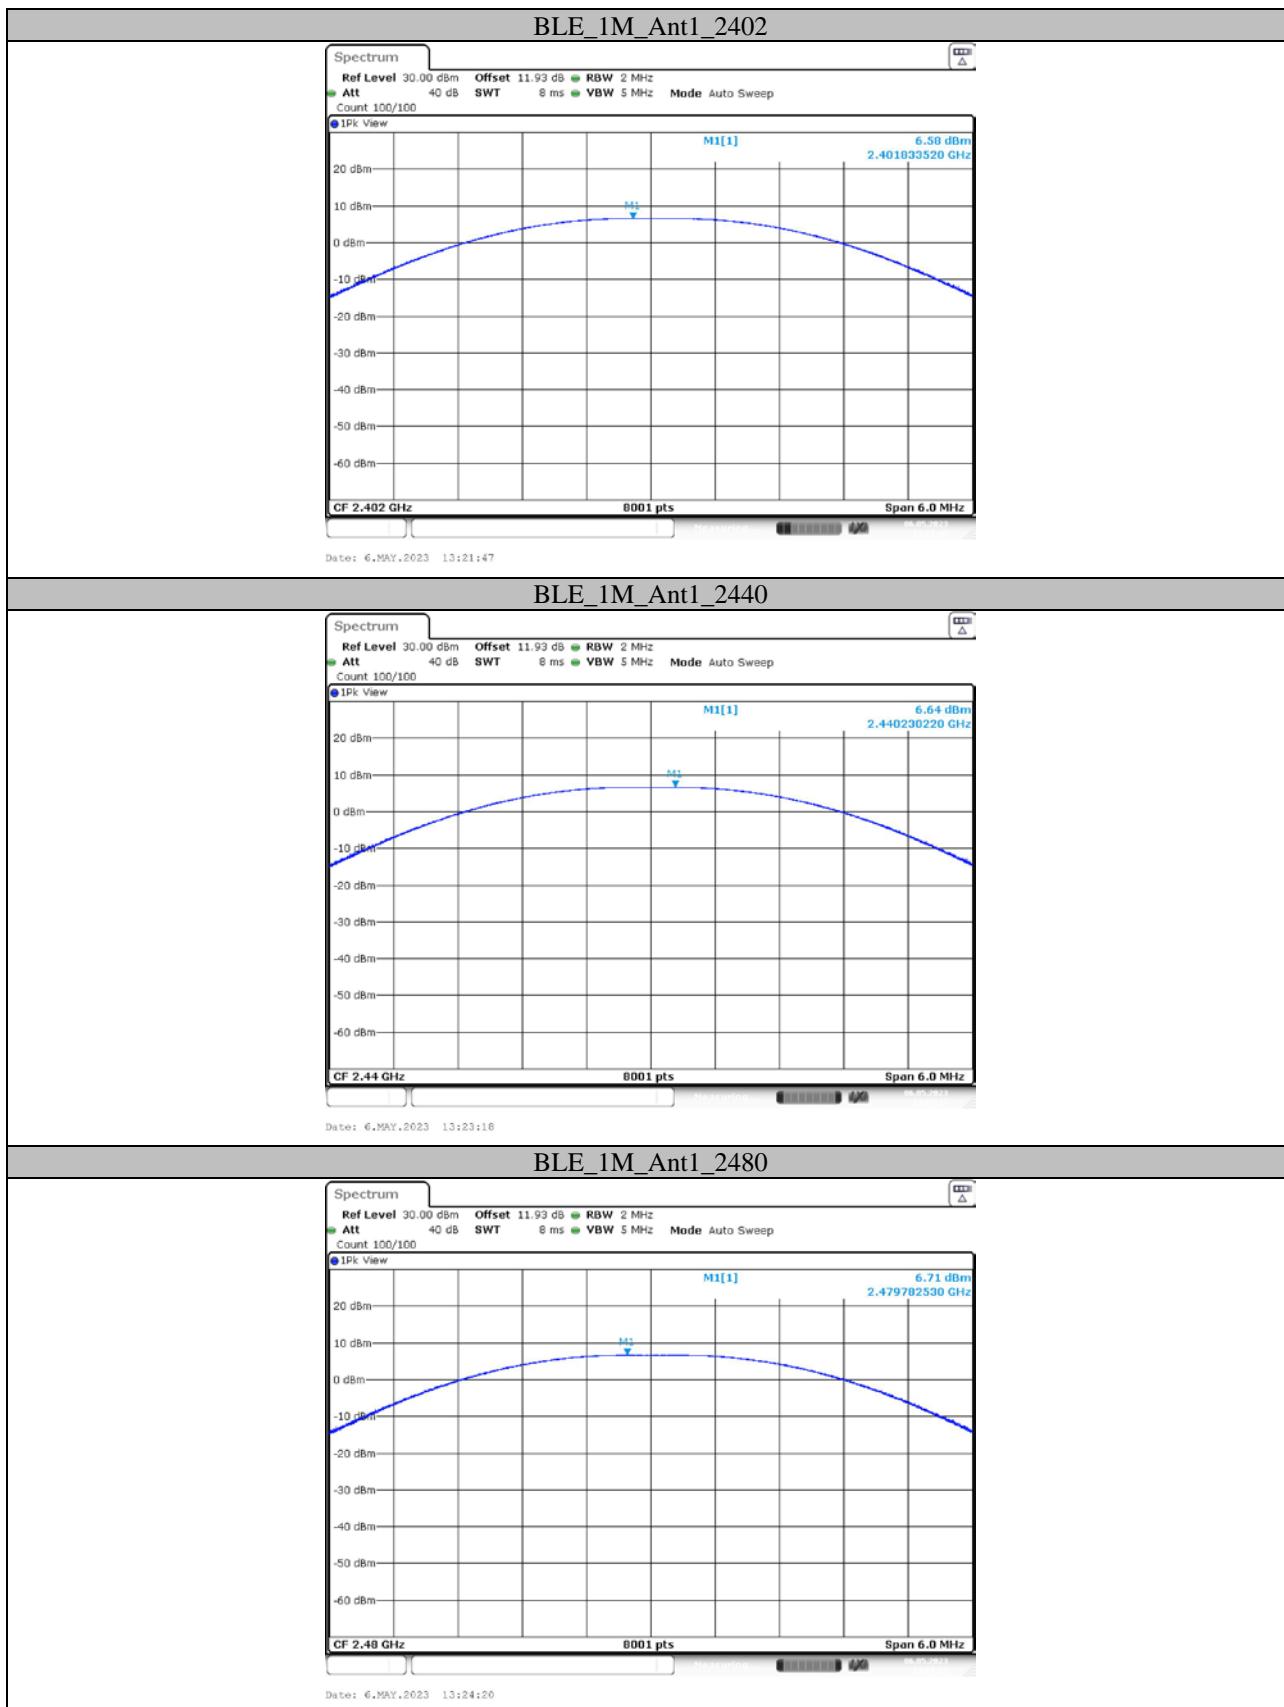

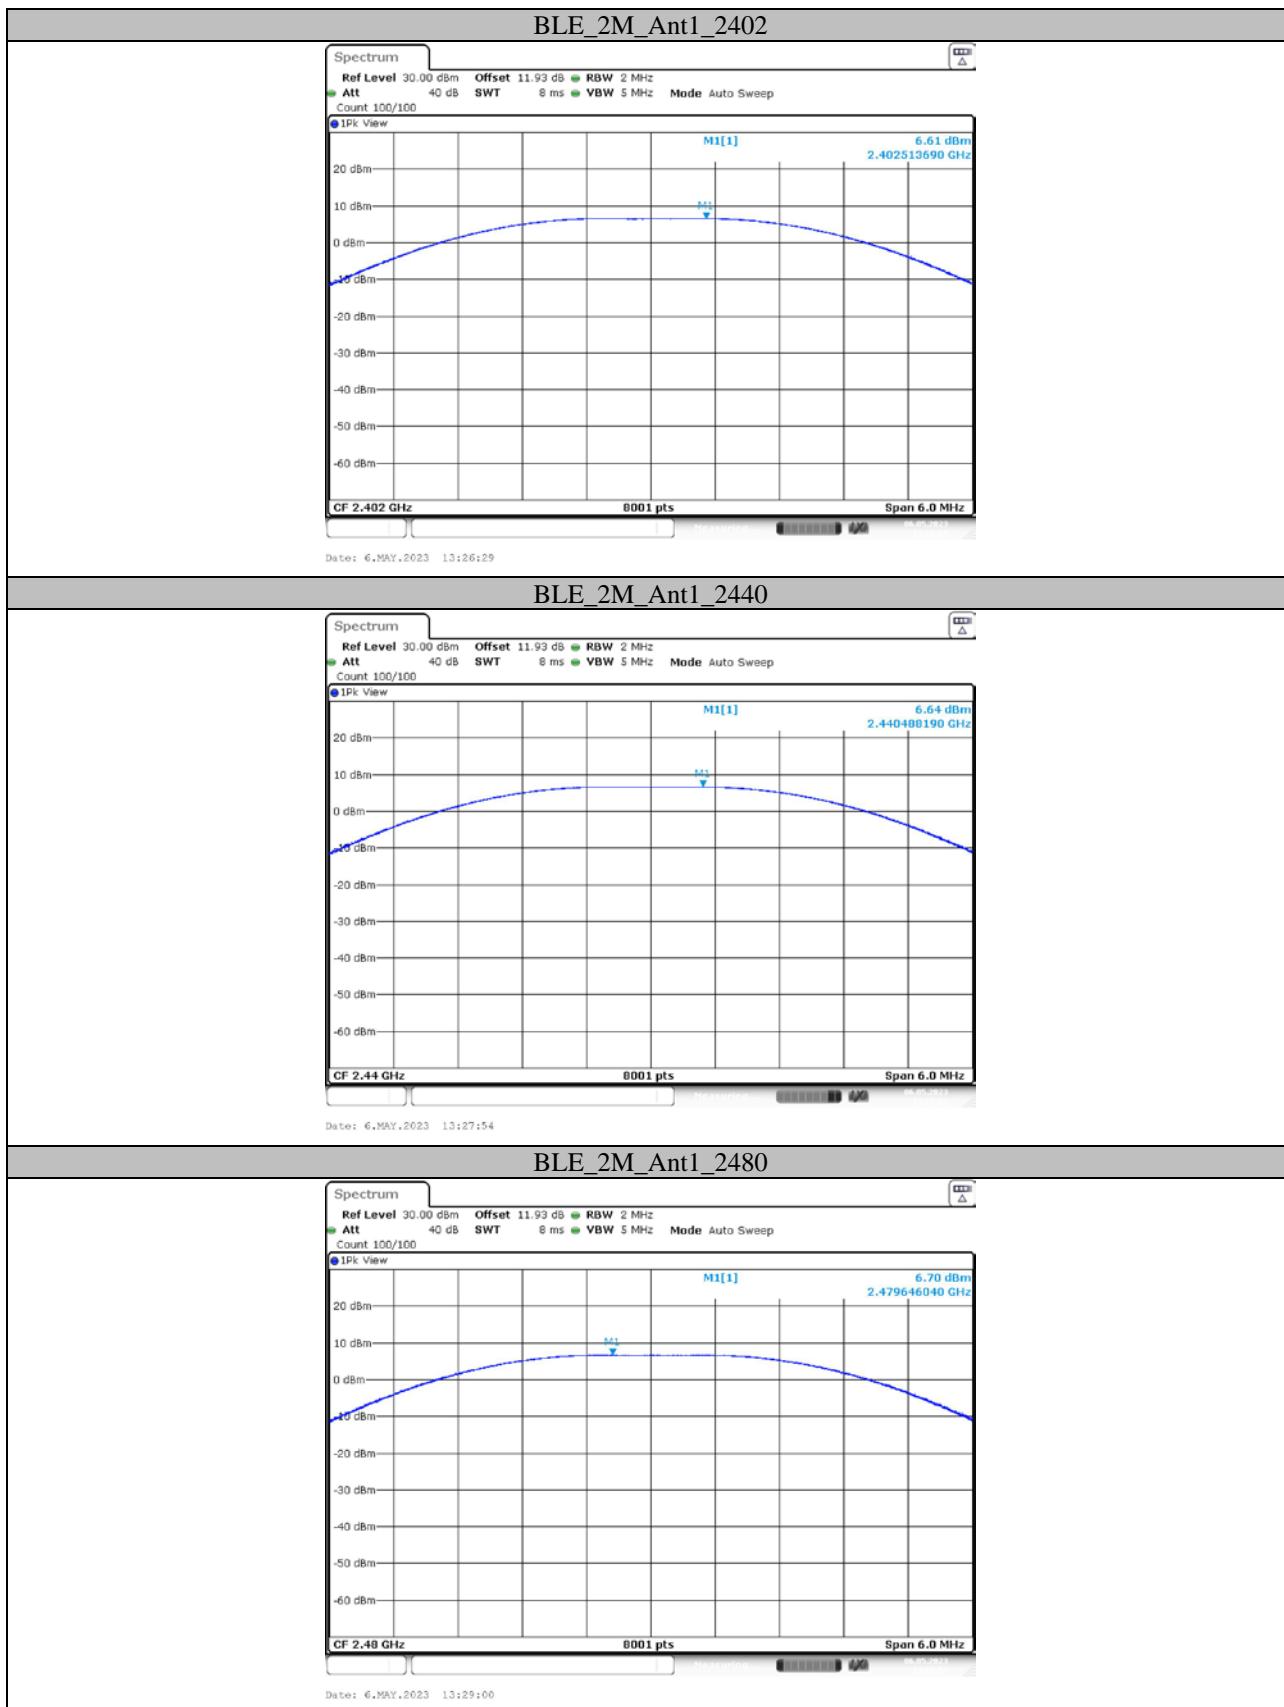

FCC §15.247(d)-100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013, section 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

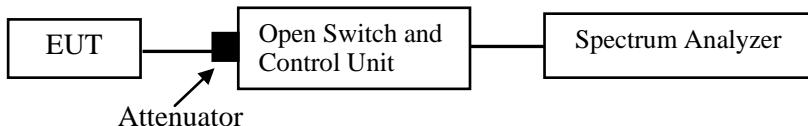

Test Data


Environmental Conditions

Temperature:	24°C
Relative Humidity:	48%
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-05-06.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the below plots.

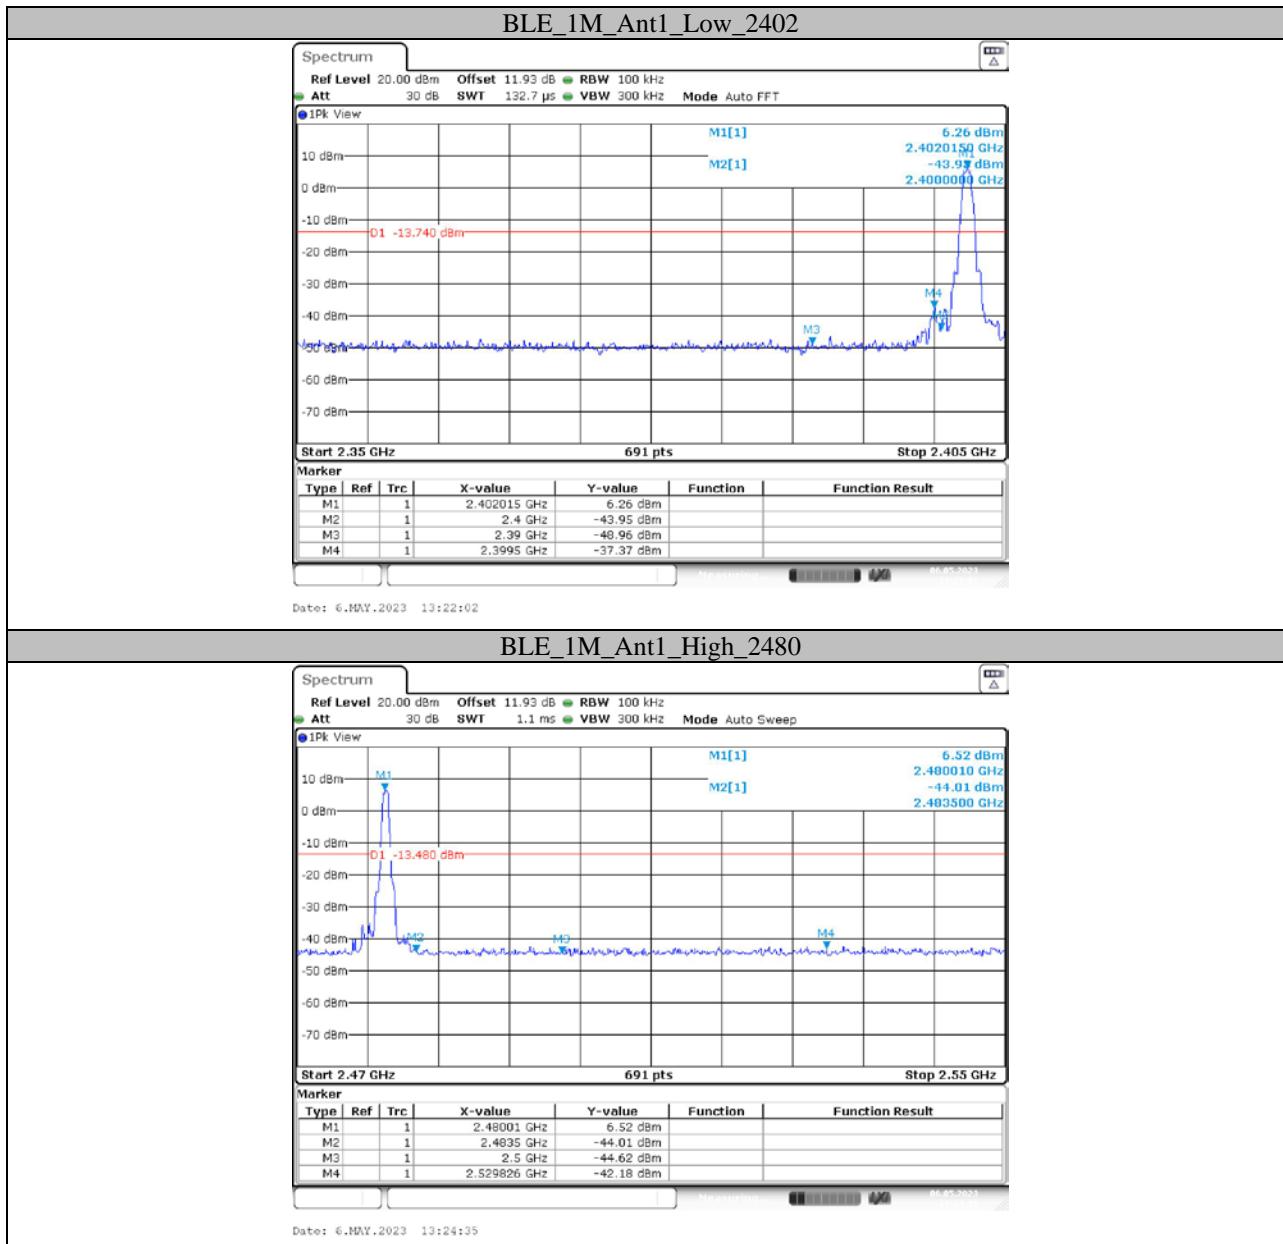



FCC §15.247(e)-POWER SPECTRAL DENSITY


Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013, section 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

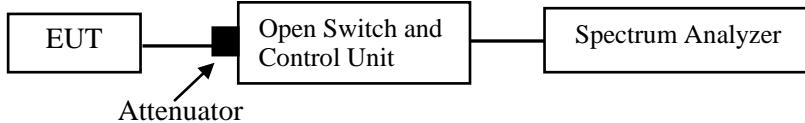

Test Data

Environmental Conditions


Temperature:	24°C
Relative Humidity:	48%
ATM Pressure:	101.0 kPa


The testing was performed by Matt Liang on 2023-05-06.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the below table and plots.

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-7.03	<=8	PASS
		2440	-6.99	<=8	PASS
		2480	-6.86	<=8	PASS
BLE_2M	Ant1	2402	-10.12	<=8	PASS
		2440	-10	<=8	PASS
		2480	-9.47	<=8	PASS

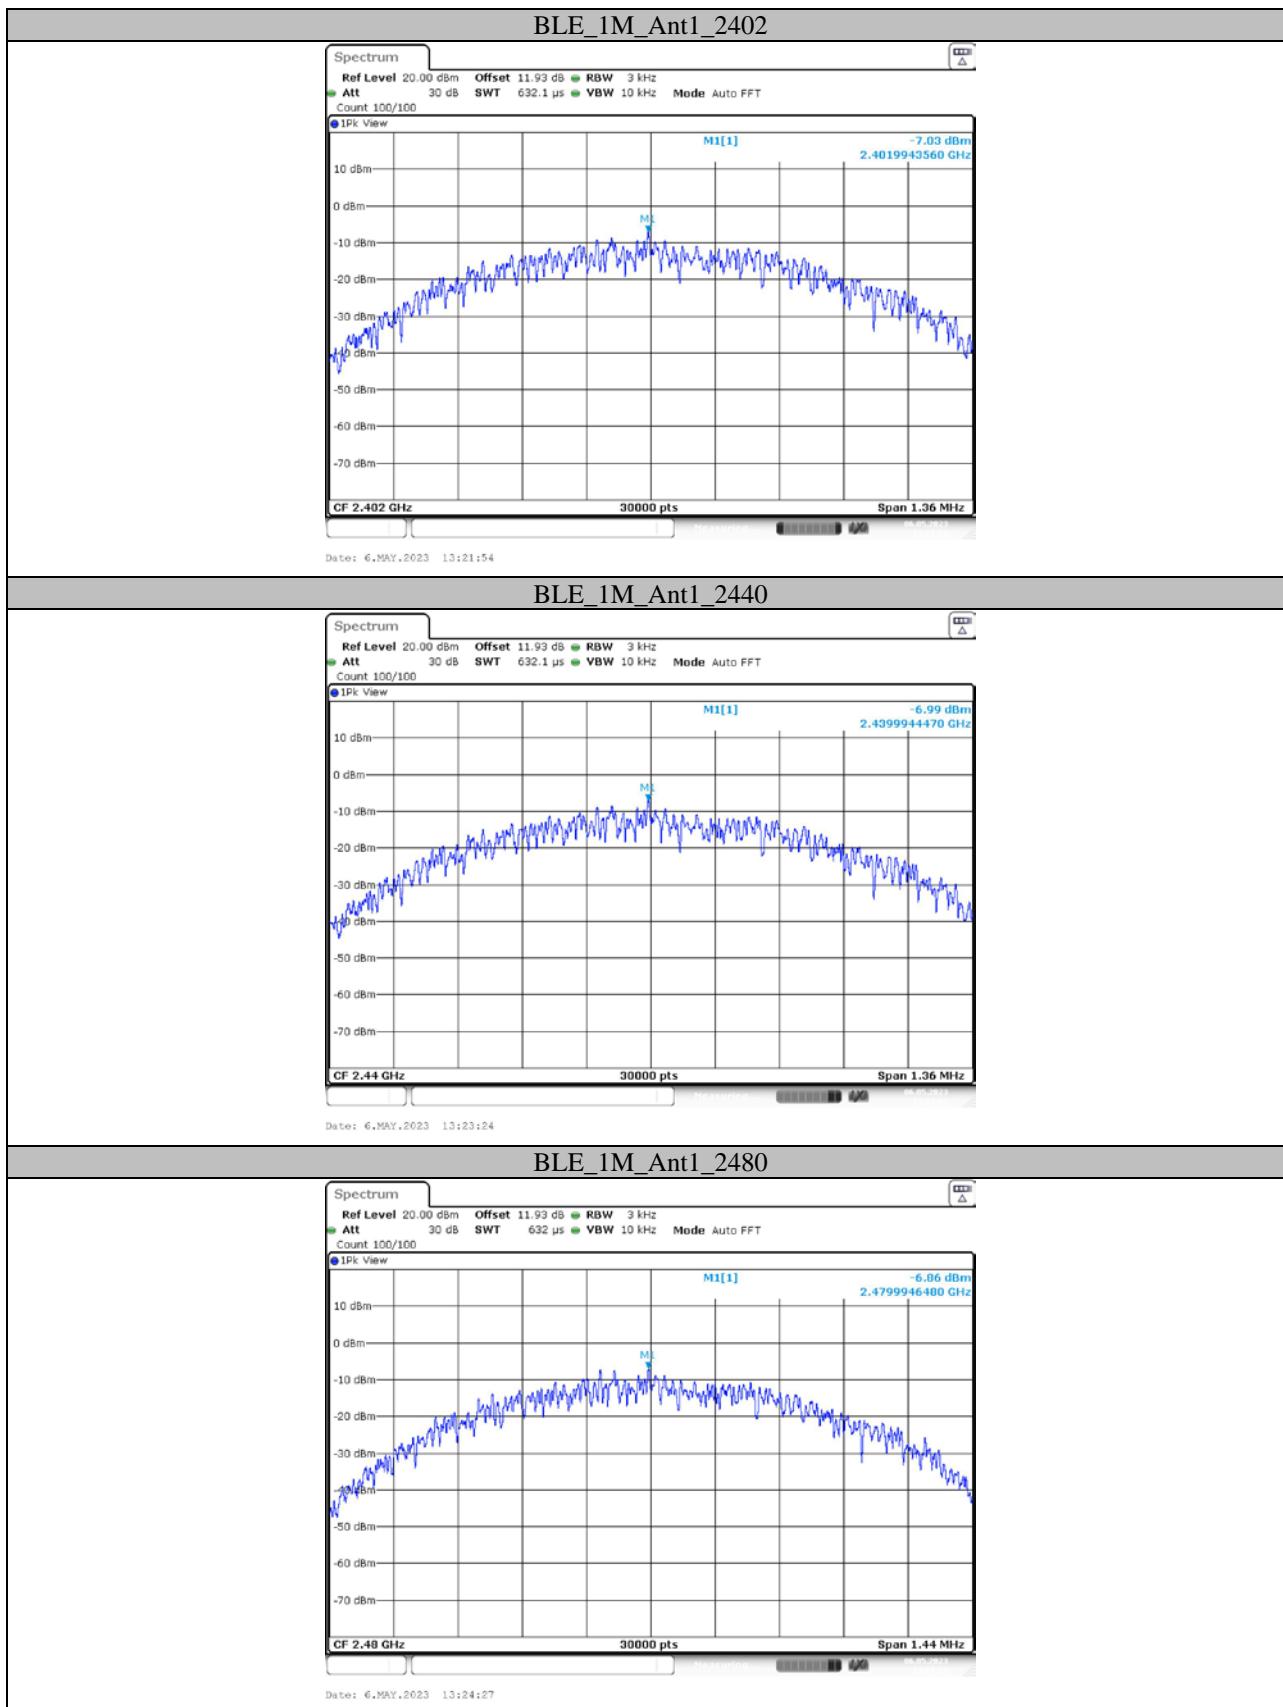

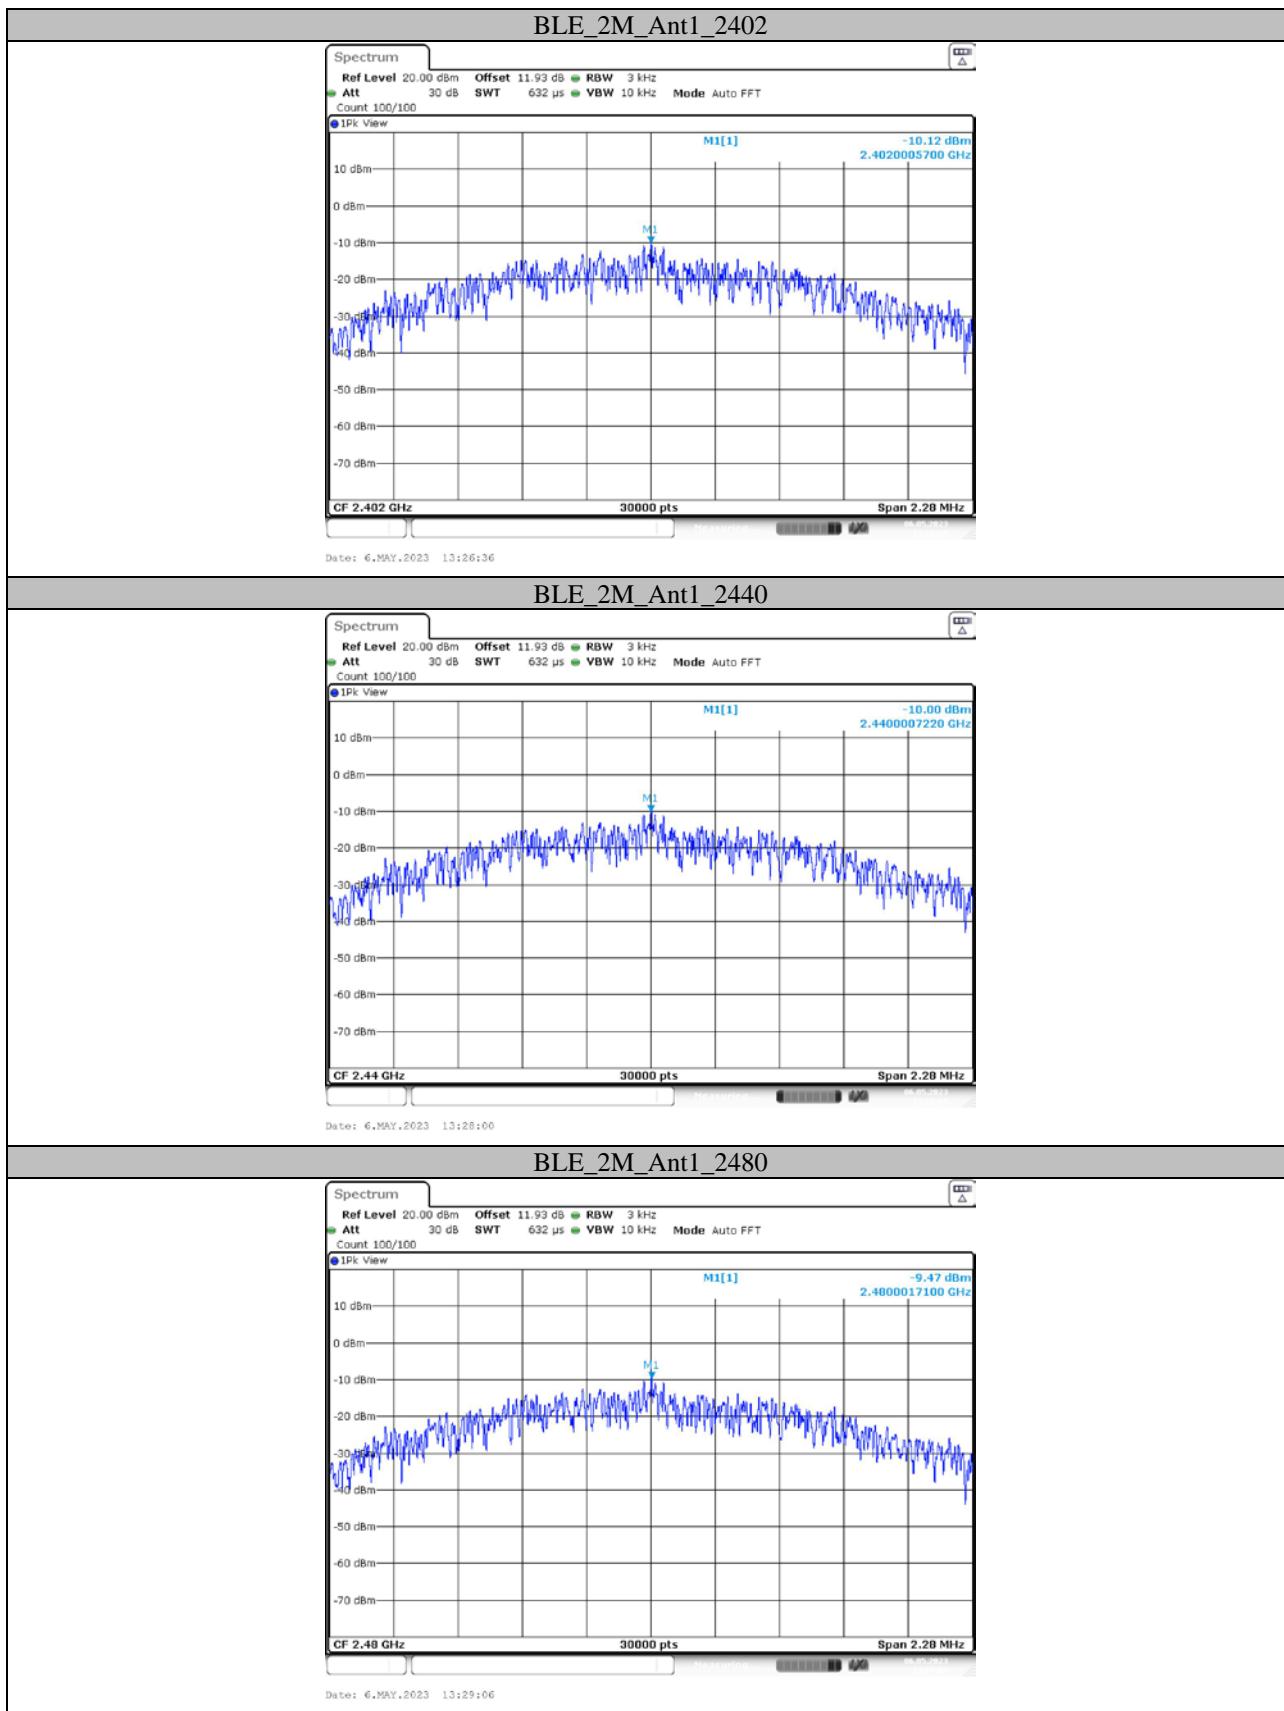

***** END OF REPORT *****