

FCC Test Report

**Test Report
On Behalf of
Shenzhen Atongmu Technology Co., LTD
For
Projector**

Model No.: GC06C, Please refer to the series models on page 7

FCC ID: 2BAAR-GC06C

Prepared For: **Shenzhen Atongmu Technology Co., LTD**
Room 605,Office A Dong,Qiaohongsheng Wenhua Chuangyiyuan,Yintian
Gongyequ,Yantian Shequ, Xixiang Jiedao,Baoan Qu,Shenzhen Shi,Guangdong,
518000 China

Prepared By: **Shenzhen HUAK Testing Technology Co., Ltd.**
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai
Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: **Jun. 06, 2025 ~ Jun. 27, 2025**

Date of Report: **Jun. 27, 2025**

Report Number: **HK2506032867-3E**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Test Result Certification

Applicant's Name: Shenzhen Atongmu Technology Co., LTD
Room 605,Office A Dong,Qiaohongsheng Wenhua Chuangyiyuan,
Address: Yintian Gongyequ,Yantian Shequ, Xixiang Jiedao,Baoan Qu,
Shenzhen Shi,Guangdong, 518000 China

Manufacturer's Name: Shenzhen Atongmu Technology Co., LTD
Room 605,Office A Dong,Qiaohongsheng Wenhua Chuangyiyuan,
Address: Yintian Gongyequ,Yantian Shequ, Xixiang Jiedao,Baoan Qu,
Shenzhen Shi,Guangdong, 518000 China

Product Description

Trade Mark:



Product Name: Projector

Model and/or Type Reference : GC06C, Please refer to the series models on page 7

Standards: **47 CFR FCC Part 15 Subpart C 15.247**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test

Date (s) of Performance of Tests **Jun. 06, 2025 ~ Jun. 27, 2025**

Date of Issue **Jun. 27, 2025**

Test Result **Pass**

Testing Engineer


Len Liao

Len Liao

Technical Manager


Sliver Wan

Sliver Wan

Authorized Signatory


Jason Zhou

Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Table of Contents

	Page
1. Summary	5
1.1. Test Standards	5
1.2. Test Description	5
1.3. Test Facility	6
1.4. Statement of the Measurement Uncertainty	6
2. General Information	7
2.1. Environmental Conditions	7
2.2. General Description of EUT	7
2.3. Description of Test Modes and Test Frequency	8
2.4. Equipments Used during the Test	9
2.5. Related Submittal(s) / Grant (s)	10
2.6. Modifications	10
2.7. Description of Test Setup	10
2.8. Description of Support Units	11
3. Test Conditions and Results	12
3.1. AC Conducted Emissions Test	12
3.2. Radiated Emissions and Band Edge	15
3.3. Maximum Peak Conducted Output Power	26
3.4. 20dB Bandwidth	27
3.5. Frequency Separation	31
3.6. Number of Hopping Frequency	33
3.7. Time of Occupancy (Dwell Time)	35
3.8. Out-of-Band Emissions	39
3.9. Pseudorandom Frequency Hopping Sequence	49
3.10. Antenna Requirement	50
4. Test Setup Photos of the EUT	51
5. Photos of the EUT	53

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Jun. 27, 2025	Jason Zhou



HUAK TESTING

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

1. Summary

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ANSI C63.10:2013 : American National Standard for Testing Unlicensed Wireless Devices

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.215	20dB Bandwidth& 99% Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247 (a) (1)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.247(a)(1)(iii)	Number of Hopping Frequency& Time of Occupancy	PASS
FCC Part 15.247(a)(1)	Frequency Separation	PASS
FCC Part 15.205/15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS

Note:



1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.



HUAK TESTING

1.3. Test Facility

1.3.1 Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

1.4. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen HUAK Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for HUAK laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.37 dB	(1)
Transmitter power Radiated	±3.35 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±3.68 %	(1)
Radiated Emission 30~1000MHz	±3.90dB	(1)
Radiated Emission Above 1GHz	±4.28dB	(1)
Conducted Disturbance0.15~30MHz	±2.71dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



HUAK TESTING

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

There are 79 channels provided to the EUT and Channel 00/39/78 was selected for testing.

Operation Frequency:

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

Note: The line display in grey were the channel selected for testing

Preliminary tests were performed in each mode and packet length of BT, and found worst case as below, finally test were conducted at those mode and recorded in this report.

Test Items	Worst case
AC Conducted Emissions	Charging mode
Radiated Emissions and Band Edge	DH5 Low channel
Maximum Conducted Output Power	DH5/2DH5/3DH5
20dB Bandwidth&99% Bandwidth	DH5/2DH5/3DH5
Frequency Separation	DH5/2DH5/3DH5 Middle channel
Number of hopping frequency	DH5/2DH5/3DH5
Time of Occupancy (Dwell Time)	DH1/DH3/DH5 Middle channel 2DH1/2DH3/2DH5 Middle channel 3DH1/3DH3/3DH5 Middle channel
Out-of-band Emissions	DH5/2DH5/3DH5

**HUAK TESTING**

HUAK TESTING

2.4. Equipments Used during the Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	HKE-002	2025/02/19	1 Year
2	L.I.S.N.	R&S	ENV216	HKE-059	2025/02/19	1 Year
3	EMI Test Receiver	R&S	ESR	HKE-005	2025/02/19	1 Year
4	Spectrum analyzer	Agilent	N9020A	HKE-025	2025/02/19	1 Year
5	Spectrum analyzer	R&S	FSV3044	HKE-126	2025/02/19	1 Year
6	Preamplifier	EMCI	EMC05184 5S	HKE-006	2025/02/19	1 Year
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2025/02/19	1 Year
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2025/02/19	1 Year
9	6dB Attenuator	Pasternack	6db	HKE-184	2025/02/19	1 Year
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2025/02/19	1 Year
11	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2024/02/21	2 Year
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2 Year
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2 Year
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-2	HKE-060	2025/02/19	1 Year
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2025/02/19	1 Year
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2025/02/19	1 Year
19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2025/02/19	1 Year
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2025/06/09	1 Year
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2025/06/09	1 Year
22	RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	/	/
23	10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	2025/02/19	1 Year
24	RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

2.8. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Note
1	Projector		GC06C	N/A	EUT

Note:


1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



Test Results

All modes have been tested, only the worst result was reported as below:

Test Specification: Line

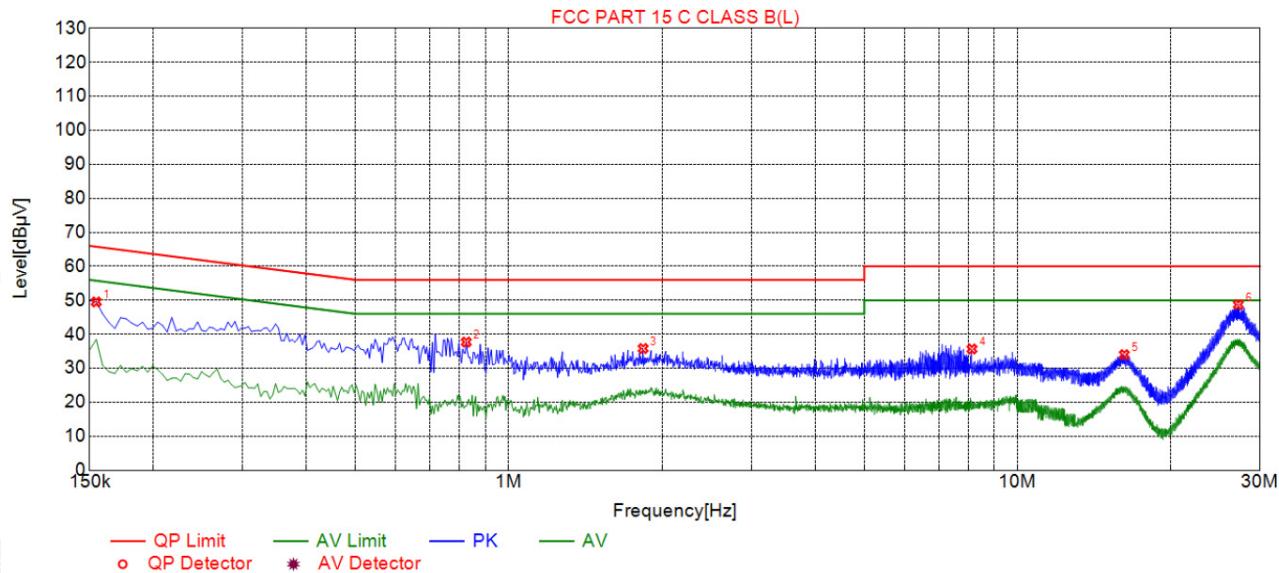

Suspected List

NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Reading [dB μ V]	Detector	Type
1	0.1545	49.51	19.56	65.75	16.24	29.95	PK	L
2	0.8250	37.71	19.70	56.00	18.29	18.01	PK	L
3	1.8375	35.81	20.09	56.00	20.19	15.72	PK	L
4	8.1420	35.66	20.68	60.00	24.34	14.98	PK	L
5	16.2240	33.99	22.13	60.00	26.01	11.86	PK	L
6	27.1905	48.71	24.89	60.00	11.29	23.82	PK	L


Remark: Margin = Limit – Level

Correction factor = Cable loss + LISN insertion loss

Level=Test receiver reading + correction factor



Test Specification: Neutral

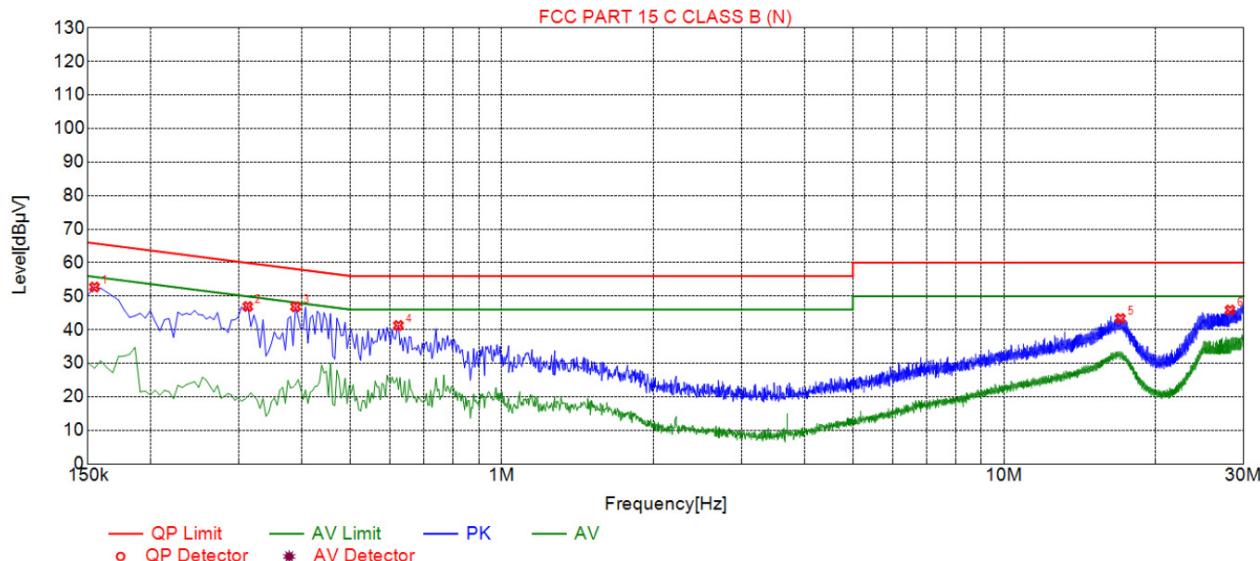

Suspected List

NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Reading [dB μ V]	Detector	Type
1	0.1545	52.73	19.63	65.75	13.02	33.10	PK	N
2	0.3120	46.93	19.69	59.92	12.99	27.24	PK	N
3	0.3885	46.85	19.70	58.10	11.25	27.15	PK	N
4	0.6225	41.27	19.75	56.00	14.73	21.52	PK	N
5	17.0430	43.37	22.29	60.00	16.63	21.08	PK	N
6	28.1760	45.88	25.06	60.00	14.12	20.82	PK	N

Remark: Margin = Limit – Level

Correction factor = Cable loss + LISN insertion loss

Level=Test receiver reading + correction factor

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Except when the requirements applicable to a given device state otherwise, emissions from

licence-exempt transmitters shall comply with the field strength limits shown in table below.


Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission

Radiated emission limits

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

Test Configuration

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

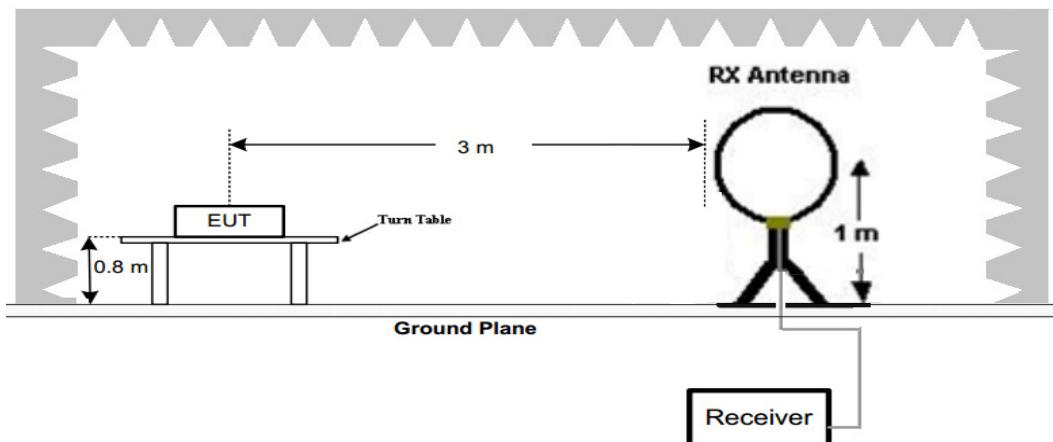

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



HUAK TESTING

Test Results

Remark:

1. Radiated Emission measured at GFSK, $\pi/4$ DQPSK and 8DPSK mode from 9 KHz to 10th harmonic of fundamental and recorded worst case at GFSK DH5 mode.
2. There is no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
3. For below 1GHz testing recorded worst at GFSK DH5 low channel.

Below 1GHz Test Results:

Antenna polarity: H



Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	31.9419	-15.76	38.19	22.43	40.00	17.57	100	297	Horizontal
2	47.4775	-13.86	34.37	20.51	40.00	19.49	100	0	Horizontal
3	111.5616	-14.50	46.96	32.46	43.50	11.04	100	280	Horizontal
4	177.5876	-16.61	48.15	31.54	43.50	11.96	100	326	Horizontal
5	342.6527	-10.22	50.36	40.14	46.00	5.86	100	335	Horizontal
6	676.6667	-4.70	40.68	35.98	46.00	10.02	100	207	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




HUAK TESTING
HUAK TESTING

HUAK TESTING
HUAK TESTING

HUAK TESTING
HUAK TESTING

HUAK TESTING

Antenna polarity: V

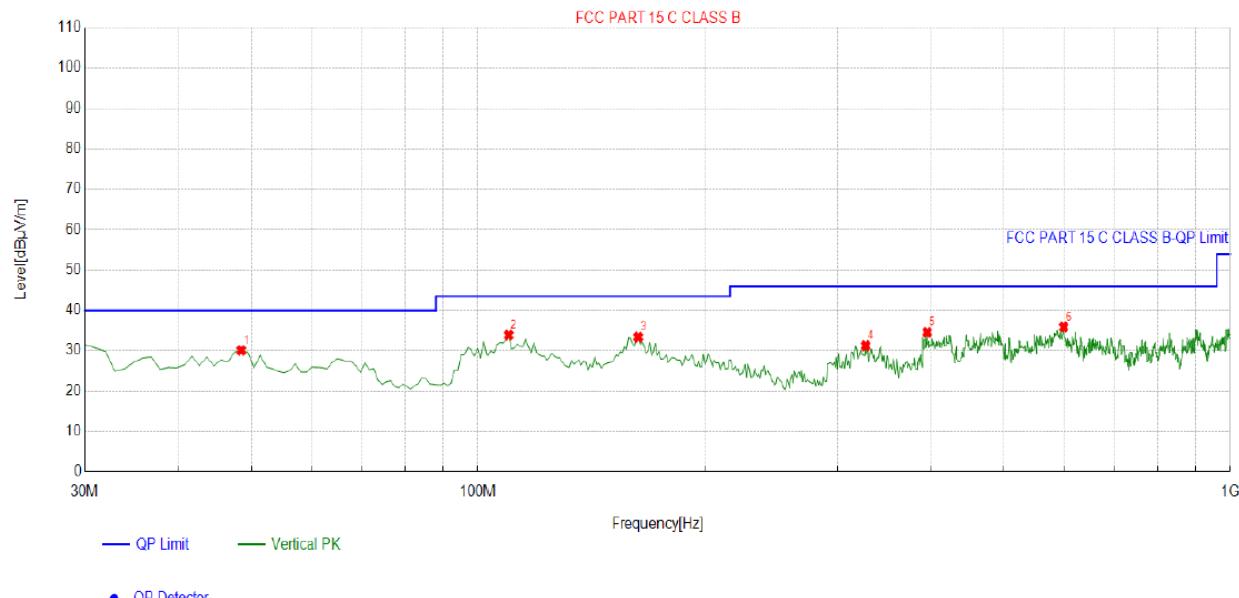

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	48.4484	-13.49	43.54	30.05	40.00	9.95	100	71	Vertical
2	109.6196	-14.22	48.06	33.84	43.50	9.66	100	318	Vertical
3	163.0230	-17.59	50.94	33.35	43.50	10.15	100	341	Vertical
4	327.1171	-10.96	42.20	31.24	46.00	14.76	100	180	Vertical
5	395.0851	-9.10	43.65	34.55	46.00	11.45	100	329	Vertical
6	599.9600	-5.33	41.18	35.85	46.00	10.15	100	54	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Harmonics and Spurious Emissions

Frequency Range (9kHz-30MHz)

Frequency (MHz)	Level@3m (dBµV/m)	Limit@3m (dBµV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

For 1GHz to 25GHz

CH Low (2402MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804.00	54.73	-3.65	51.08	74.00	22.92	peak
4804.00	43.97	-3.65	40.32	54.00	13.68	AVG
7206.00	56.19	-0.95	55.24	74.00	18.76	peak
7206.00	44.26	-0.95	43.31	54.00	10.69	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Limit - Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804.00	56.79	-3.65	53.14	74.00	20.86	peak
4804.00	45.19	-3.65	41.54	54.00	12.46	AVG
7206.00	55.63	-0.95	54.68	74.00	19.32	peak
7206.00	42.35	-0.95	41.40	54.00	12.60	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Limit - Level.



HUAK TESTING

CH Middle (2441MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4882.00	57.24	-3.54	53.70	74.00	20.30	peak
4882.00	43.67	-3.54	40.13	54.00	13.87	AVG
7323.00	54.34	-0.81	53.53	74.00	20.47	peak
7323.00	43.15	-0.81	42.34	54.00	11.66	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	HUAK TESTING Limits (dB μ V/m)	Margin (dB)	Detector Type
4882.00	55.88	-3.54	52.34	74.00	21.66	peak
4882.00	43.80	-3.54	40.26	54.00	13.74	AVG
7323.00	55.61	-0.81	54.80	74.00	19.20	peak
7323.00	44.55	-0.81	43.74	54.00	10.26	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Limit - Level.

**HUAK TESTING**

HUAK TESTING

CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960.00	56.21	-3.43	52.78	74.00	21.22	peak
4960.00	44.38	-3.44	40.94	54.00	13.06	AVG
7440.00	56.68	-0.77	55.91	74.00	18.09	peak
7440.00	43.52	-0.77	42.75	54.00	11.25	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960.00	56.52	-3.43	53.09	74.00	20.91	peak
4960.00	44.00	-3.44	40.56	54.00	13.44	AVG
7440.00	55.37	-0.77	54.60	74.00	19.40	peak
7440.00	44.45	-0.77	43.68	54.00	10.32	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) <54 dB μ V/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

Radiated Band Edge Test:

Hopping

Horizontal (Worst case):

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	54.68	-5.81	48.87	74	25.13	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	55.45	-5.84	49.61	74	24.39	peak
2390.00	/	-5.84	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Limit - Level.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.4	-5.81	50.59	74	23.41	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	55.32	-5.84	49.48	74	24.52	peak
2390.00	/	-5.84	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

**HUAK TESTING**

HUAK TESTING

HUAK TESTING

HUAK TESTING

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	56.63	-5.81	50.82	74	23.18	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	56.82	-6.06	50.76	74	23.24	peak
2500.00	/	-6.06	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Limit - Level.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

NO Hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case):

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	56.4	-5.81	50.59	74	23.41	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	56.26	-5.84	50.42	74	23.58	peak
2390.00	/	-5.84	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	54.3	-5.81	48.49	74	25.51	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.51	-5.84	48.67	74	25.33	peak
2390.00	/	-5.84	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.



HUAK TESTING
HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Operation Mode: TX CH High (2480MHz)

Horizontal (Worst case):

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	54.36	-5.81	48.55	74	25.45	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	54.08	-6.06	48.02	74	25.98	peak
2500.00	/	-6.06	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Limit - Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	57.07	-5.81	51.26	74	22.74	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	54.71	-6.06	48.65	74	25.35	peak
2500.00	/	-6.06	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Limit - Level.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Remark:

1. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
2. In restricted bands of operation, the spurious emissions below the permissible value more than 20dB.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



HUAK TESTING

3.3. Maximum Peak Conducted Output Power

Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

Type	Channel	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK	00	6.96	21.00 HUAK TESTING	Pass HUAK TESTING
	39	7.06		
	78	7.45		
π/4DQPSK	00	6.89	21.00 HUAK TESTING	Pass HUAK TESTING
	39	6.90		
	78	7.37		
8DPSK	00	6.63	21.00 HUAK TESTING	Pass HUAK TESTING
	39	6.89		
	78	7.38		

Note: The test results including the cable loss.

**HUAK TESTING**

3.4. 20dB Bandwidth

Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

RBW=1% to 5% of the OBW

VBW=approximately 3 X RBW

Detector=Peak

Trace Mode: Max Hold

Use the 99% power bandwidth function of the instrument to measure the Occupied Bandwidth and recoded.

Test Configuration



Test Results

Modulation	Channel	20dB bandwidth (MHz)	Result
GFSK	CH00	0.951	Pass
	CH39	0.981	
	CH78	0.936	
$\pi/4$ DQPSK	CH00	1.308	Pass
	CH39	1.293	
	CH78	1.311	
8DPSK	CH00	1.314	Pass
	CH39	1.311	
	CH78	1.335	

Test plot as follows:

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

20dB bandwidth

HUAK TESTING

HUAK TESTING

HUAK TESTING



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.


Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

8DPSK Modulation

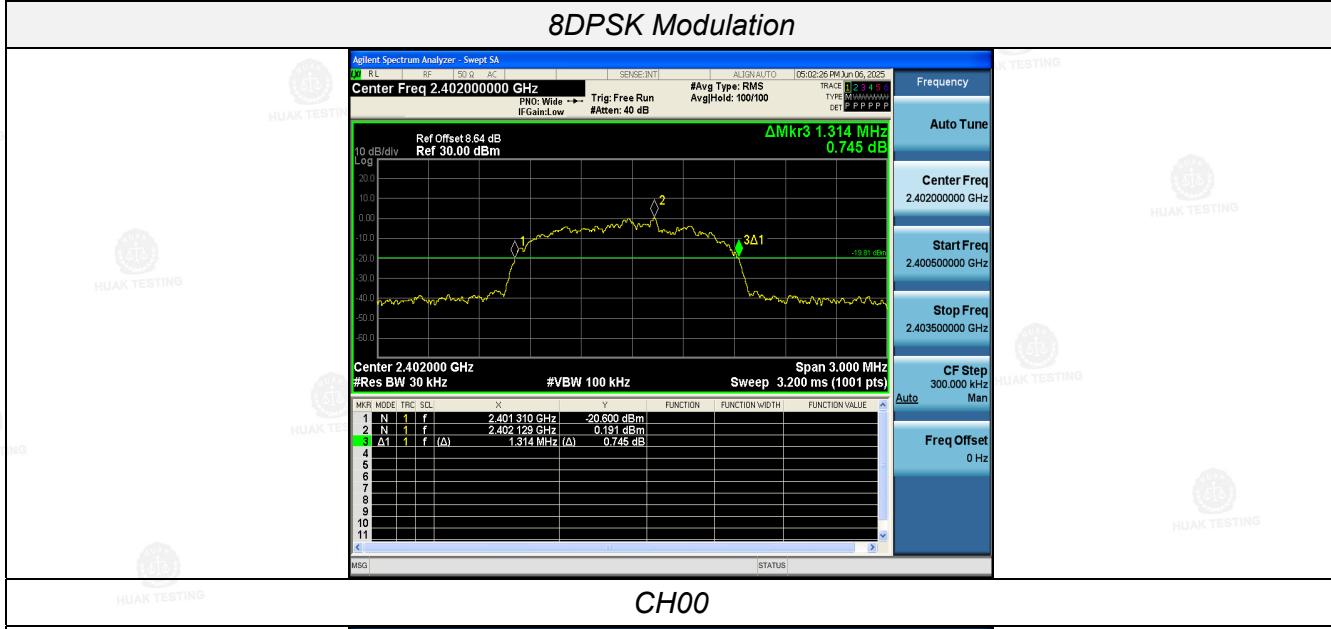

HUAK TESTING

CH00



CH39



CH78

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China