



## CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel: +86-755-27521059 Fax: +86-755-27521011 <http://www.sz-ctc.org.cn>

# TEST REPORT

**Report No.** .....: **CTC20230289E02**  
**FCC ID**.....: **2BAG3MS20A15**  
**Applicant**.....: **EVELAB INSIGHT (SINGAPORE) PTE. LTD.**  
**Address**.....: 80 Robinson Road #02-00 Singapore 068898  
**Manufacturer**.....: Xiamen MeituEve Technology Co., Ltd.  
**Address**.....: Room 568, No.942, Tonglong 2nd Road, Gaoxin District  
(Xiang'an) Industries, Xiamen, China  
**Product Name**.....: **EveLab Insight-Eve V Skin Imaging Analysis System**  
**Trade Mark**.....: EveLab Insight  
**Model/Type reference**.....: MS20A15  
**Listed Model(s)** .....: /  
**Standard**.....: **FCC CFR Title 47 Part 15 Subpart C Section 15.247**  
**Date of receipt of test sample...**: Feb. 13, 2023  
**Date of testing**.....: Feb. 13, 2023 to Mar. 7, 2023  
**Date of issue**.....: Mar. 7, 2023  
**Result**.....: **PASS**

Compiled by:

(Printed name+signature)

Jim Jiang

*Jim Jiang*

Supervised by:

(Printed name+signature)

Eric Zhang

*Eric Zhang*

Approved by:

(Printed name+signature)

Totti Zhao

*Totti Zhao*

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



## Table of Contents

## Page

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>1. TEST SUMMARY .....</b>                            | <b>3</b>  |
| 1.1. TEST STANDARDS.....                                | 3         |
| 1.2. REPORT VERSION .....                               | 3         |
| 1.3. TEST DESCRIPTION.....                              | 3         |
| 1.4. TEST FACILITY .....                                | 4         |
| 1.5. MEASUREMENT UNCERTAINTY .....                      | 4         |
| 1.6. ENVIRONMENTAL CONDITIONS.....                      | 5         |
| <b>2. GENERAL INFORMATION .....</b>                     | <b>6</b>  |
| 2.1. CLIENT INFORMATION .....                           | 6         |
| 2.2. GENERAL DESCRIPTION OF EUT .....                   | 6         |
| 2.3. ACCESSORY EQUIPMENT INFORMATION .....              | 7         |
| 2.4. OPERATION STATE .....                              | 8         |
| 2.5. MEASUREMENT INSTRUMENTS LIST .....                 | 9         |
| <b>3. TEST ITEM AND RESULTS .....</b>                   | <b>11</b> |
| 3.1. CONDUCTED EMISSION.....                            | 11        |
| 3.2. RADIATED EMISSION .....                            | 14        |
| 3.3. BAND EDGE EMISSIONS (RADIATED) .....               | 28        |
| 3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED) ..... | 41        |
| 3.5. BANDWIDTH.....                                     | 56        |
| 3.6. CHANNEL SEPARATION.....                            | 63        |
| 3.7. NUMBER OF HOPPING CHANNEL.....                     | 65        |
| 3.8. DWELL TIME .....                                   | 67        |
| 3.9. PEAK OUTPUT POWER .....                            | 72        |
| 3.10. DUTY CYCLE .....                                  | 73        |
| 3.11. ANTENNA REQUIREMENT.....                          | 77        |



# 1. TEST SUMMARY

## 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

[RSS-247 Issue 2](#): Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSs) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices.

## 1.2. Report Version

| Revised No. | Date of issue | Description |
|-------------|---------------|-------------|
| 01          | Mar. 7, 2023  | Original    |
|             |               |             |
|             |               |             |

## 1.3. Test Description

| FCC Part 15 Subpart C (15.247)/ RSS-247 Issue 2 |                  |                             |        |               |
|-------------------------------------------------|------------------|-----------------------------|--------|---------------|
| Test Item                                       | Standard Section |                             | Result | Test Engineer |
|                                                 | FCC              | IC                          |        |               |
| Antenna Requirement                             | 15.203           | /                           | Pass   | Jim Jiang     |
| Conducted Emission                              | 15.207           | RSS-Gen 8.8                 | Pass   | Jim Jiang     |
| Restricted Bands                                | 15.205           | RSS-Gen 8.10                | Pass   | Jim Jiang     |
| Hopping Channel Separation                      | 15.247(a)(1)     | RSS-247 5.1 (b)             | Pass   | Jim Jiang     |
| Dwell Time                                      | 15.247(a)(iii)   | RSS-247 5.1 (d)             | Pass   | Jim Jiang     |
| Peak Output Power                               | 15.247(b)(1)     | RSS-247 5.4 (b)             | Pass   | Jim Jiang     |
| Number of Hopping Frequency                     | 15.247(a)(iii)   | RSS-247 5.1 (d)             | Pass   | Jim Jiang     |
| Band Edge Emissions                             | 15.247(d)        | RSS-247 5.5                 | Pass   | Jim Jiang     |
| Radiated Spurious Emission                      | 15.247(d)&15.209 | RSS-247 5.5&<br>RSS-Gen 8.9 | Pass   | Jim Jiang     |
| 20dB Bandwidth                                  | 15.247(a)        | RSS-247 5.1 (b)             | Pass   | Jim Jiang     |

Note: The measurement uncertainty is not included in the test result.



## 1.4. Test Facility

### CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

### Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

#### FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.





| Test Items                              | Measurement Uncertainty | Notes |
|-----------------------------------------|-------------------------|-------|
| Transmitter power conducted             | 0.42 dB                 | (1)   |
| Transmitter power Radiated              | 2.14 dB                 | (1)   |
| Conducted spurious emissions 9kHz~40GHz | 1.60 dB                 | (1)   |
| Radiated spurious emissions 9kHz~40GHz  | 2.20 dB                 | (1)   |
| Conducted Emissions 9kHz~30MHz          | 3.20 dB                 | (1)   |
| Radiated Emissions 30~1000MHz           | 4.70 dB                 | (1)   |
| Radiated Emissions 1~18GHz              | 5.00 dB                 | (1)   |
| Radiated Emissions 18~40GHz             | 5.54 dB                 | (1)   |
| Occupied Bandwidth                      | -----                   | (1)   |

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

|                       |           |
|-----------------------|-----------|
| Temperature:          | 21°C~27°C |
| Relative Humidity:    | 40%~60%   |
| Atmospheric Pressure: | 101kPa    |



## 2. GENERAL INFORMATION

### 2.1. Client Information

|               |                                                                                                 |
|---------------|-------------------------------------------------------------------------------------------------|
| Applicant:    | EVELAB INSIGHT (SINGAPORE) PTE. LTD.                                                            |
| Address:      | 80 Robinson Road #02-00 Singapore 068898                                                        |
| Manufacturer: | Xiamen MeituEve Technology Co., Ltd.                                                            |
| Address:      | Room 568, No.942, Tonglong 2nd Road, Gaoxin District (Xiang'an) Industries, Xiamen, China       |
| Factory:      | Kingtronics Corporation Of Elec.& Mech. Technology (Zhangzhou) Co.,Ltd.                         |
| Address:      | NO.20 Longchi Road, Longchi Industrial Park, Zhangzhou Taiwanese Investment Zone, Fujian, China |

### 2.2. General Description of EUT

|                              |                                                   |
|------------------------------|---------------------------------------------------|
| Product Name:                | EveLab Insight-Eve V Skin Imaging Analysis System |
| Trade Mark:                  | EveLab Insight                                    |
| Model/Type reference:        | MS20A15                                           |
| Listed Model(s):             | /                                                 |
| Model Difference:            | /                                                 |
| Power supply:                | DC12V 5.0A from AC/DC Adapter                     |
| Hardware version:            | /                                                 |
| Software version:            | /                                                 |
| <b>Bluetooth 5.0/ BR+EDR</b> |                                                   |
| Modulation:                  | GFSK, $\pi/4$ -DQPSK, 8-DPSK                      |
| Operation frequency:         | 2402MHz~2480MHz                                   |
| Channel number:              | 79                                                |
| Channel separation:          | 1MHz                                              |
| Antenna type:                | FPC Antenna                                       |
| Antenna gain:                | 3.21dBi                                           |



## 2.3. Accessory Equipment Information

| Equipment Information     |               |              |                                    |
|---------------------------|---------------|--------------|------------------------------------|
| Name                      | Model         | S/N          | Manufacturer                       |
| Notebook                  | ThinkPad X220 | /            | Lenovo                             |
| AC/DC Adapter             | FY0681205000  | /            | Shenzhen Fuyuandian Power Co.,Ltd. |
| Cable Information         |               |              |                                    |
| Name                      | Shielded Type | Ferrite Core | Length                             |
| USB Cable                 | Unshielded    | NO           | 100cm                              |
| Test Software Information |               |              |                                    |
| Name                      | Version       | /            | /                                  |
| QRCT                      | V3.0.303.0    | /            | /                                  |

## 2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

| Channel   | Frequency (MHz) |
|-----------|-----------------|
| <b>00</b> | <b>2402</b>     |
| 01        | 2403            |
| :         | :               |
| 38        | 2440            |
| <b>39</b> | <b>2441</b>     |
| 40        | 2442            |
| :         | :               |
| 77        | 2479            |
| <b>78</b> | <b>2480</b>     |

Note: The display in grey were the channel selected for testing.

Test mode

|                                                                                                                                                                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| For RF test items:                                                                                                                                                                                                       |
| The engineering test program was provided and enabled to make EUT continuous transmit                                                                                                                                    |
| For AC power line conducted emissions:                                                                                                                                                                                   |
| The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.                                                                                                                         |
| For Radiated spurious emissions test item:                                                                                                                                                                               |
| The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report. |



## 2.5. Measurement Instruments List

| Tonscend JS0806-2 Test system |                                     |              |           |            |                  |
|-------------------------------|-------------------------------------|--------------|-----------|------------|------------------|
| Item                          | Test Equipment                      | Manufacturer | Model No. | Serial No. | Calibrated until |
| 1                             | MXA Signal Analyzer                 | Keysight     | N9020A    | MY46471737 | Dec. 16, 2023    |
| 2                             | Spectrum Analyzer                   | R&S          | FSU26     | 100105     | Dec. 16, 2023    |
| 3                             | Spectrum Analyzer                   | R&S          | FSV40-N   | 101331     | Mar. 15, 2023    |
| 4                             | MXG Vector Signal Generator         | Agilent      | N5182A    | MY47420864 | Dec. 16, 2023    |
| 5                             | PSG Analog Signal Generator         | Agilent      | E8257D    | MY46521908 | Dec. 16, 2023    |
| 6                             | Power Sensor                        | Keysight     | U2021XA   | MY55130004 | Mar. 15, 2023    |
| 7                             | Power Sensor                        | Keysight     | U2021XA   | MY55130006 | Mar. 15, 2023    |
| 8                             | Wideband Radio Communication Tester | R&S          | CMW500    | 102414     | Dec. 16, 2023    |
| 9                             | High and low temperature box        | ESPEC        | MT3035    | /          | Mar. 24, 2023    |
| 10                            | JS1120 RF Test system               | TONSCEND     | v2.6      | /          | /                |

| Radiated emission |                              |              |            |            |                  |
|-------------------|------------------------------|--------------|------------|------------|------------------|
| Item              | Test Equipment               | Manufacturer | Model No.  | Serial No. | Calibrated until |
| 1                 | Trilog-Broadband Antenna     | Schwarzbeck  | VULB 9163  | 01026      | Dec. 18, 2024    |
| 2                 | Horn Antenna                 | Schwarzbeck  | BBHA 9120D | 9120D-647  | Dec. 01, 2024    |
| 3                 | Test Receiver                | Keysight     | N9038A     | MY56400071 | Dec. 16, 2023    |
| 4                 | Broadband Premplifier        | SCHWARZBECK  | BBV9743B   | 259        | Dec. 16, 2023    |
| 5                 | Mirowave Broadband Amplifier | SCHWARZBECK  | BBV9718C   | 111        | Dec. 16, 2023    |
| 6                 | 3m chamber 3                 | YIHENG       | EE106      | /          | Sep. 09, 2023    |



| Conducted Emission |                   |              |           |                |                  |
|--------------------|-------------------|--------------|-----------|----------------|------------------|
| Item               | Test Equipment    | Manufacturer | Model No. | Serial No.     | Calibrated until |
| 1                  | LISN              | R&S          | ENV216    | 101112         | Dec. 16, 2023    |
| 2                  | LISN              | R&S          | ENV216    | 101113         | Dec. 16, 2023    |
| 3                  | EMI Test Receiver | R&S          | ESCS30    | 100353         | Dec. 16, 2023    |
| 4                  | ISN CAT6          | Schwarzbeck  | NTFM 8158 | CAT6-8158-0046 | Dec. 16, 2023    |
| 5                  | ISN CAT5          | Schwarzbeck  | NTFM 8158 | CAT5-8158-0046 | Dec. 16, 2023    |

Note:

1. The Cal. Interval was one year.
2. The Cal. Interval was three years of the antenna.

### 3. TEST ITEM AND RESULTS

#### 3.1. Conducted Emission


##### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS – Gen 8.8

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

##### Test Configuration

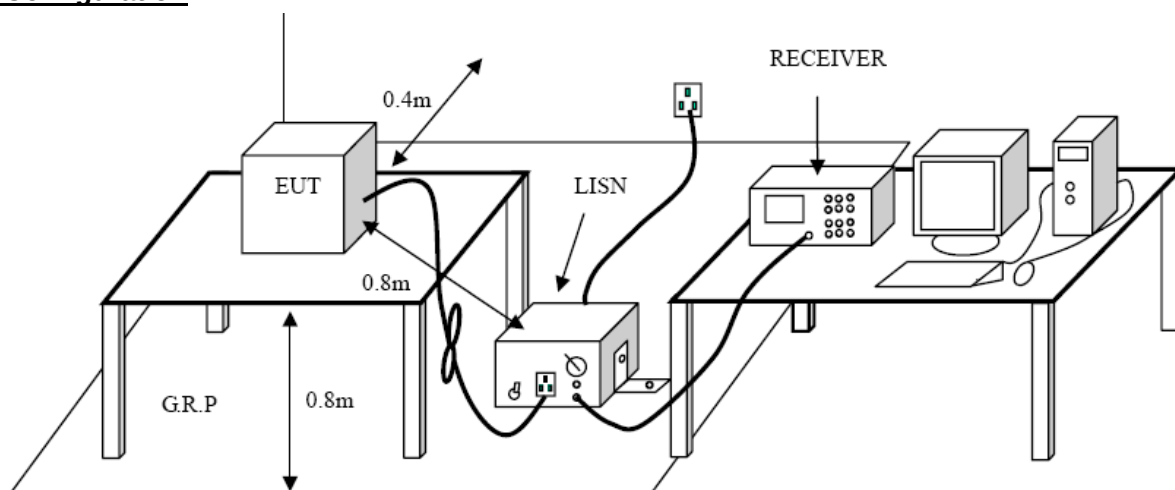

##### Test Procedure


1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

##### Test Mode

Please refer to the clause 2.4.

**Test Results**

|               |                             |
|---------------|-----------------------------|
| Test Voltage: | AC 120V/60 Hz               |
| Terminal:     | Line                        |
| Remark:       | Only worse case is reported |

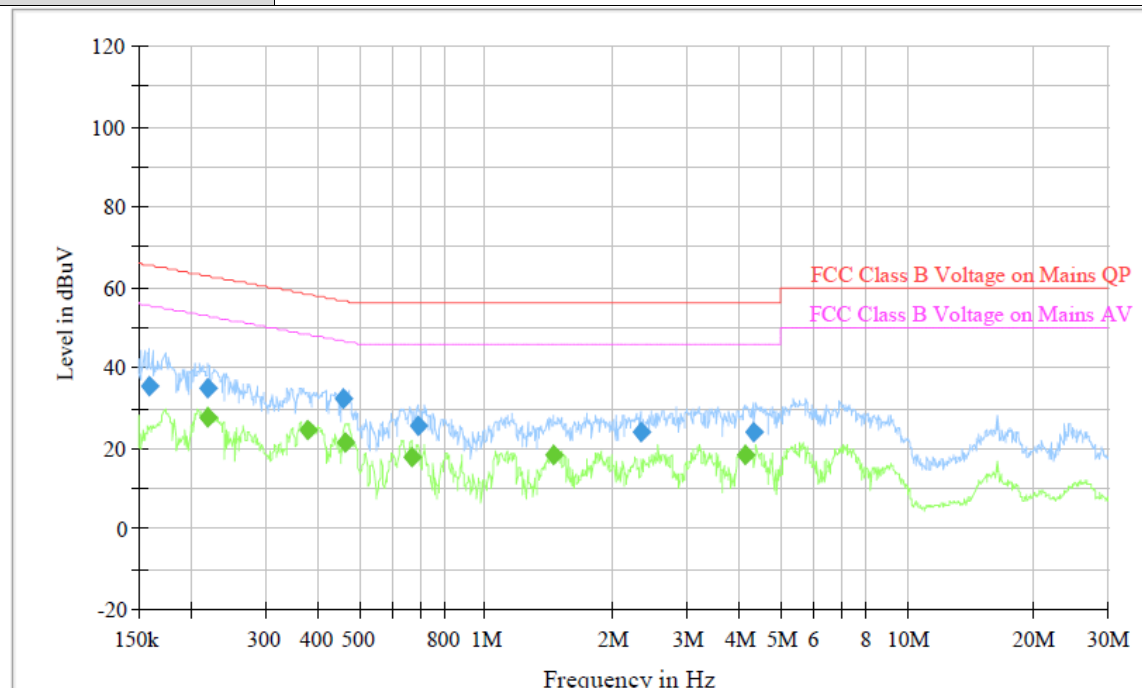**Final Measurement Detector 1**

| Frequency (MHz) | QuasiPeak (dB $\mu$ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) | Comment |
|-----------------|------------------------|-----------------|-----------------|--------|------|------------|-------------|--------------------|---------|
| 0.158620        | 35.7                   | 1000.00         | 9.000           | On     | L1   | 9.7        | 29.8        | 65.5               |         |
| 0.218300        | 34.8                   | 1000.00         | 9.000           | On     | L1   | 9.7        | 28.1        | 62.9               |         |
| 0.460540        | 32.2                   | 1000.00         | 9.000           | On     | L1   | 9.7        | 24.5        | 56.7               |         |
| 0.689240        | 25.4                   | 1000.00         | 9.000           | On     | L1   | 9.7        | 30.6        | 56.0               |         |
| 2.328910        | 24.1                   | 1000.00         | 9.000           | On     | L1   | 9.7        | 31.9        | 56.0               |         |
| 4.306690        | 24.2                   | 1000.00         | 9.000           | On     | L1   | 9.7        | 31.8        | 56.0               |         |


**Final Measurement Detector 2**

| Frequency (MHz) | Average (dB $\mu$ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) | Comment |
|-----------------|----------------------|-----------------|-----------------|--------|------|------------|-------------|--------------------|---------|
| 0.219180        | 27.7                 | 1000.00         | 9.000           | On     | L1   | 9.7        | 25.1        | 52.8               |         |
| 0.377210        | 24.5                 | 1000.00         | 9.000           | On     | L1   | 9.7        | 23.8        | 48.3               |         |
| 0.464230        | 21.3                 | 1000.00         | 9.000           | On     | L1   | 9.7        | 25.3        | 46.6               |         |
| 0.664920        | 18.0                 | 1000.00         | 9.000           | On     | L1   | 9.7        | 28.0        | 46.0               |         |
| 1.448240        | 18.3                 | 1000.00         | 9.000           | On     | L1   | 9.7        | 27.7        | 46.0               |         |
| 4.154710        | 18.5                 | 1000.00         | 9.000           | On     | L1   | 9.7        | 27.5        | 46.0               |         |

Emission Level= Read Level+ Correct Factor



|               |                             |
|---------------|-----------------------------|
| Test Voltage: | AC 120V/60 Hz               |
| Terminal:     | Neutral                     |
| Remark:       | Only worse case is reported |

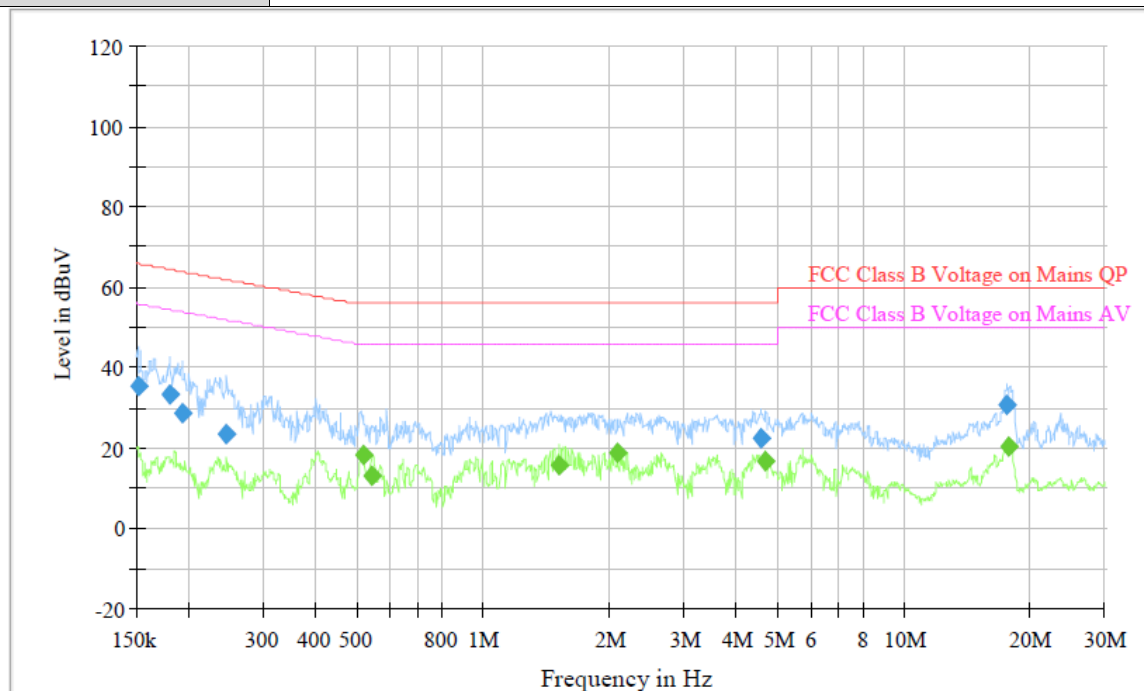

### Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dB $\mu$ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) | Comment |
|-----------------|------------------------|-----------------|-----------------|--------|------|------------|-------------|--------------------|---------|
| 0.151200        | 35.3                   | 1000.00         | 9.000           | On     | N    | 10.0       | 30.6        | 65.9               |         |
| 0.180240        | 33.5                   | 1000.00         | 9.000           | On     | N    | 10.0       | 31.0        | 64.5               |         |
| 0.192890        | 28.5                   | 1000.00         | 9.000           | On     | N    | 10.0       | 35.4        | 63.9               |         |
| 0.246080        | 23.3                   | 1000.00         | 9.000           | On     | N    | 10.0       | 38.6        | 61.9               |         |
| 4.572460        | 22.3                   | 1000.00         | 9.000           | On     | N    | 10.0       | 33.7        | 56.0               |         |
| 17.555410       | 30.9                   | 1000.00         | 9.000           | On     | N    | 10.0       | 29.1        | 60.0               |         |

### Final Measurement Detector 2

| Frequency (MHz) | Average (dB $\mu$ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) | Comment |
|-----------------|----------------------|-----------------|-----------------|--------|------|------------|-------------|--------------------|---------|
| 0.517060        | 18.4                 | 1000.00         | 9.000           | On     | N    | 10.0       | 27.6        | 46.0               |         |
| 0.544600        | 13.1                 | 1000.00         | 9.000           | On     | N    | 10.0       | 32.9        | 46.0               |         |
| 1.513250        | 15.7                 | 1000.00         | 9.000           | On     | N    | 10.0       | 30.3        | 46.0               |         |
| 2.082610        | 18.9                 | 1000.00         | 9.000           | On     | N    | 10.0       | 27.1        | 46.0               |         |
| 4.702030        | 17.1                 | 1000.00         | 9.000           | On     | N    | 10.0       | 28.9        | 46.0               |         |
| 17.837980       | 20.4                 | 1000.00         | 9.000           | On     | N    | 10.0       | 29.6        | 50.0               |         |

Emission Level= Read Level+ Correct Factor



## 3.2. Radiated Emission

### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS – Gen 8.9


| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009~0.490     | 2400/F(KHz)                       | 300                           |
| 0.490~1.705     | 24000/F(KHz)                      | 30                            |
| 1.705~30.0      | 30                                | 30                            |
| 30~88           | 100                               | 3                             |
| 88~216          | 150                               | 3                             |
| 216~960         | 200                               | 3                             |
| 960~1000        | 500                               | 3                             |

| Frequency (MHz) | dB(uV/m) (at 3 meters) |         |
|-----------------|------------------------|---------|
|                 | Peak                   | Average |
| Above 1000      | 74                     | 54      |


### **Note:**

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


### Test Configuration

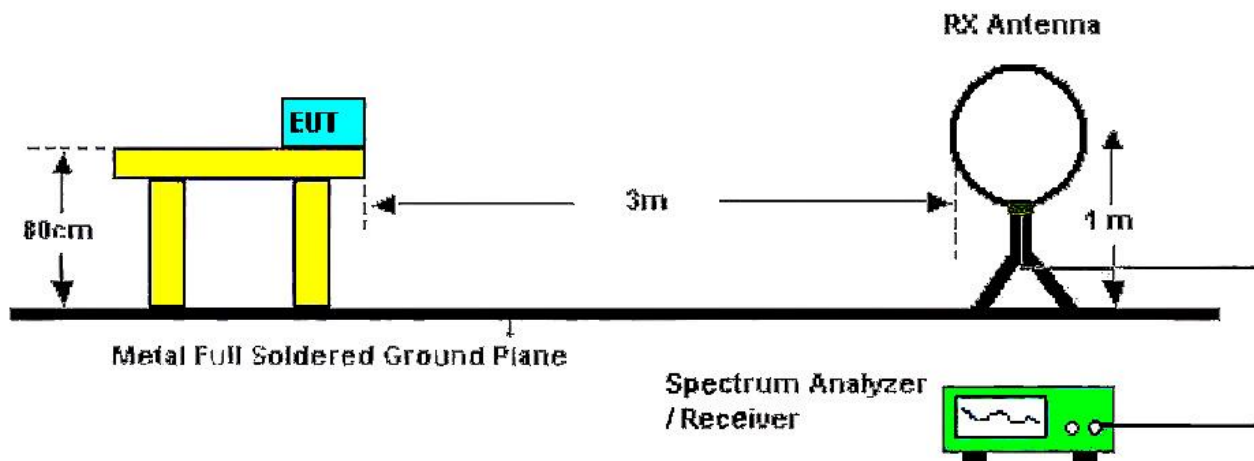

Below 30MHz Test Setup

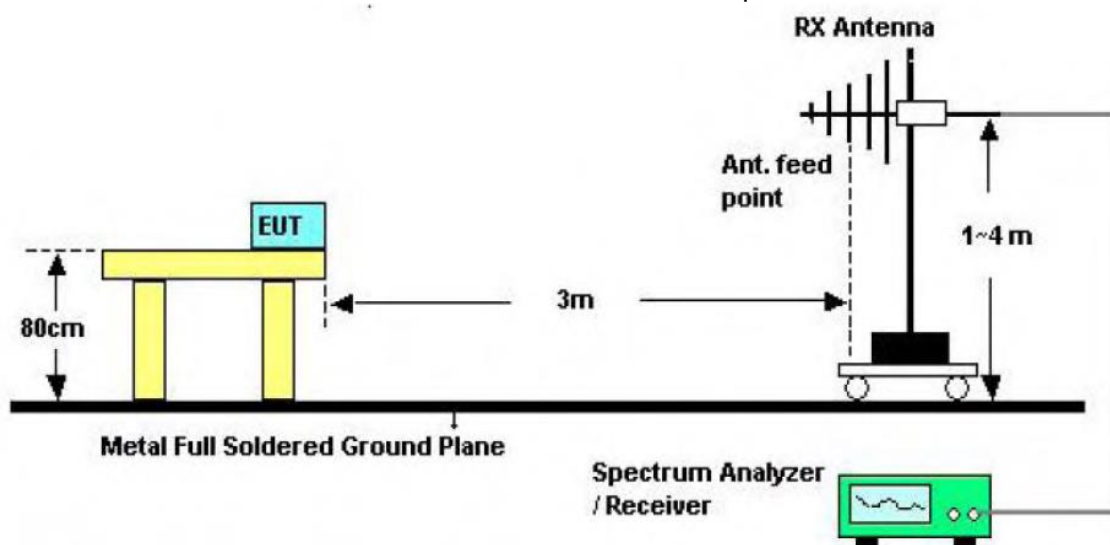

30-1000MHz Test Setup

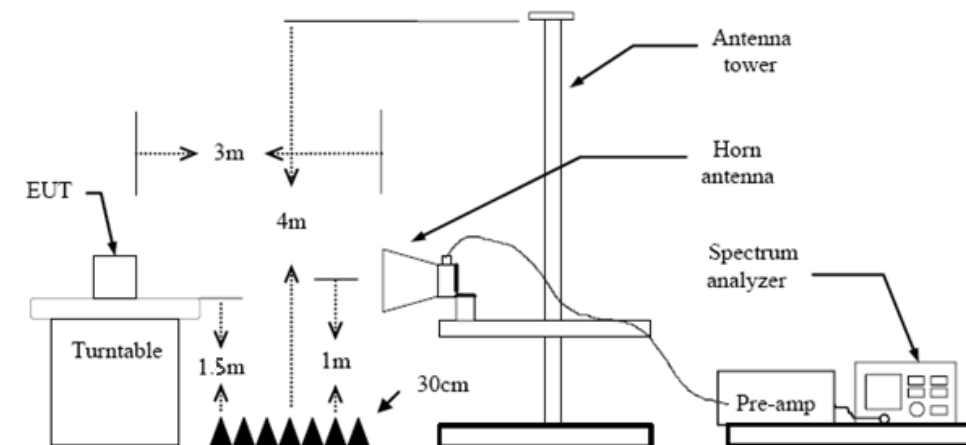

Above 1GHz Test Setup

### Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Below 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;  
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - (3) From 1 GHz to 10<sup>th</sup> harmonic:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW=3MHz RMS detector for Average value.

### Test Mode

Please refer to the clause 2.4.

### Test Result

#### 9 KHz~30 MHz


From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 30MHz-1GHz

|            |                              |
|------------|------------------------------|
| Ant. Pol.  | Horizontal                   |
| Test Mode: | TX GFSK Mode 2402MHz         |
| Remark:    | Only worse case is reported. |

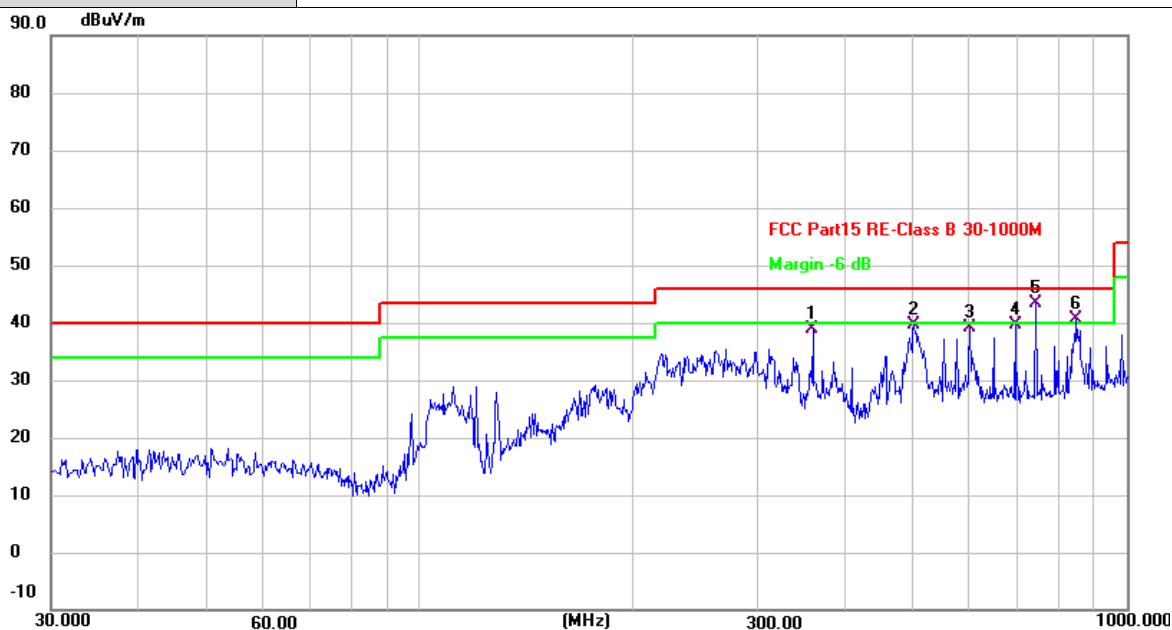


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 360.1230        | 50.89          | -12.05        | 38.84          | 46.00          | -7.16       | QP       |
| 2   | 500.7733        | 48.92          | -9.17         | 39.75          | 46.00          | -6.25       | QP       |
| 3   | 600.0366        | 45.85          | -6.69         | 39.16          | 46.00          | -6.84       | QP       |
| 4   | 696.0665        | 45.17          | -5.58         | 39.59          | 46.00          | -6.41       | QP       |
| 5 * | 743.9200        | 48.41          | -4.91         | 43.50          | 46.00          | -2.50       | QP       |
| 6 ! | 849.9732        | 43.90          | -3.34         | 40.56          | 46.00          | -5.44       | QP       |

## Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



|            |                              |
|------------|------------------------------|
| Ant. Pol.  | Vertical                     |
| Test Mode: | TX GFSK Mode 2402MHz         |
| Remark:    | Only worse case is reported. |

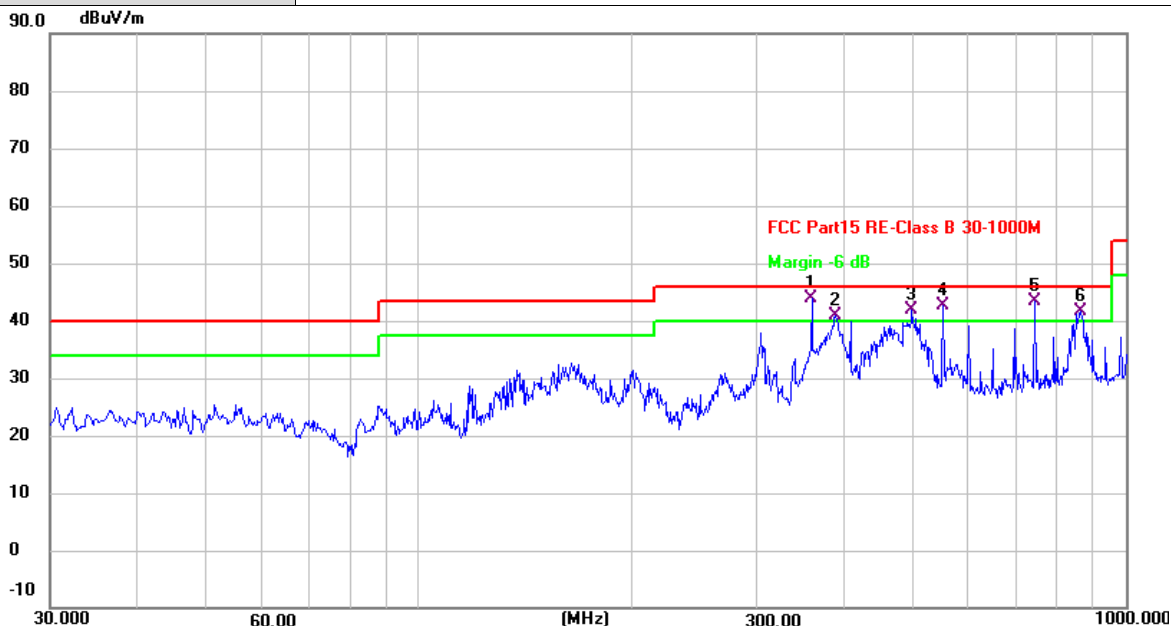

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 * | 360.1230        | 55.97          | -12.05        | 43.92          | 46.00          | -2.08       | QP       |
| 2 ! | 388.5765        | 52.26          | -11.34        | 40.92          | 46.00          | -5.08       | QP       |
| 3 ! | 498.5100        | 51.03          | -9.21         | 41.82          | 46.00          | -4.18       | QP       |
| 4 ! | 551.8600        | 50.61          | -7.89         | 42.72          | 46.00          | -3.28       | QP       |
| 5 ! | 743.9200        | 48.22          | -4.91         | 43.31          | 46.00          | -2.69       | QP       |
| 6 ! | 865.8165        | 44.65          | -3.11         | 41.54          | 46.00          | -4.46       | QP       |

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



## Above 1GHz

|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Horizontal                                                                    |
| <b>Test Mode:</b> | TX GFSK Mode 2402MHz                                                          |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 * | 4803.876        | 30.71          | 2.16          | 32.87          | 54.00          | -21.13      | AVG      |
| 2   | 4803.893        | 41.20          | 2.16          | 43.36          | 74.00          | -30.64      | peak     |

## Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value

|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Vertical                                                                      |
| <b>Test Mode:</b> | TX GFSK Mode 2402MHz                                                          |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1 * | 4803.899        | 28.95         | 2.56        | 31.51       | 54.00       | -22.49      | AVG      |
| 2   | 4803.923        | 39.74         | 2.56        | 42.30       | 74.00       | -31.70      | peak     |

## Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Horizontal                                                                    |
| <b>Test Mode:</b> | TX GFSK Mode 2441MHz                                                          |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 * | 4882.001        | 30.88          | 2.31          | 33.19          | 54.00          | -20.81      | AVG      |
| 2   | 4882.025        | 41.61          | 2.31          | 43.92          | 74.00          | -30.08      | peak     |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Vertical                                                                      |
| <b>Test Mode:</b> | TX GFSK Mode 2441MHz                                                          |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1 * | 4882.109        | 28.51         | 2.79        | 31.30       | 54.00       | -22.70      | AVG      |
| 2   | 4882.210        | 39.23         | 2.79        | 42.02       | 74.00       | -31.98      | peak     |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Horizontal                                                                    |
| <b>Test Mode:</b> | TX GFSK Mode 2480MHz                                                          |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 * | 4959.909        | 30.55          | 2.48          | 33.03          | 54.00          | -20.97      | AVG      |
| 2   | 4959.954        | 41.27          | 2.48          | 43.75          | 74.00          | -30.25      | peak     |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Vertical                                                                      |
| <b>Test Mode:</b> | TX GFSK Mode 2480MHz                                                          |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1   | 4959.905        | 39.48         | 3.04        | 42.52       | 74.00       | -31.48      | peak     |
| 2 * | 4959.962        | 28.17         | 3.04        | 31.21       | 54.00       | -22.79      | AVG      |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Horizontal                                                                    |
| <b>Test Mode:</b> | TX $\pi/4$ -DQPSK Mode 2402MHz                                                |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 4803.865        | 40.86          | 2.16          | 43.02          | 74.00          | -30.98      | peak     |
| 2 * | 4803.922        | 30.80          | 2.16          | 32.96          | 54.00          | -21.04      | AVG      |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Vertical                                                                      |
| <b>Test Mode:</b> | TX $\pi/4$ -DQPSK Mode 2402MHz                                                |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1   | 4803.850        | 39.92         | 2.56        | 42.48       | 74.00       | -31.52      | peak     |
| 2 * | 4803.898        | 29.52         | 2.56        | 32.08       | 54.00       | -21.92      | AVG      |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Horizontal                                                                    |
| <b>Test Mode:</b> | TX $\pi/4$ -DQPSK Mode 2441MHz                                                |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1 * | 4882.102        | 29.51         | 2.79        | 32.30       | 54.00       | -21.70      | AVG      |
| 2   | 4882.110        | 39.71         | 2.79        | 42.50       | 74.00       | -31.50      | peak     |

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Vertical                                                                      |
| <b>Test Mode:</b> | TX $\pi/4$ -DQPSK Mode 2441MHz                                                |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1 * | 4881.860        | 28.24         | 2.79        | 31.03       | 54.00       | -22.97      | AVG      |
| 2   | 4882.003        | 40.08         | 2.79        | 42.87       | 74.00       | -31.13      | peak     |

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Horizontal                                                                    |
| <b>Test Mode:</b> | TX $\pi/4$ -DQPSK Mode 2480MHz                                                |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1 * | 4959.896        | 29.59         | 3.04        | 32.63       | 54.00       | -21.37      | AVG      |
| 2   | 4960.210        | 39.66         | 3.04        | 42.70       | 74.00       | -31.30      | peak     |

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Vertical                                                                      |
| <b>Test Mode:</b> | TX $\pi/4$ -DQPSK Mode 2480MHz                                                |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1   | 4959.880        | 39.62         | 3.04        | 42.66       | 74.00       | -31.34      | peak     |
| 2 * | 4959.896        | 29.16         | 3.04        | 32.20       | 54.00       | -21.80      | AVG      |

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Horizontal                                                                    |
| <b>Test Mode:</b> | TX 8-DPSK Mode 2402MHz                                                        |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1   | 4803.897        | 40.49         | 2.56        | 43.05       | 74.00       | -30.95      | peak     |
| 2 * | 4803.900        | 29.93         | 2.56        | 32.49       | 54.00       | -21.51      | AVG      |

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Vertical                                                                      |
| <b>Test Mode:</b> | TX 8-DPSK Mode 2402MHz                                                        |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1   | 4803.852        | 39.55         | 2.56        | 42.11       | 74.00       | -31.89      | peak     |
| 2 * | 4803.891        | 29.31         | 2.56        | 31.87       | 54.00       | -22.13      | AVG      |

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Horizontal                                                                    |
| <b>Test Mode:</b> | TX 8-DPSK Mode 2441MHz                                                        |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1   | 4882.019        | 40.06         | 2.79        | 42.85       | 74.00       | -31.15      | peak     |
| 2 * | 4882.036        | 29.39         | 2.79        | 32.18       | 54.00       | -21.82      | AVG      |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Vertical                                                                      |
| <b>Test Mode:</b> | TX 8-DPSK Mode 2441MHz                                                        |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1 * | 4881.859        | 28.57         | 2.79        | 31.36       | 54.00       | -22.64      | AVG      |
| 2   | 4881.960        | 39.21         | 2.79        | 42.00       | 74.00       | -32.00      | peak     |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Horizontal                                                                    |
| <b>Test Mode:</b> | TX 8-DPSK Mode 2480MHz                                                        |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1 * | 4959.890        | 29.89         | 3.04        | 32.93       | 54.00       | -21.07      | AVG      |
| 2   | 4960.120        | 40.13         | 3.04        | 43.17       | 74.00       | -30.83      | peak     |

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| <b>Ant. Pol.</b>  | Vertical                                                                      |
| <b>Test Mode:</b> | TX 8-DPSK Mode 2480MHz                                                        |
| <b>Remark:</b>    | No report for the emission which more than 20 dB below the pre-scribed limit. |

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1   | 4960.011        | 38.94         | 3.04        | 41.98       | 74.00       | -32.02      | peak     |
| 2 * | 4960.018        | 29.58         | 3.04        | 32.62       | 54.00       | -21.38      | AVG      |

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

### 3.3. Band Edge Emissions (Radiated)


#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

| Restricted Frequency Band (MHz) | (dBuV/m)(at 3m) |         |
|---------------------------------|-----------------|---------|
|                                 | Peak            | Average |
| 2310 ~2390                      | 74              | 54      |
| 2483.5 ~2500                    | 74              | 54      |

Conducted band edge limit: The highest point of the operating frequency waveform down 20dB

#### Test Configuration

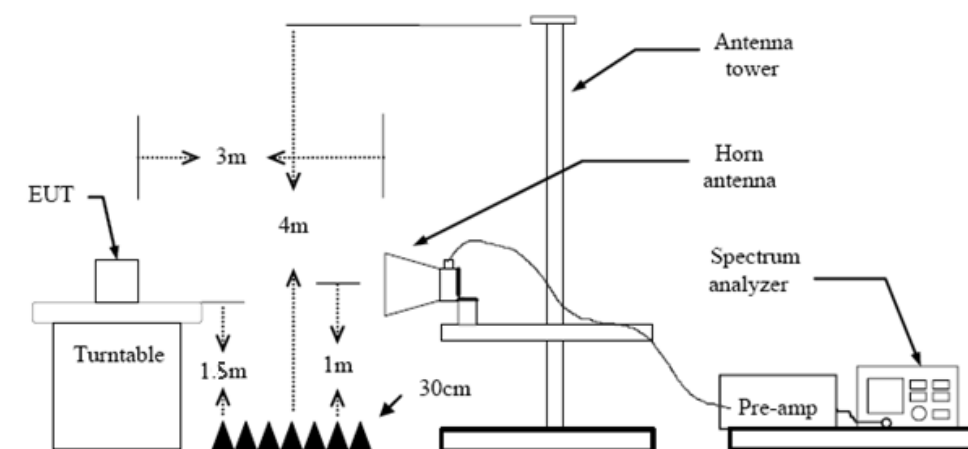


#### Test Procedure


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.


#### Test Mode


Please refer to the clause 2.4.

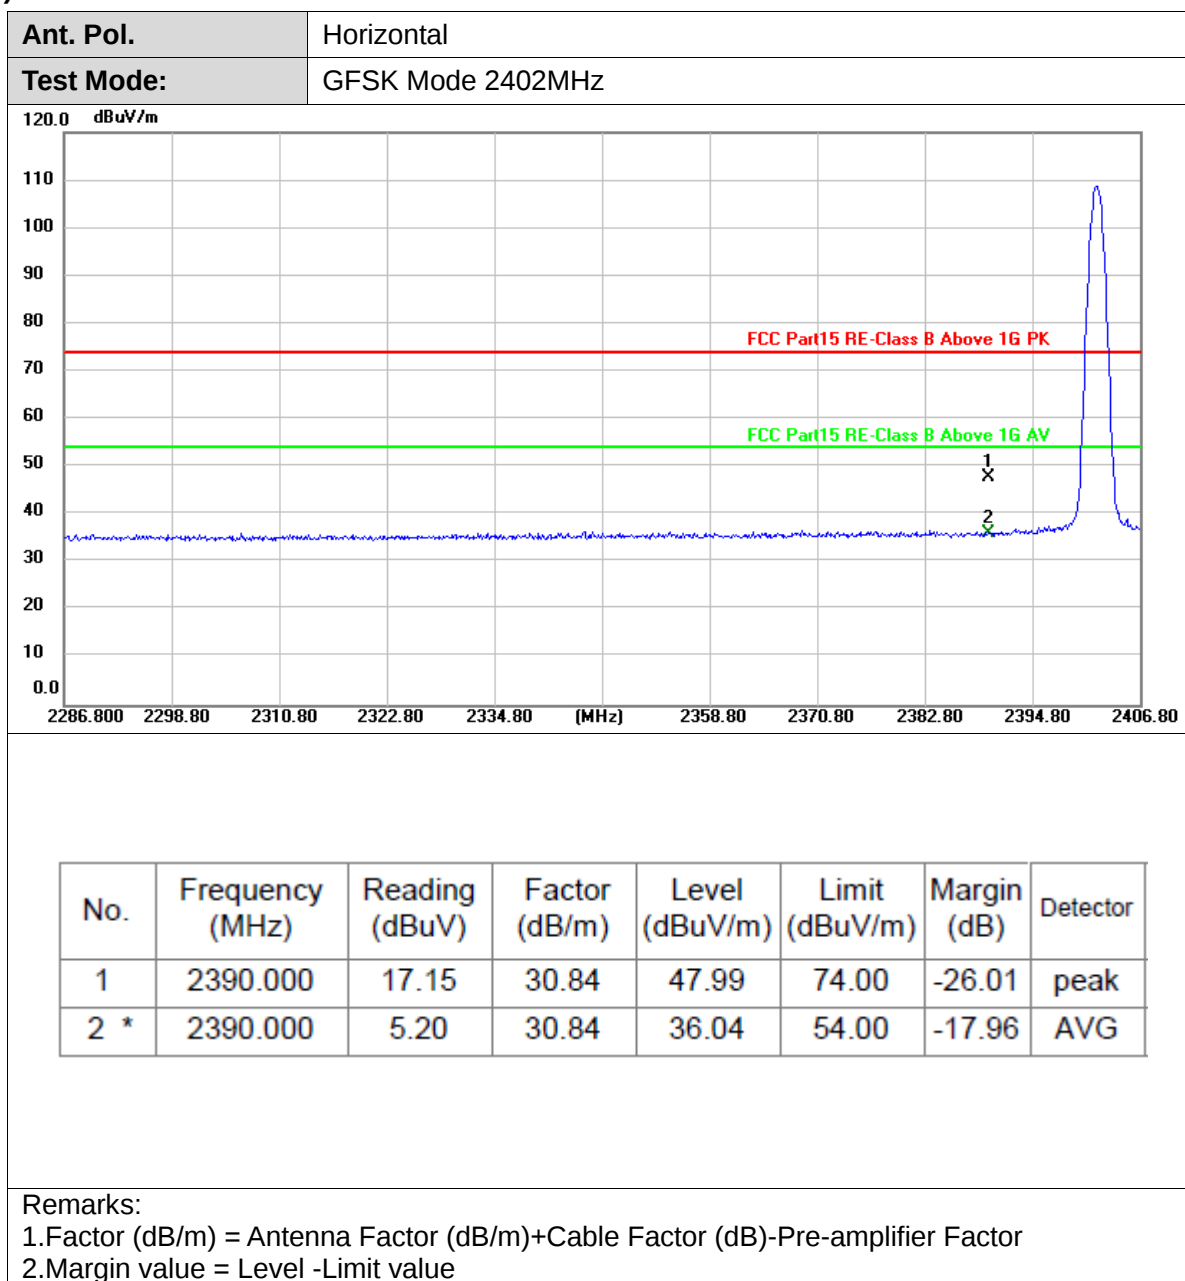
**Test Results****(1) Radiation Test**

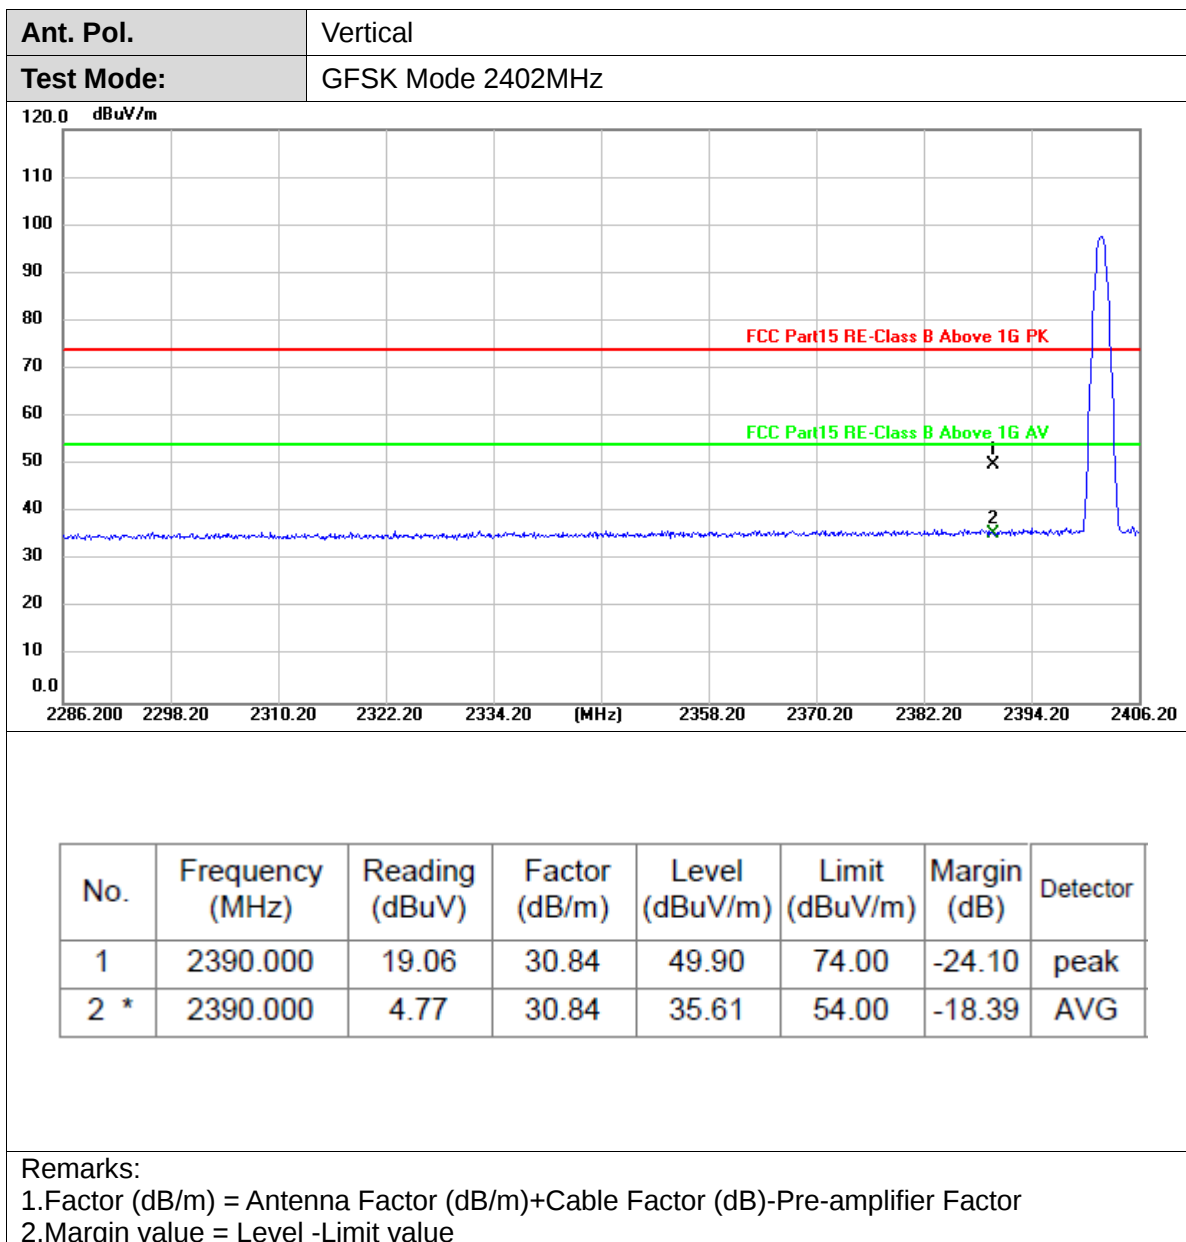


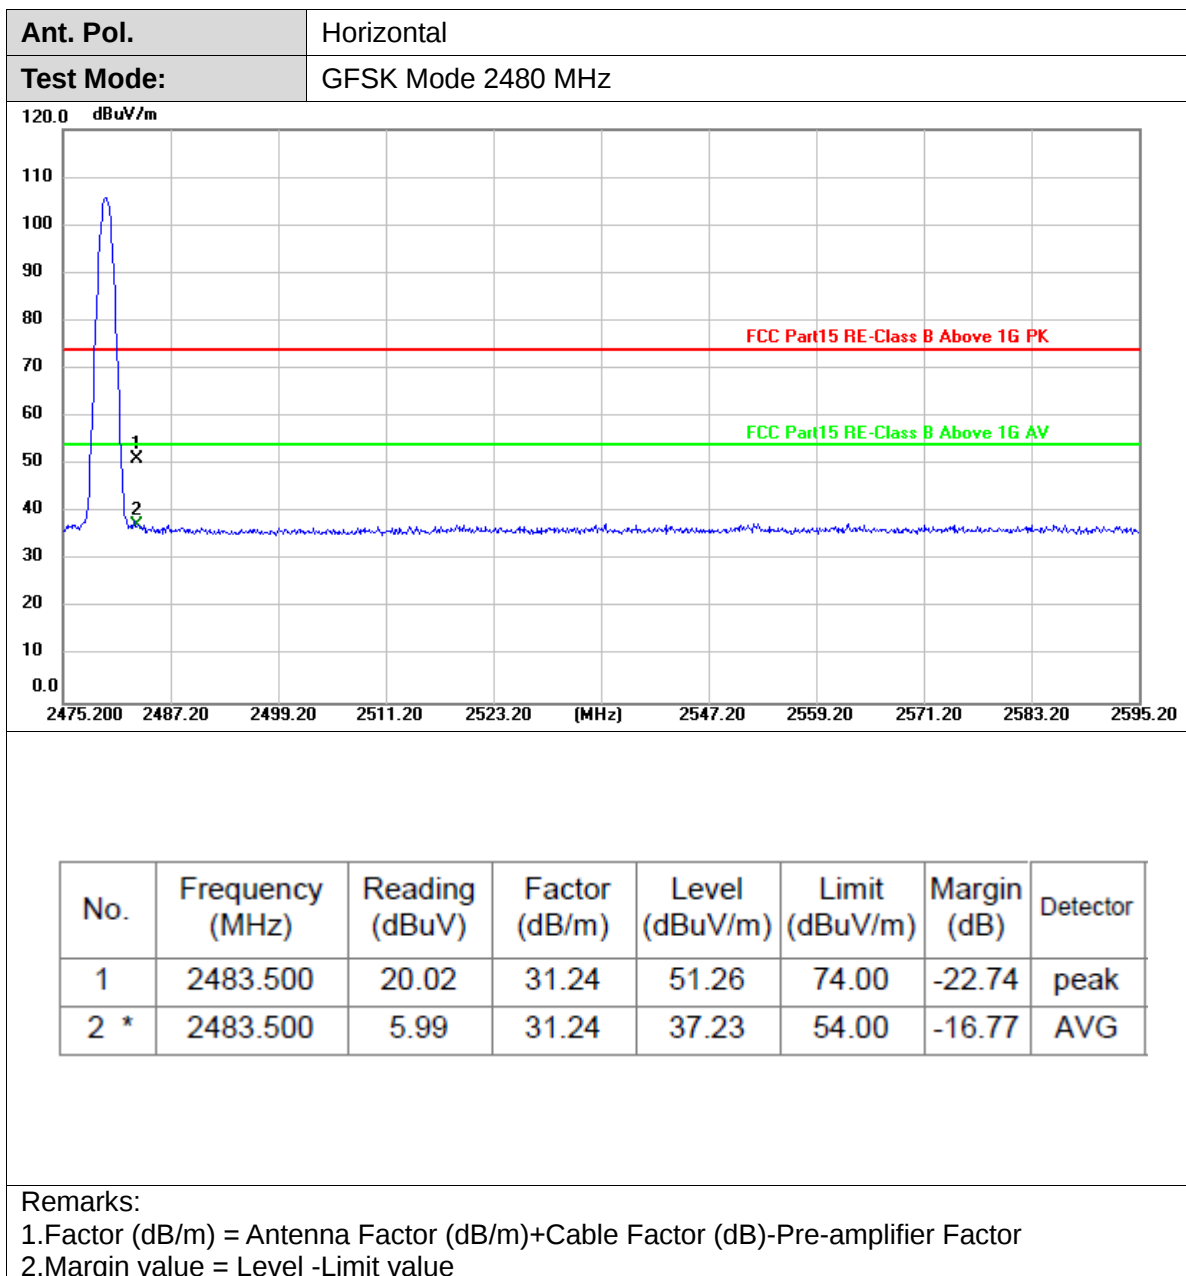


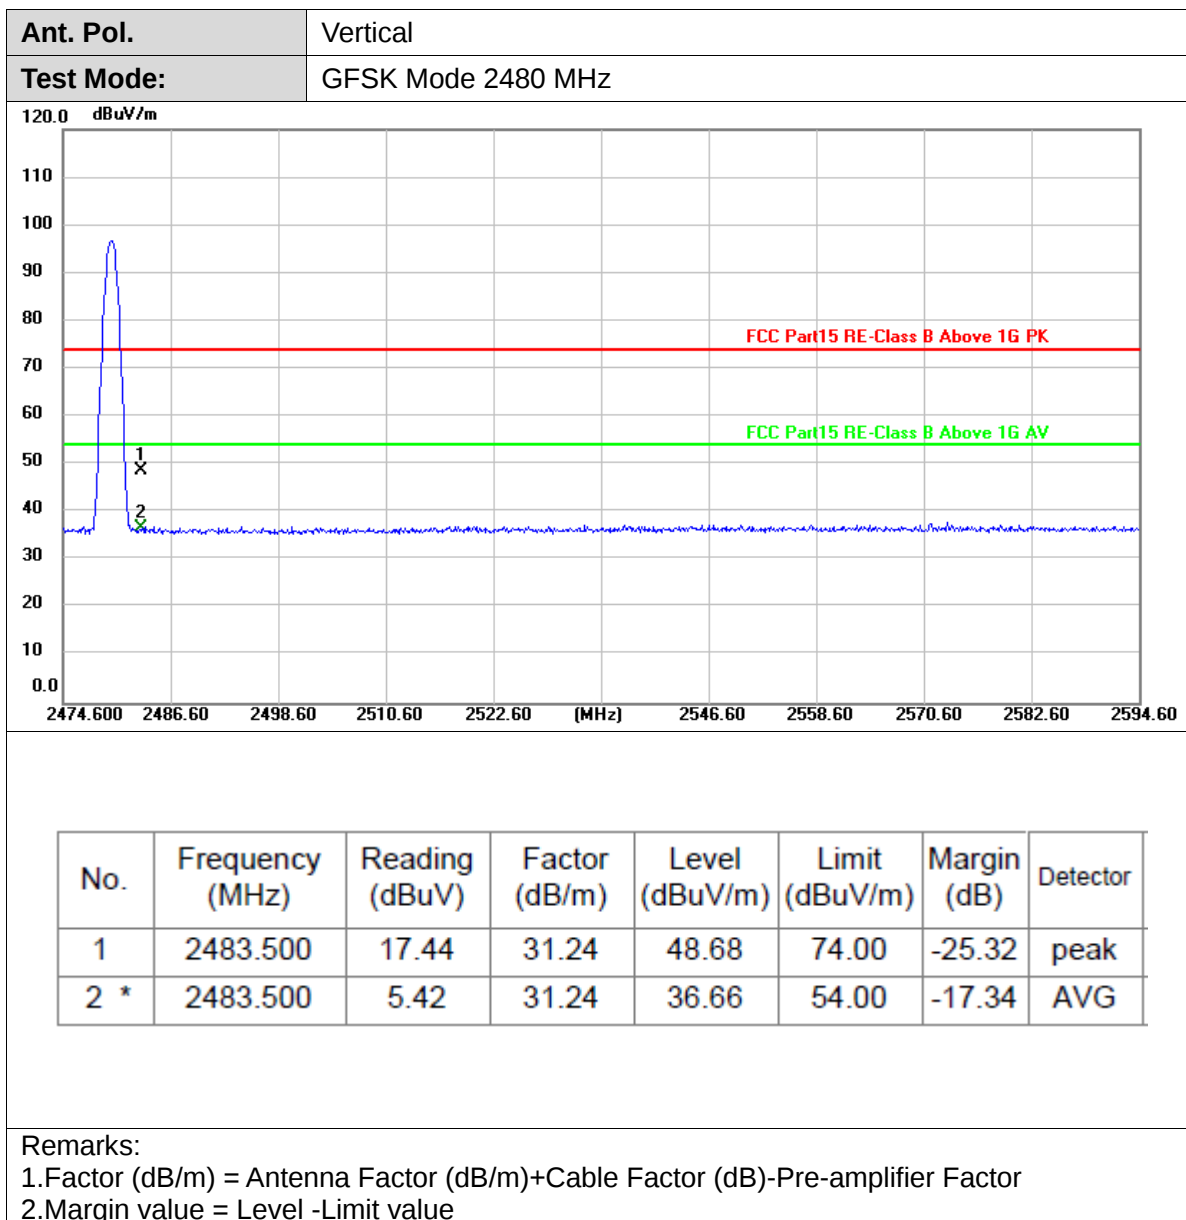


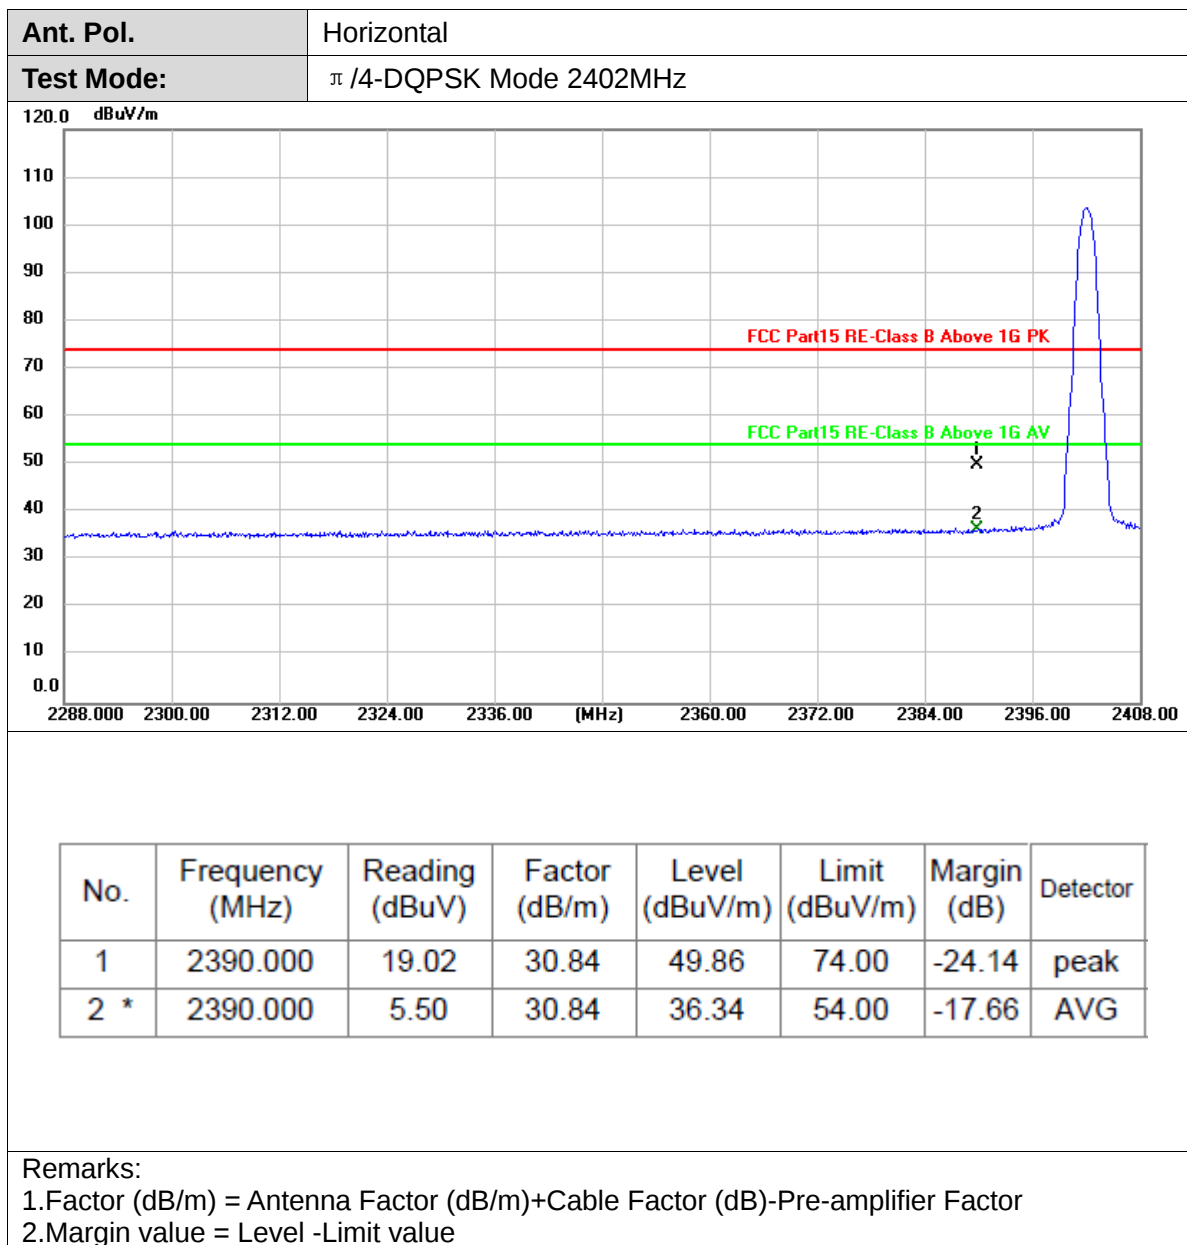


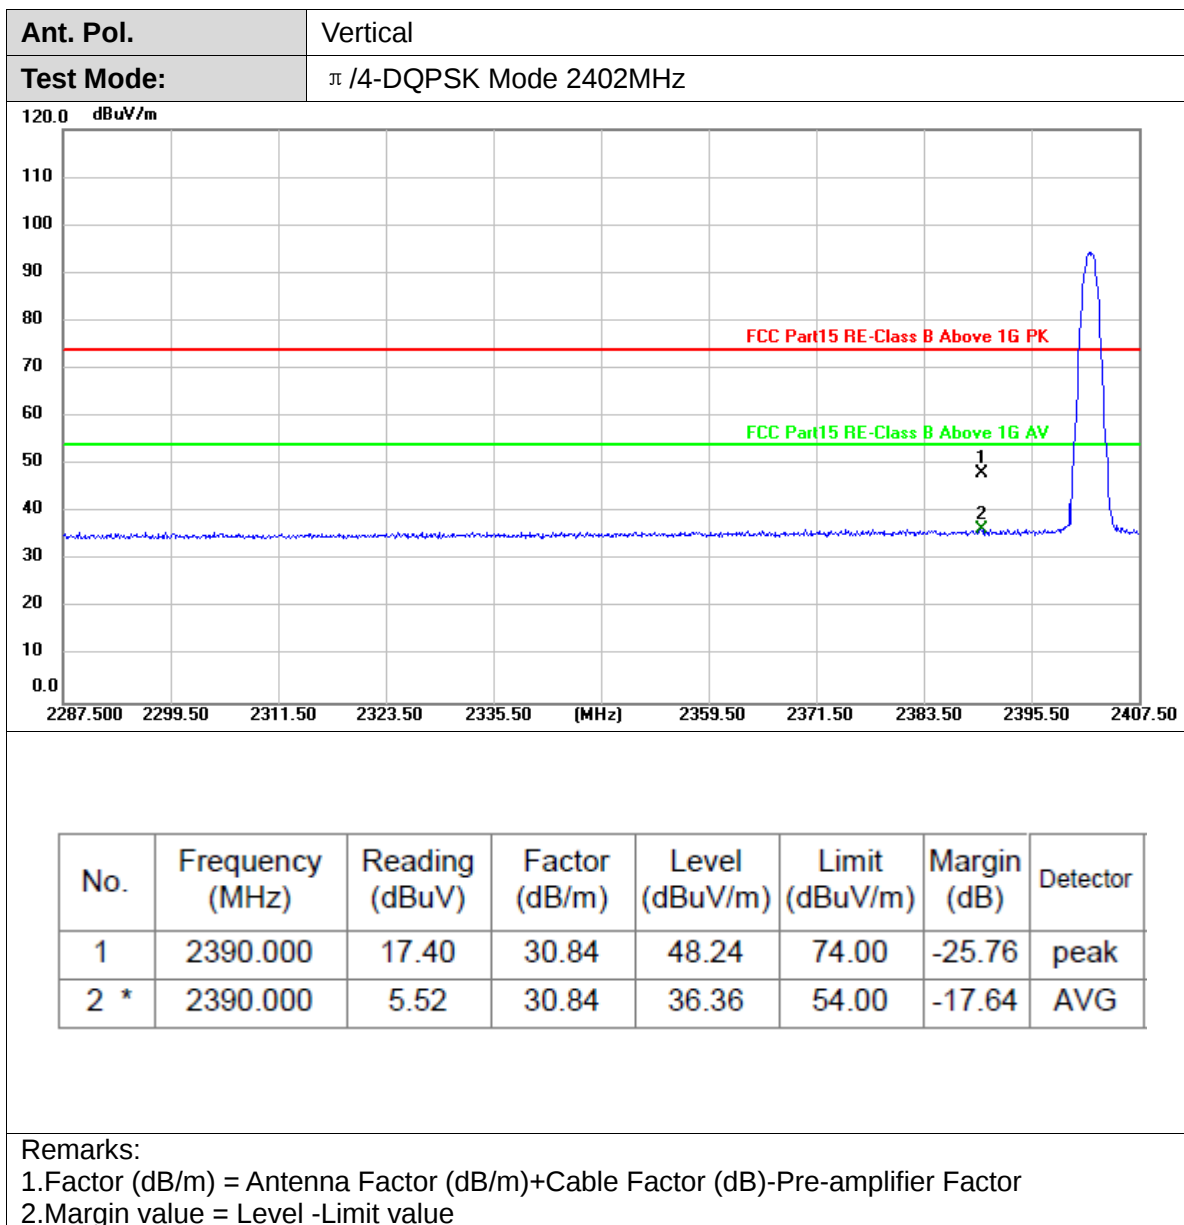


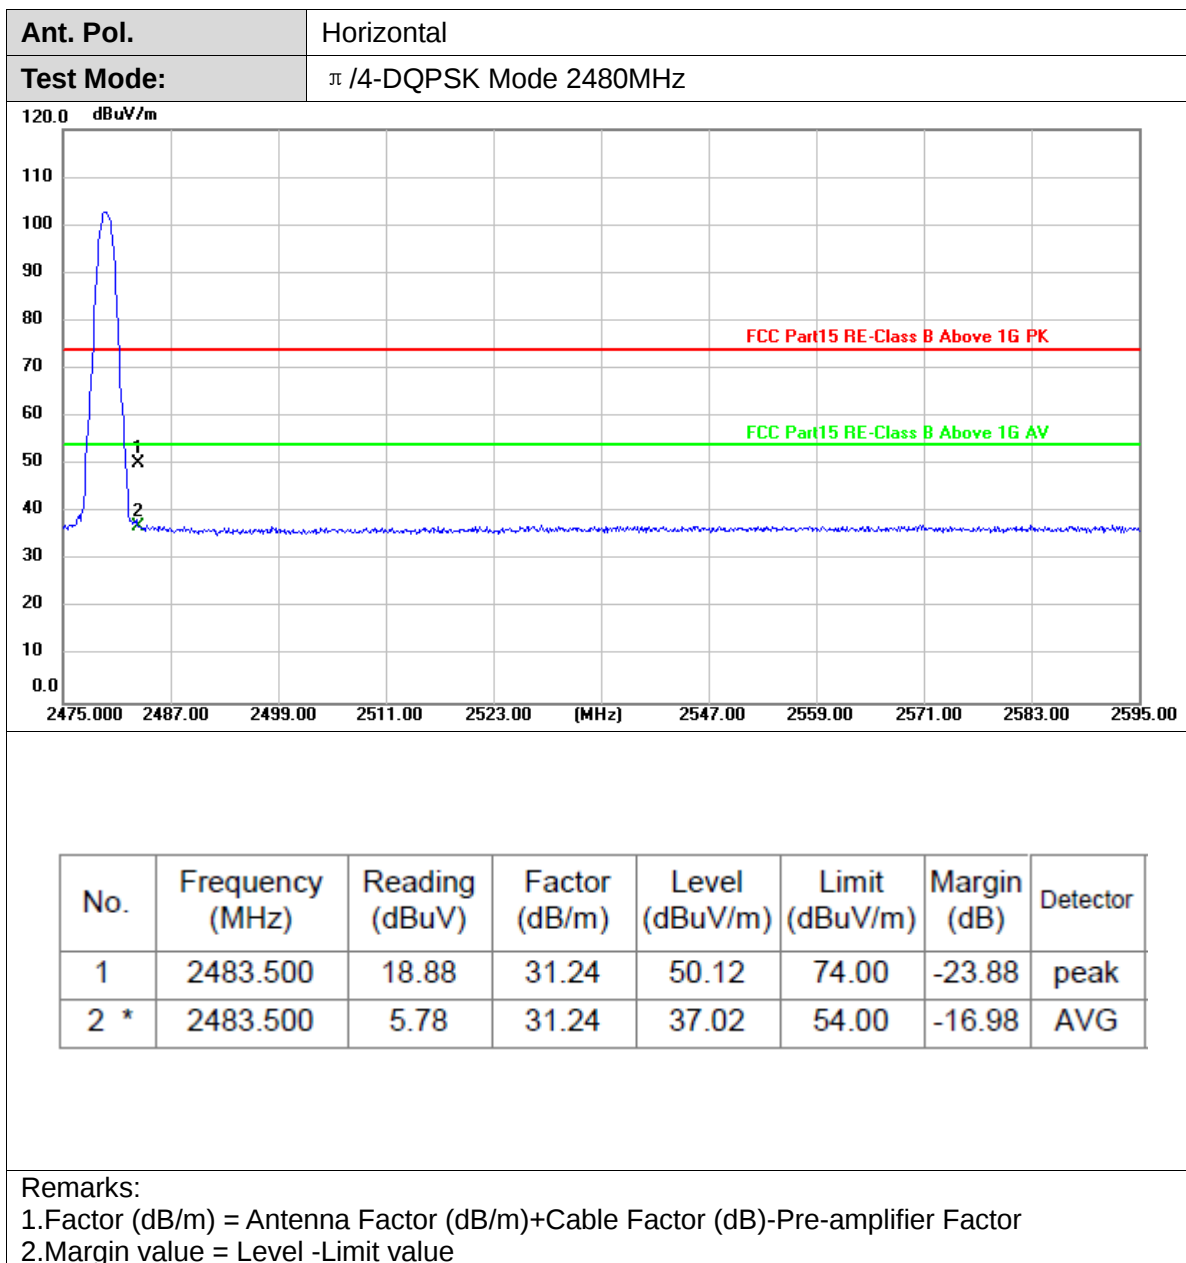


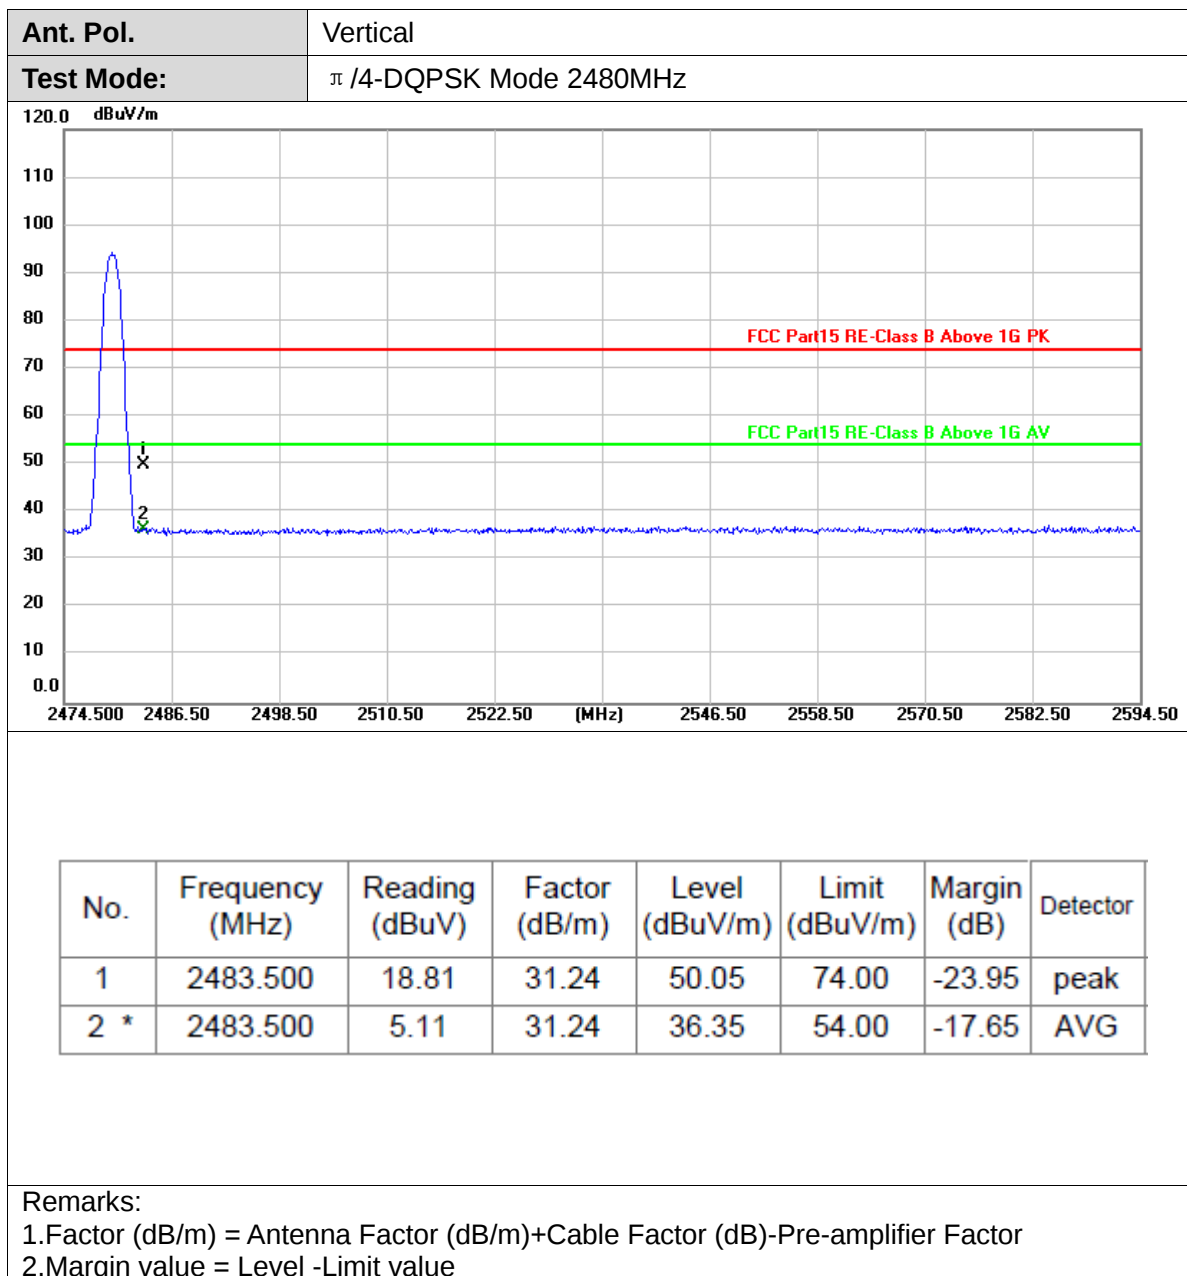

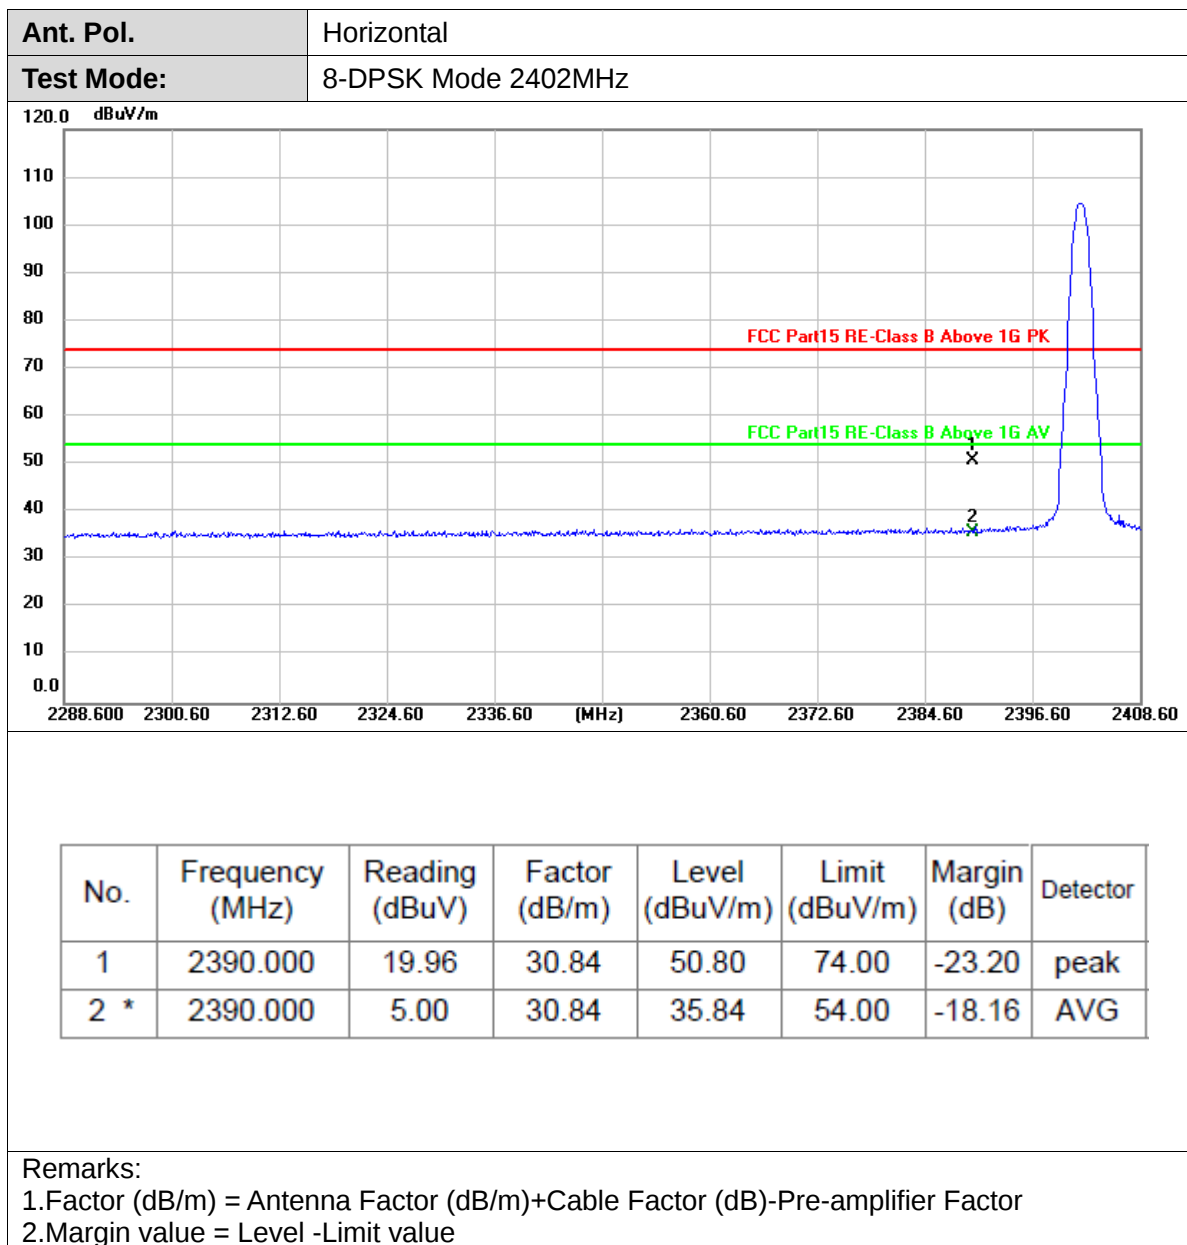

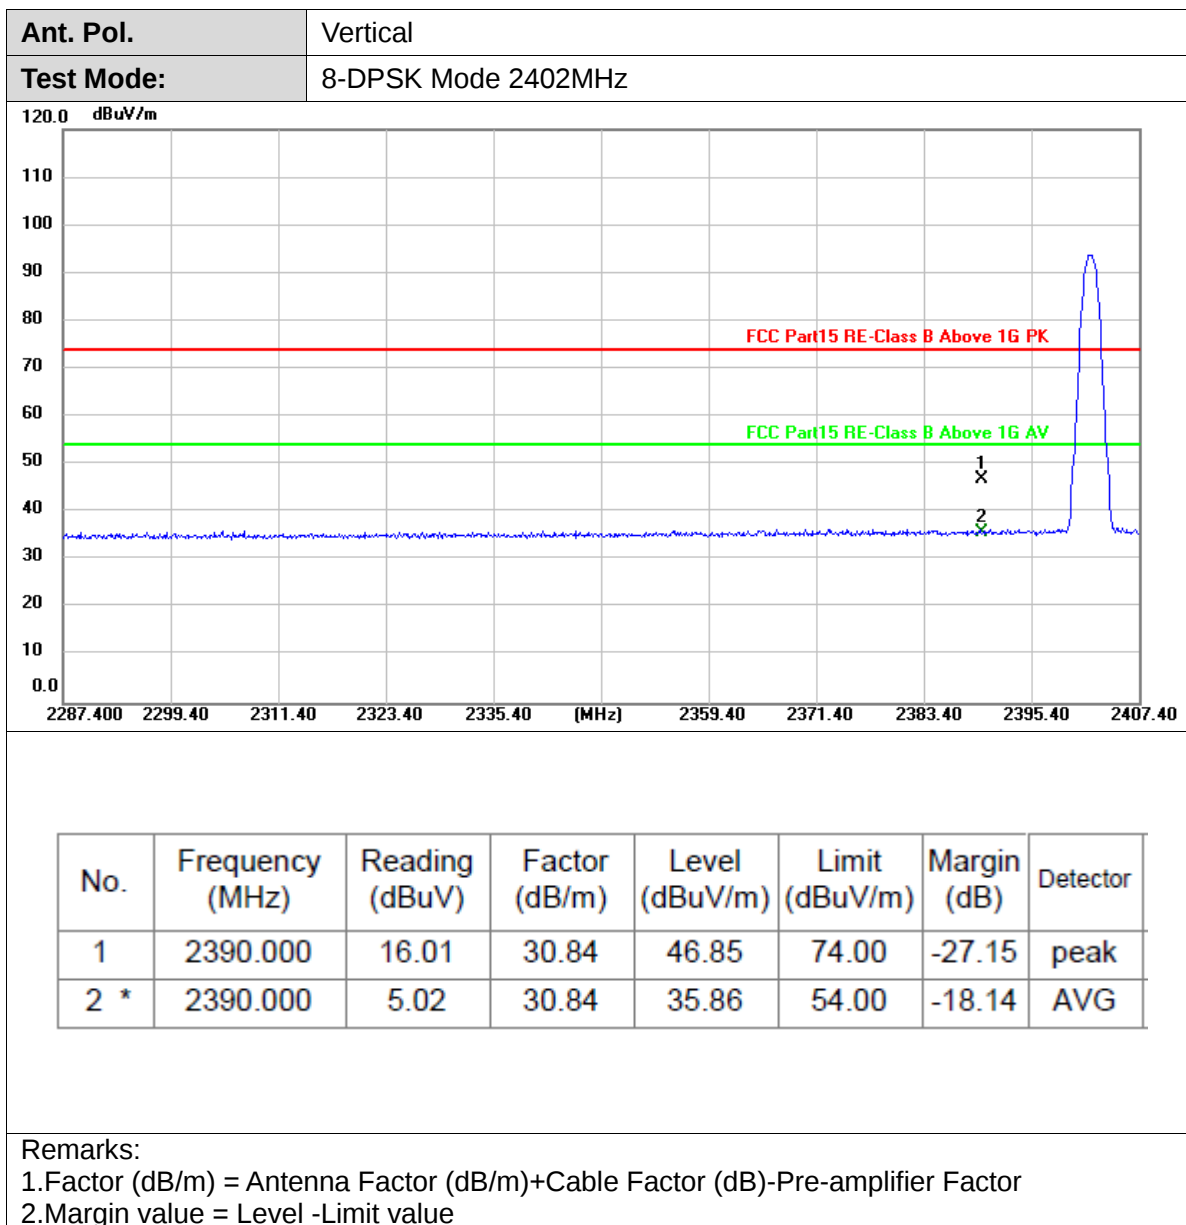

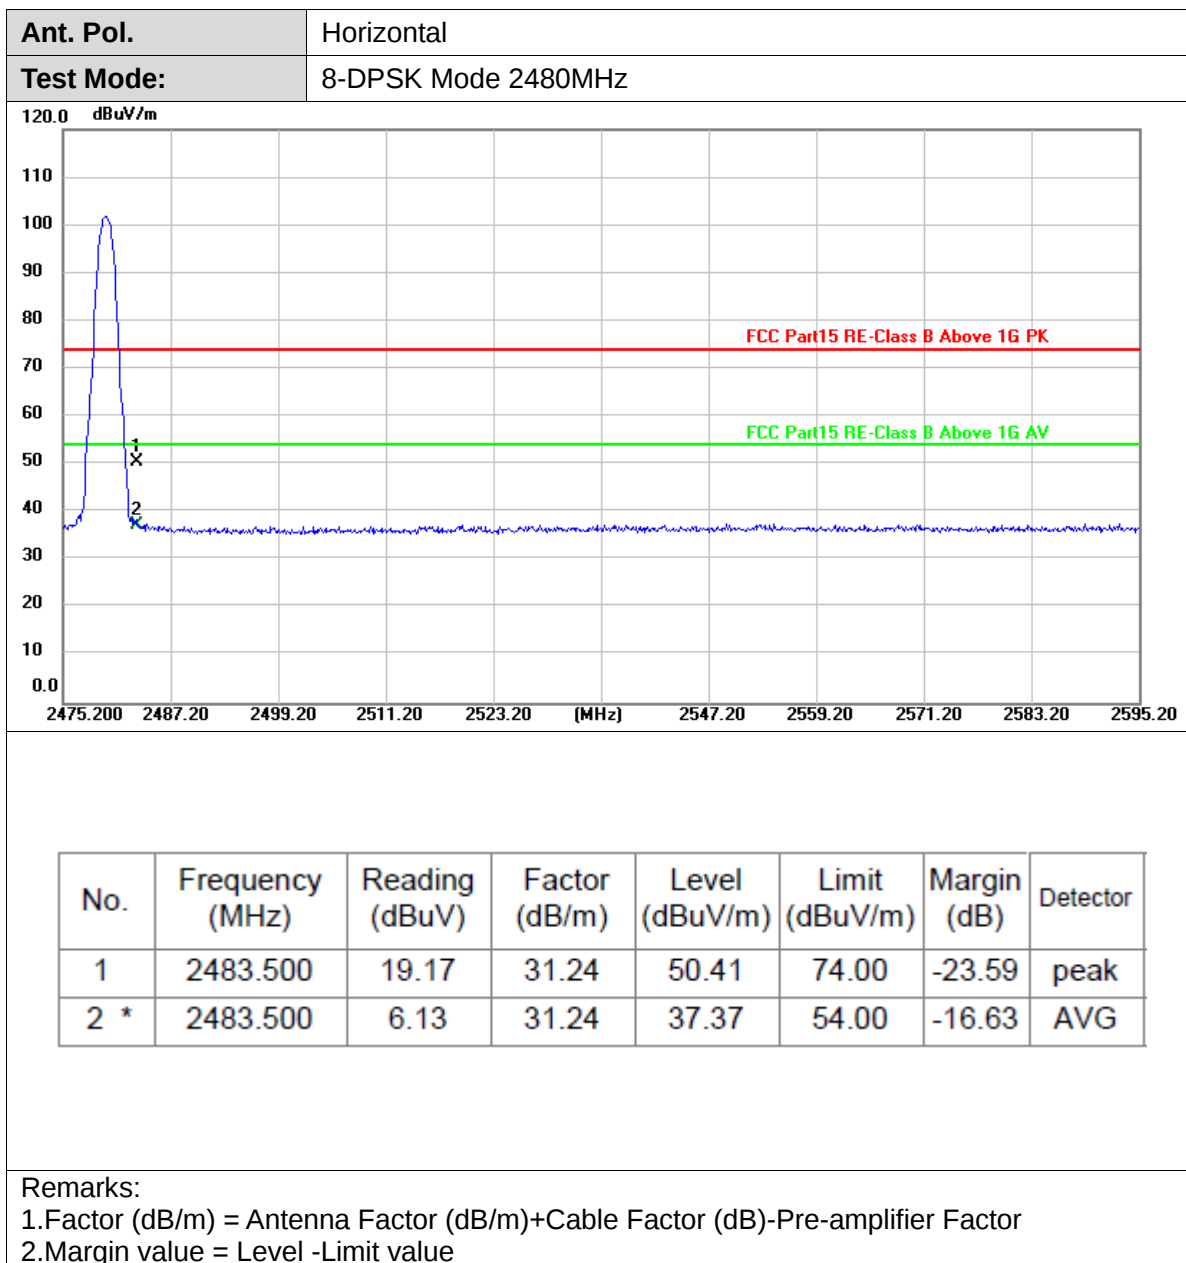

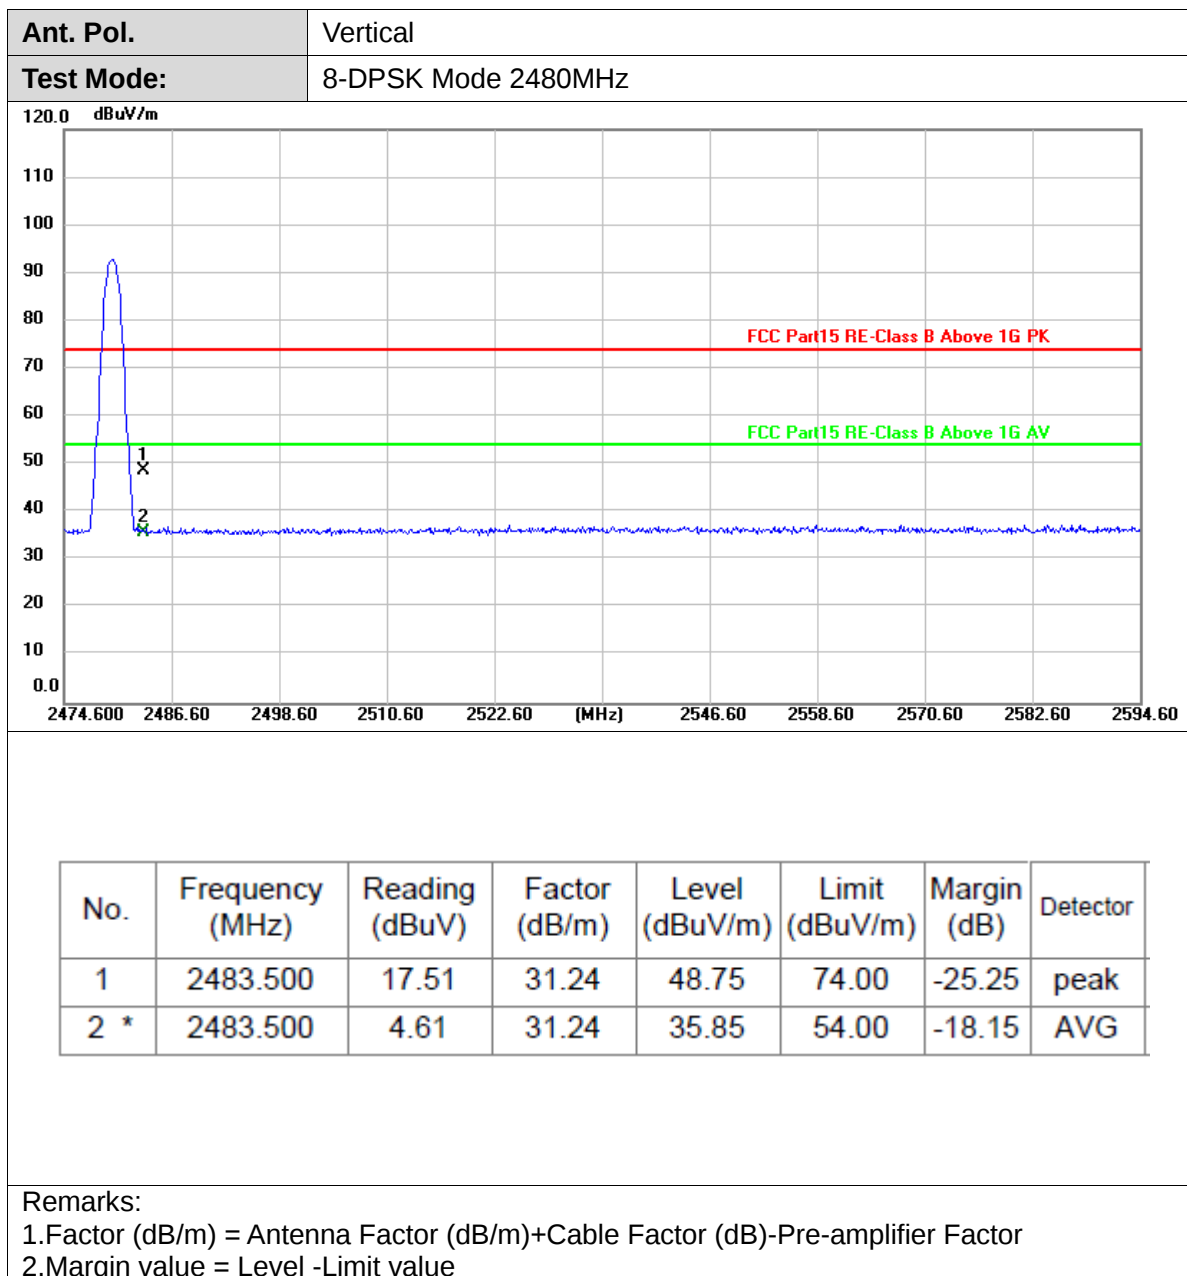


### 3.4. Band edge and Spurious Emissions (Conducted)

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

#### Test Configuration



#### Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
RBW = 100 kHz, VBW  $\geq$  RBW, scan up through 10<sup>th</sup> harmonic.  
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

#### Test Mode

Please refer to the clause 2.4.

#### Test Results

##### (1) Band edge Conducted Test

| Test Mode      | Ch Name | Frequency (MHz) | Ref Level [dBm] | Result [dBm] | Limit [dBm]   | Verdict |
|----------------|---------|-----------------|-----------------|--------------|---------------|---------|
| GFSK           | Low     | 2402            | 8.33            | -45.76       | $\leq -11.67$ | PASS    |
|                | High    | 2480            | 8.58            | -57.73       | $\leq -11.43$ | PASS    |
|                | Low     | Hop_2402        | 7.49            | -51.90       | $\leq -12.52$ | PASS    |
|                | High    | Hop_2480        | 9.04            | -59.14       | $\leq -10.96$ | PASS    |
| $\pi/4$ -DQPSK | Low     | 2402            | 6.56            | -50.90       | $\leq -13.44$ | PASS    |
|                | High    | 2480            | 6.09            | -57.91       | $\leq -13.91$ | PASS    |
|                | Low     | Hop_2402        | 5.05            | -51.40       | $\leq -14.95$ | PASS    |
|                | High    | Hop_2480        | 7.33            | -58.60       | $\leq -12.67$ | PASS    |
| 8-DPSK         | Low     | 2402            | 6.97            | -49.88       | $\leq -13.03$ | PASS    |
|                | High    | 2480            | 6.96            | -56.61       | $\leq -13.04$ | PASS    |
|                | Low     | Hop_2402        | 4.07            | -51.80       | $\leq -15.94$ | PASS    |
|                | High    | Hop_2480        | 6.74            | -58.50       | $\leq -13.26$ | PASS    |



Test plot as follows:



CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)

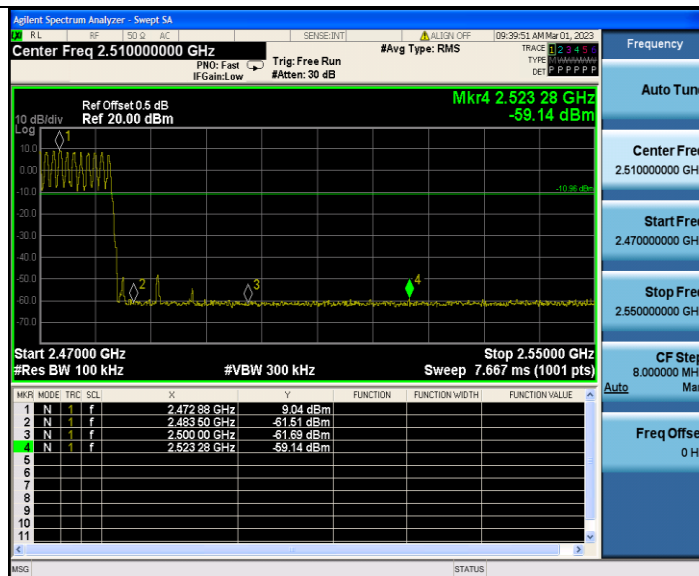


2DH5 Ant1 Low 2402

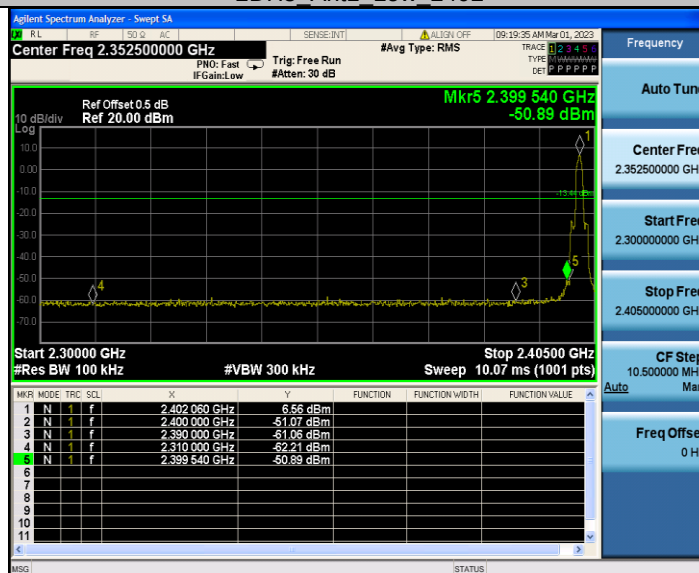


2DH5 Ant1 High 2480

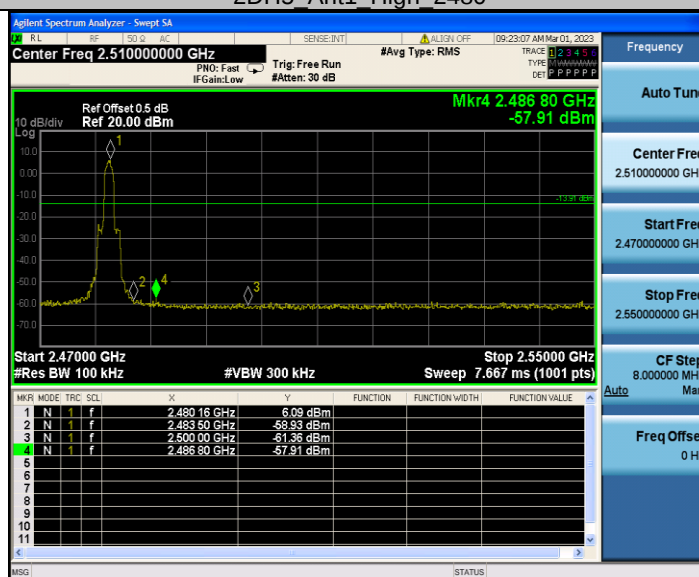


2DH5 Ant1 Low Hop 2402

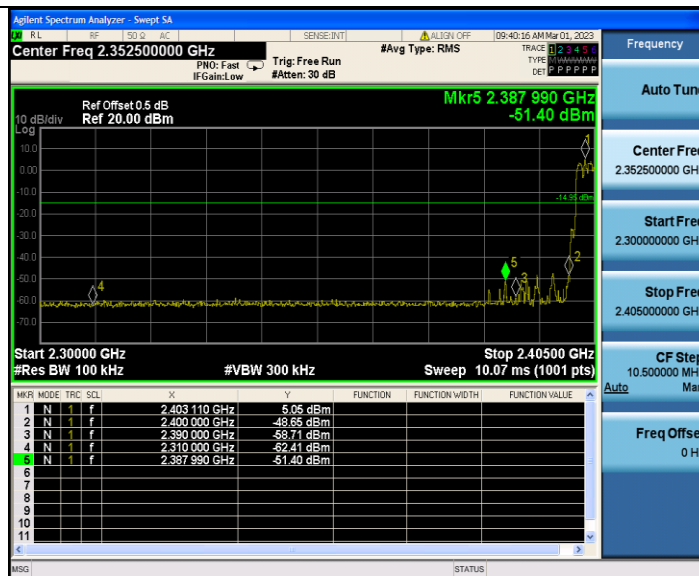

2DH5 Ant1 High Hop 2480

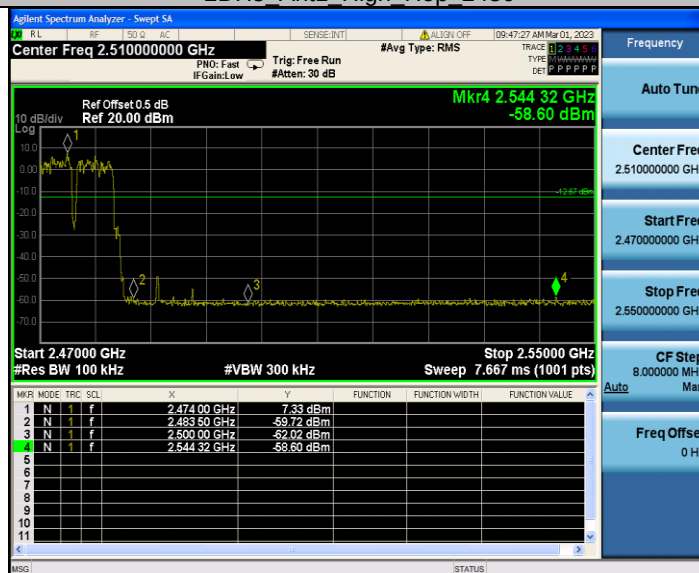

3DH5 Ant1 Low 2402

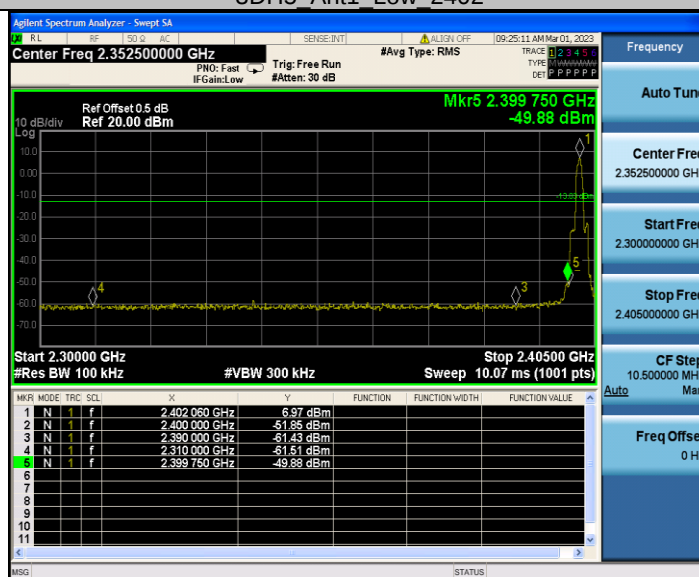

3DH5 Ant1 High 2480

CTC Laboratories, Inc.


1-2/F, Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)

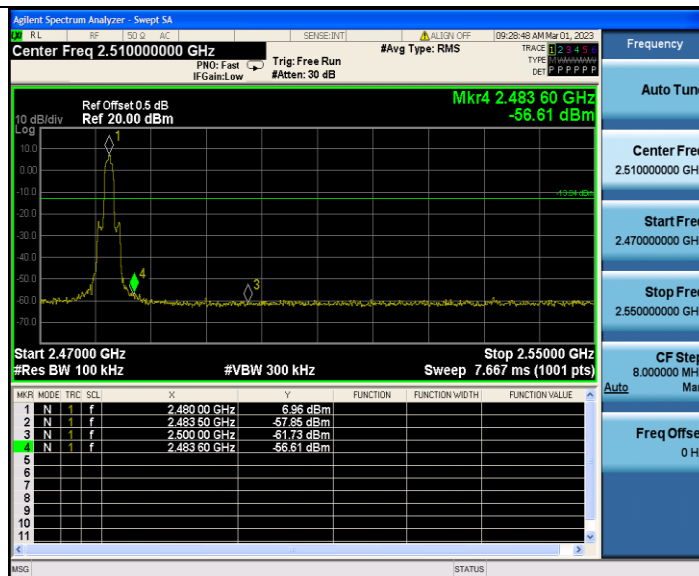

3DH5 Ant1 Low Hop 2402

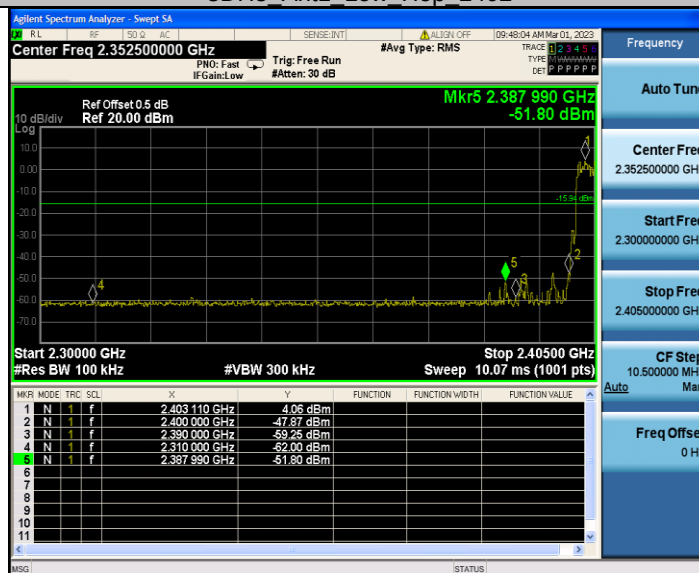

3DH5 Ant1 High Hop 2480

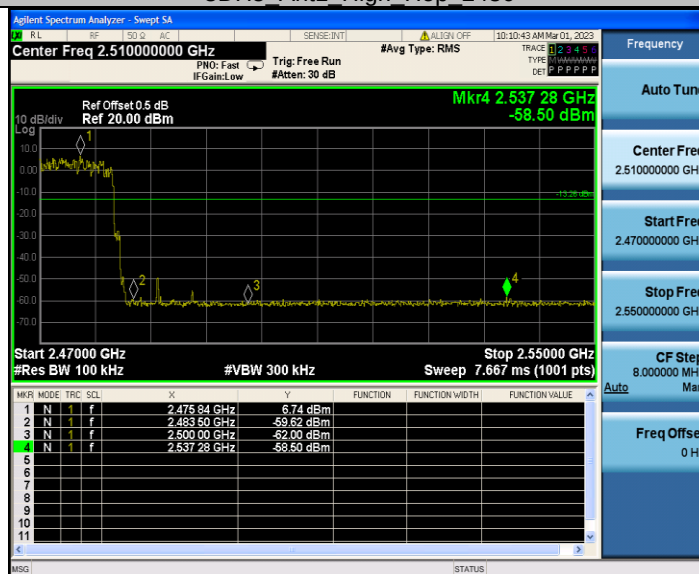


**(2) Conducted Spurious Emissions Test**

| Test Mode | Antenna | Frequency (MHz) | Freq Range [MHz] | Ref Level [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|-----------|---------|-----------------|------------------|-----------------|--------------|-------------|---------|
| GFSK      | Ant1    | 2402            | Reference        | 8.44            | 8.44         | ---         | PASS    |
|           |         |                 | 30~1000          | 8.44            | -69.97       | ≤-11.56     | PASS    |
|           |         |                 | 1000~26500       | 8.44            | -46.24       | ≤-11.56     | PASS    |
|           |         | 2441            | Reference        | 8.67            | 8.67         | ---         | PASS    |
|           |         |                 | 30~1000          | 8.67            | -69.27       | ≤-11.33     | PASS    |
|           |         |                 | 1000~26500       | 8.67            | -47.02       | ≤-11.33     | PASS    |
|           |         | 2480            | Reference        | 8.42            | 8.42         | ---         | PASS    |
|           |         |                 | 30~1000          | 8.42            | -69.88       | ≤-11.58     | PASS    |
|           |         |                 | 1000~26500       | 8.42            | -46.76       | ≤-11.58     | PASS    |
| π/4-DQPSK | Ant1    | 2402            | Reference        | 6.86            | 6.86         | ---         | PASS    |
|           |         |                 | 30~1000          | 6.86            | -68.68       | ≤-13.14     | PASS    |
|           |         |                 | 1000~26500       | 6.86            | -46.11       | ≤-13.14     | PASS    |
|           |         | 2441            | Reference        | 6.72            | 6.72         | ---         | PASS    |
|           |         |                 | 30~1000          | 6.72            | -69.69       | ≤-13.28     | PASS    |
|           |         |                 | 1000~26500       | 6.72            | -46.00       | ≤-13.28     | PASS    |
|           |         | 2480            | Reference        | 6.84            | 6.84         | ---         | PASS    |
|           |         |                 | 30~1000          | 6.84            | -68.95       | ≤-13.17     | PASS    |
|           |         |                 | 1000~26500       | 6.84            | -46.35       | ≤-13.17     | PASS    |
| 8-DPSK    | Ant1    | 2402            | Reference        | 6.98            | 6.98         | ---         | PASS    |
|           |         |                 | 30~1000          | 6.98            | -69.59       | ≤-13.03     | PASS    |
|           |         |                 | 1000~26500       | 6.98            | -45.65       | ≤-13.03     | PASS    |
|           |         | 2441            | Reference        | 6.84            | 6.84         | ---         | PASS    |
|           |         |                 | 30~1000          | 6.84            | -68.97       | ≤-13.16     | PASS    |
|           |         |                 | 1000~26500       | 6.84            | -46.93       | ≤-13.16     | PASS    |
|           |         | 2480            | Reference        | 6.80            | 6.80         | ---         | PASS    |
|           |         |                 | 30~1000          | 6.80            | -69.75       | ≤-13.20     | PASS    |
|           |         |                 | 1000~26500       | 6.80            | -46.15       | ≤-13.20     | PASS    |



Test plot as follows:

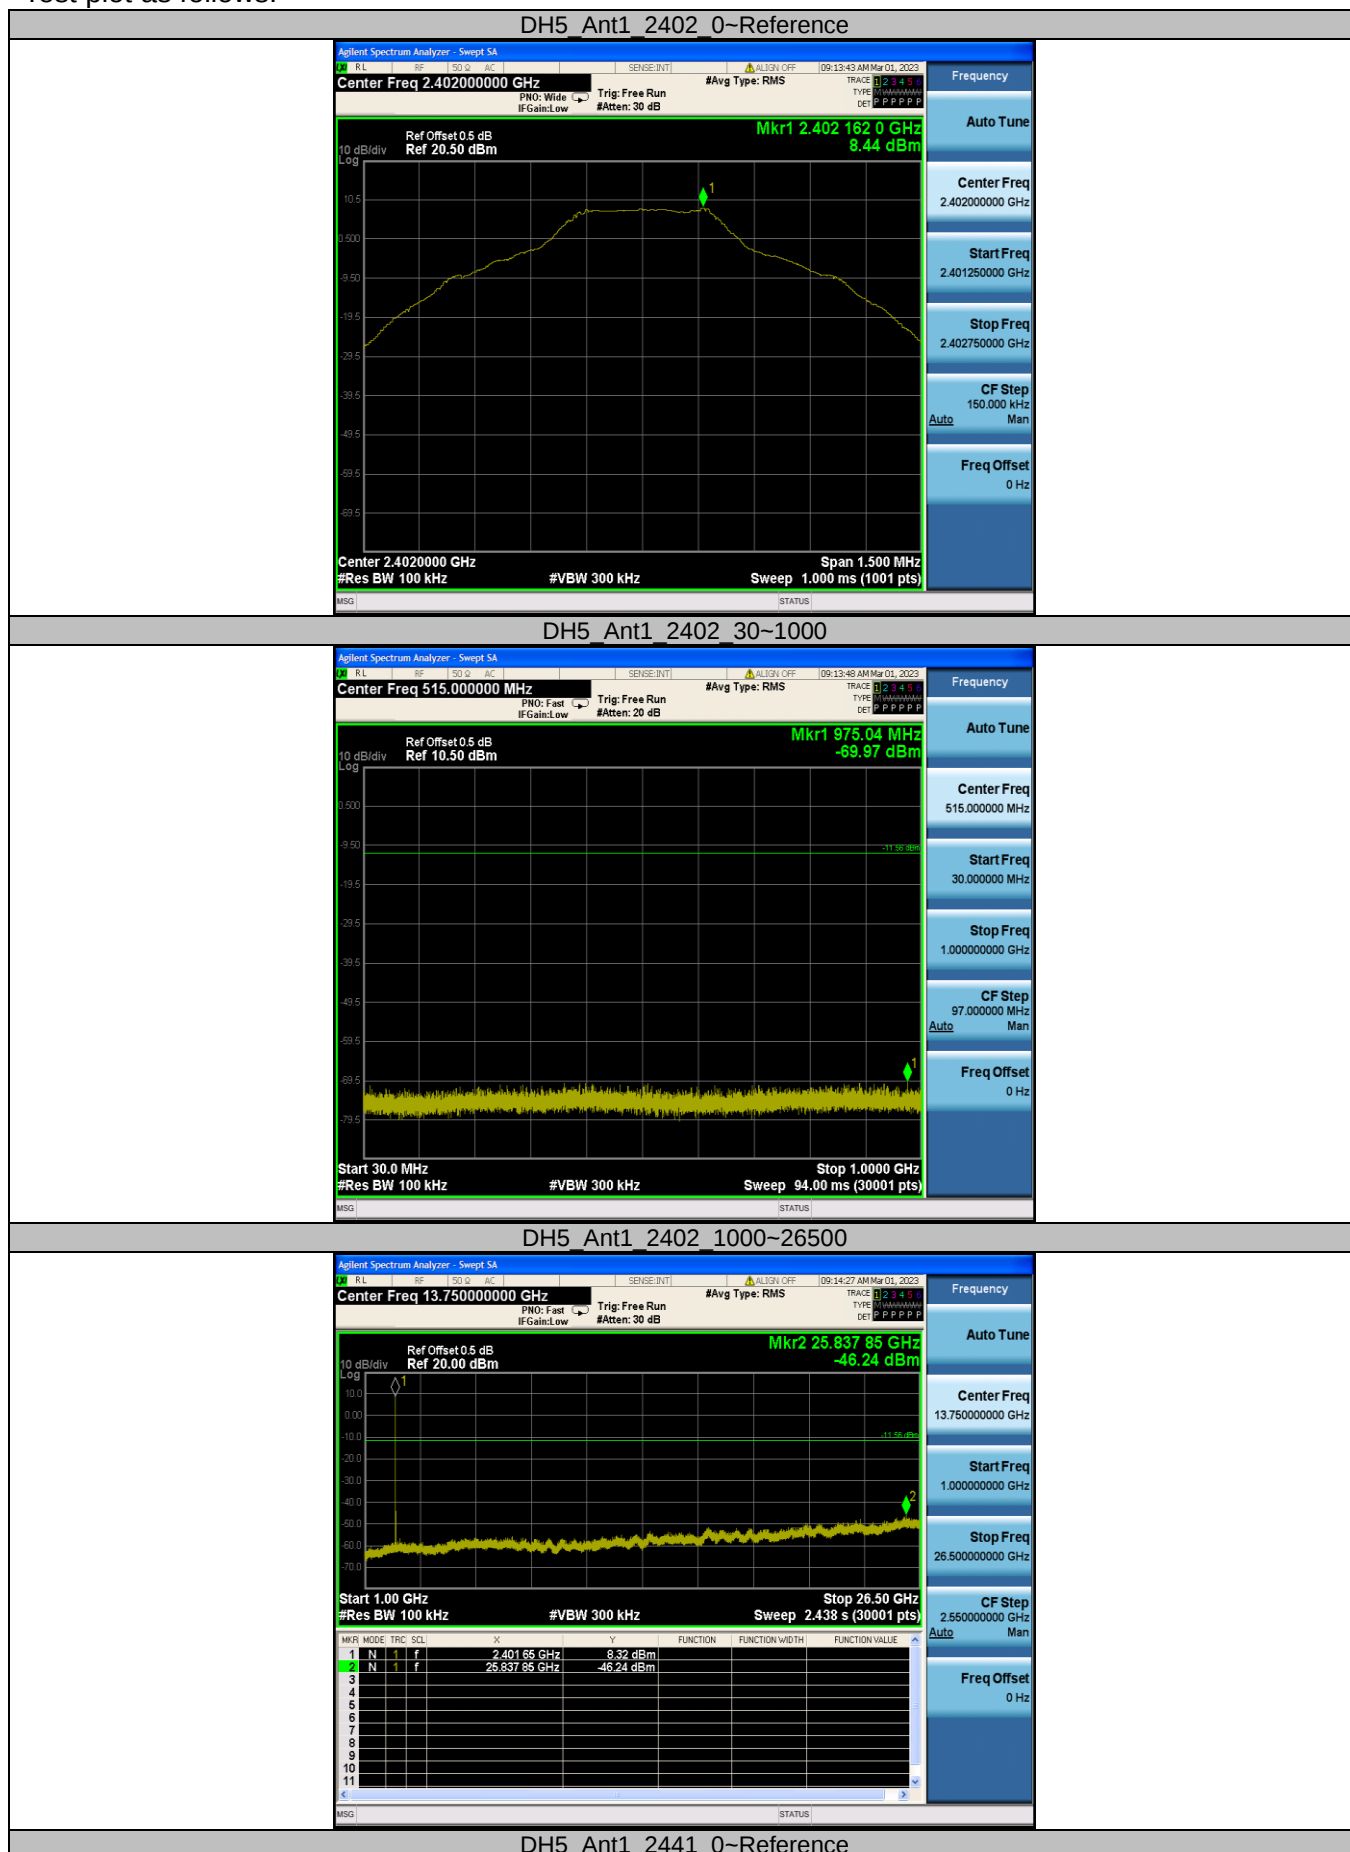

CTC Laboratories, Inc.

1-2/F, Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)



DH5 Ant1 2441 30~1000

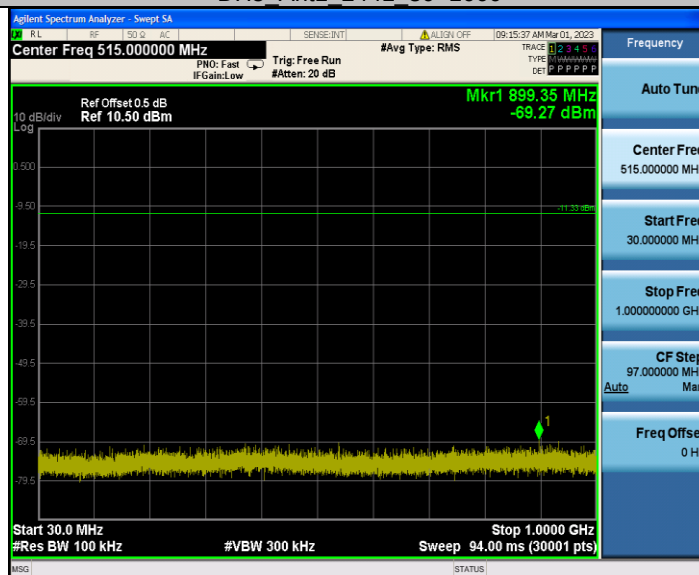

DH5 Ant1 2441 1000~26500

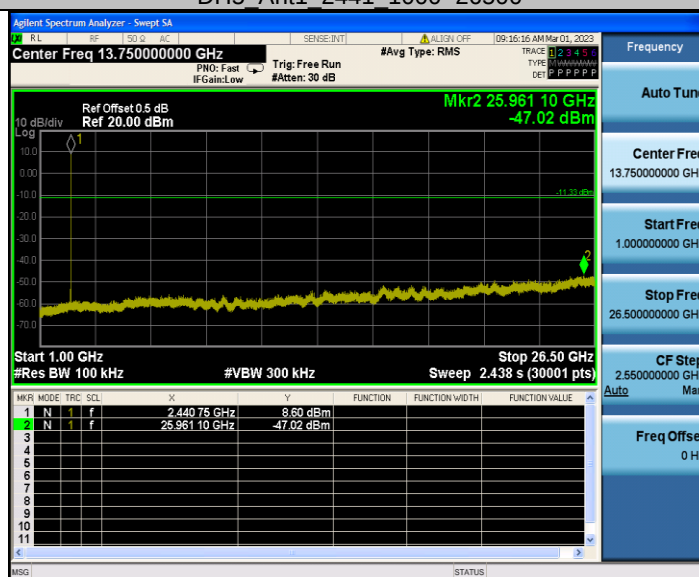

DH5 Ant1 2480 0~Reference

CTC Laboratories, Inc.

1-2/F, Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)



DH5\_Ant1\_2480\_30~1000

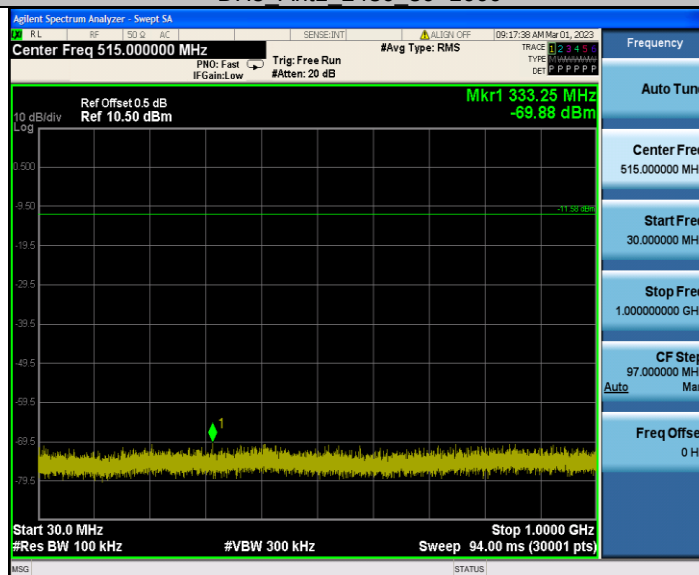


DH5\_Ant1\_2480\_1000~26500

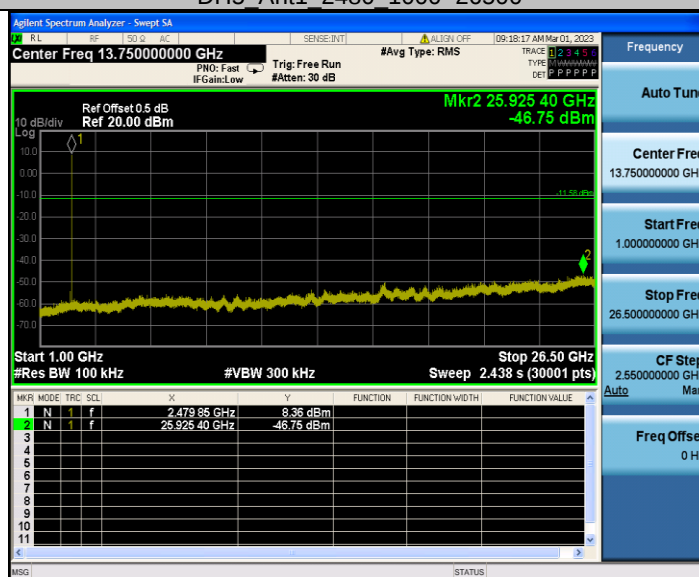


2DH5\_Ant1\_2402\_0~Reference



2DH5\_Ant1\_2402\_30~1000

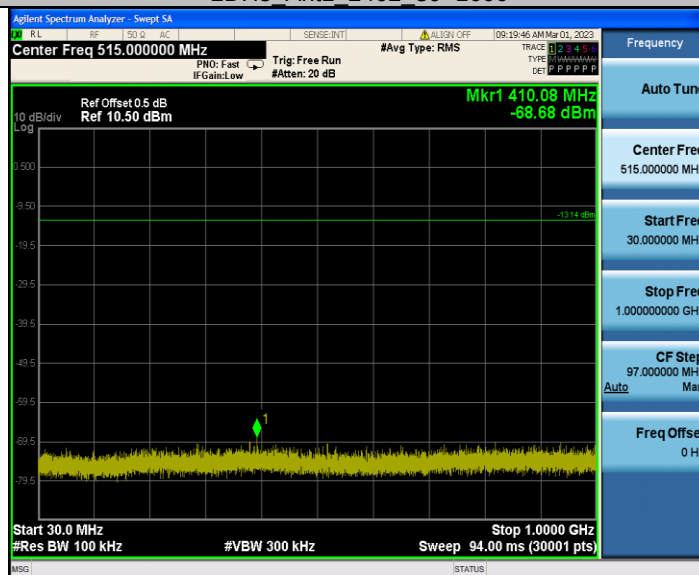


2DH5\_Ant1\_2402\_1000~26500

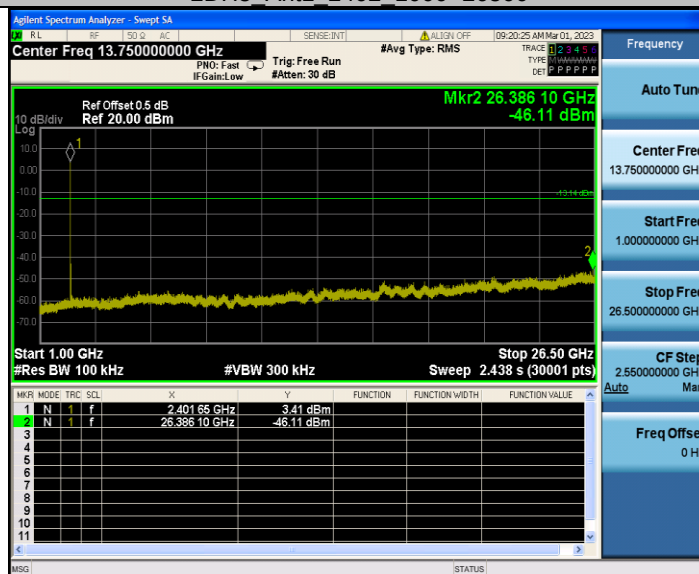


2DH5\_Ant1\_2441\_0~Reference



2DH5\_Ant1\_2441\_30~1000

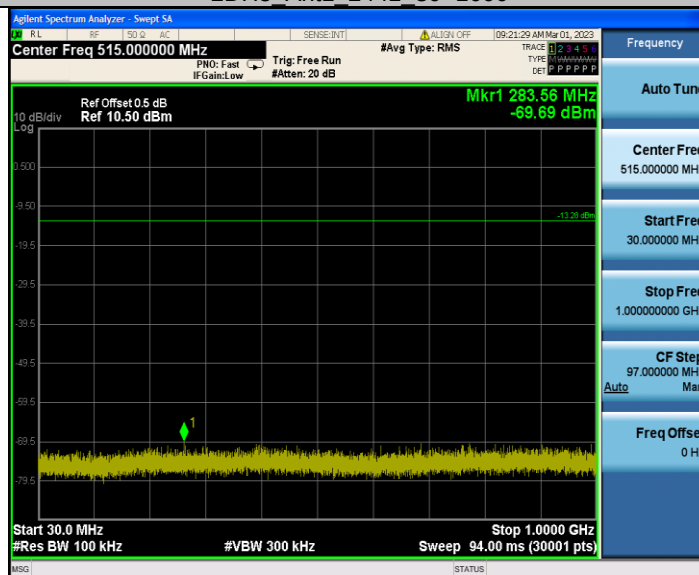

2DH5\_Ant1\_2441\_1000~26500

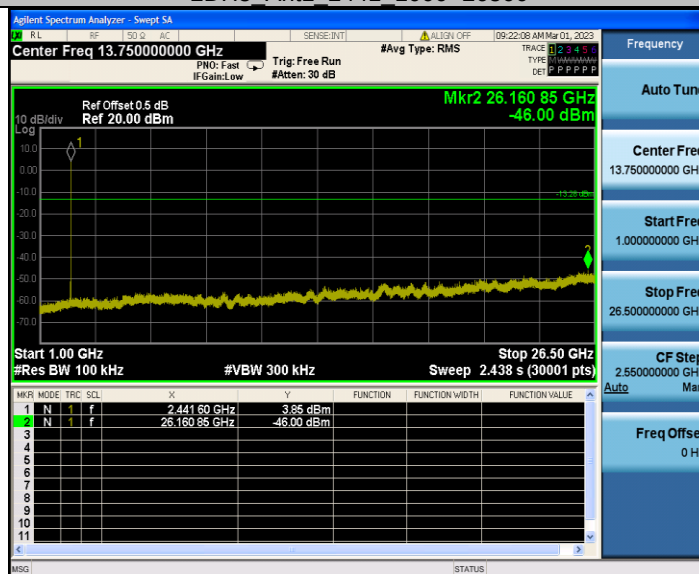

2DH5\_Ant1\_2480\_0~Reference

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)





2DH5\_Ant1\_2480\_30~1000

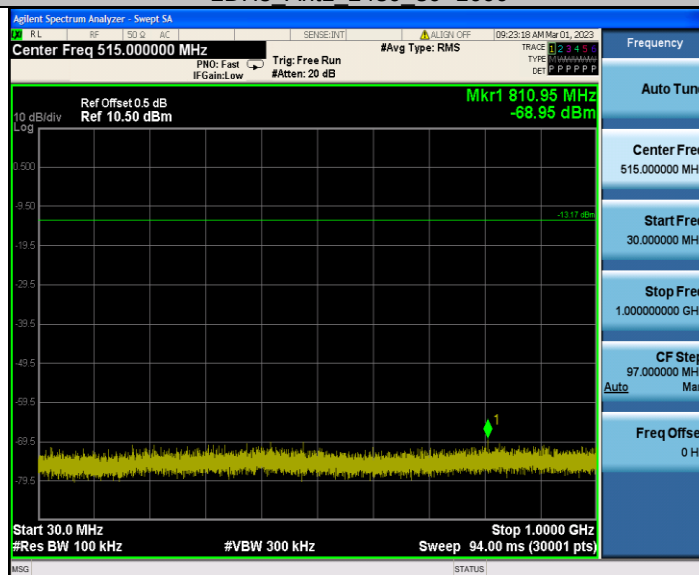

2DH5\_Ant1\_2480\_1000~26500

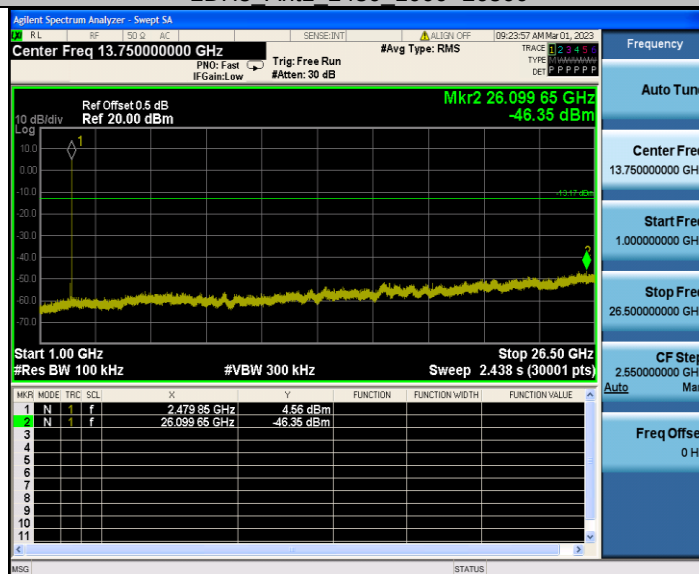


3DH5\_Ant1\_2402\_0~Reference

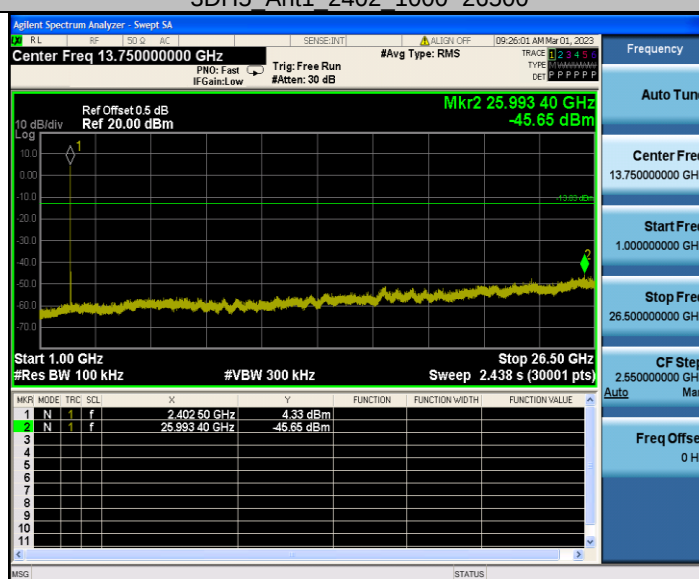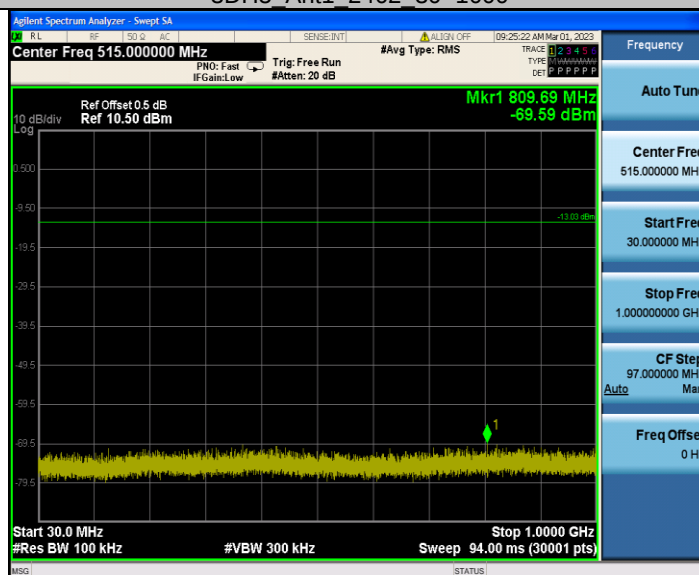




3DH5\_Ant1\_2441\_30~1000

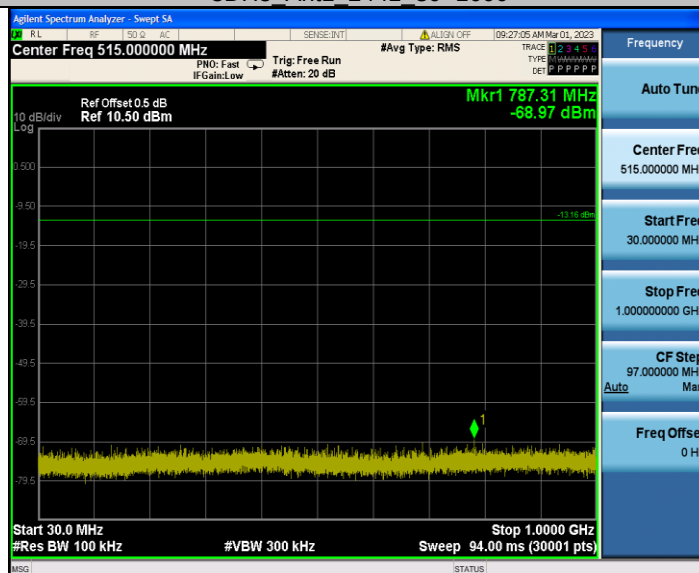


3DH5\_Ant1\_2441\_1000~26500

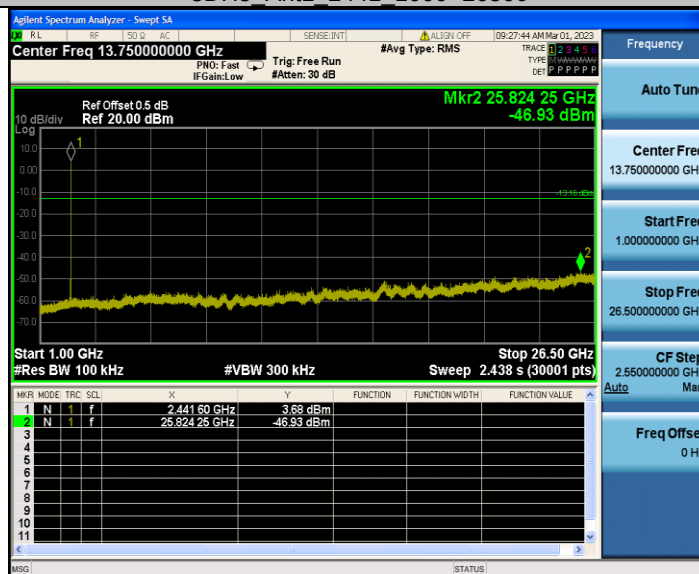


3DH5\_Ant1\_2480\_0~Reference



3DH5 Ant1 2480 30~1000

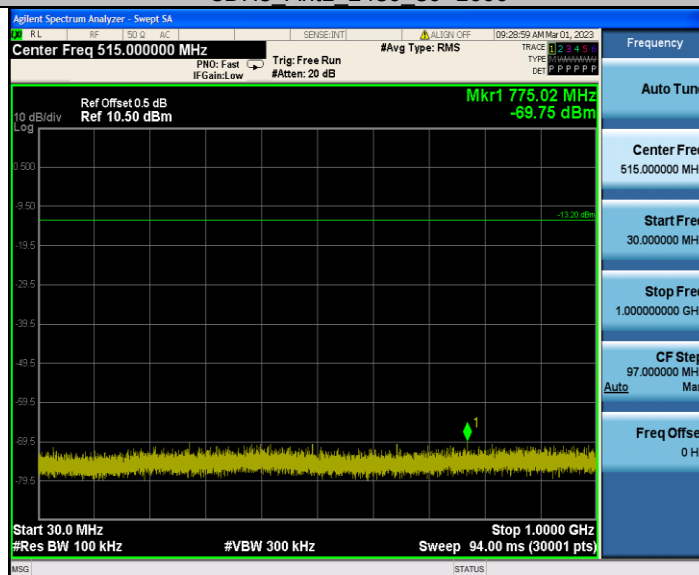

3DH5 Ant1 2480 1000~26500

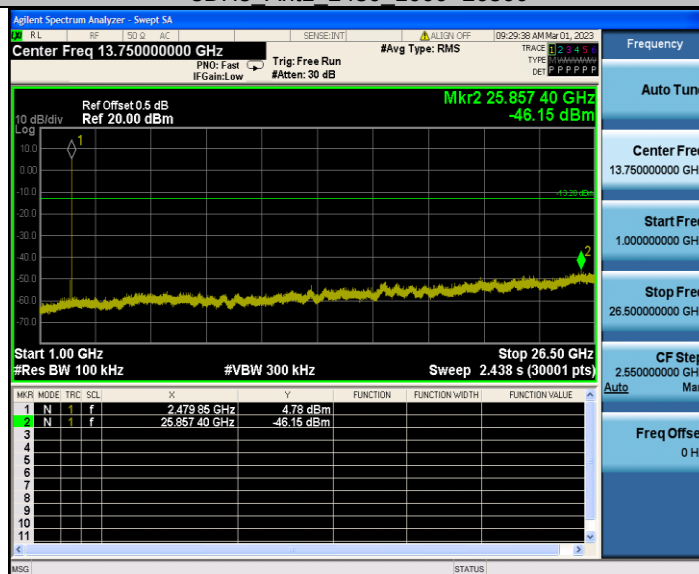

CTC Laboratories, Inc.

1-2/F, Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)