





KIEL2403-YW03403-R01

RF TEST REPORT




Report Number		KIEL2403-YW03403-R01		
Applicant	Company Name	MAYTON		
	Address	404, Annam-ro Bupyeong-gu, Incheon, South Korea		
Product	Product Name	AutoProX		
	Model Name	AUTOPRO-X		
	FCC ID	2BAG8-AUTOPROX		
	Manufacturer	SUZHOU MEIYITE AUTO PARTS CO.,LTD		
Other	Receipt Date	2024.02.07	Receipt Number	RQW2403-1236
	Issued Date	2023.03.29	Tested Date	2024.02.07 ~ 2024.03.11
Standards		FCC 47 CFR Part 15 Subpart E 15.407 ANSI C63.10 : 2020		
Tested by		Dominic Sim (Sign)		
Approved by		David Jang (Sign)		
KIEL Institute Daewoo Technopark A-403, 261, Doyak-ro, Bucheon-si, Gyeonggi-do, 14523, Korea. Tel : +82-32-670-8888, Fax : +82-32-670-8889 o This is certified that the above mentioned products have been tested for the sample provided by client. o No part of this document may not be duplicated or reproduced by any means without the express written permission of KIEL Institute. o This test report is irrelevant to KS Q ISO/IEC 17025 and KOLAS accreditation				





Revision History



Issued Date	Issued Report No.	Revisions
2024.03.25	KIEL2403-YW03403	Initial Issue
2024.03.29	KIEL2403-YW03403-R01	Correct typo & add comment





Contents

1.0 LABORATORY INFORMATION	4
2.0 APPLICANT INFORMATION	4
3.0 SUMMARY OF TEST RESULTS	5
3.1 MEASUREMNT UNCERTAINTY	6
4.0 GENERAL INFORMATION.....	7
4.1 EUT DESCRIPTION	7
4.1.1 List of Accessories	7
4.1.2 Auxiliary Test equipment.....	7
4.1.3 Antenna Information	8
4.1.4 Channel List of EUT	8
4.2 DESCRIPTION OF TEST MODE	9
4.2.1 Test Mode Configuration.....	9
4.3 GENERAL DESCRIPTION OF APPLIED STANDARD	12
5.0 TEST EQUIPMENT	13
6.0 TEST RESULTS.....	14
6.1 ANTENNA REQUIREMENT.....	14
6.1.1 Result.....	14
6.2 EMISSION BANDWIDTH.....	15
6.2.1 Regulation.....	15
6.2.2 Test Procedure.....	15
6.2.3 Test Setup	15
6.2.4 Test Result	16
6.3 MAXIMUM PEAK OUTPUT POWER.....	20
6.3.1 Regulation.....	20
6.3.2 Test Procedure.....	20
6.3.3 Test Setup	20
6.3.4 Test Result	21
6.4 POWER SPECTRAL DENSITY	22
6.4.1 Regulation.....	22
6.4.2 Test Procedure.....	22
6.4.3 Test Setup	24
6.4.4 Test Result	24
6.5 SPURIOUS EMISSION, BAND EDGE AND RESTRICTED BANDS	28
6.5.1 Regulation.....	28
6.5.2 Test Procedure.....	29
6.5.3 Test Setup	32
6.5.4 Test Result	34
6.6 AC CONDUCTED EMISSIONSS (150 KHZ TO 30 MHZ)	60
6.6.1 Regulation.....	60
6.6.2 Test Procedure.....	60
6.6.3 Test Setup	60
6.6.4 Test Result	61






KIEL2403-YW03403-R01

1.0 Laboratory Information

Laboratory Name	KIEL Institute
Location	1-1, Gilju-ro, Bucheon-city, Gyeonggi-do, Korea 14505
FCC Registration No.	KR0167 (RRA accredited Lab.)
IC Registration No.	KR0167 (31291)
Phone	+82-32-325-7045
Fax	+82-32-670-8889

2.0 Applicant Information

Applicant Name	MAYTON
Address	404, Annam-ro Bupyeong-gu, Incheon, South Korea
Manufacturer	SUZHOU MEIYITE AUTO PARTS CO.,LTD
Address	Room A212, Building 2, 160 Sanxiang Road, Suzhou City, China





3.0 Summary of Test Results

Applied standard: FCC part 15, subpart E 15.407

FCC Part Section(s)	Test Item	Reference	Result
-	26 dB Channel Bandwidth (EBW)	Section 6.2	P
15.407 (e)	6 dB Channel Bandwidth	-	NA ^{note5}
15.407 (a)(1)(iv)(2)(3)	Maximum Conducted Output Power	Section 6.3	P
15.407 (a)(1)(iv)(2)(3)	Power Spectral Density	Section 6.4	P
15.470 (h)	Dynamic Frequency Selection	-	NA ^{note5}
15.407 (b)(1),(2),(3),(4)	Band Edge / Out-of-Band Emissions (Conducted Spurious Emission)	Section 6.5	P
15.205 15.407(b)(1),(4), (5), (6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Section 6.5	P
15.207	AC Power Line Conducted Emissions (150 kHz – 30 MHz)	Section 6.7	P

(Note 1) P = Pass, NC = Not comply, NT = Not Tested, NA = Not Applicable



(Note 2) The general test methods used to test on this devices are ANSI C63.10.

(Note 3) Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

(Note 4) For emission test from 9 kHz to 30 MHz,

Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

(Note 5) This EUT use only UNII 1 band.





3.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2

Measurement Items	Frequency Range	Expanded Uncertainty U = kUc (k = 2)
Conducted Emission at main ports	150 kHz – 30 MHz	3.24 dB
Radiated Spurious Emissions	9 kHz – 30 MHz	3.39 dB
	30 MHz – 1 GHz	5.14 dB
	1 GHz – 18 GHz	3.18 dB
	18 GHz – 40 GHz	4.54 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k = 2.





4.0 General Information

4.1 EUT Description

Product name	AutoProX
Basic model	AUTOPRO-X
Product S/N	-
Variant model(s)	-
Model Difference	-
Power supply	DC 5 V
Modulation	OFDM
Transfer Rate	802.11a : 6, 9, 12, 18, 24, 36, 48, 54 [Mbps] 802.11n(HT20), (HT40) : 0 to 7 [MCS] 802.11ac(VHT20) : 0 to 8 [MCS] 802.11ac(VHT40) : 0 to 9 [MCS]
Operating Frequency	5 180 MHz ~ 5 240 MHz(U-NII-1)
Number of channel	4 channels (U-NII-1) 20 MHz BW 2 channels (U-NII-1) 40 MHz BW
Output Power	-6.06 dBm (0.25 mW)
Antenna Type	FPCB (1T1R)
Antenna Connector	U.FL Connector


(Note 1) The above equipment has been tested by KIEL Institute, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

4.1.1 List of Accessories

Accessories	Brand	Model	Manufacturer	Specification
-	-	-	-	-

4.1.2 Auxiliary Test equipment

Accessories	Brand	Model	Manufacturer	Specification
Laptop	Lenovo IdeaPad S500 Touch	20248	Lenovo PC HK Limited	-
AC Adapter(Laptop)	Lenovo	ADLX45NCC3A	CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD.	Input: AC 100 V ~ 240 V / 50 ~ 60 Hz Output: DC 20 V






4.1.3 Antenna Information

Antenna	Type	Frequency Range	Peak Gain
Ant A (Bluetooth)	FPCB	2 400 MHz – 2 483.5 MHz	1.56 dBi
Ant B (Wi-Fi)	FPCB	2 400 MHz – 2 483.5 MHz	2.15 dBi
		5 150 MHz – 5 350 MHz	4.41 dBi

4.1.4 Channel List of EUT

BW [MHz]	Channel	Frequency [MHz]	BW [MHz]	Channel	Frequency [MHz]
20	36	5 180	40	38	5 190
	40	5 200		46	5 230
	44	5 220			
	48	5 240			

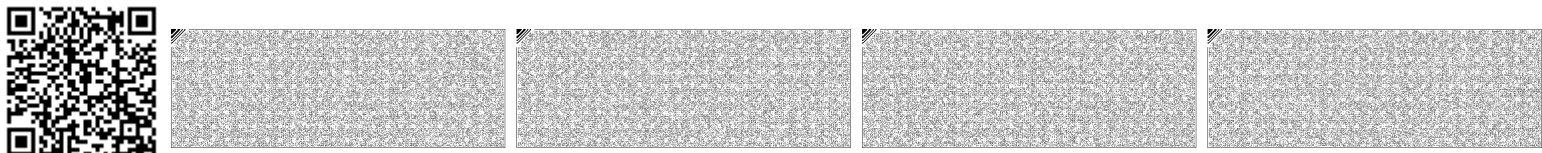



4.2 Description of Test Mode

4.2.1 Test Mode Configuration

- Axis worst case

Pre-Scan has been performed to determine the worst case axis between antenna port, XYZ axis and frequency band.

EUT Configuration	Applicable to		Description
	Ant A(Bluetooth)	Ant B(Wi-Fi)	
Transmission	X axis	X axis	-

-We tested Co-location (BT + 5 GHz Wi-Fi) and evaluated and reported only worst-case test result.

- Radiated Emission (Below 1 GHz, Above 18 GHz, and AC Power line conducted emission) worst case

Radiated emission below 1 GHz, above 18 GHz and AC power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Tested Mode	Tested Channel	Data Rate	Description
802.11a	36	6 Mbps	-

- Radiated Emission (Above 1 GHz)


Radiated emission above 1 GHz was performed with the EUT set to transmit Low/Mid/High channels.

Tested Mode	Tested Channel	Data Rate	Description
802.11a	36, 44, 48	6 Mbps	-
802.11n(HT20)	36, 44, 48	MCS0	-
802.11n(HT40)	38, 46	MCS0	-
802.11ac(VHT20)	36, 44, 48	MCS0	-
802.11ac(VHT40)	38, 46	MCS0	-

- Antenna Port Conducted Measurement

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Tested Mode	Tested Channel	Data Rate	Description
802.11a	36, 44, 48	6 Mbps	-
802.11n(HT20)	36, 44, 48	MCS0	-
802.11n(HT40)	38, 46	MCS0	-





KIEL2403-YW03403-R01

802.11ac(VHT20)	36, 44, 48	MCS0	-
802.11ac(VHT40)	38, 46	MCS0	-

- Test Conditon

Applicable to	Environmental Conditions	Test Voltage	Tested by
Radiated emissions(< 1GHz)	(23.0 ± 2) °C, (41.6 ± 3) % R.H.	DC 5 V	Dominic Sim
Radiated emissions(> 1GHz)	(22.5 ± 2) °C, (42.6 ± 3) % R.H.	DC 5 V	Dominic Sim
AC power line emission	(23.2 ± 2) °C, (43.1 ± 3) % R.H.	AC 120 V, 60 HZ	Dominic Sim
Antenna port conducted	(23.1 ± 2) °C, (44.3 ± 3) % R.H.	DC 5 V	Dominic Sim

- Worst case of data rate

Transmission	Test Mode	Bandwidth [MHz]	Worst Case Data Rate
SISO	802.11a	20	6 Mbps
	802.11n	20	MCS0
		40	MCS0
	802.11ac	20	MCS0
		40	MCS0

- Duty Cycle of Test Signal

Test Mode	On Time [msec]	Period [msec]	Duty cycle X [Linear]	Duty Cycle [%]	DCCF [dB]
802.11a	2.043	2.233	0.915	91.50	0.39
802.11n(HT20)	1.897	2.078	0.913	91.29	0.40
802.11n(HT40)	0.915	1.103	0.830	82.97	0.81
802.11ac(VHT20)	2.044	2.499	0.818	81.78	0.87
802.11ac(VHT40)	2.051	2.427	0.845	84.52	0.73





KIEL2403-YW03403-R01

- Test Plots of Duty Cycle





4.3 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards.

FCC CFR 47 Part 15, Subpart E (§15.407)

789033 D02 General UNII Test Procedures New Rules v02r01

ANSI C63.10-2020

All test items in this test report have been performed and recorded as per the above standards.






5.0 Test Equipment

Test Equipment is traceable to the National Institute of Standards and Technology (NIST). Measurement antenna used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

	Equipment	Manufacturer	Model	S/N	Description	Cal Due
■	Spectrum Analyzer	Rohde & Schwarz	FSV3044	101034	10 Hz ~ 44 GHz	2025-01-22
■	Spectrum Analyzer	Rohde & Schwarz	FSV3030	102117	10 Hz ~ 30 GHz	2024-05-25
■	DC Power Supply	ODA	OPM-305D	ODA-04-0923-07960	DC 30 V, 5 A, 2Ch	2025-01-24
■	Signal Generator	Rohde & Schwarz	SMBV100B	101818	8 kHz ~ 6 GHz	2025-01-23
■	Vector Signal Generator	Rohde & Schwarz	SMB100A	180880	100 kHz ~ 40 GHz	2024-08-03
■	Attenuator	INMET	26A-10	2	DC to 26.5 GHz, 10 dB,	2025-01-22
■	Attenuator	INMET	26A-10	3	DC to 26.5 GHz, 10 dB,	2025-01-22
■	True RMS Multimeter	FLUKE	177	59570153	1000 V, 10 A	2025-01-24
■	Power Meter	Rohde & Schwarz	NRX	101971	DC ~ 40 GHz	2025-01-23
■	Power Sensor	Rohde & Schwarz	NRP-Z86	104137	50 MHz ~ 40 GHz	2024-06-23
■	Notch Filter	Micro-Tronics	BRM50702	G577	Stop band: 2 400 MHz ~ 2 500 MHz	2024-05-25
■	High Pass Filter	WT Microwave INC.	WT-A3331-HS	23041001-1	Pass band: 6.0 GHz ~ 24.5 GHz	2024-05-25
■	EMI Test Receiver	Rohde & Schwarz	ESW44	101737	1 Hz ~ 44 GHz	2025-01-22
■	EMI Test Receiver	Rohde & Schwarz	ESW26	103106	1 Hz ~ 26.5 GHz	2025-01-22
■	Active Loop Antenna	Rohde & Schwarz	HFH2-Z2E	100858	8.3 kHz ~ 30 MHz	2024-08-22
■	Bi-Log Antenna	SCHWARZBECK	VULB9168	00915	25 MHz ~ 2 GHz	2024-10-27
■	Horn Antenna	Rohde & Schwarz	HF907	102722	800 MHz ~ 18 GHz	2024-08-16
■	Horn Antenna	SCHWARZBECK	BBHA9170	00981	15 GHz ~ 40 GHz	2025-04-29
■	Preamplifier	Rohde & Schwarz	SCU-01F	010094	10 kHz ~ 1 GHz, 35 dB	2024-08-02
■	Preamplifier	Rohde & Schwarz	SCU-18F	180084	1 GHz ~ 18 GHz	2024-08-02
■	Preamplifier	EXYNOD	ELNA40-50	2305161	18 GHz ~ 40 GHz	2024-05-25
■	6dB Attenuator	Fairview Microwave	SA3N5W-06	190311028	DC ~ 3 GHz, 6 dB	2024-10-27
■	Turntable	Innco	DT 3000-3t	-	-	-
□	Antenna Mast_L	Innco	MA4000-EP	-	-	-
■	Antenna Mast_R	Innco	MA4000-EP	-	-	-
■	Controller_1	Innco	CO3000	1062	-	-
■	Controller_2	Innco	CO3000	1063	-	-
■	Software	Rohde & Schwarz	EMC32	101535	-	-
■	Software	Rohde & Schwarz	ELEKTRA	102739	-	-





6.0 Test Results

6.1 Antenna Requirement

Except from §15.203 of the FCC Rules/Regulations:

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of the section.

- The antenna(s) of the EUT are Unique (non-standard) antenna connector.
 - The connector is within the transmitter enclosure.
- There are no provisions for connection to an external antenna.

6.1.1 Result

The EUT complies with the requirement of §15.203



6.2 Emission Bandwidth

6.2.1 Regulation

§15.207(e) : Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

6.2.2 Test Procedure

26 dB Bandwidth(EBW)



- a) Use the following spectrum analyzer settings:
 - 1) RBW : 1 % of the EBW
 - 2) VBW > RBW.
 - 3) Detector function : Peak.
 - 4) Trace : Max hold.
- b) Allow trace to stabilize
- c) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- d) A plot of the test results and setup description shall be included in the test report.

6 dB Bandwidth

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- e) Use the following spectrum analyzer settings:
 - 1) RBW : 100 kHz
 - 2) VBW $\geq 3 \times$ RBW.
 - 3) Detector function : Peak.
 - 4) Trace : Max hold.
 - 5) Sweep : Auto.
- f) Allow trace to stabilize
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
A plot of the test results and setup description shall be included in the test report.


6.2.3 Test Setup

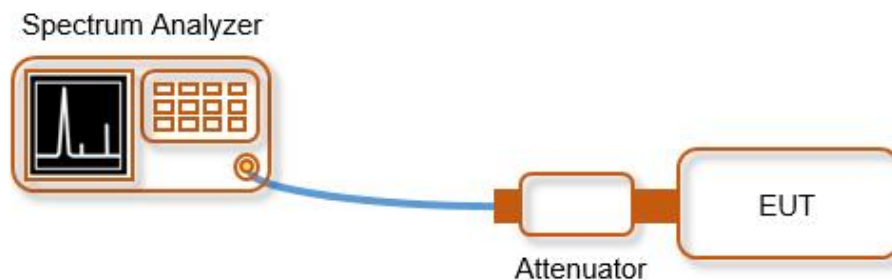



6.3.4 Test Result




Test Mode	Band	Channel	Frequency [MHz]	EBW (26 dB) [MHz]
802.11a	UNII 1	36	5 180	19.15
		44	5 220	19.15
		48	5 240	19.15
802.11n(HT20)	UNII 1	36	5 180	19.88
		44	5 220	19.85
		48	5 240	19.71
802.11n(HT40)	UNII 1	38	5 190	37.58
		46	5 230	37.65
802.11ac(VHT20)	UNII 1	36	5 180	19.51
		44	5 220	19.15
		48	5 240	19.04
802.11ac(VHT40)	UNII 1	38	5 190	39.21
		46	5 230	39.29







KIEL2403-YW03403-R01

Test Plot of Emission Bandwidth

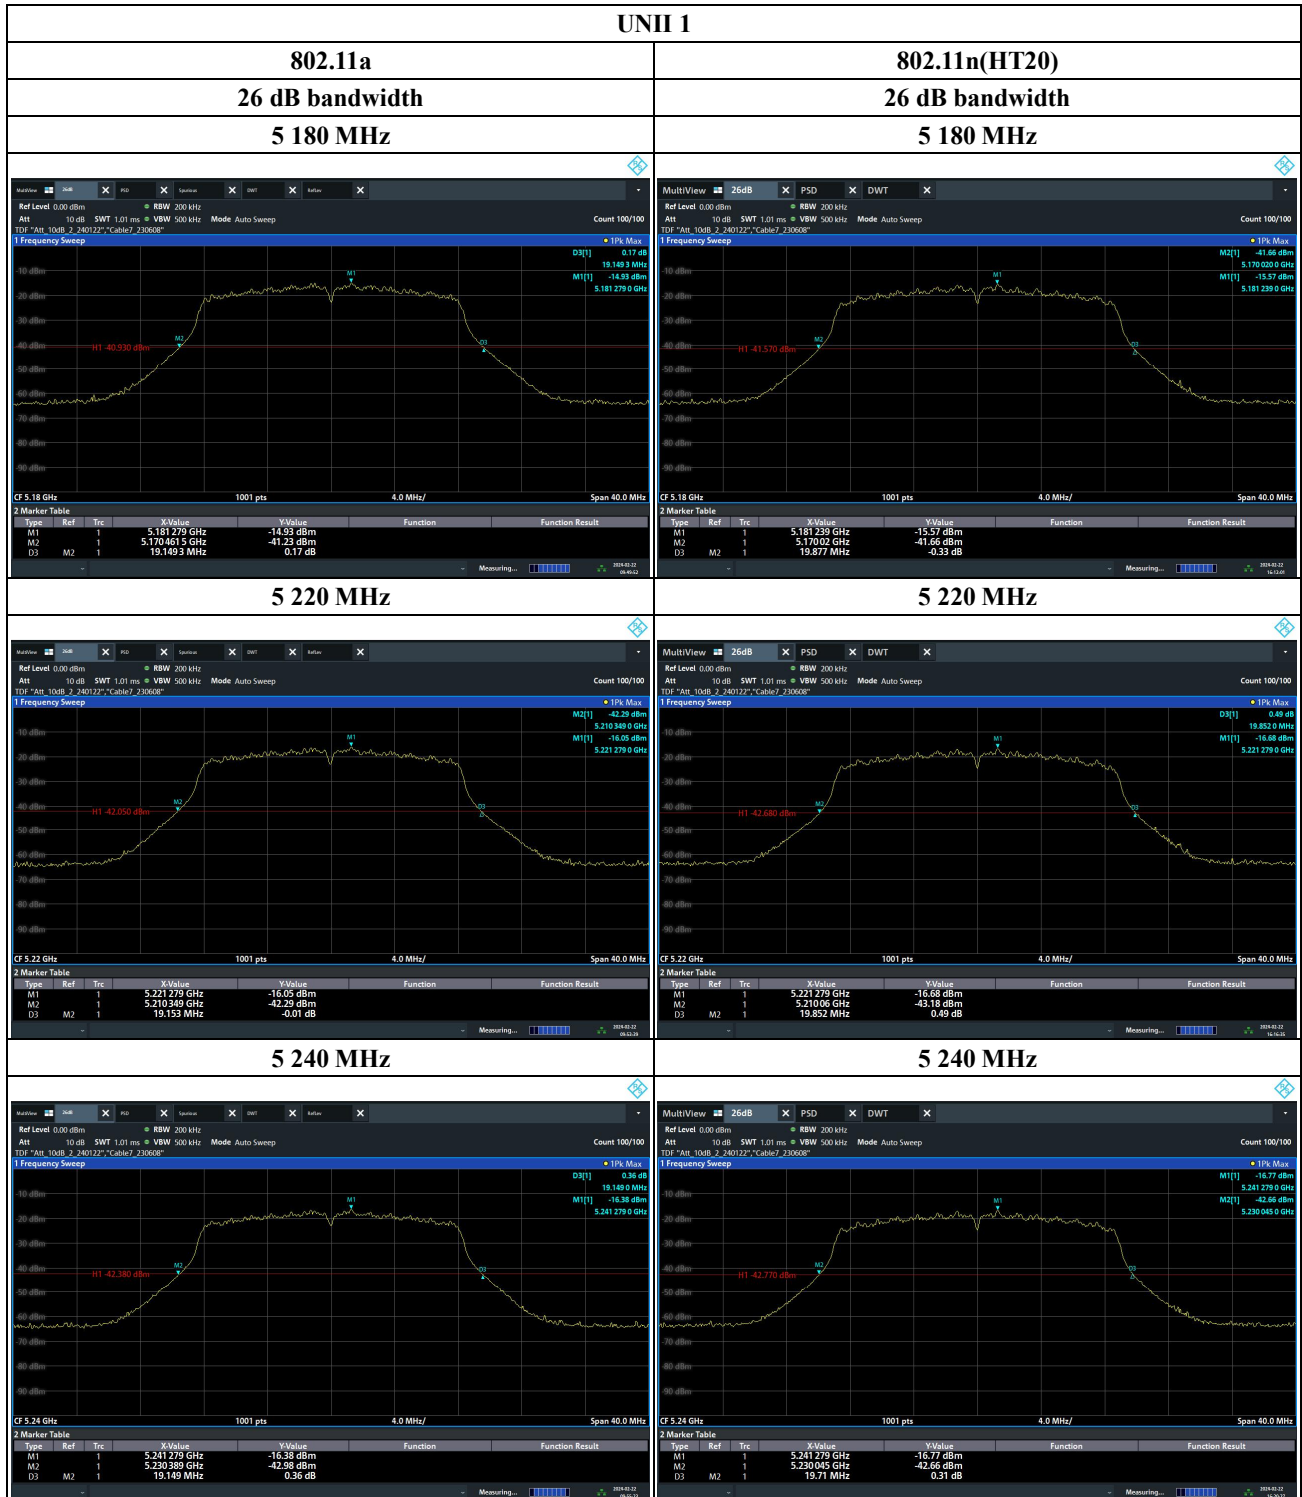





KIEL2403-YW03403-R01

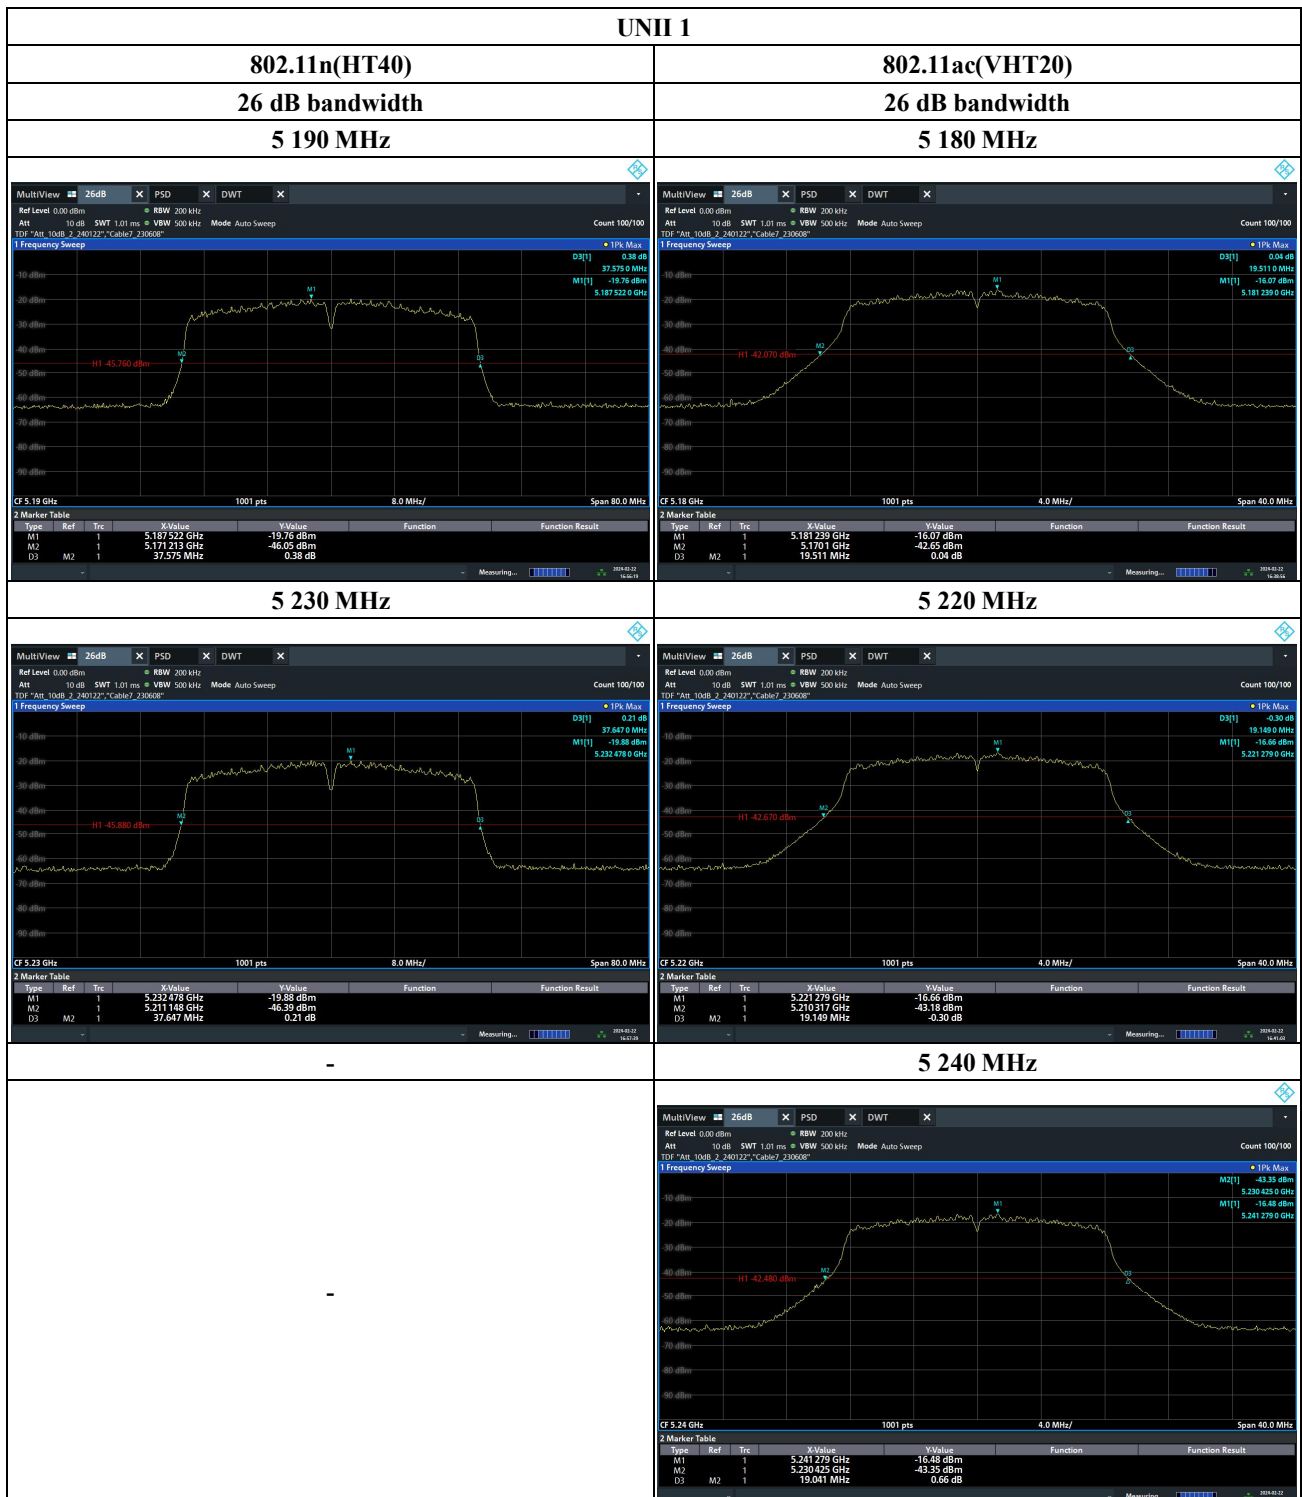



KIEL2403-YW03403-R01



6.3 Maximum Peak Output Power

6.3.1 Regulation

§15.407(a)(1)(iv) : For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407(a)(2) : For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407(a)(3) : For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

6.3.2 Test Procedure

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal.
- c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- d) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle {e.g., $[10 \log (1 / 0.25)]$, if the duty cycle is 25%}.

6.3.3 Test Setup

