

TEST REPORT

Product Name: IOT Coupler
FCC ID: 2BALE-RS-CLT
Trademark: ROOSENSMART
Model Number: RS-CLT, RS-EX-CLT
Prepared For: Roosen Intelligence Science&Technnology (Shanghai) CO.,Ltd
Address: Room 1472, Floor 5, Building 9, No. 1, Yangming Road, Xinghuo Development Zone, Fengxian District, Shanghai
Manufacturer: Roosen Intelligence Science&Technnology (Shanghai) CO.,Ltd
Address: Room 1472, Floor 5, Building 9, No. 1, Yangming Road, Xinghuo Development Zone, Fengxian District, Shanghai
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.
Sample Received Date: Feb. 28, 2023
Sample tested Date: Feb. 28, 2023 to Mar. 14, 2023
Issue Date: Mar. 14, 2023
Report No.: CTB230314022RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is zigbee radio test report.

Compiled by:

Reviewed by:

Approved by:

Chen ZhengArron LiuBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	10
6.1 Block Diagram Of Test Setup.....	10
6.2 Limit.....	10
6.3 Test procedure	10
6.4 Test Result	12
7. RADIATED SPURIOUS EMISSION	13
7.1 Block Diagram Of Test Setup.....	13
7.2 Limit.....	13
7.3 Test procedure	14
7.4 Test Result	15
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	22
8.1 Block Diagram Of Test Setup.....	22
8.2 Limit.....	22
8.3 Test procedure	22
8.4 Test Result.....	23
9. CONDUCTED OUTPUT POWER.....	25
9.1 Block Diagram Of Test Setup.....	25
9.2 Limit.....	25
9.3 Test procedure	25
9.4 Test Result	26
10. 6DB OCCUPIED BANDWIDTH.....	28
10.1 Block Diagram Of Test Setup.....	28
10.2 Limit.....	28
10.3 Test procedure	28
10.4 Test Result.....	28
11. POWER SPECTRAL DENSITY.....	30
11.1 Block Diagram Of Test Setup.....	30
11.2 Limit.....	30
11.3 Test procedure	30
11.4 Test Result.....	30
12. ANTENNA REQUIREMENT	32
13. EUT TEST SETUP PHOTOGRAPHS.....	33

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB230314022RFX	Mar. 14, 2023	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	N/A
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9K-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): RS-CLT, RS-EX-CLT

Model Description: All the model are the same circuit and RF module, only for model name. Test sample model: RS-CLT

Hardware Version: ZM21P2S24E V1.01

Software Version: railtest_zm32_mg21

Operation Frequency: Zigbee: 2405-2480MHz

Max. RF output power: Zigbee: 9.269dBm

Type of Modulation: Zigbee: O-QPSK

Antenna installation: External antenna

Antenna Gain: Zigbee: 4.12dBi

Ratings: DC 24V by DC power

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	DC power	LONGWEI	TPR-12002D	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)
0	2405	1	2410	2	2415	3	2420
4	2425	5	2430	6	2435	7	2440
8	2445	9	2450	10	2455	11	2460
12	2465	13	2470	14	2475	15	2480

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (O-QPSK)	2405MHz	2445MHz	2475MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	24V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used


Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2022.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

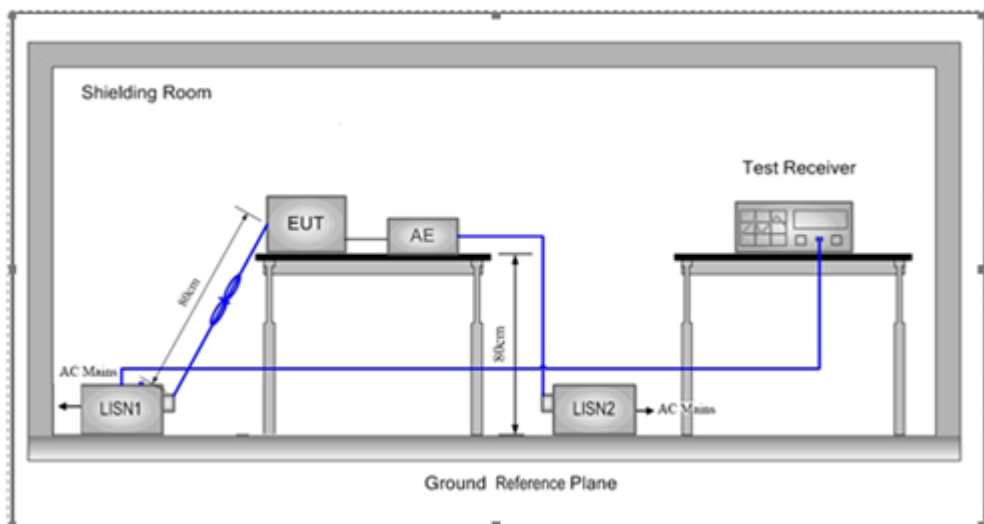

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under

test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

N/A

NOTE: This EUT is powered by DC power only, this test item is not applicable.

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

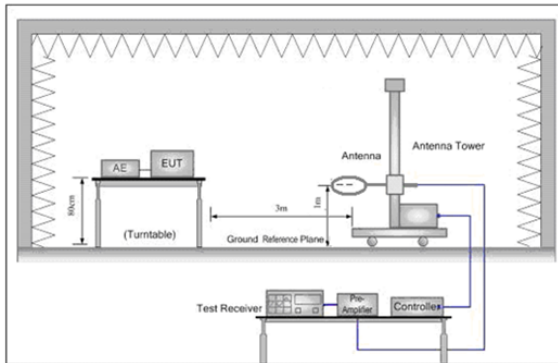


Figure 1. Below 30MHz


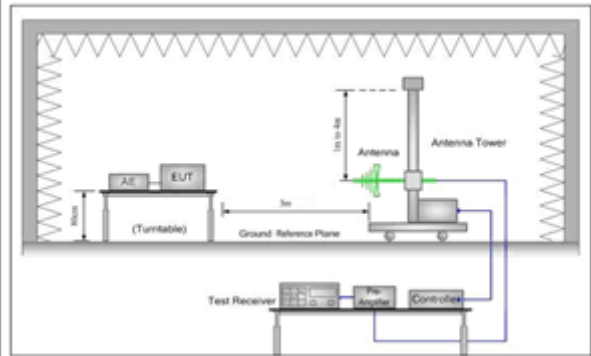


Figure 2. 30MHz to 1GHz

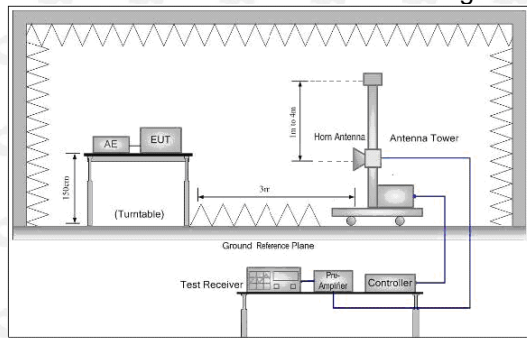

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
 - h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
 - j.Repeat above procedures until all frequencies measured was complete.
 - j. Full battery is used during test
- Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		55.9025	31.57	-7.17	24.40	40.00	-15.60	QP
2		72.0841	29.64	-9.38	20.26	40.00	-19.74	QP
3		144.0818	30.65	-5.49	25.16	43.50	-18.34	QP
4		412.5466	27.85	-2.31	25.54	46.00	-20.46	QP
5		762.0384	30.09	5.05	35.14	46.00	-10.86	QP
6	*	948.7608	28.37	7.63	36.00	46.00	-10.00	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V

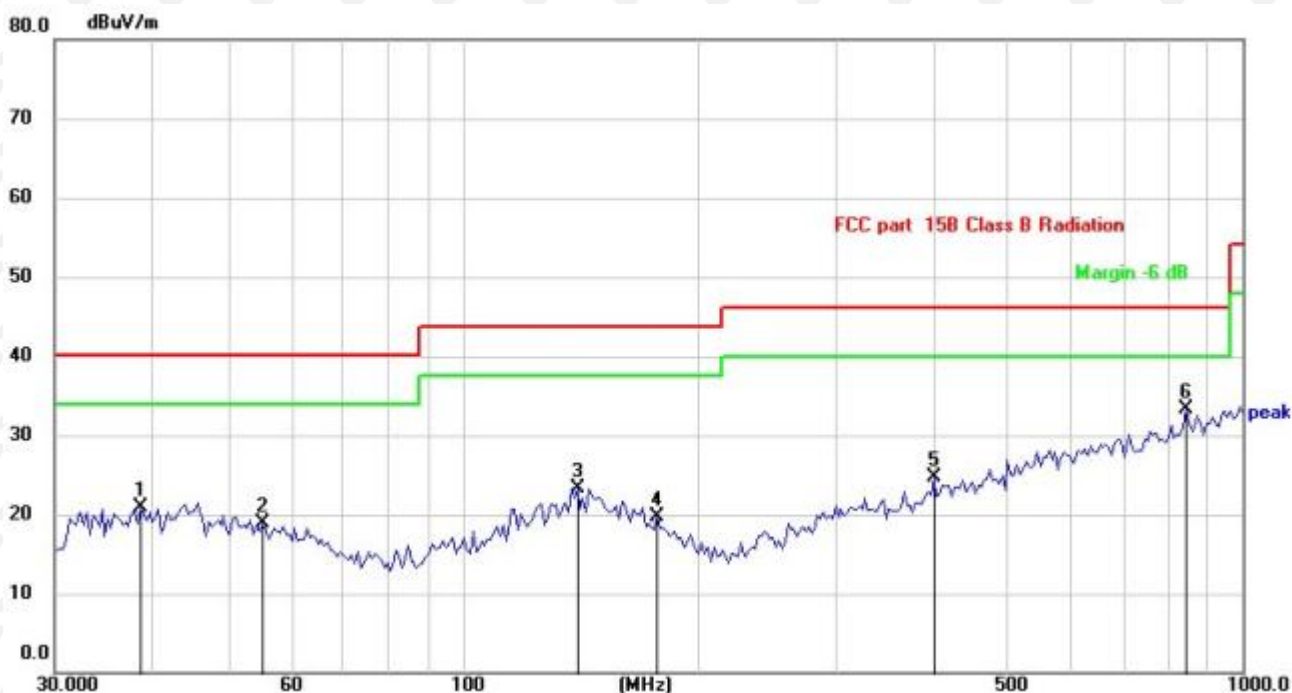

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		38.6837	27.34	-6.51	20.83	40.00	-19.17	QP
2		55.4147	25.95	-7.12	18.83	40.00	-21.17	QP
3		140.3420	28.87	-5.51	23.36	43.50	-20.14	QP
4		177.8206	27.41	-7.65	19.76	43.50	-23.74	QP
5		401.8383	27.22	-2.59	24.63	46.00	-21.37	QP
6	*	846.5706	27.00	6.38	33.38	46.00	-12.62	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Above 1 GHz Test Results:

CH Low (2405MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2405	120.25	-5.84	114.41	N/A	N/A	peak
2405	96.51	-5.84	90.67	N/A	N/A	AVG
4810	60.24	-3.64	56.60	74	-17.40	peak
4810	50.13	-3.64	46.49	54	-7.51	AVG
7215	60.37	-0.95	59.42	74	-14.58	peak
7215	51.47	-0.95	50.52	54	-3.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2405	120.65	-5.84	114.81	N/A	N/A	peak
2405	95.67	-5.84	89.83	N/A	N/A	AVG
4810	59.78	-3.64	56.14	74	-17.86	peak
4810	50.21	-3.64	46.57	54	-7.43	AVG
7215	60.34	-0.95	59.39	74	-14.61	peak
7215	50.74	-0.95	49.79	54	-4.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH Middle (2445MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2445	120.78	-5.71	115.07	N/A	N/A	peak
2445	92.32	-5.71	86.61	N/A	N/A	AVG
4890	59.98	-3.51	56.47	74	-17.53	peak
4890	48.65	-3.51	45.14	54	-8.86	AVG
7335	60.12	-0.82	59.30	74	-14.70	peak
7335	49.87	-0.82	49.05	54	-4.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2445	120.47	-5.71	114.76	N/A	N/A	peak
2445	92.16	-5.71	86.45	N/A	N/A	AVG
4890	57.62	-3.51	54.11	74	-19.89	peak
4890	49.67	-3.51	46.16	54	-7.84	AVG
7335	59.78	-0.82	58.96	74	-15.04	peak
7335	49.31	-0.82	48.49	54	-5.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH High (2475MHz)
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2475	120.85	-5.65	115.20	N/A	N/A	peak
2475	90.97	-5.65	85.32	N/A	N/A	AVG
4950	58.69	-3.43	55.26	74	-18.74	peak
4950	49.78	-3.43	46.35	54	-7.65	AVG
7425	59.10	-0.75	58.35	74	-15.65	peak
7425	50.30	-0.75	49.55	54	-4.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2475	120.58	-5.65	114.93	N/A	N/A	peak
2475	92.45	-5.65	86.80	N/A	N/A	AVG
4950	57.48	-3.43	54.05	74	-19.95	peak
4950	49.67	-3.43	46.24	54	-7.76	AVG
7425	58.12	-0.75	57.37	74	-16.63	peak
7425	48.74	-0.75	47.99	54	-6.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 9KHz to the 25 GHz, The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report.
- (2). All modes of O-QPSK were test at Low, Middle, and High channel, only the worst result of O-QPSK Low Channel was reported for below 1GHz test.
- (3). For BT above 1GHz test all modes of O-QPSK were test at Low, Middle, and High channel, only the worst result of O-QPSK Low Channel was reported.
- (4). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

Restricted bands around fundamental frequency (Radiated)

Operation Mode: TX CH Low (2405MHz)
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310	55.49	-5.81	49.68	74	-24.32	peak
2310	/	-5.81	/	54	/	AVG
2390	55.54	-5.84	49.70	74	-24.30	peak
2390	/	-5.84	/	54	/	AVG
2400	52.66	-5.84	46.82	74	-27.18	peak
2400	/	-5.84	/	54	/	AVG

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310	56.51	-5.81	50.70	74	-23.30	peak
2310	/	-5.81	/	54	/	AVG
2390	54.37	-5.84	48.53	74	-25.47	peak
2390	/	-5.84	/	54	/	AVG
2400	57.77	-5.84	51.93	74	-22.07	peak
2400	/	-5.84	/	54	/	AVG

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2475MHz)
Horizontal (Worst case)

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.55	-5.65	49.90	74	-24.10	
2483.50	/	-5.65	/	54	/	AVG
2500.00	53.27	-5.65	47.62	74	-26.38	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	54.74	-5.65	49.09	74	-24.91	
2483.50	/	-5.65	/	54	/	AVG
2500.00	55.47	-5.65	49.82	74	-24.18	peak
2500.00	/	-5.65	/	54	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

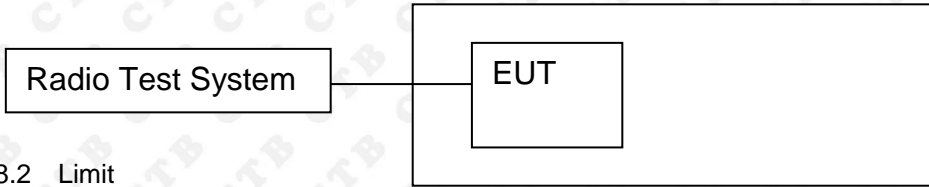


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result

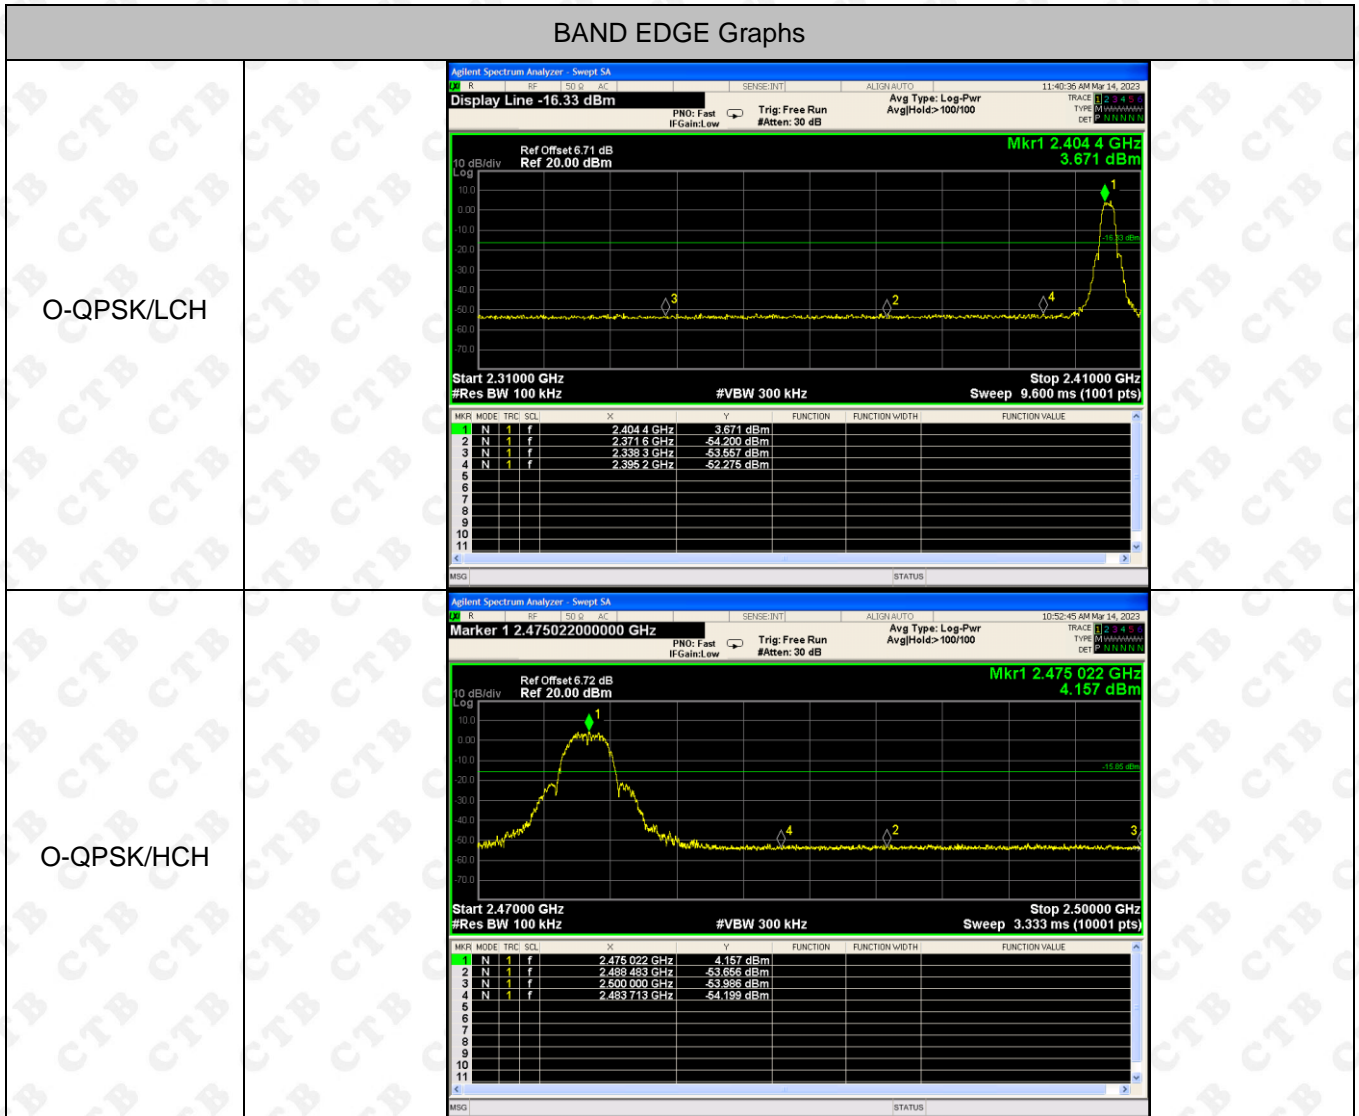


RF Conducted Spurious Emissions Graphs


O-QPSK/LCH

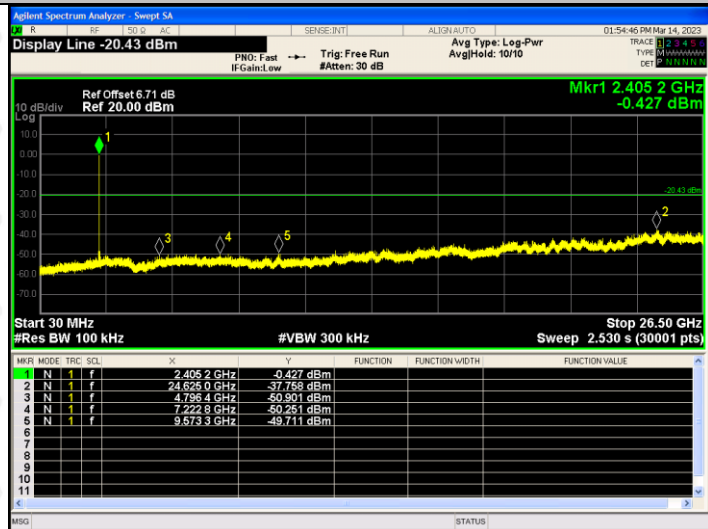

O-QPSK/MCH

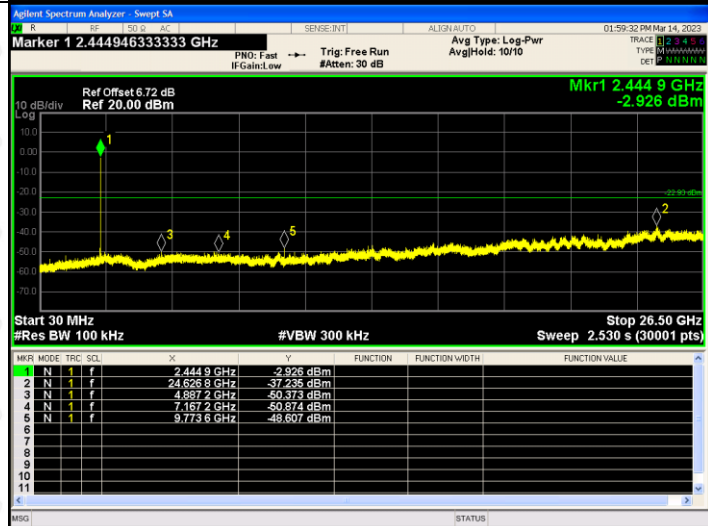


O-QPSK/HCH

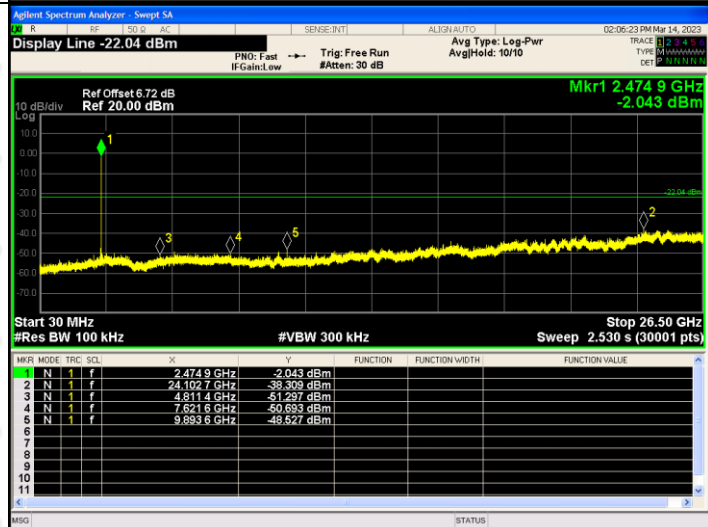

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

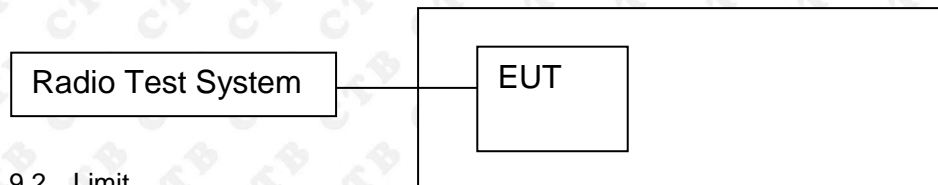

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Channel power measurement. Sweep = auto; Detector Function = peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm]	Limit[dBm]	Verdict
O-QPSK	LCH	9.269	30	PASS
	MCH	9.133	30	PASS
	HCH	9.176	30	PASS

Duty Cycle


Mode	Channel.	Duty Cycle(%)	Correction Factor (dB)
O-QPSK	LCH	100	0
	MCH	100	0
	HCH	100	0

Test Graph:

<p>O-QPSK Low channel</p>		
<p>O-QPSK Mid channel</p>		
<p>O-QPSK High channel</p>		

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

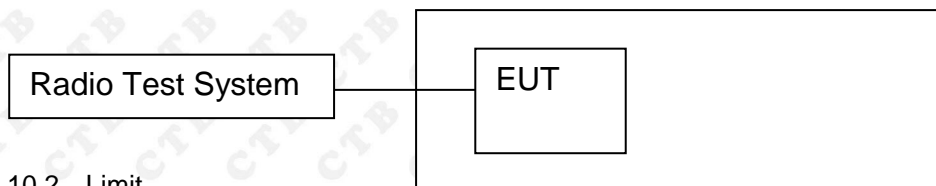

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Result
O-QPSK	Low channel	1.265	PASS
	Mid channel	1.297	PASS
	High channel	1.148	PASS


Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

<p>O-QPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Marker 3 2.4056 GHz Center Freq: 2.405000000 GHz Trig: Free Run #Atten: 30 dB Avg Hold> 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.71 dB Ref 26.71 dBm Mkr3 2.405584 GHz 2.2730 dBm</p> <p>Center 2.405 GHz #Res BW 100 kHz #VBW 300 kHz Span 10 MHz Sweep 1 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.0 dBm</td> </tr> <tr> <td>2.2508 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-50.549 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.265 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	15.0 dBm	2.2508 MHz			Transmit Freq Error	OBW Power	99.00 %	-50.549 kHz	x dB	-6.00 dB	x dB Bandwidth			1.265 MHz		
Occupied Bandwidth	Total Power	15.0 dBm																	
2.2508 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-50.549 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
1.265 MHz																			
<p>O-QPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Marker 3 2.4456 GHz Center Freq: 2.445000000 GHz Trig: Free Run #Atten: 30 dB Avg Hold> 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.44563 GHz 0.74963 dBm</p> <p>Center 2.445 GHz #Res BW 100 kHz #VBW 300 kHz Span 10 MHz Sweep 1 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.1 dBm</td> </tr> <tr> <td>2.2632 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-50.751 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.297 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	15.1 dBm	2.2632 MHz			Transmit Freq Error	OBW Power	99.00 %	-50.751 kHz	x dB	-6.00 dB	x dB Bandwidth			1.297 MHz		
Occupied Bandwidth	Total Power	15.1 dBm																	
2.2632 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-50.751 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
1.297 MHz																			
<p>O-QPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Marker 3 2.4756 GHz Center Freq: 2.475000000 GHz Trig: Free Run #Atten: 30 dB Avg Hold> 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.47564 GHz 0.11708 dBm</p> <p>Center 2.475 GHz #Res BW 100 kHz #VBW 300 kHz Span 10 MHz Sweep 1 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.2 dBm</td> </tr> <tr> <td>2.2426 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-56.834 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.148 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	15.2 dBm	2.2426 MHz			Transmit Freq Error	OBW Power	99.00 %	-56.834 kHz	x dB	-6.00 dB	x dB Bandwidth			1.148 MHz		
Occupied Bandwidth	Total Power	15.2 dBm																	
2.2426 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-56.834 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
1.148 MHz																			

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

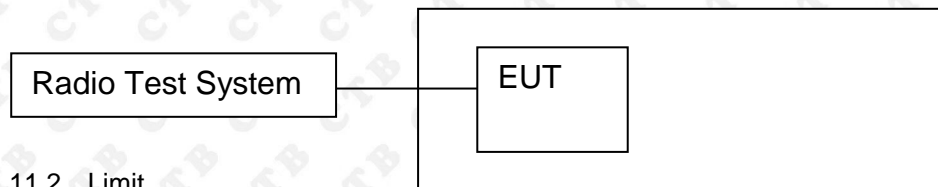

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density (dBm/3KHz)	Limit(dBm/3KHz)	Verdict
O-QPSK	LCH	-9.852	8	PASS
O-QPSK	MCH	-1.485	8	PASS
O-QPSK	HCH	-8.386	8	PASS

Test Graph

Graphs	
O-QPSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40500000 GHz Ref Offset 6.71 dB, Ref 20.00 dBm Mkr1 2.405 83 GHz, -9.852 dBm Center 2.405000 GHz, #Res BW 3.0 kHz, #VBW 10 kHz, Span 10.00 MHz, Sweep 1.054 s (1001 pts)</p>
O-QPSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44500000 GHz Ref Offset 6.72 dB, Ref 20.00 dBm Mkr1 2.445 39 GHz, -1.485 dBm Center 2.445000 GHz, #Res BW 3.0 kHz, #VBW 10 kHz, Span 10.00 MHz, Sweep 1.054 s (1001 pts)</p>
O-QPSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.47500000 GHz Ref Offset 6.72 dB, Ref 20.00 dBm Mkr1 2.475 26 GHz, -8.386 dBm Center 2.475000 GHz, #Res BW 3.0 kHz, #VBW 10 kHz, Span 10.00 MHz, Sweep 1.054 s (1001 pts)</p>

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:


The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The EUT antenna is External antenna. The best case gain of the antenna is 4.12dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emissions

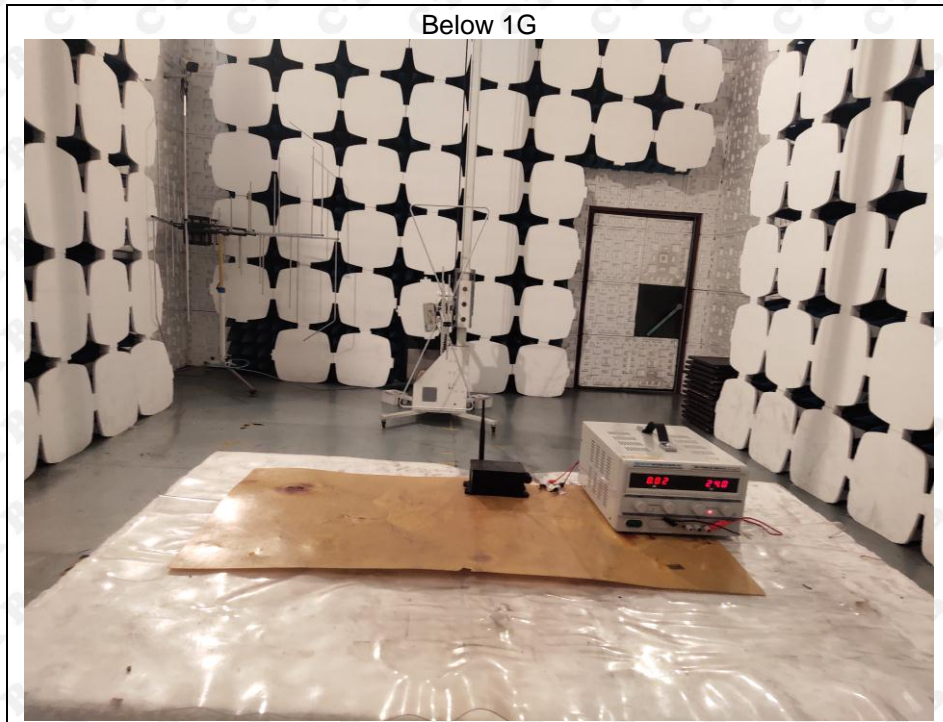

***** END OF REPORT *****