

品名：RFDPA151600SMBB801

History List

[illegible]

1.Explanation of part number :

RF	DPA	1516	00	S	M	B	B	8	01
Type Code	Product Code	Dipole Dimension (Unit: mm)	Cable Length (unit: cm)	Connector Brand	Type of Connector	Application	Project status	Wire Diameter	Project
Walsin RF Device	DPA: Dipole Antenna	Per 2 digits of length, width e.g.: 1516 Length 154mm, Width Ø13.0mm	2 digits for cable length e.g.:00 Cable Length: 00cm	A: N C:MCX D:IPEX III E: IPEX IV F: IPEX A13 H: Hirose I: IPEX M: MMCX S: SMA T: TNC U:MURATA N: None	A: Reverse Female B: Reverse Male F: Female M: Male N: None	0: 0GHz 3: 3GHz 5: 5 GHz 6: 6GHz A: 2.4GHz ISM band B: GSM 900/1800 dual band G: GPS band L: 2.4/5.2/5.8 GHz tri-band N: NFC T:LTE band W: WCDMA band	B: MP T:During Test X: Pile Run	0:None 1:Ø0.81 3:Ø1.13 6:RG316 7:Ø1.37 8:RG178 9:Low Loss Ø1.37	01~99 series number

2.Electrical Specification :

Item	Specification
Working Frequency Range	865 ~ 915 MHz
Return Loss	-10 dB
Peak Gain	1.95 dBi.
Polarization	Linear Vertical
Radiation Pattern	Directional
Impedance	50Ω
Operation Temperature	-20℃ ~ +65℃

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠雯

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎


APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFDPA151600SMBB801

DOCUMENT
NO.SPEC REV.
A0

3. Antenna Drawing :

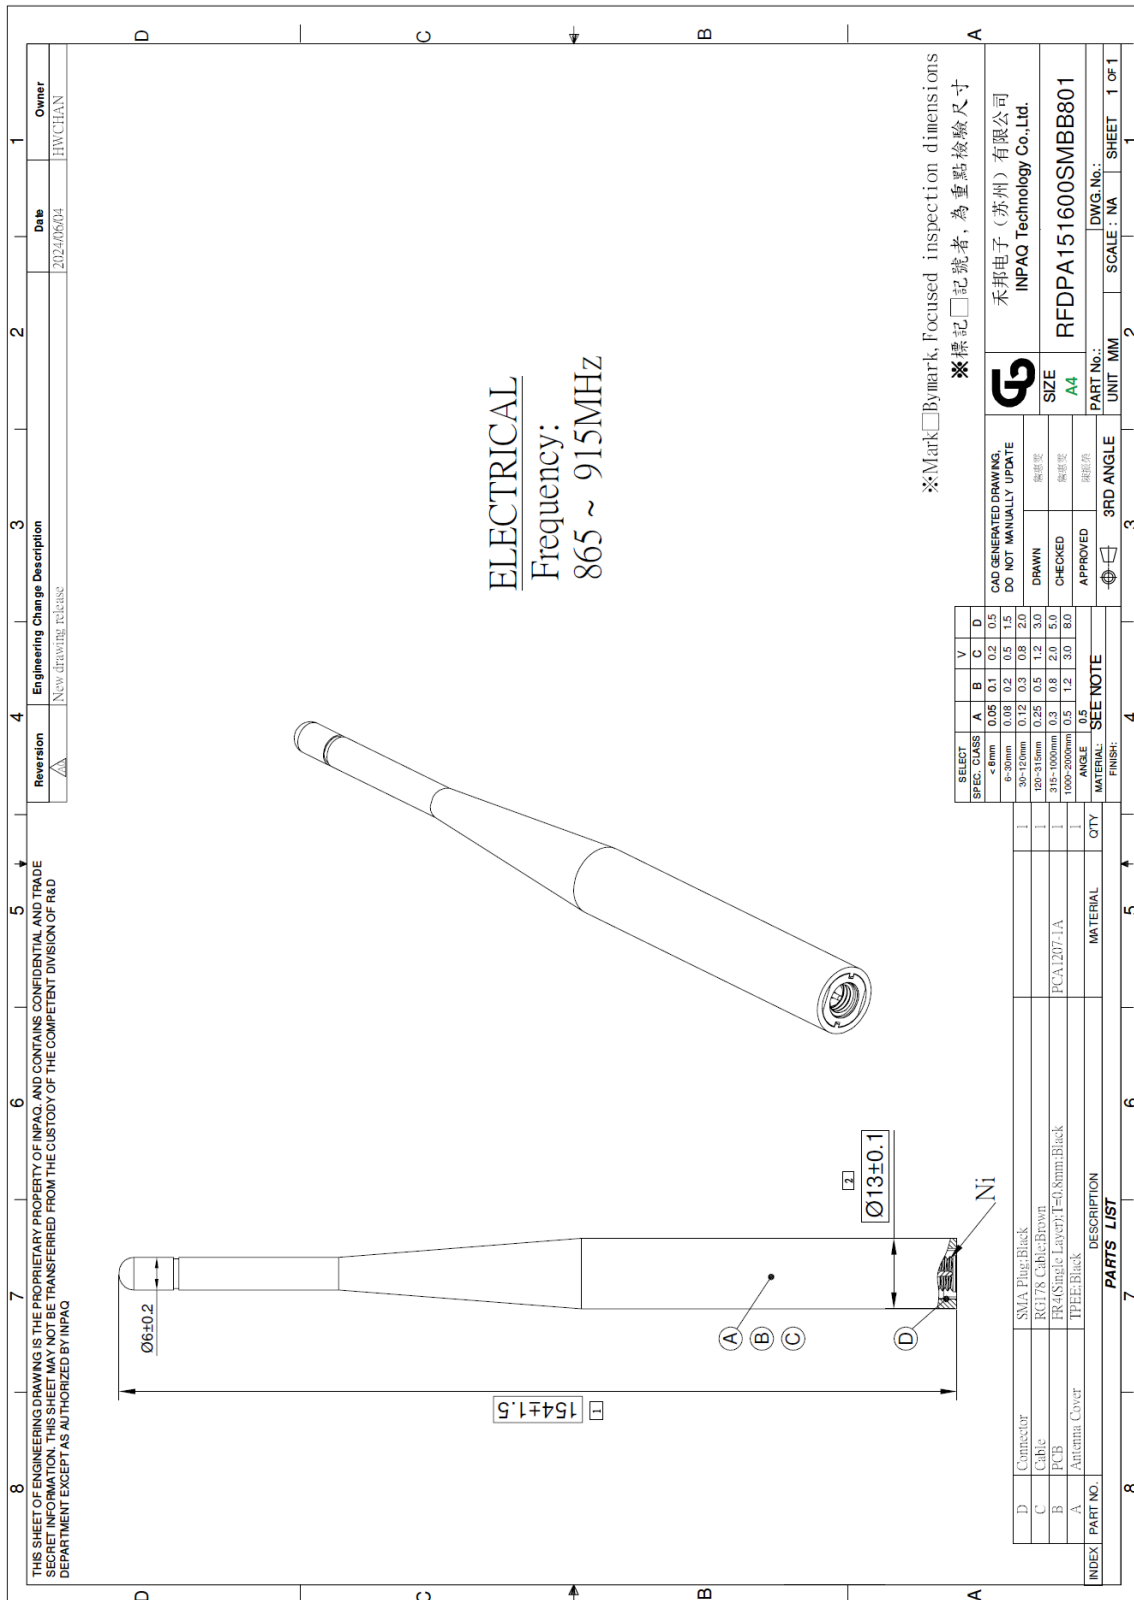

UNLESS OTHER SPECIFIED TOLERANCES ON :

X= N/A

X.X= N/A

X.XX= N/A

ANGLES= N/A

HOLEDIA= N/A

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠愛

CHECKED BY : 詹惠愛

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮

TITLE : RFDPA151600SMBB801



INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.SPEC REV.
A0

4. Performance Report :

Test Report

■ ELECTRICAL CHARACTERISTICS

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠雯

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : RFDPA151600SMBB801

DOCUMENT
NO.

SPEC REV.
A0

ELECTRICAL CHARACTERISTICS

S-Parameter

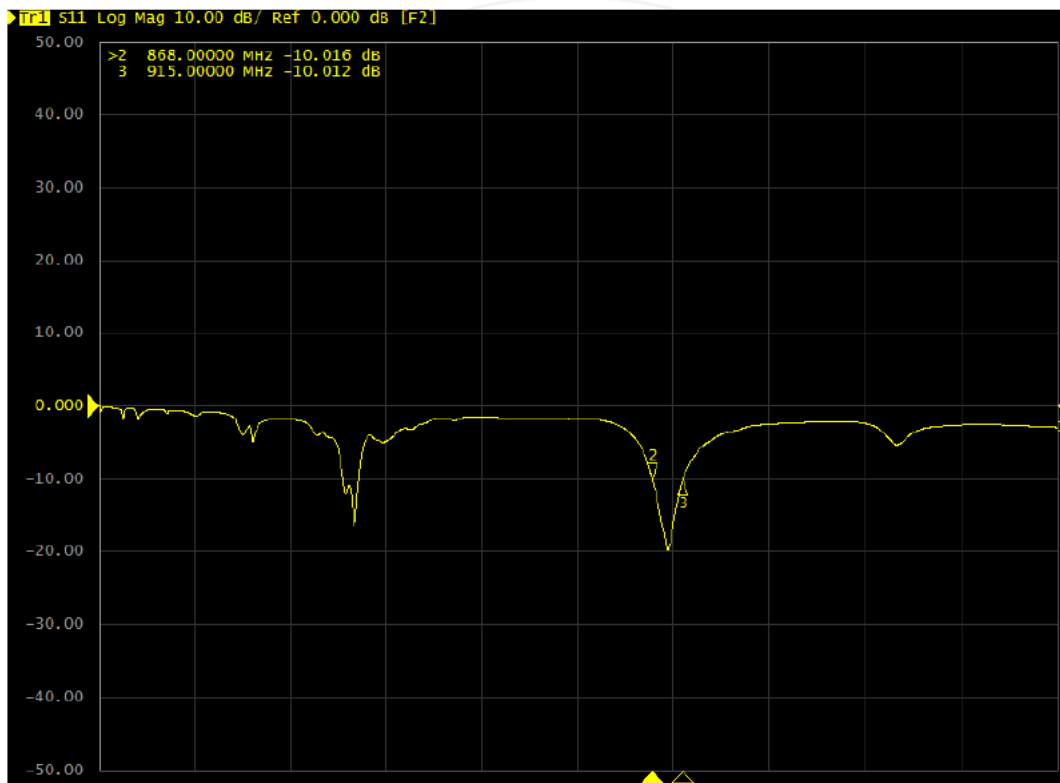

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠雯

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFDPA151600SMBB801


DOCUMENT
NO.

SPEC REV.
A0

■ Antenna Efficiency & Peak Gain

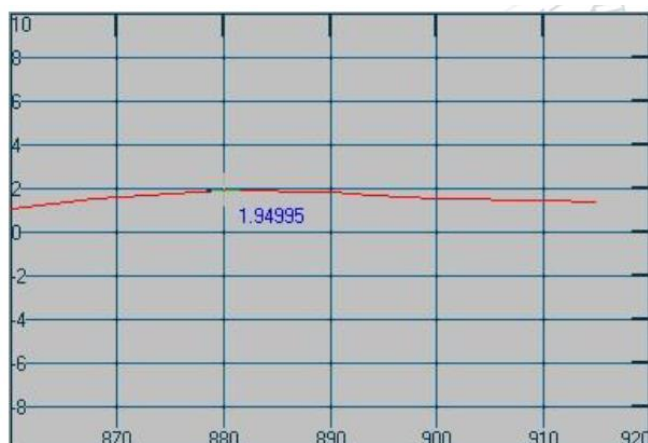

Maximum Peak Gain at 890MHz : 1.95 dBi

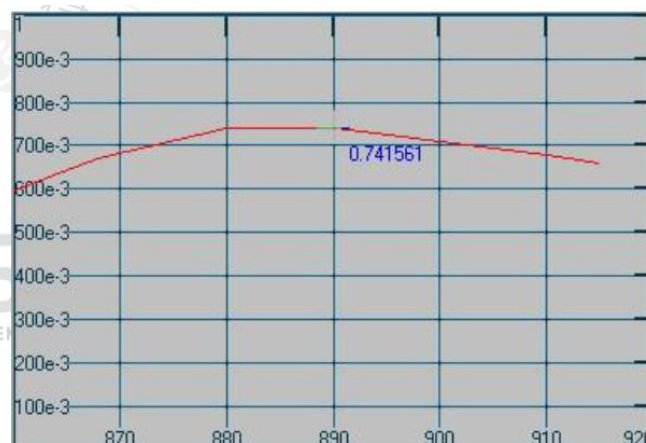

Maximum Efficiency at 890MHz : 74.16 %

UNLESS OTHER SPECIFIED TOLERANCES ON :
 X = N/A X.X = N/A X.XX = N/A
 ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠雯

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎


APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFDPA151600SMBB801

DOCUMENT
NO.

SPEC REV.
A0

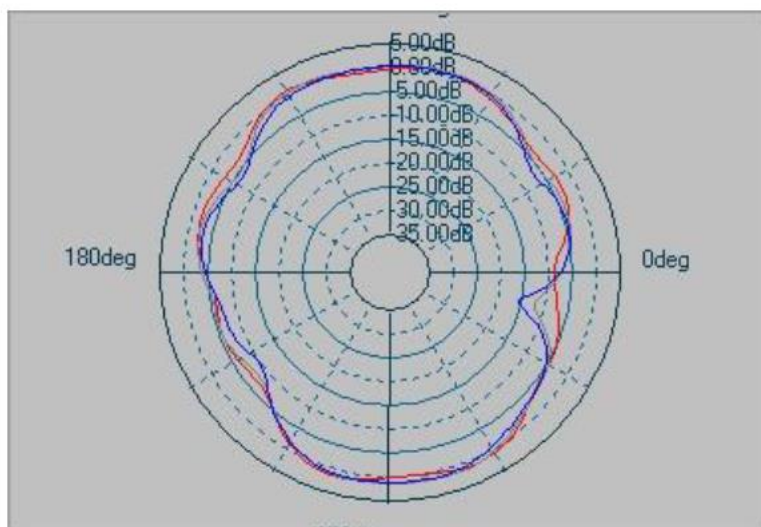RADIATION PATTERN**X-Z Plane****Phi=0.00deg****Gain . dB**

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A

**INPAQ TECHNOLOGY CO., LTD.****SCALE : N/A****UNIT : mm****DRAWN BY : 詹惠雯****CHECKED BY : 詹惠雯****DESIGNED BY : 黃瑞郎****APPROVED BY : 陳振榮**


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFDPA151600SMBB801**DOCUMENT
NO.****SPEC REV.
A0**

Y-Z Plane

Phi=90.00deg

Gain . dB

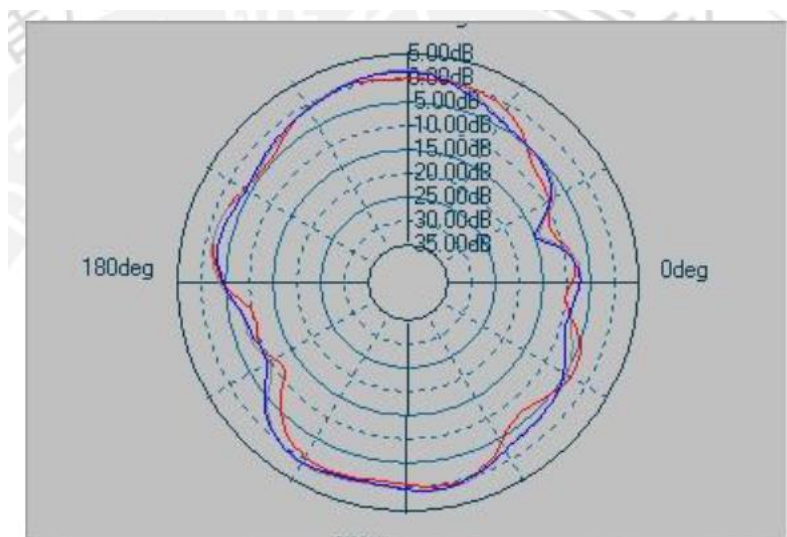

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠雯

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFDPA151600SMBB801


DOCUMENT
NO.

SPEC REV.
A0

X-Y Plane

Theta=90.00deg

Gain . dB

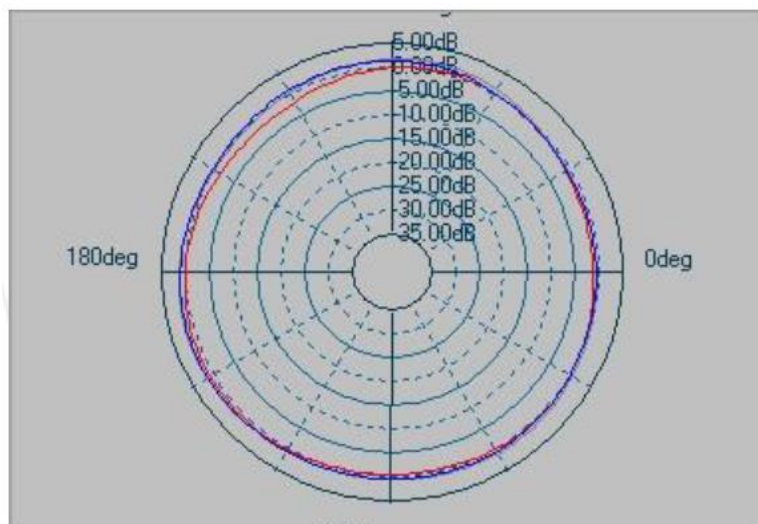

Frequency[MHz]	ZX plane		ZY plane		XY plane	
	Max Value[dBi]	Average[dBi]	Max Value[dBi]	Average[dBi]	Max Value[dBi]	Average[dBi]
868	1.09	-2.10	0.26	-3.18	0.57	-0.57
890	1.33	-2.04	1.03	-2.43	1.46	0.41
915	1.03	-2.53	0.73	-2.70	1.36	0.27

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 詹惠雯

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFDPA151600SMBB801

DOCUMENT
NO.

SPEC REV.
A0