


Inverted F Antenna Specification

Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2400MHz	2500MHz	2400MHz	2400MHz	2500MHz
	-1.73 dBi	-0.84 dBi	-0.68 dBi	-6.15 dBi	-3.70 dBi	-2.32 dBi
MAX. Gain	-0.68 dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Manufacture	ZHUHAI JIELI TECHNOLOGY CO.,LTD 333 Kexing Road, Xiangzhou District, Zhuhai City, China					


Antenna Photo

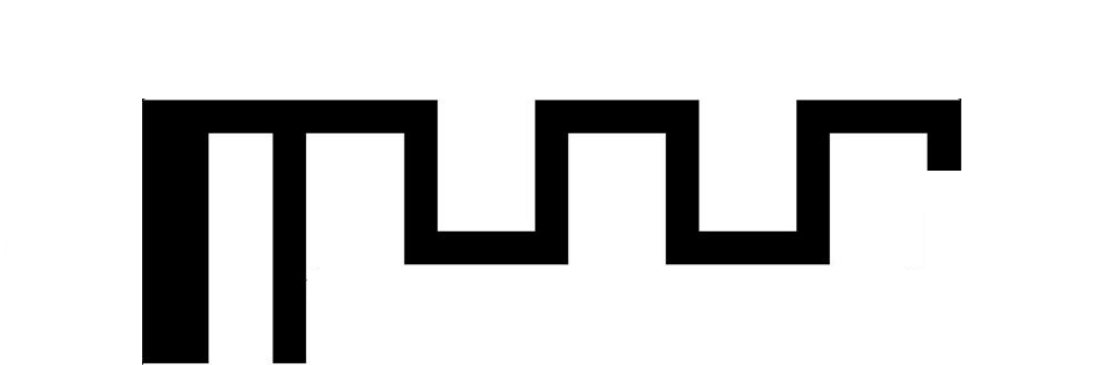

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div

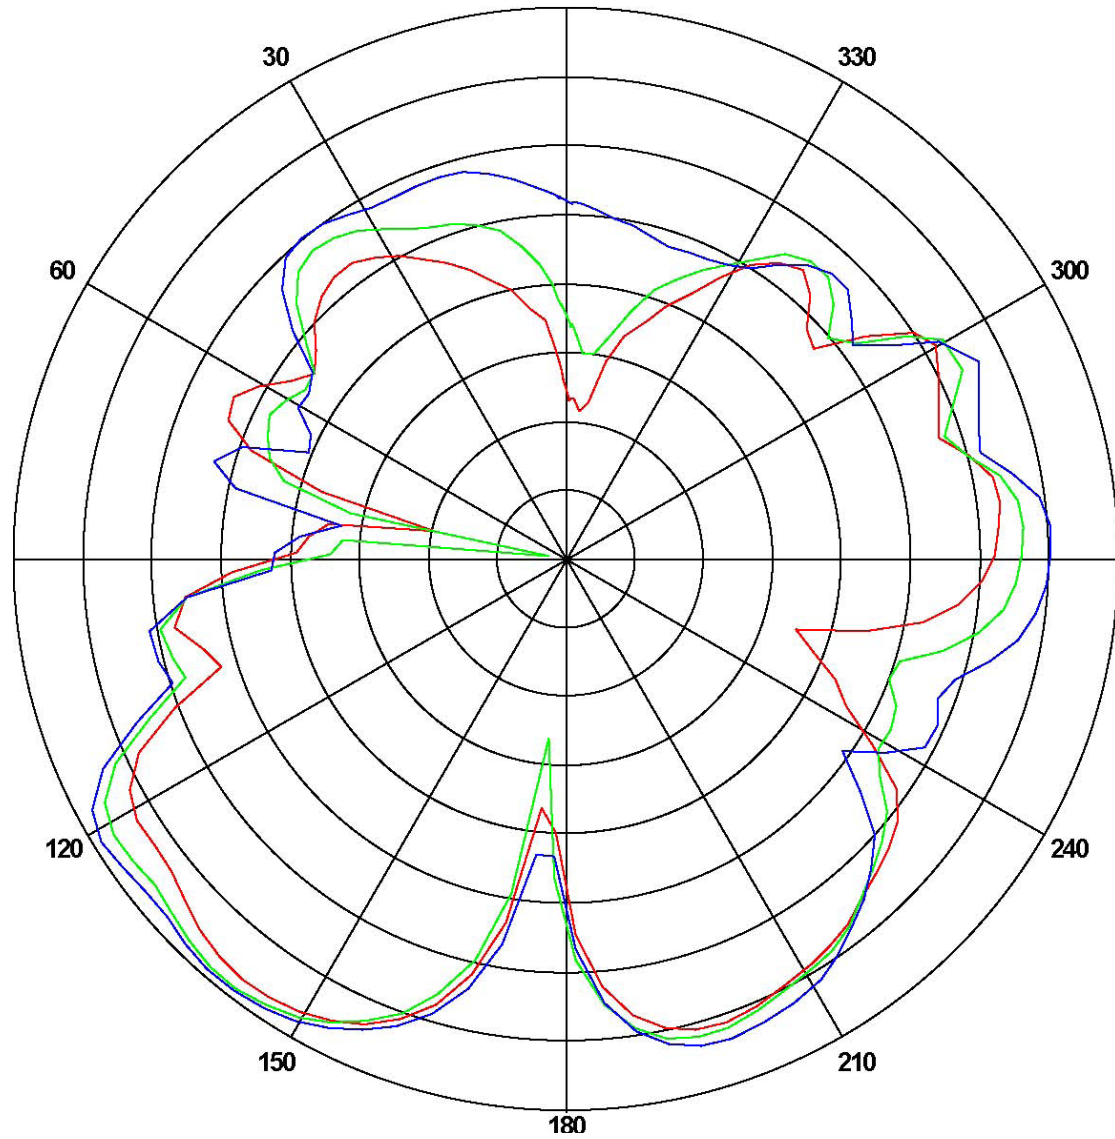


Frequency (MHz)	Gain(dBi)	
	Max	Min
2400	-1.73	-30.08
2450	-0.84	-38.56
2500	-0.68	-24.03

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div

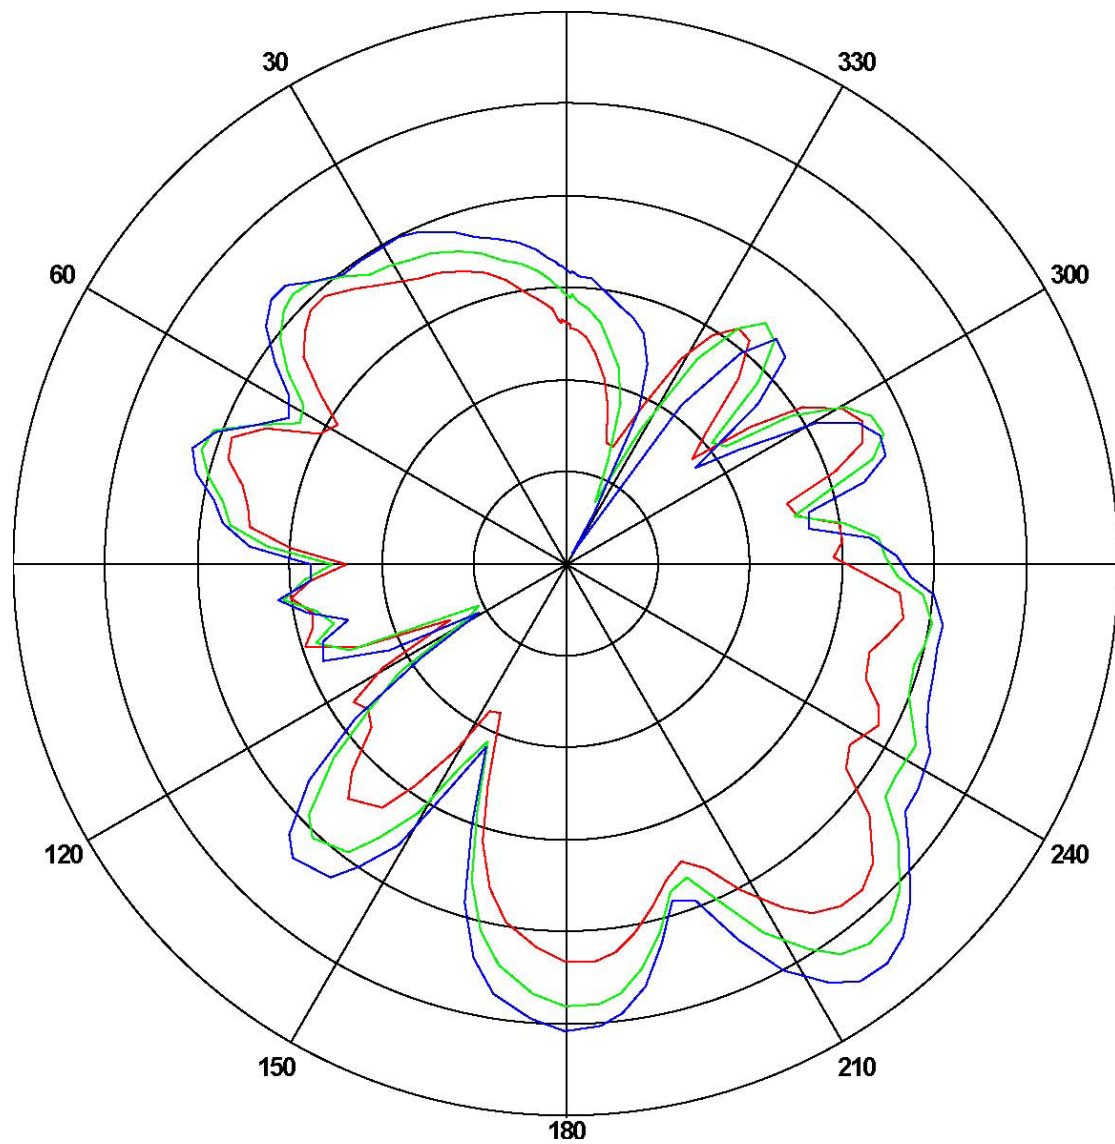

Frequency (MHz)	Gain(dBi)	
	Max	Min
2400	-6.15	-24.14
2450	-3.70	-26.58
2500	-2.32	-30.43

ANT Test Labs: Attestation of Global Compliance Co., Ltd.