

TEST REPORT

Applicant Name : ShenZhen Bijiasuo Electronic Co.,Ltd
Address: 1F,B13,DayunSoftwareTown,Heao,Yuanshan,longgang, Shenzhen,China
Report Number : RA230619-34931E-RF-00A
FCC ID: 2BB2X-CP82

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: Car Adapter
Model No.: CP82, PCS47, PCS51, PCS55, PCS56, AA82, CP85, AA85, CP86, CP87, CA361, AP-ACP, PCS60, PCS61, PCS65, PCS66, CP88, CP89, CP90, CP91, CA451, CA481, C5, C5SE
Trade Mark: N/A
Date Received: 2023-06-19
Date of Test: 2023-06-28 to 2023-06-29
Report Date: 2023-07-11

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Amanda Wei
EMC Engineer

Approved By:



Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503290

Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
DUTY CYCLE	6
SUPPORT EQUIPMENT LIST AND DETAILS	10
EXTERNAL I/O CABLE.....	10
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS.....	11
TEST EQUIPMENT LIST	12
FCC §1.1310 & §2.1091-RF EXPOSURE.....	13
FCC §15.203-ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.205, §15.209 & §15.247(d)-RADIADED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
CALCULATION	16
TEST DATA	16
FCC §15.247(a) (2)-6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH.....	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA	24
FCC §15.247(b) (3)-MAXIMUM CONDUCTED OUTPUT POWER.....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(d)-100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(e)-POWER SPECTRAL DENSITY	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	39

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230619-34931E-RF-00A	Original Report	2023-07-11

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Car Adapter
Tested Model	CP82
Multiple Model	PCS47, PCS51, PCS55, PCS56, AA82, CP85, AA85, CP86, CP87, CA361, AP-ACP, PCS60, PCS61, PCS65, PCS66, CP88, CP89, CP90, CP91, CA451, CA481, C5, C5SE
Model Difference	Please refer to DOS letter
Frequency Range	BLE 1M/2M: 2402-2480MHz
Maximum Conducted Peak Output Power	BLE: 0.79dBm
Modulation Technique	GFSK
Antenna Specification*	-0.61dBi (It is provided by the applicant)
Voltage Range	DC 5V from USB port
Sample serial number	277Q-1 (RE) & 277Q-2 (RF Conducted Test) (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	5%	
RF output power, conducted	0.71dB	
Unwanted Emission, conducted	1.6dB	
AC Power Lines Conducted Emissions	2.74dB	
Emissions, Radiated	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
Temperature	1°C	
Humidity	6%	
Supply voltages	0.4%	

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
...
...
...
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

EUT Exercise Software

Software “SecureCRT”* was used during testing and the Power level is Default*

Special Accessories

N/A


Equipment Modifications

No modification was made to the EUT tested.

Duty Cycle


Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T Minimum VBW[kHz]
BLE_1M	Ant1	2402	2.12	2.50	84.80	0.47
		2440	2.12	2.50	84.80	0.47
		2480	2.12	2.50	84.80	0.47
BLE_2M	Ant1	2402	1.06	1.87	56.68	0.94
		2440	1.06	1.87	56.68	0.94
		2480	1.06	1.87	56.68	0.94

BLE_1M_Ant1_2402

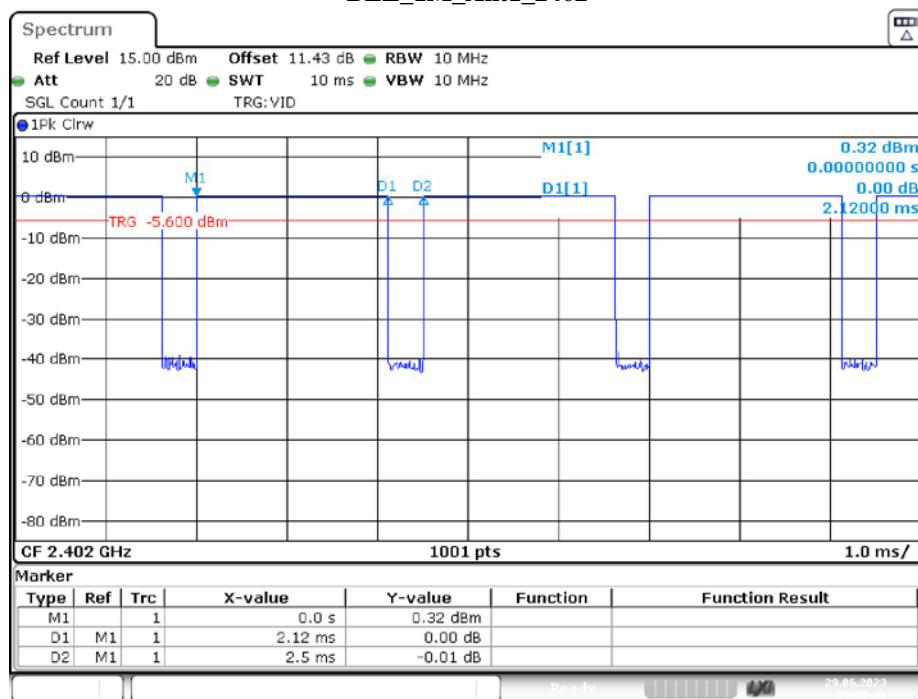


Date: 29.JUN.2023 18:58:40

BLE_1M_Ant1_2440

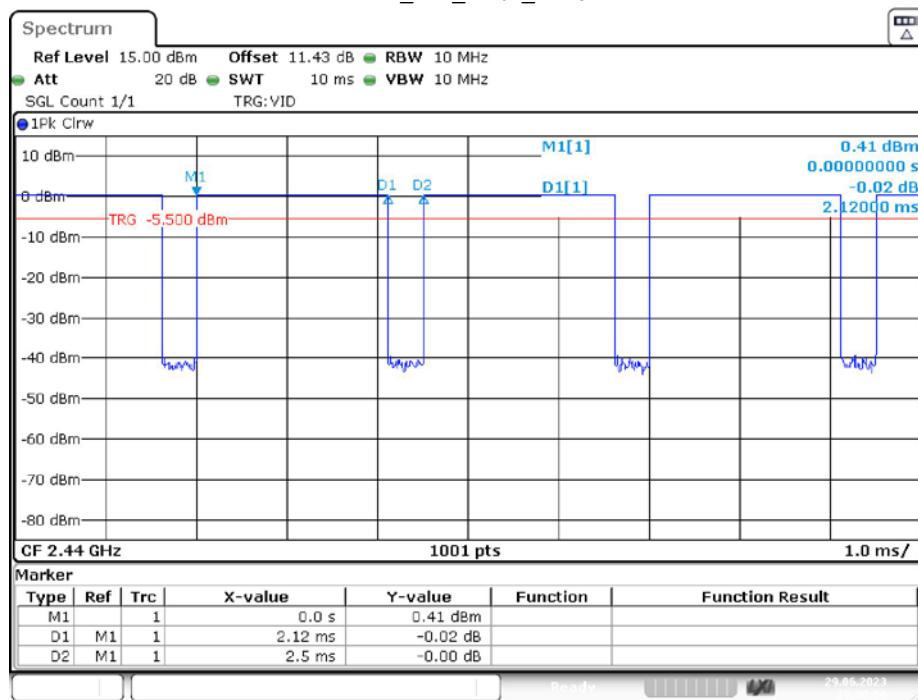


Date: 29.JUN.2023 19:00:00

BLE_1M_Ant1_2480

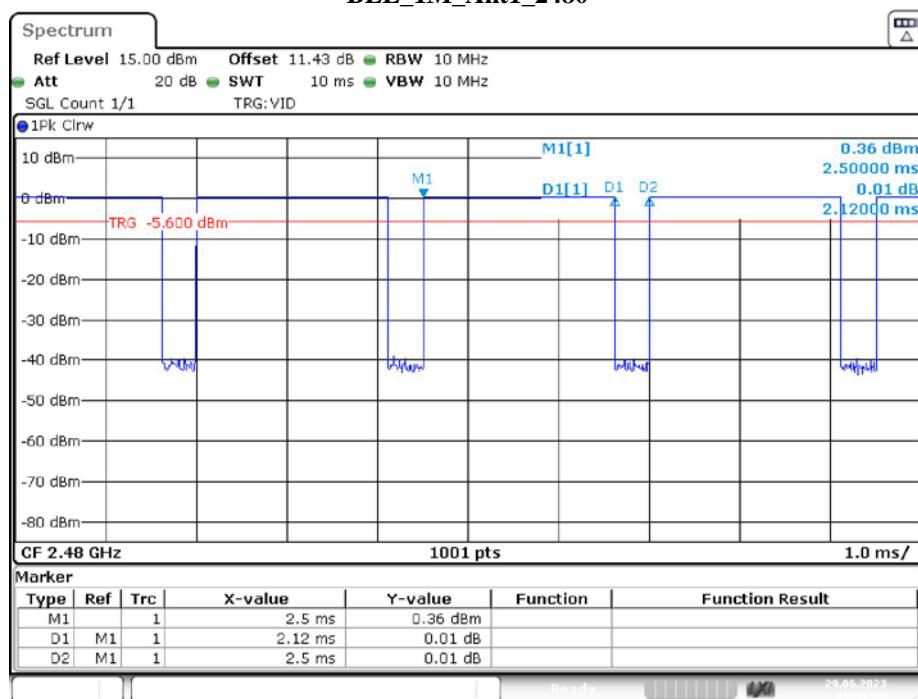


Date: 29.JUN.2023 19:01:01

BLE_2M_Ant1_2402

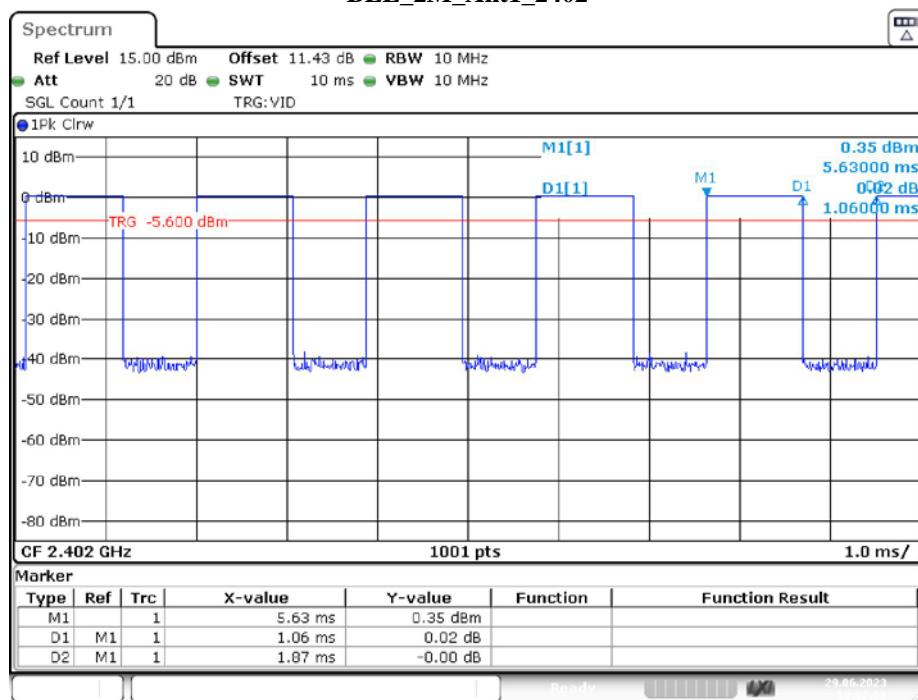


Date: 29.JUN.2023 19:02:08

BLE_2M_Ant1_2440

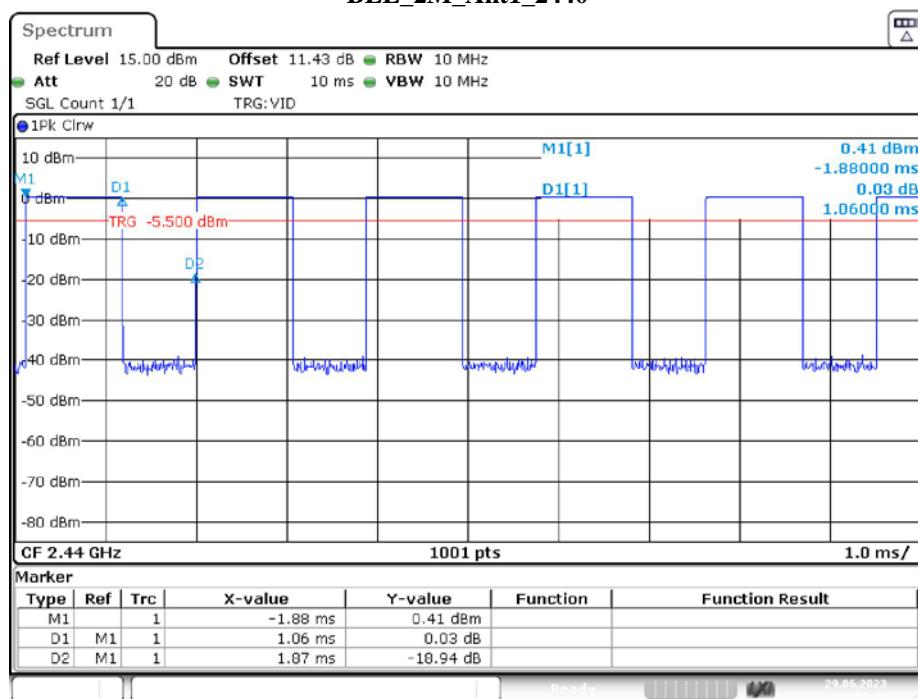

Date: 29.JUN.2023 19:03:12

BLE_2M_Ant1_2480

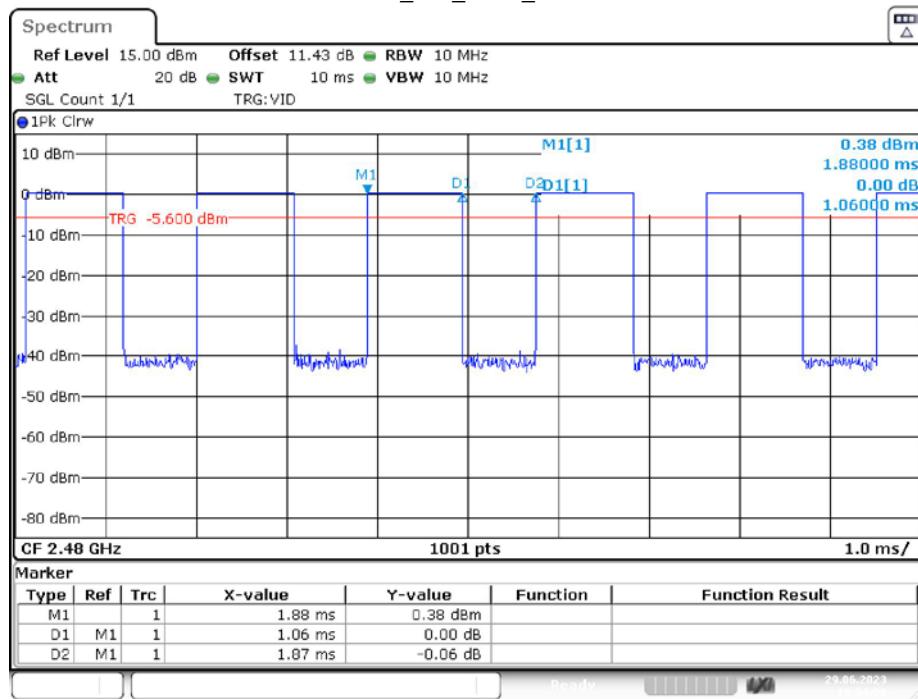

Date: 29.JUN.2023 19:04:08

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Notebook	ThinkPad X240	unknown

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB cable	2.3	Notebook	EUT

Block Diagram of Test Setup

For Radiated Emissions:

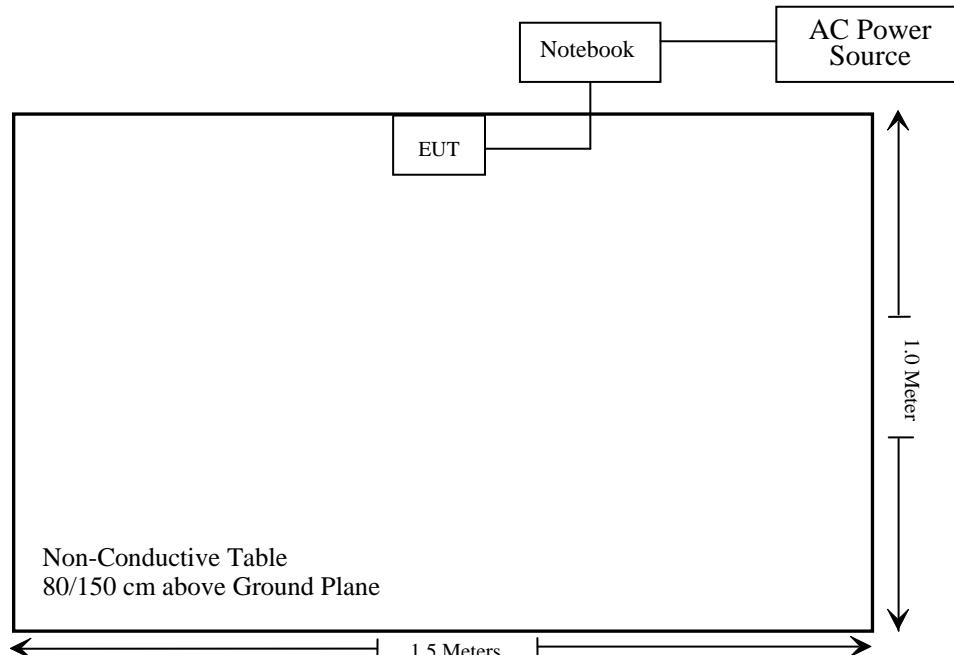

Note: the support table edge was flush with the center of turntable

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

Not Applicable: the device is intend for vehicle use.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2022/11/30	2025/11/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Radiated Emission Test Software: e3191218 (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2022/11/25	2023/11/24
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2022/11/25	2023/11/24
WEINSCHEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091-RF EXPOSURE

Applicable Standard

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.4 –MPE-Based Exemption:

An alternative to the SAR-based exemption is provided in § 1.1307(b)(3)(i)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the product of the maximum antenna gain and the delivered maximum time-averaged power. For this case, a RF source is an RF exempt device if its ERP (watts) is no more than a frequency-dependent value, as detailed tabular form in Appendix B. These limits have been derived based on the basic specifications on Maximum Permissible Exposure (MPE) considered for the FCC rules in § 1.1310(e)(1).

Table to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	1,920 R^2 .
1.34-30	3,450 R^2/f^2 .
30-300	3.83 R^2 .
300-1,500	0.0128 R^2f .
1,500-100,000	19.2 R^2 .

f = frequency in MHz;

R = minimum separation distance from the body of a nearby person (appropriate units, e.g., m);

Test result

For worst case:

Mode	Frequency Range (MHz)	Tune-up Output Power		Antenna Gain		ERP		Evaluation Distance (cm)	MPE-Based Exemption Threshold (W)
		(dBm)	(mW)	(dBi)	(dBd)	(dBm)	(W)		
BLE 1M/2M	2402-2480	1.0	1.26	-0.61	-2.76	-1.76	0.0007	20	0.768

Note 1: The tune-up power was declared by the applicant.

Note 2: 0dBd=2.15dBi.

Note 3: The BLE and 5G Wi-Fi cannot transmit at same time.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203-ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is -0.61dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FCC §15.205, §15.209 & §15.247(d)-RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

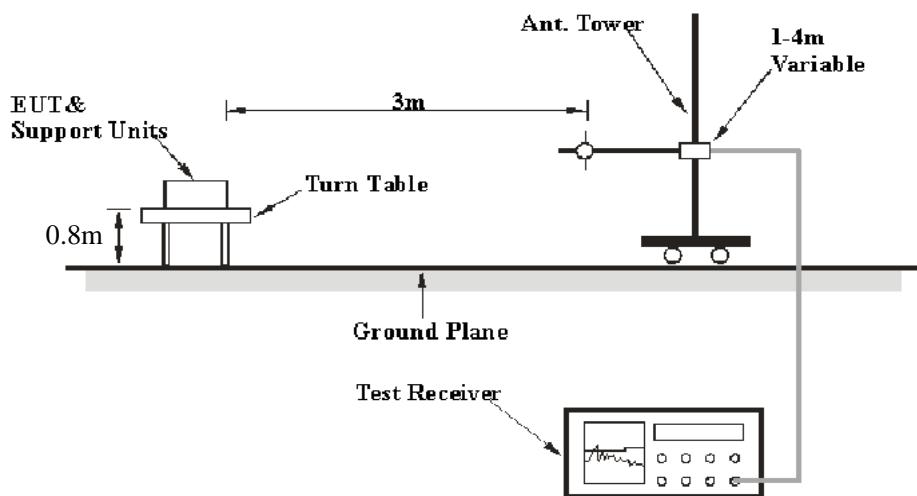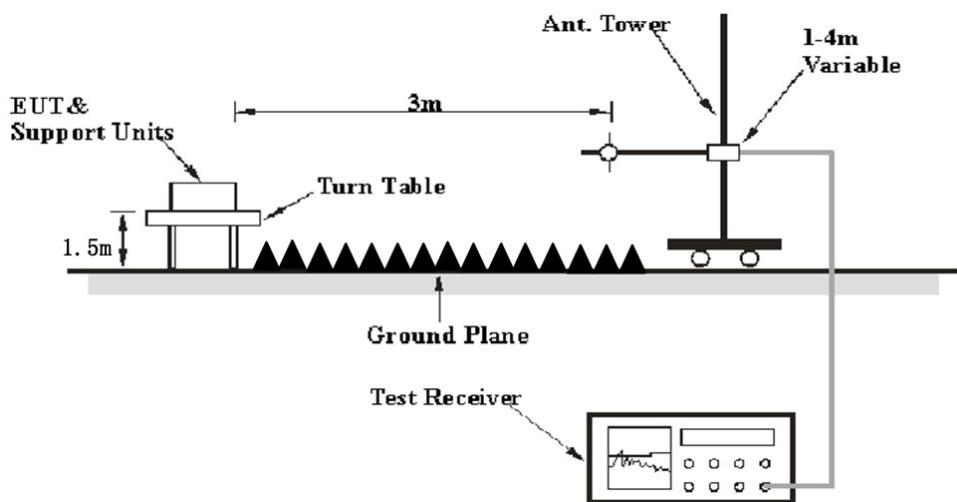EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	>1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP/Average measurement

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	22-23 °C
Relative Humidity:	53-57 %
ATM Pressure:	101.0 kPa

*The Below 1G testing was performed by Jason Liu on 2023-06-29.
The Above 1G testing was performed by Jimi Zheng on 2023-06-28.*

EUT operation mode: BLE Transmitting

(Pre-scan in the X, Y and Z axes of orientation, the worst case orientation was photo and recorded)

Note: For below 1GHz, when the test result of peak was 6dB below to the limit of QP, just peak value was recorded.

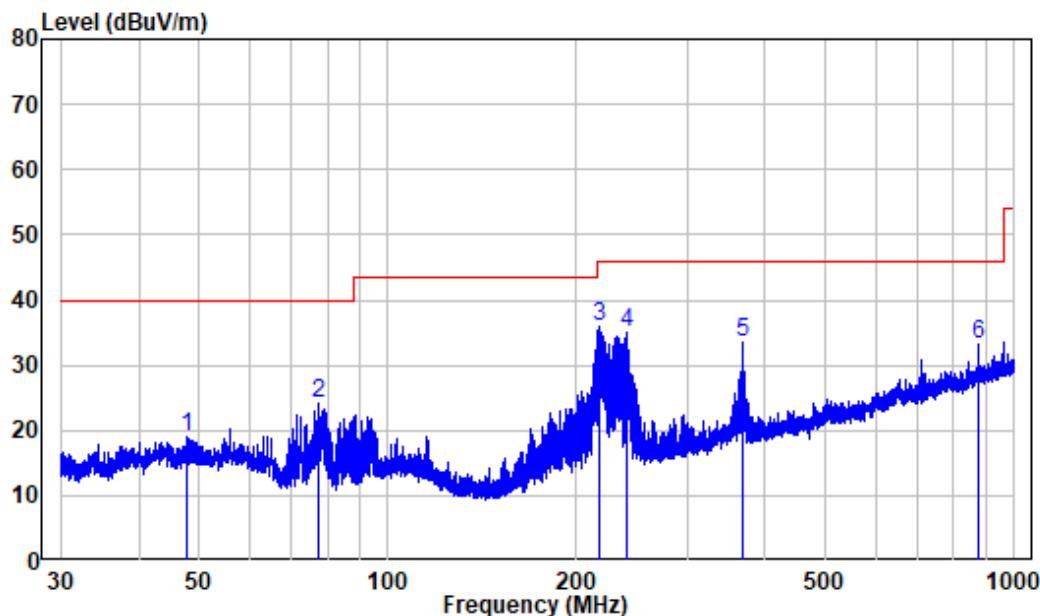Below 1GHz:**BLE 1M: (Middle Channel)****Horizontal**

Site : chamber


Condition: 3m HORIZONTAL

Job No. : RA230619-34931E-RF

Test Mode: BLE 1M Transmitting

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.700	-10.00	28.88	18.88	40.00	-21.12	Peak
2	77.593	-16.57	40.61	24.04	40.00	-15.96	Peak
3	217.258	-11.56	47.60	36.04	46.00	-9.96	Peak
4	239.987	-10.91	45.99	35.08	46.00	-10.92	Peak
5	368.758	-7.37	40.83	33.46	46.00	-12.54	Peak
6	877.552	1.21	31.88	33.09	46.00	-12.91	Peak

Vertical

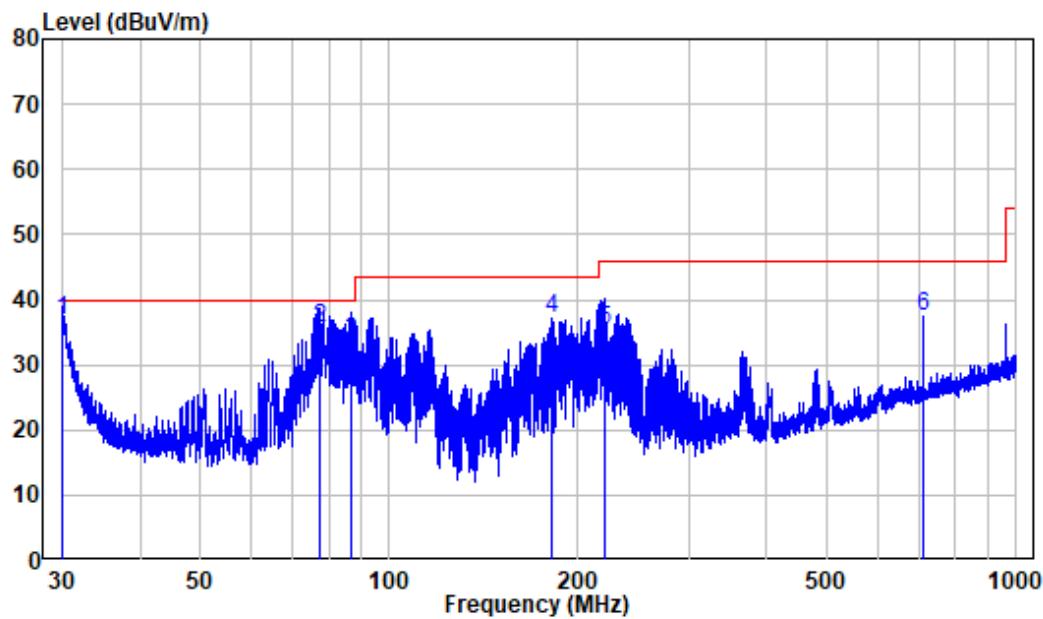

Site : chamber

Condition: 3m VERTICAL


Job No. : RA230619-34931E-RF

Test Mode: BLE 1M Transmitting

Freq	Factor	Read	Limit	Over	Remark			
		Level	Level	Line				
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.066	-12.39	49.20	36.81	40.00	-3.19	QP	
2	77.525	-16.56	52.20	35.64	40.00	-4.36	QP	
3	86.807	-14.95	48.50	33.55	40.00	-6.45	QP	
4	182.000	-12.54	49.71	37.17	43.50	-6.33	Peak	
5	220.811	-11.39	46.56	35.17	46.00	-10.83	QP	
6	711.986	-1.43	38.87	37.44	46.00	-8.56	Peak	

BLE 2M: (Middle Channel)


Horizontal

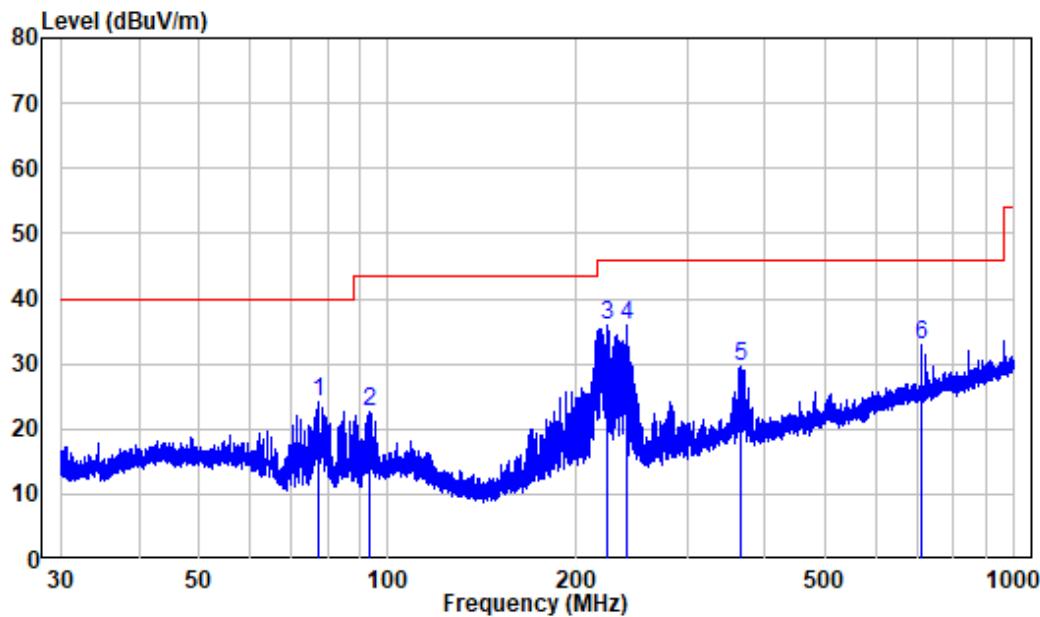

Site : chamber
Condition: 3m HORIZONTAL
Job No. : RA230619-34931E-RF
Test Mode: BLE 2M Transmitting

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	77.559	-16.57	40.65	24.08	40.00	-15.92	Peak
2	93.113	-12.97	35.63	22.66	43.50	-20.84	Peak
3	223.244	-11.32	47.17	35.85	46.00	-10.15	Peak
4	239.882	-10.91	46.76	35.85	46.00	-10.15	Peak
5	365.219	-7.54	37.22	29.68	46.00	-16.32	Peak
6	711.674	-1.44	34.23	32.79	46.00	-13.21	Peak

Vertical

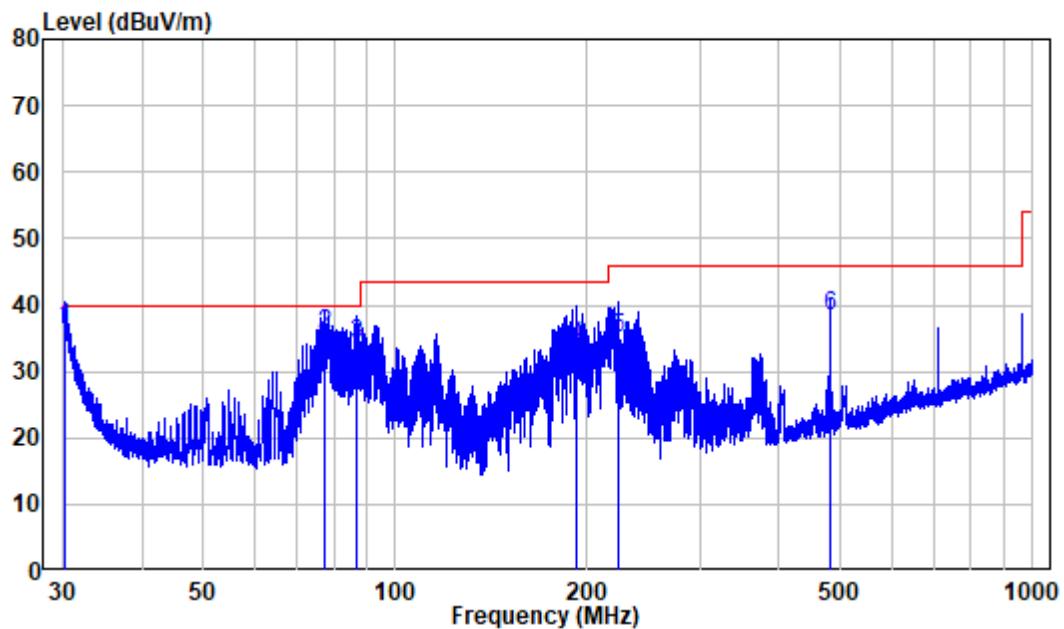

Site : chamber

Condition: 3m VERTICAL

Job No. : RA230619-34931E-RF

Test Mode: BLE 2M Transmitting

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
1	30.304	-12.36	48.99	36.63	40.00	-3.37 QP
2	77.559	-16.57	52.20	35.63	40.00	-4.37 QP
3	86.997	-14.89	49.00	34.11	40.00	-5.89 QP
4	192.841	-11.27	45.11	33.84	43.50	-9.66 QP
5	223.733	-11.29	46.19	34.90	46.00	-11.10 QP
6	480.107	-5.00	43.30	38.30	46.00	-7.70 QP

Above 1GHz:

Frequency (MHz)	Receiver		Turtable Angle	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/AV	Degree	Height (m)	Polar (H/V)				
BLE 1M, Low Channel									
2310	46.47	PK	123	1.4	H	-10.32	36.15	74	-37.85
2310	45.42	PK	355	1.7	V	-10.32	35.1	74	-38.9
2390	47.99	PK	134	1.7	H	-10.62	37.37	74	-36.63
2390	45.55	PK	189	1.6	V	-10.62	34.93	74	-39.07
4804	49.02	PK	252	1.4	H	-5.58	43.44	74	-30.56
4804	47.88	PK	184	1.9	V	-5.58	42.3	74	-31.7
BLE 1M, Middle Channel									
4880	49.3	PK	295	2.2	H	-5.23	44.07	74	-29.93
4880	49.17	PK	124	1.5	V	-5.23	43.94	74	-30.06
BLE 1M, High Channel									
2483.5	61.2	PK	159	1.9	H	-10.46	50.74	74	-23.26
2483.5	50.09	PK	196	1.2	V	-10.46	39.63	74	-34.37
2500	46.55	PK	287	1.0	H	-10.32	36.23	74	-37.77
2500	47.35	PK	225	2.1	V	-10.32	37.03	74	-36.97
4960	48.19	PK	113	1.8	H	-4.90	43.29	74	-30.71
4960	48.27	PK	135	1.7	V	-4.90	43.37	74	-30.63
BLE 2M, Low Channel									
2310	46.41	PK	123	1.4	H	-10.32	36.09	74	-37.91
2310	45.75	PK	355	1.7	V	-10.32	35.43	74	-38.57
2390	46.99	PK	134	1.7	H	-10.62	36.37	74	-37.63
2390	46.57	PK	189	1.6	V	-10.62	35.95	74	-38.05
4804	48.34	PK	252	1.4	H	-5.58	42.76	74	-31.24
4804	47.14	PK	184	1.9	V	-5.58	41.56	74	-32.44
BLE 2M, Middle Channel									
4880	48.63	PK	295	2.2	H	-5.23	43.4	74	-30.6
4880	48.26	PK	124	1.5	V	-5.23	43.03	74	-30.97
BLE 2M, High Channel									
2483.5	57.8	PK	159	1.9	H	-10.46	47.34	74	-26.66
2483.5	49.59	PK	196	1.2	V	-10.46	39.13	74	-34.87
2500	46.81	PK	287	1.0	H	-10.32	36.49	74	-37.51
2500	46.78	PK	225	2.1	V	-10.32	36.46	74	-37.54
4960	47.53	PK	113	1.8	H	-4.90	42.63	74	-31.37
4960	47.33	PK	135	1.7	V	-4.90	42.43	74	-31.57

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading

Margin = Absolute Level - Limit


The other spurious emission which is in the noise floor level was not recorded.

For above 1GHz, when the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, just peak value was recorded.


1 GHz - 18 GHz: (Pre-Scan plots)

(worst case for BLE 1M Middle Channel)

Horizontal

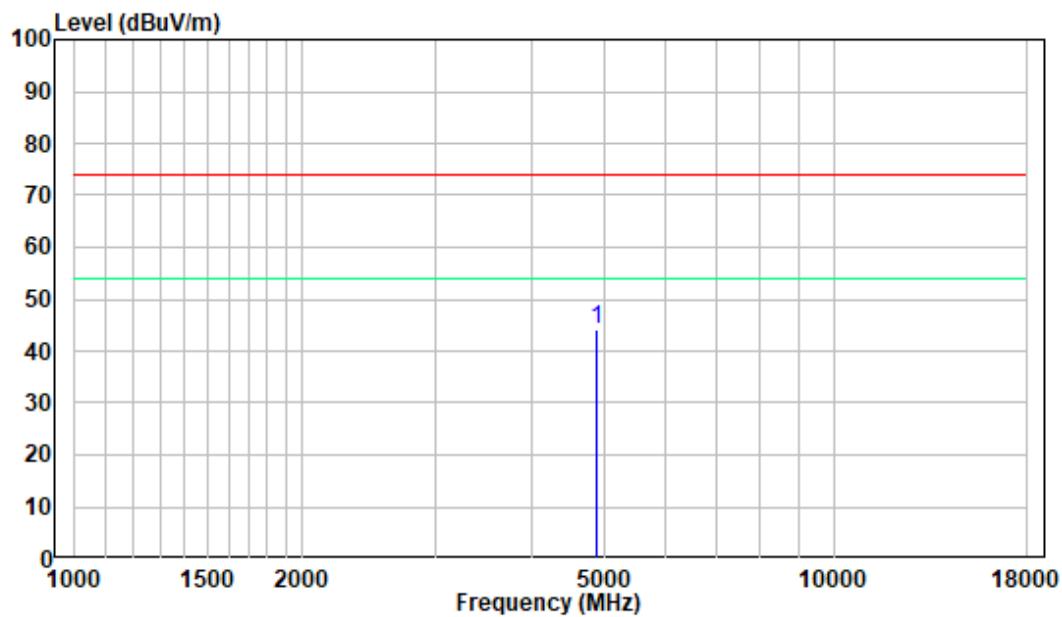


Vertical

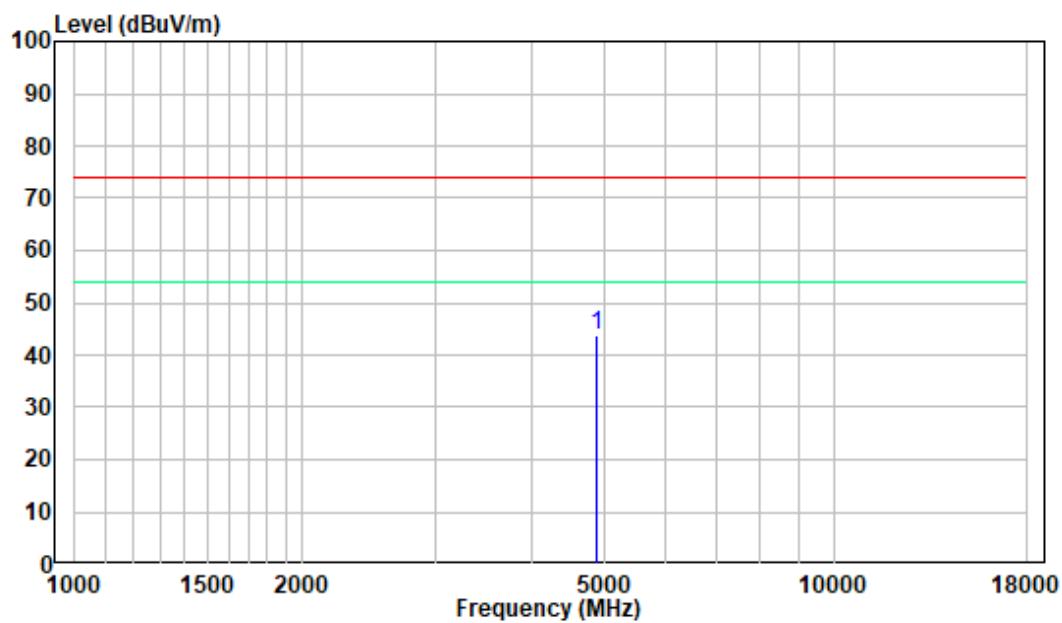


18-25GHz: (Pre-Scan plots)

(worst case for BLE 1M Middle Channel)

Horizontal

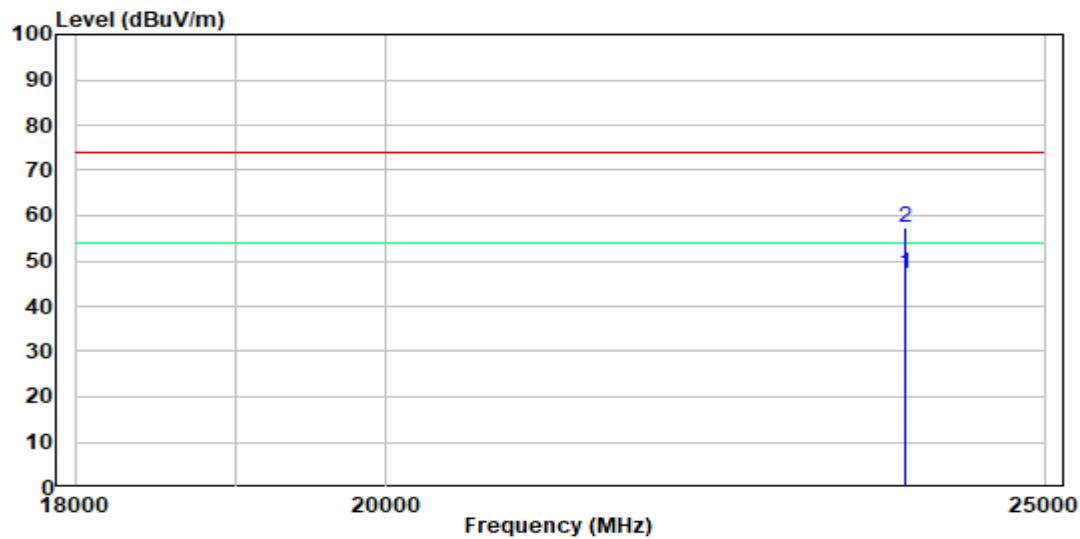

Vertical

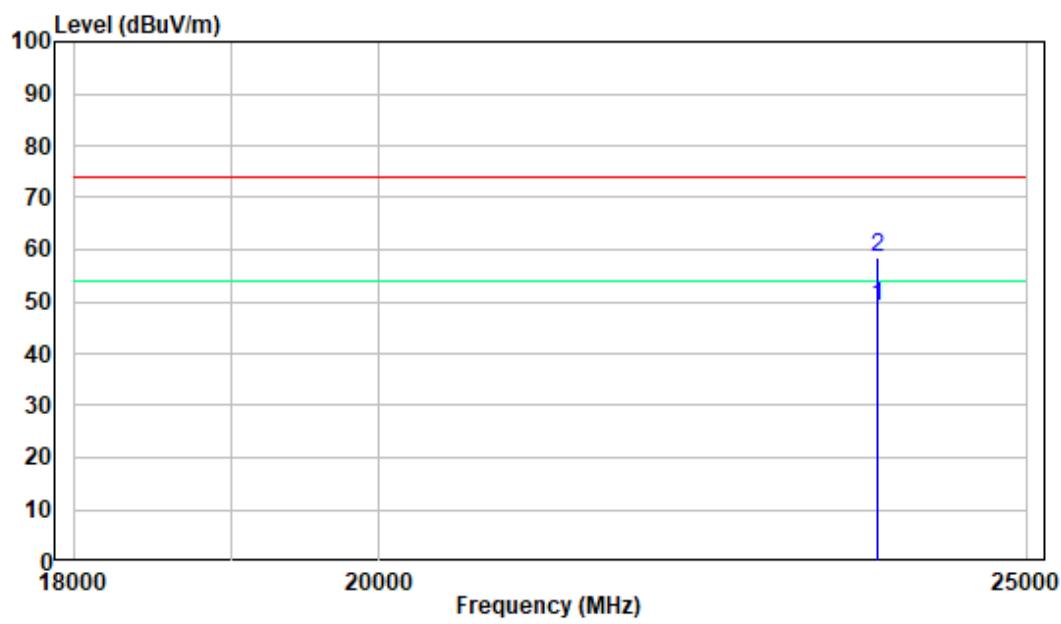

FCC §15.247(a) (2)-6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013, section 11.8 and section 6.9

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	26°C
Relative Humidity:	51%
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-06-29.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the below tables and plots.

6 dB EMISSION BANDWIDTH


Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.66	0.5	PASS
		2440	0.66	0.5	PASS
		2480	0.66	0.5	PASS
BLE_2M	Ant1	2402	1.24	0.5	PASS
		2440	1.23	0.5	PASS
		2480	1.24	0.5	PASS

OCCUPIED BANDWIDTH


Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
BLE_1M	Ant1	2402	1.063	2401.4765	2402.5395	PASS
		2440	1.067	2439.4765	2440.5435	PASS
		2480	1.071	2479.4805	2480.5514	PASS
BLE_2M	Ant1	2402	2.134	2400.9411	2403.0749	PASS
		2440	2.110	2438.9730	2441.0829	PASS
		2480	2.182	2478.9131	2481.0949	PASS

6 dB EMISSION BANDWIDTH



BLE_1M_Ant1_2402

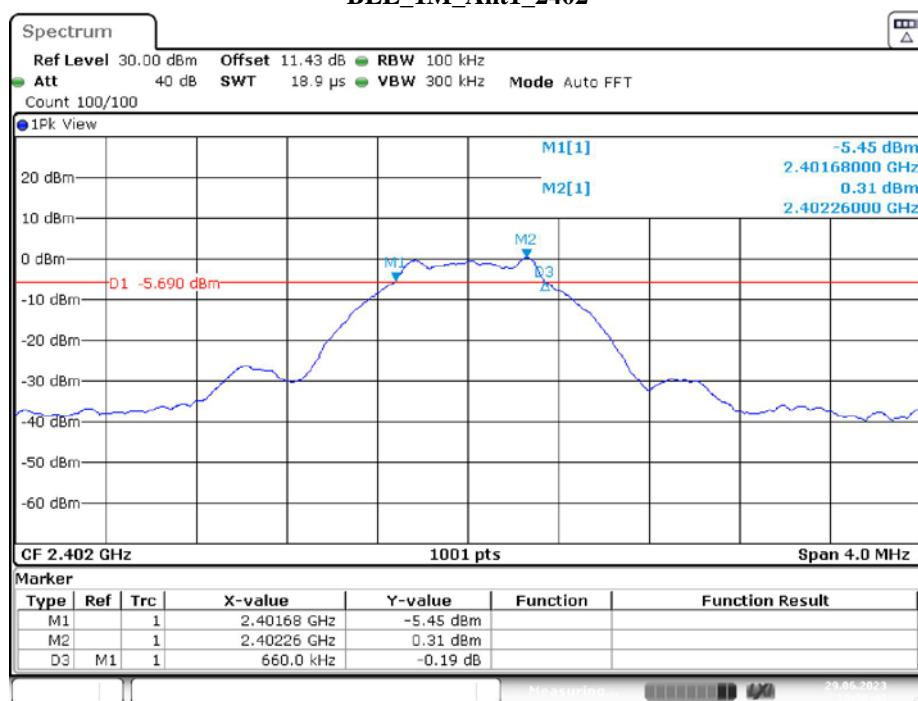


BLE_1M_Ant1_2440

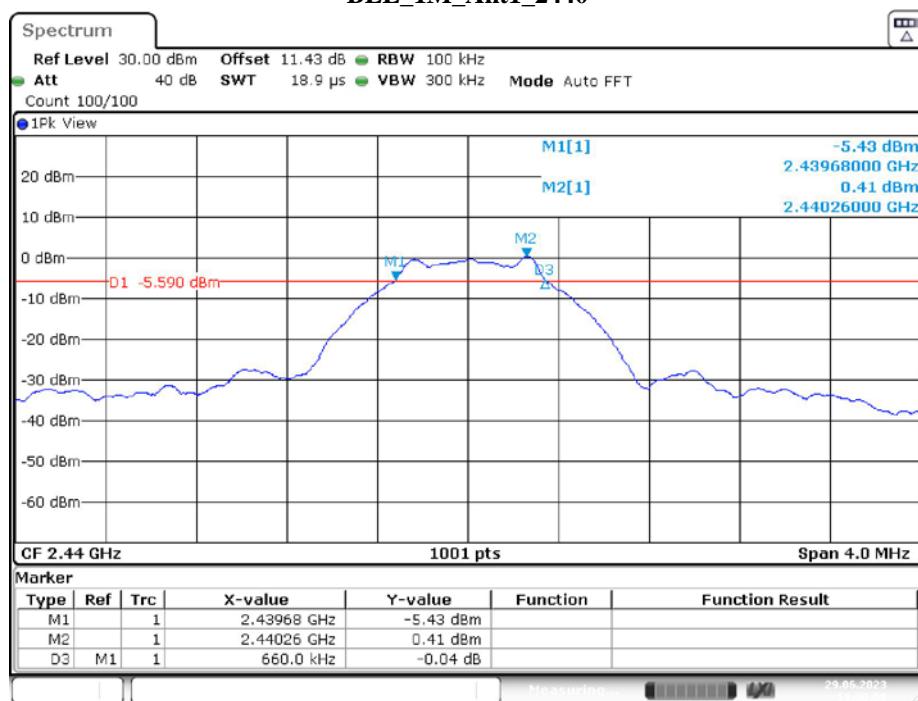

BLE_1M_Ant1_2480

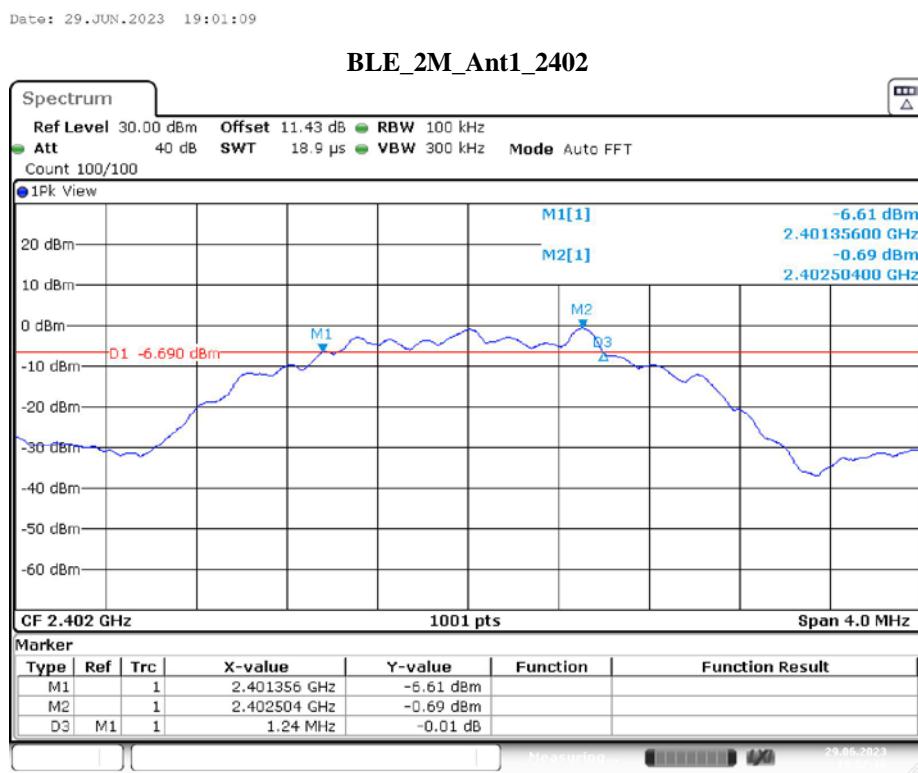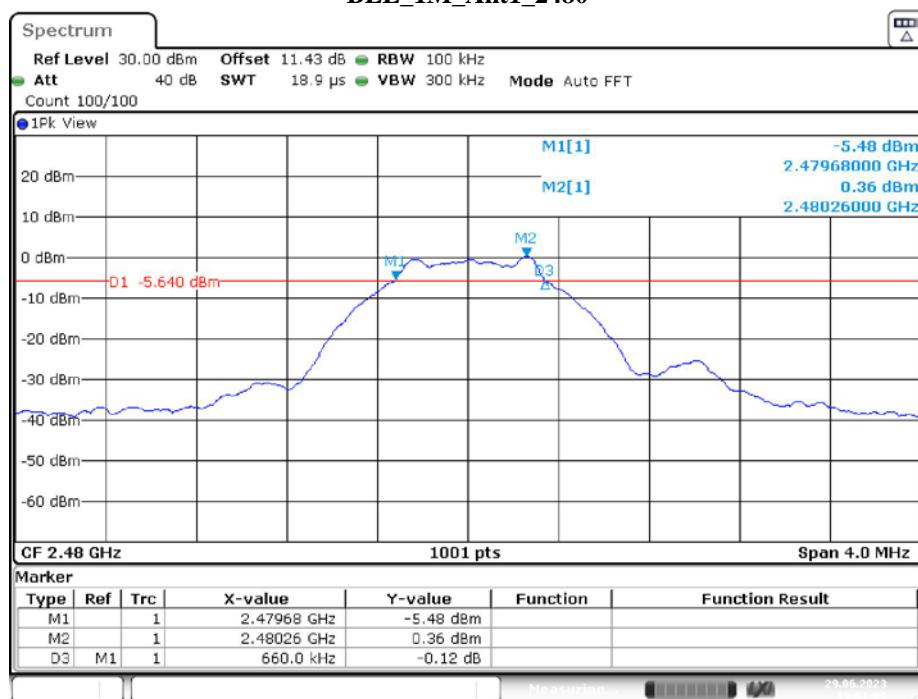


BLE_2M_Ant1_2440

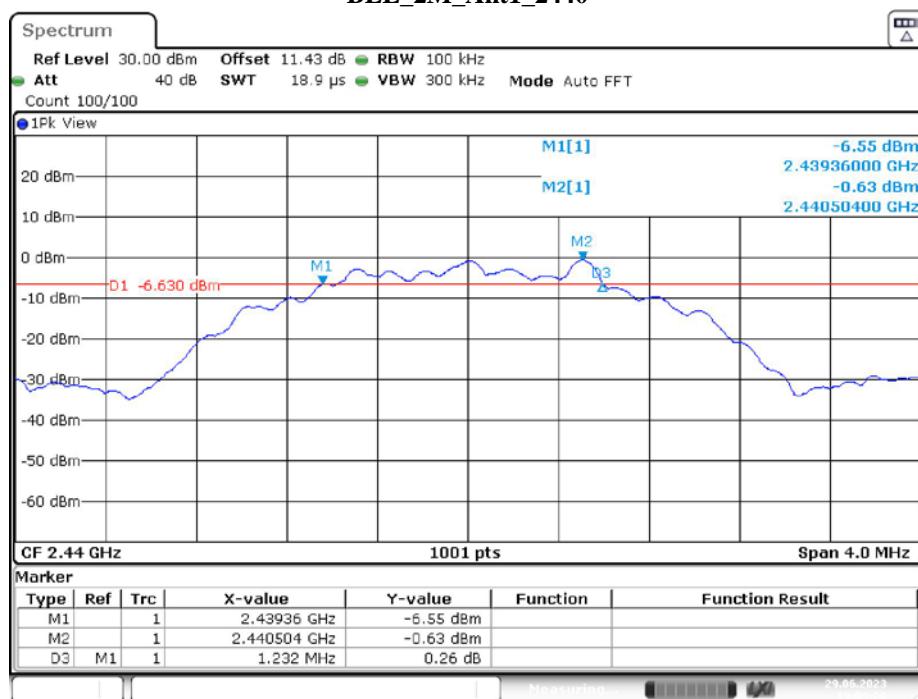

Date: 29.JUN.2023 19:03:20


BLE_2M_Ant1_2480

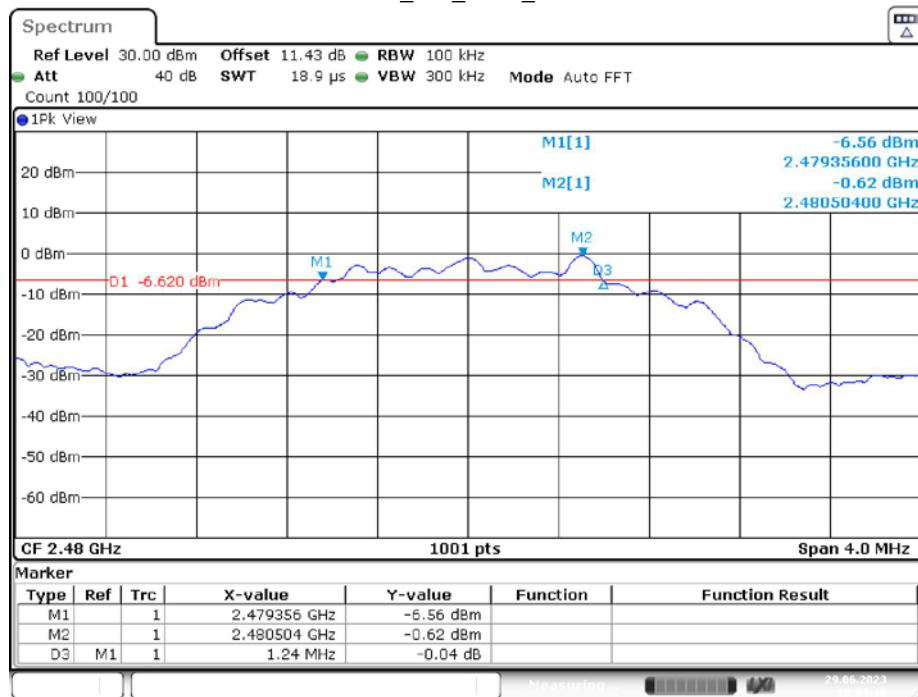


Date: 29.JUN.2023 19:04:16

OCCUPIED BANDWIDTH


BLE_1M_Ant1_2402

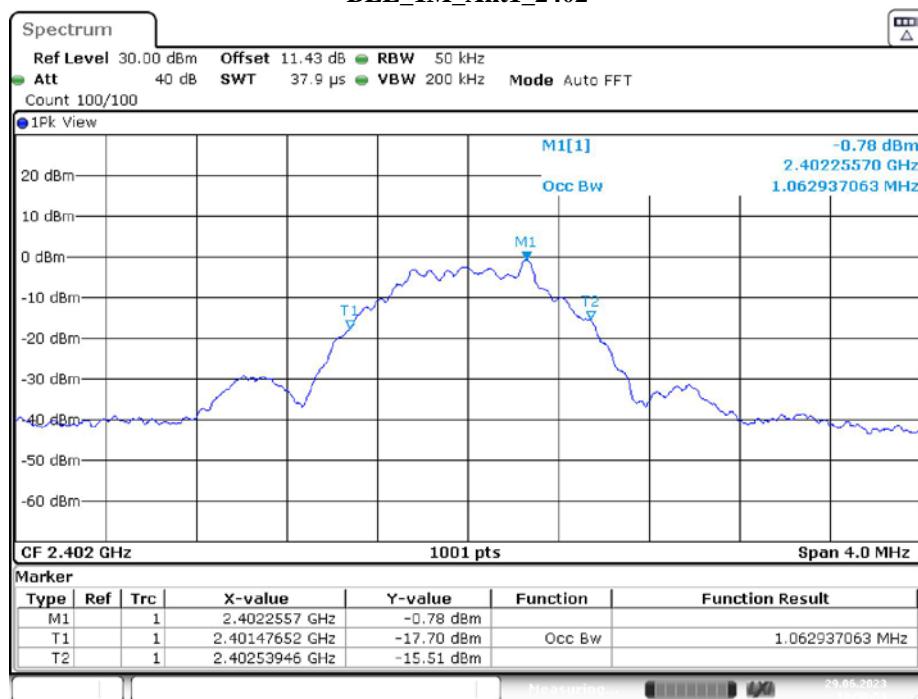

BLE_1M_Ant1_2440

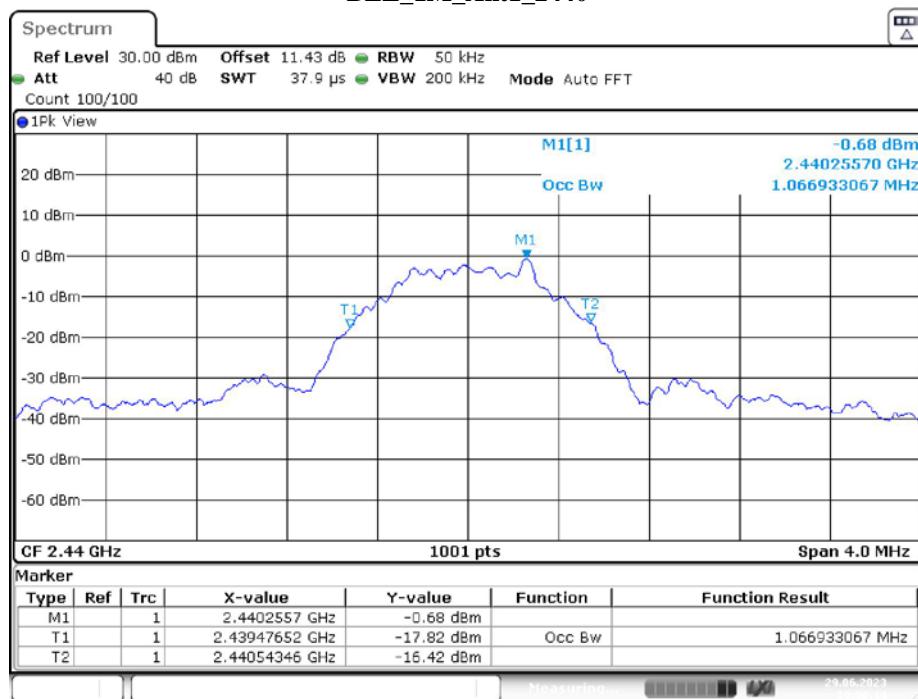


BLE_1M_Ant1_2480

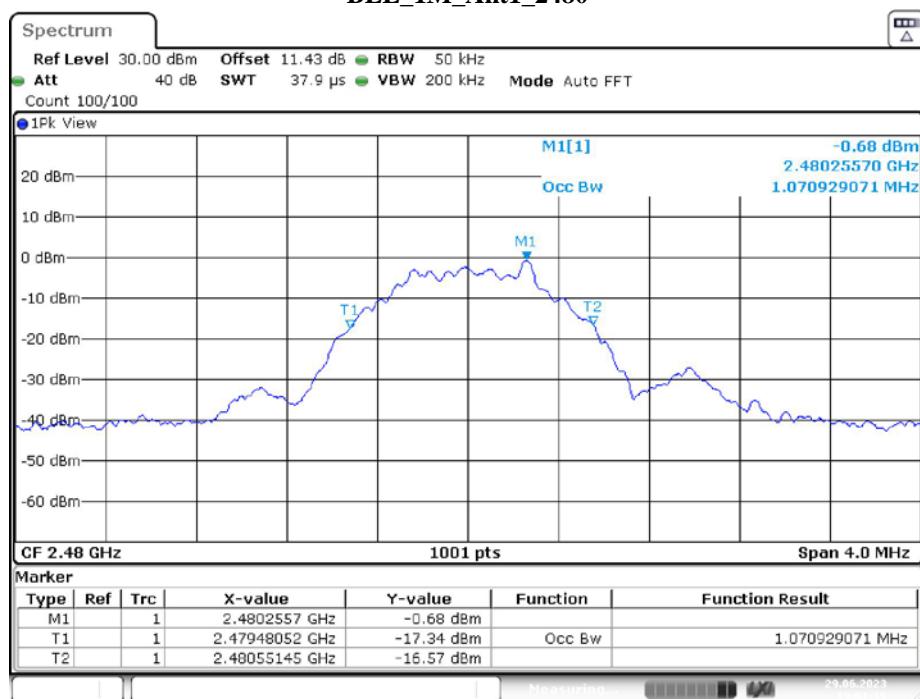


Date: 29.JUN.2023 19:01:15

BLE_2M_Ant1_2402

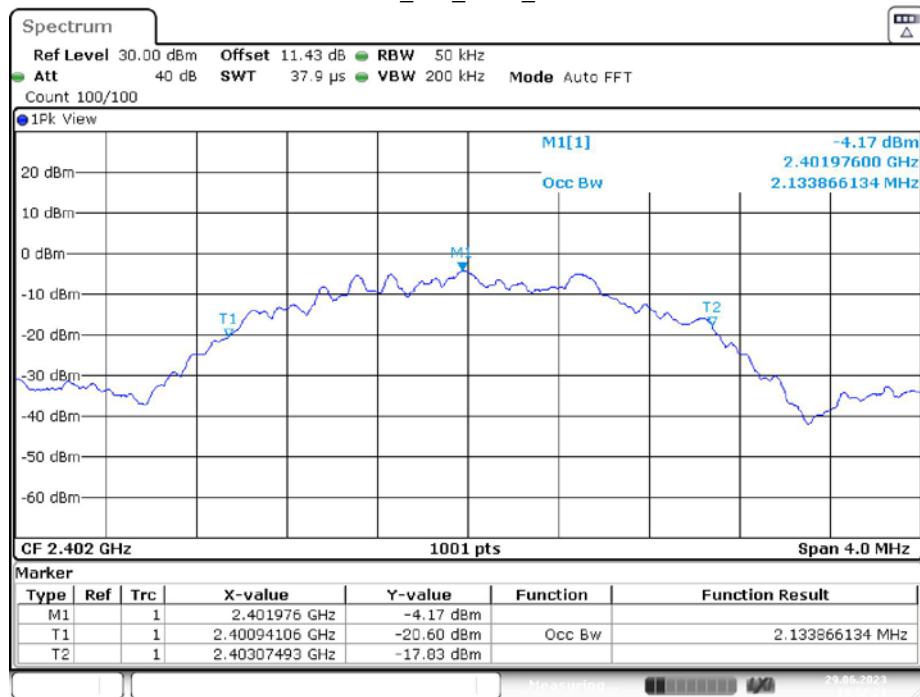


Date: 29.JUN.2023 19:02:21

BLE_2M_Ant1_2440

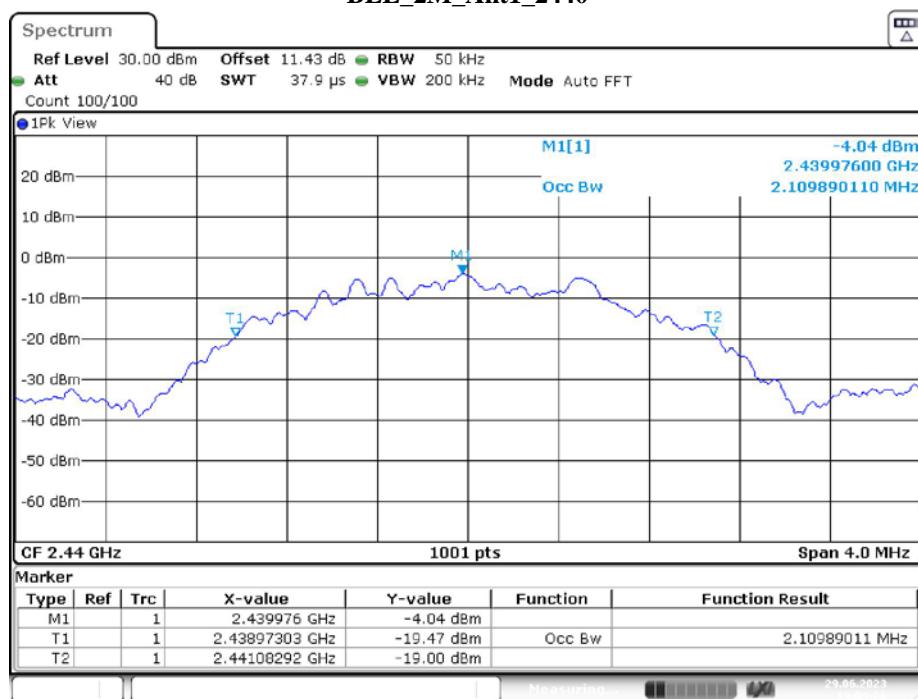

Date: 29.JUN.2023 19:03:26

BLE_2M_Ant1_2480

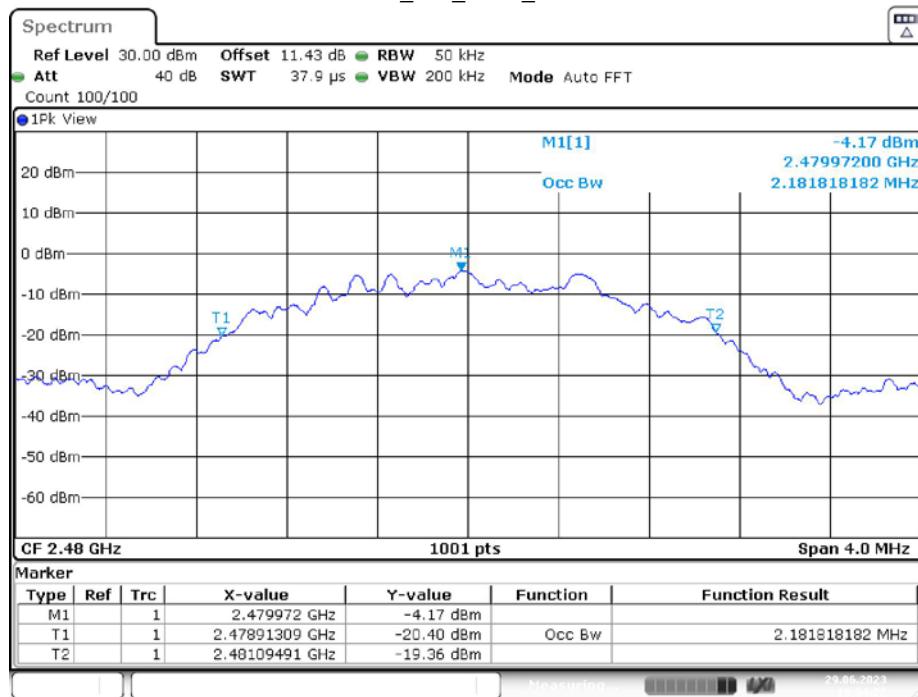

Date: 29.JUN.2023 19:04:21

FCC §15.247(b) (3)-MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013, section 11.9.1.1

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions


Temperature:	26°C
Relative Humidity:	51%
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-06-29.


EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the below the table and plots.



Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	0.72	<=30	PASS
		2440	0.79	<=30	PASS
		2480	0.76	<=30	PASS
BLE_2M	Ant1	2402	0.75	<=30	PASS
		2440	0.78	<=30	PASS
		2480	0.74	<=30	PASS


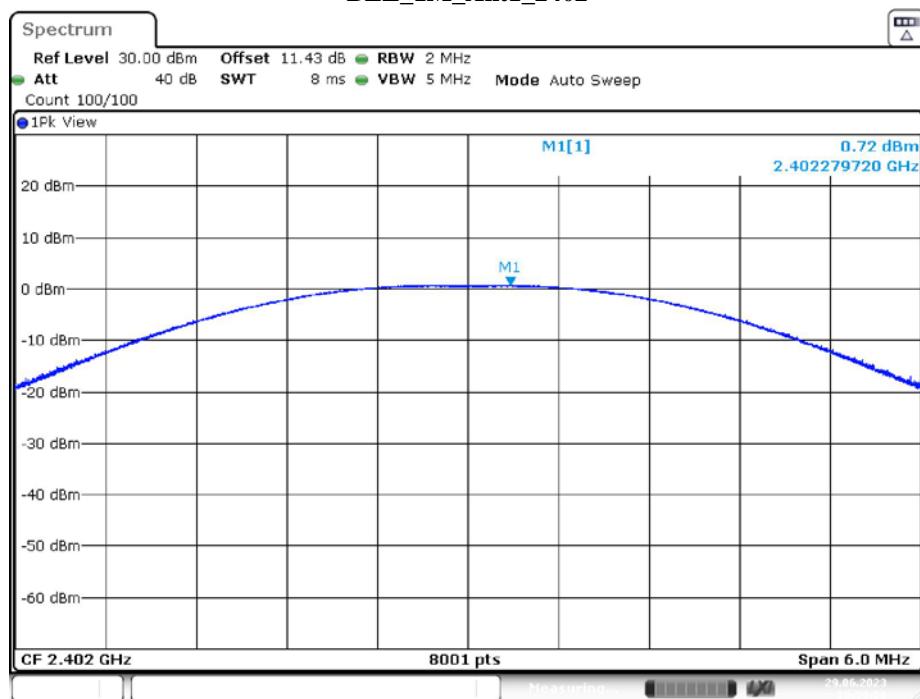
BLE_1M_Ant1_2402

Date: 29.JUN.2023 18:58:59

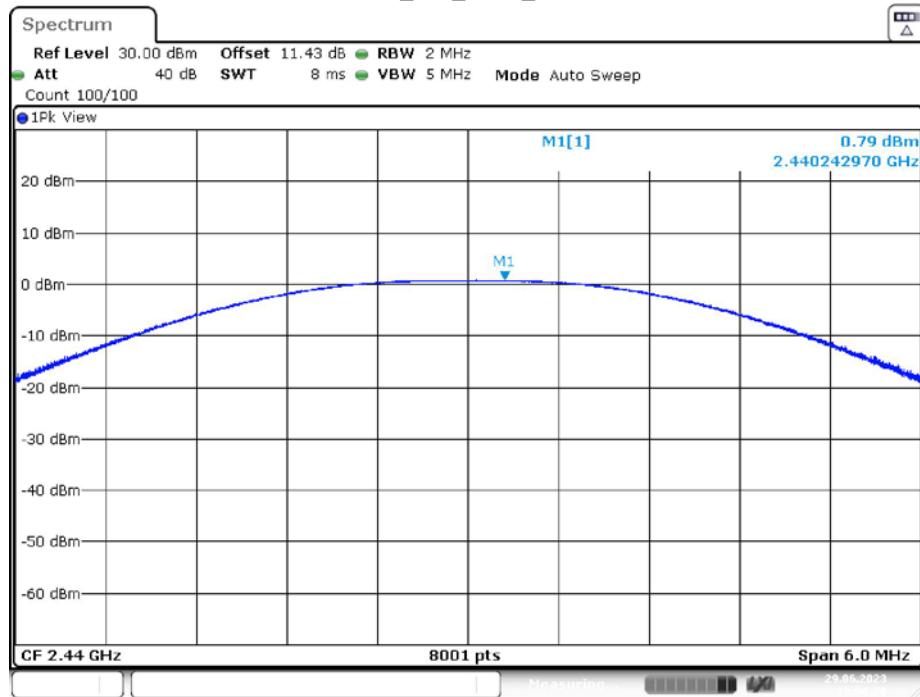BLE_1M_Ant1_2440

Date: 29.JUN.2023 19:00:19

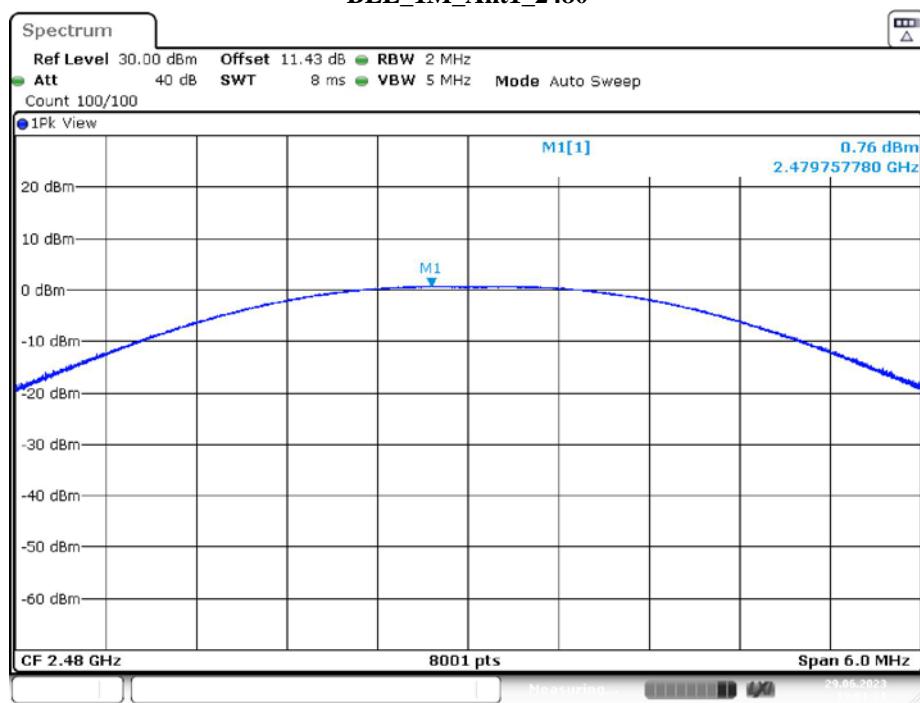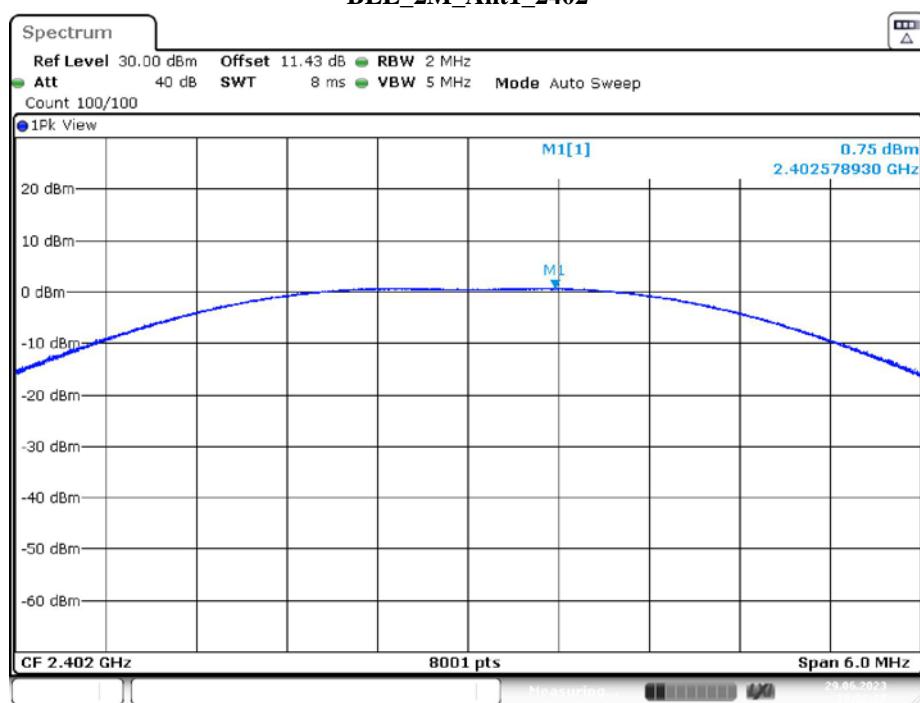BLE_1M_Ant1_2480**BLE_2M_Ant1_2402**

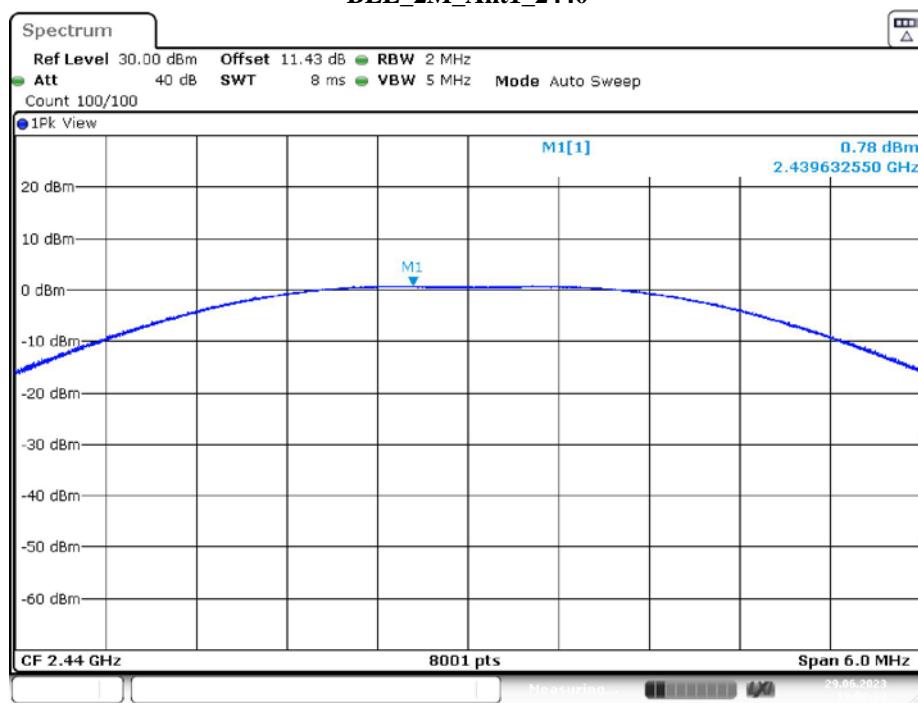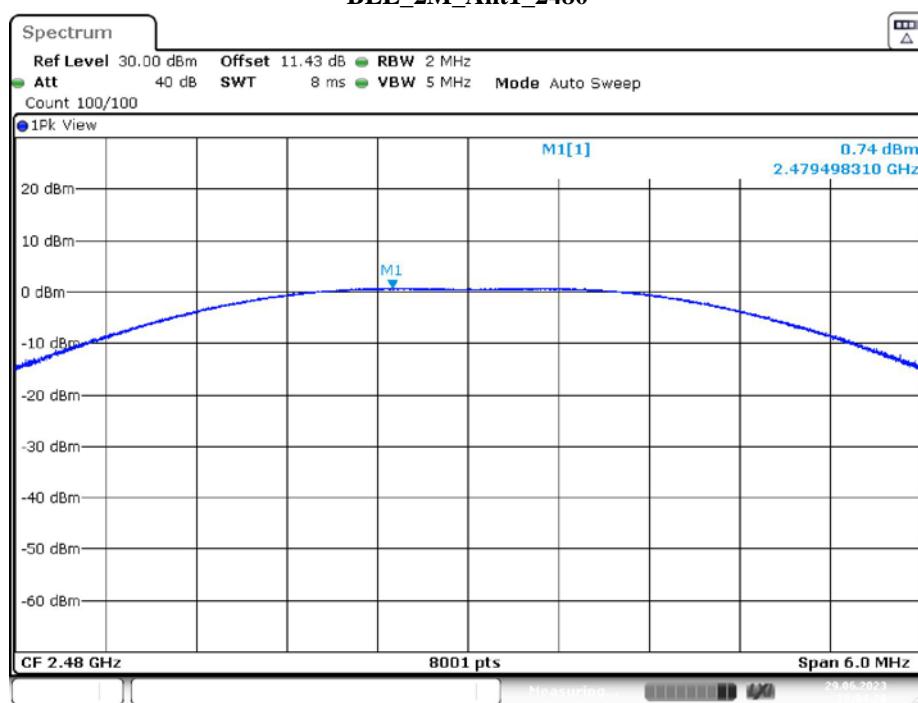BLE_2M_Ant1_2440**BLE_2M_Ant1_2480**

FCC §15.247(d)-100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013, section 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

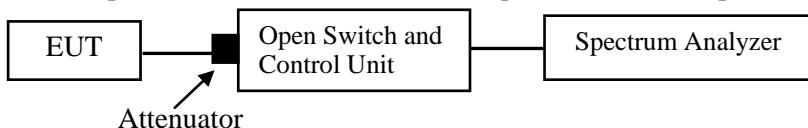

Test Data


Environmental Conditions

Temperature:	26°C
Relative Humidity:	51%
ATM Pressure:	101.0 kPa


The testing was performed by Matt Liang on 2023-06-29.

EUT operation mode: Transmitting



Test Result: Compliant. Please refer to the below plots.

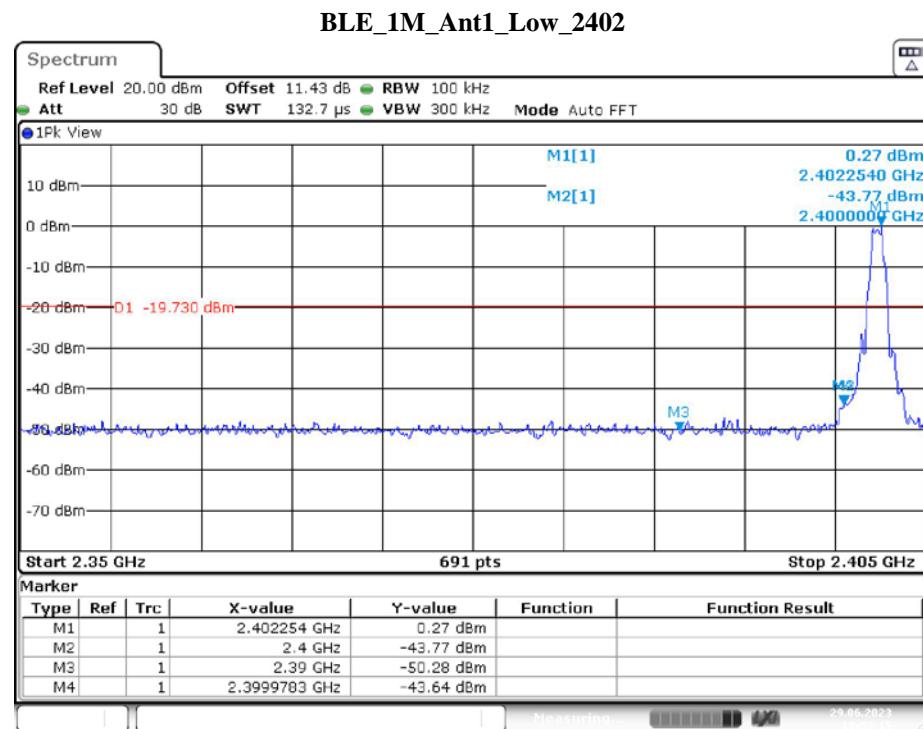

Date: 29.JUN.2023 18:59:15

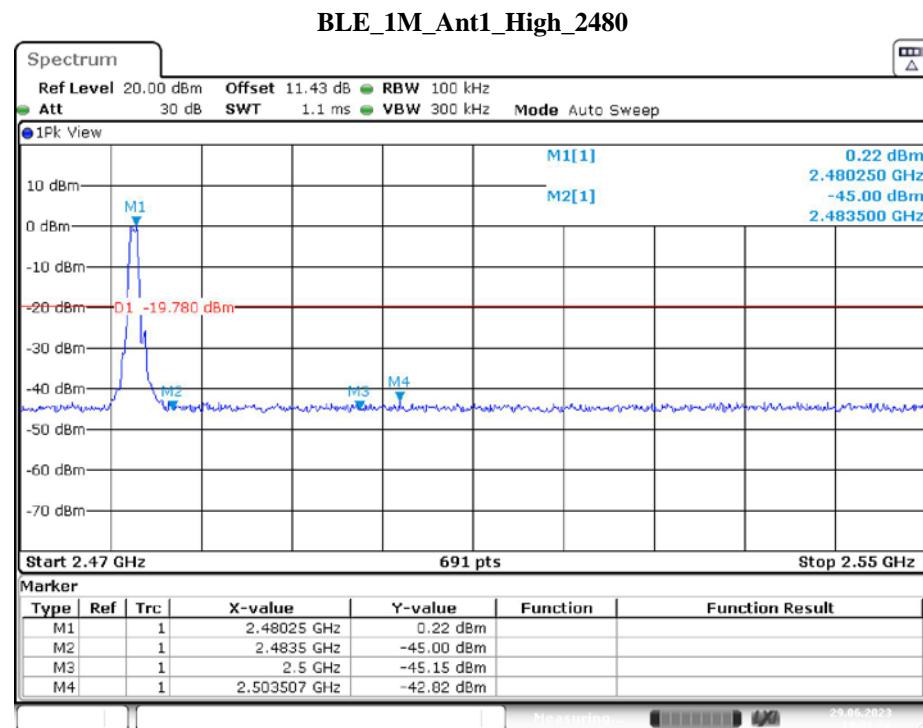

Date: 29.JUN.2023 19:01:36

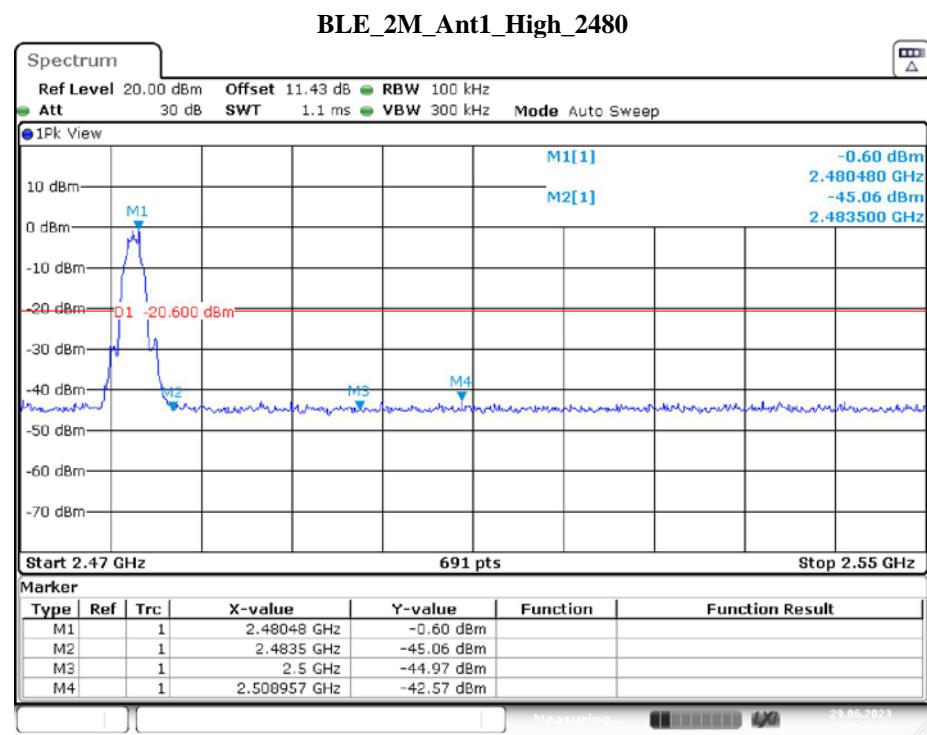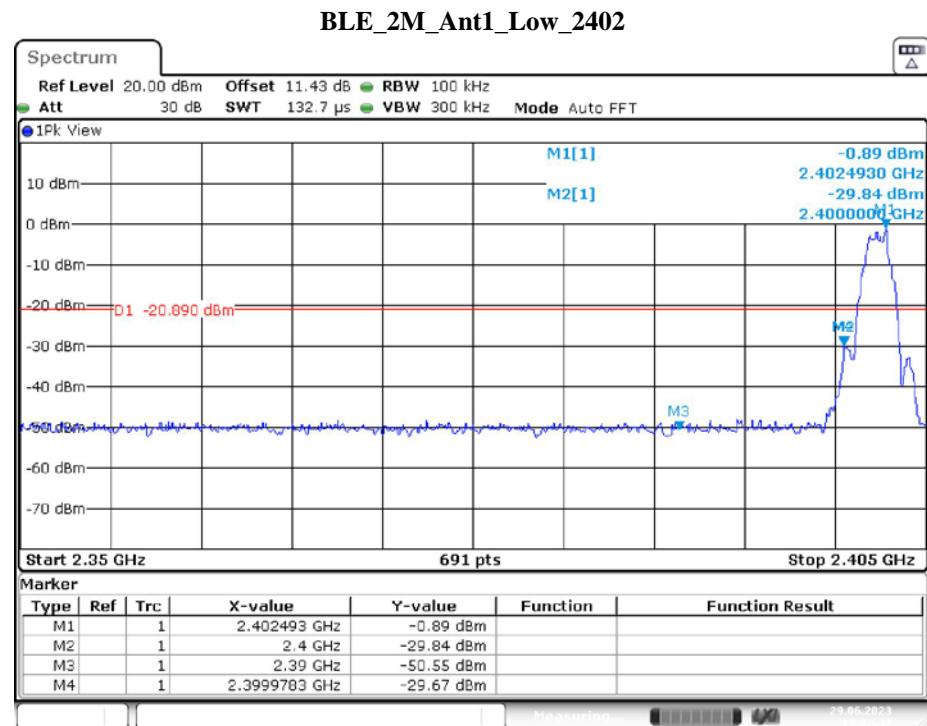

FCC §15.247(e)-POWER SPECTRAL DENSITY


Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013, section 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

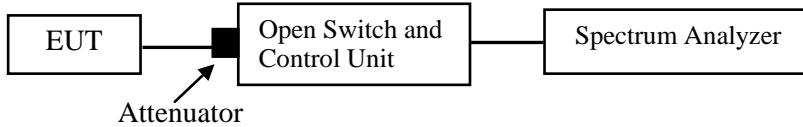

Test Data

Environmental Conditions


Temperature:	26°C
Relative Humidity:	51%
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-06-29.


EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the below table and plots.



Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-16.42	<=8	PASS
		2440	-16.35	<=8	PASS
		2480	-16.31	<=8	PASS
BLE_2M	Ant1	2402	-19.28	<=8	PASS
		2440	-19.17	<=8	PASS
		2480	-19.40	<=8	PASS


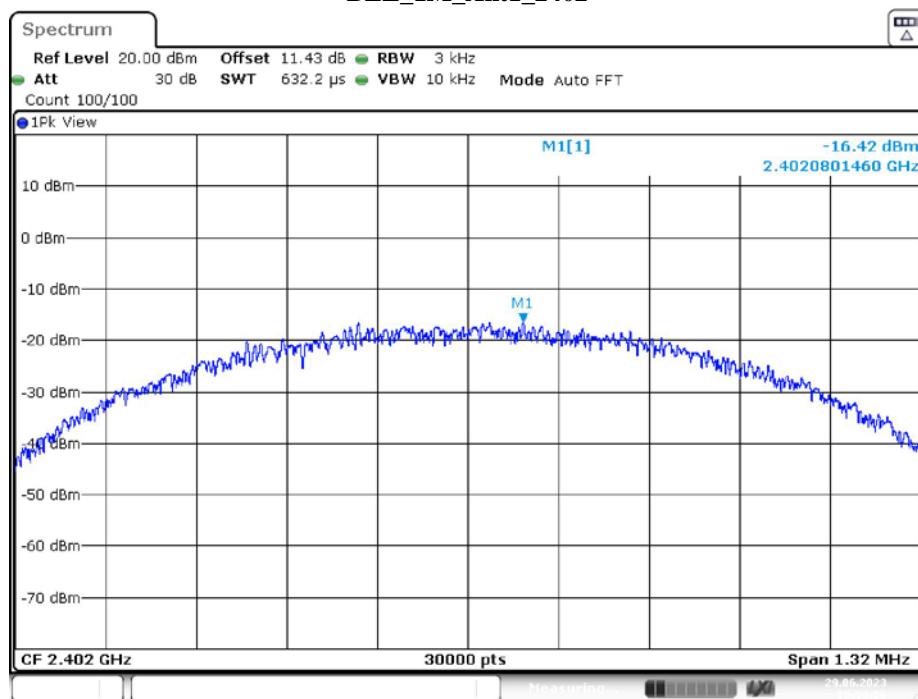
BLE_1M_Ant1_2402

Date: 29.JUN.2023 18:59:06

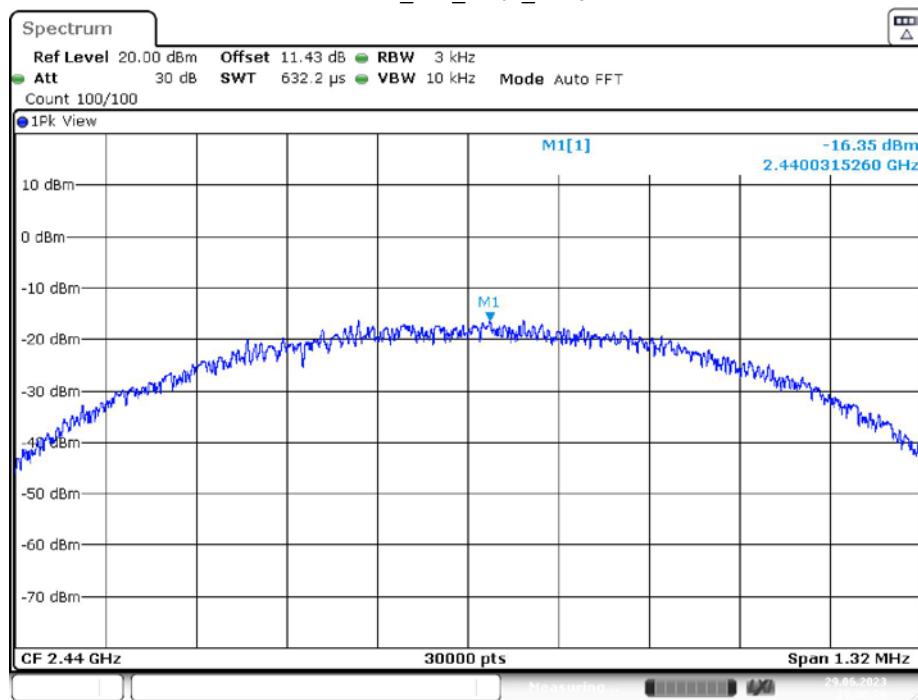BLE_1M_Ant1_2440

Date: 29.JUN.2023 19:00:26

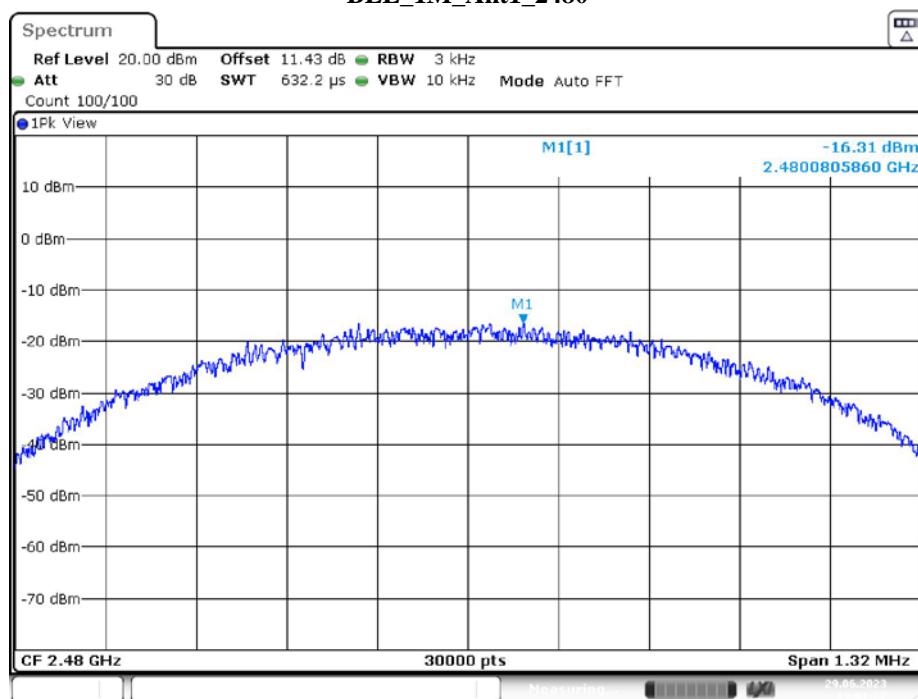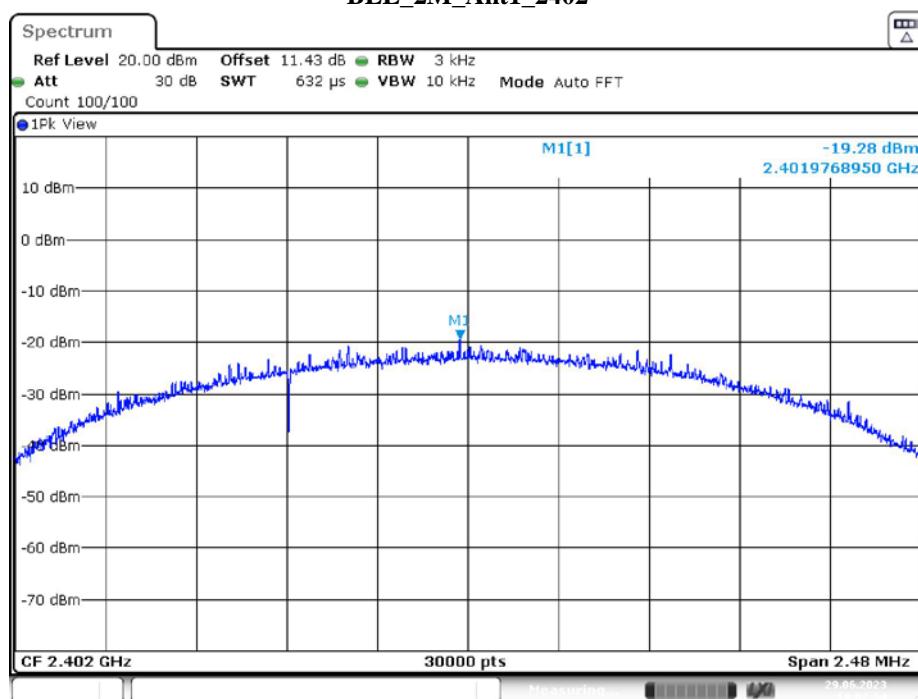BLE_1M_Ant1_2480**BLE_2M_Ant1_2402**

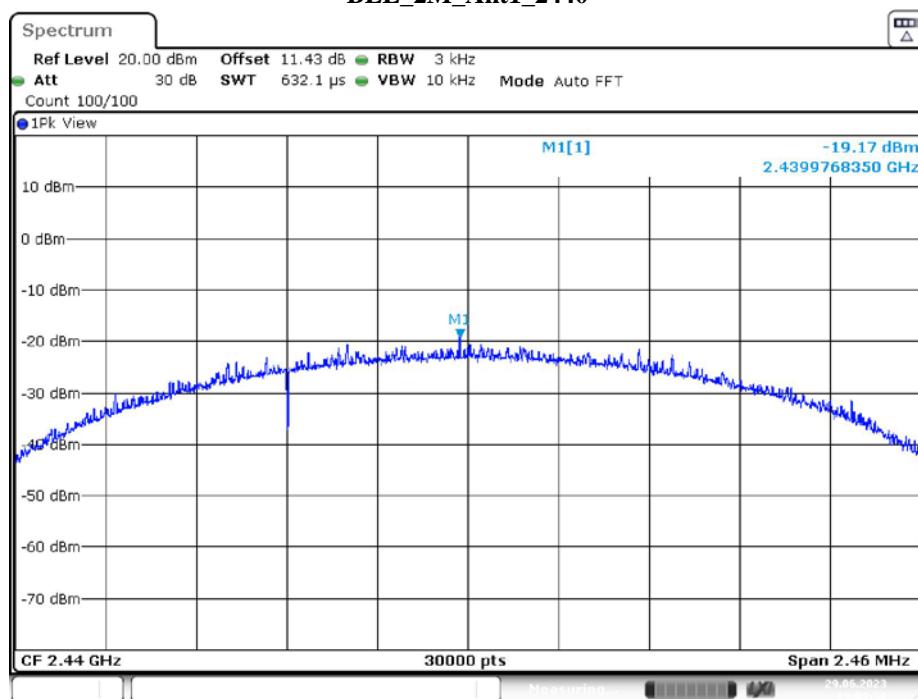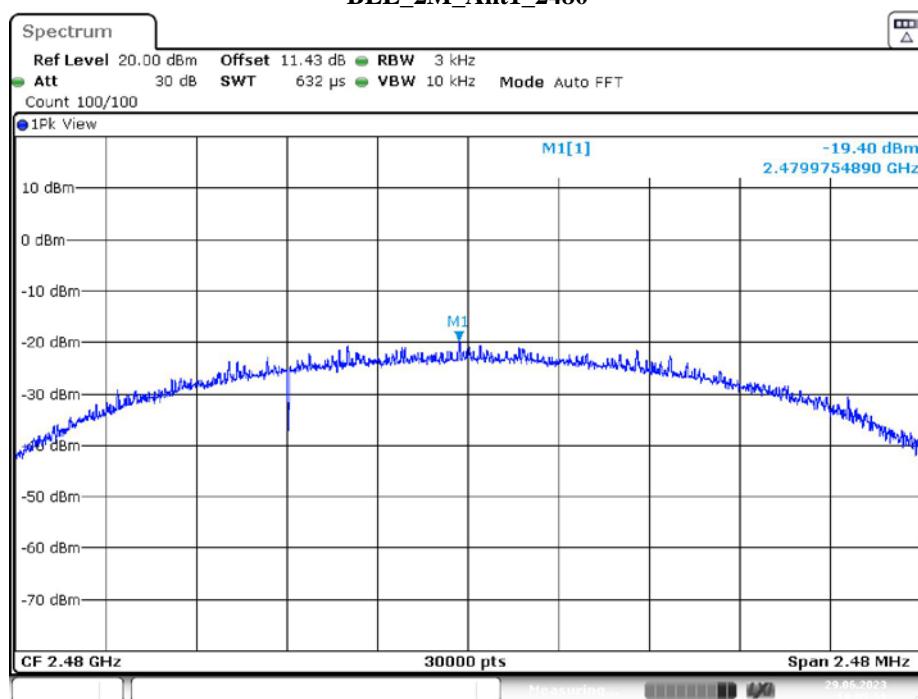BLE_2M_Ant1_2440**BLE_2M_Ant1_2480********* END OF REPORT *******