



FCC Test Report

Report No: FCS202307102W01

Issued for

Applicant:	Zhongshan chuanguyote Electronic Technology Co., Ltd
Address:	F3, No. 233, Dongfu Road, Dongfeng Town, Zhongshan City
Product Name:	keyless start system
Brand Name:	N/A
Model Name:	UTE-K7-9100
Series Model:	UTE-K3-8100,UTE-K3-9100,UTE-K5-9100,UTE-K7-8100, UTE-K7-8100S,UTE-K9-9100,UTE-S3-8100,UTE-S5-8100
FCC ID:	2BB86-UTEK79100
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.FCS-lab.com	

TEST RESULT CERTIFICATION

Applicant's Name.....: Zhongshan chuanguyote Electronic Technology Co., Ltd
Address.....: F3, No. 233, Dongfu Road, Dongfeng Town, Zhongshan City
Manufacture's Name.....: Zhongshan chuanguyote Electronic Technology Co., Ltd
Address.....: F3, No. 233, Dongfu Road, Dongfeng Town, Zhongshan City

Product Description

Product Name.....: keyless start system
Brand Name: N/A
Model Name.....: UTE-K7-9100
Series Model.....: UTE-K3-8100,UTE-K3-9100,UTE-K5-9100,UTE-K7-8100,
UTE-K7-8100S,UTE-K9-9100,UTE-S3-8100,UTE-S5-8100
Test Standards.....: FCC Rules and Regulations Part 15 Subpart C, Section 231
Test Procedure.....: ANSI C63.10:2013

This device described above has been tested FCS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of FCS, this document may be altered or revised by FCS, personal only, and shall be noted in the revision of the document..

Date of Test.....:

Date (s) of performance of tests.: Jun 14, 2023 ~ Jun 26, 2023

Date of Issue.....: Jun 26, 2023

Test Result.....: Pass

Tested by

:

Scott Shen

(Scott Shen)

Reviewed by

:

Duke Qian

(Duke Qian)

Approved by

:

Jack Wang

(Jack Wang)



Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	9
2.4 EQUIPMENTS LIST	10
3. RADIATED EMISSION MEASUREMENT	11
3.1 LIMIT	11
3.2 TEST PROCEDURE	12
3.3 TEST SETUP	13
3.4 TEST RESULTS	14
4. TRANSMITTER TIME	18
4.1 LIMIT	18
4.2 TEST PROCEDURE	18
4.3 TEST SETUP	18
4.4 TEST RESULTS	18
5. 20 DB BANDWIDTH TEST	19
5.1 LIMIT	19
5.2 TEST PROCEDURE	19
5.3 TEST SETUP	19
5.4 TEST RESULTS	20
6. DUTY CYCLE	21
6.1 LIMIT	21
6.2 TEST PROCEDURE	21
6.3 TEST SETUP	21
6.4 TEST RESULTS	22
7 ANTENNA REQUIREMENT	24
7.1 STANDARD REQUIREMENT	24
7.2 EUT ANTENNA	24

Revision History

Rev.	Issue Date	Effect Page	Contents
00	Jul 26, 2023	N/A	Initial Issue

1. SUMMARY OF TEST RESULTS

FCC Part 15.231,Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	--
15.209, 15.231(b)	Radiated Emission	PASS	--
15.231(a) (1)	Transmitter time	PASS	--
15.231(c)	20dB Bandwidth	PASS	--
15.231	Duty cycle	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

(2) All tests are according to ANSI C63.10-2013

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.98 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	All emissions radiated (9KHz -30MHz)	± 3.1 dB
5	Conducted Emission (150KHz-30MHz)	± 4.74 dB
6	All emissions,radiated(<1G) 30MHz-1000MHz	± 3.2 dB
7	All emissions,radiated (1GHz -18GHz)	± 3.66 dB
8	All emissions,radiated (18GHz -40GHz)	± 4.31 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	keyless start system
Trade Name	N/A
Model Name	UTE-K7-9100
Series Model	UTE-K3-8100,UTE-K3-9100,UTE-K5-9100,UTE-K7-8100,UTE-K7-8100S,UTE-K9-9100,UTE-S3-8100,UTE-S5-8100
Model Difference	The above product with same circuit, PCB layout, electrical parts, materials and wiring structures, Appearance shape, the materials of decorative accessories is same, the only difference is the model name.
Frequency	433.92MHz
Modulation	ASK
Antenna type	PCB antenna
Power Supply	DC 3V
Battery	DC 3V
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Table for Filed Antenna


Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	YTHF	PCB antenna	N/A	0 dBi	Antenna

2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Configuration and peripherals

Mode 1:



Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range: 21-25°C

Humidity range: 40-75%

Pressure range: 86-106kPa

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.4 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2022.08.30	2023.08.29
Signal Analyzer	R&S	FSV40-N	FCS-E012	2022.08.30	2023.08.29
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2022.08.30	2023.08.29
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2022.08.30	2023.08.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2022.08.30	2023.08.29
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2022.08.30	2023.08.29
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2022.08.30	2023.08.29
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2022.08.30	2023.08.29
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2022.08.30	2023.08.29
Temperature & Humidity	HTC-1	victor	FCS-E005	2022.08.30	2023.08.29

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2022.08.30	2023.08.29
LISN	R&S	ENV216	FCS-E007	2022.08.30	2023.08.29
LISN	ETS	3810/2NM	FCS-E009	2022.08.30	2023.08.29
Temperature & Humidity	HTC-1	victor	FCS-E008	2022.08.30	2023.08.29

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
Spectrum Analyzer	Keysight	N9020A	FCS-E015	2022.08.30	2023.08.29
Spectrum Analyzer	Agilent	E4447A	MY50180039	2022.08.30	2023.08.29
Spectrum Analyzer	R&S	FSV-40	101499	2022.08.30	2023.08.29

3. RADIATED EMISSION MEASUREMENT

3.1 LIMIT

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009mhz - 1000mhz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

LIMITS OF FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
433.92	100.83	80.83

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector

(2) At frequencies below 30MHz, measurement may be performed at a distance closer then that specified, and the limit at closer measurement distance can be extrapolated by below formula:
 $\text{Limit3m(dBuV/m)} = \text{Limit300m(dBuV/m)} + 40\text{Log}(300\text{m}/3\text{m}) = \text{Limit300m(dBuV/m)} + 80$
 $\text{Limit3m(dBuV/m)} = \text{Limit30m(dBuV/m)} + 40\text{Log}(30\text{m}/3\text{m}) = \text{Limit30m(dBuV/m)} + 40$

(3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions include fundamental emission shall not exceed FCC 15.231 section (b) limit of comply with FCC 15.209 limit which permit higher emission level.

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, uV/m at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

3.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

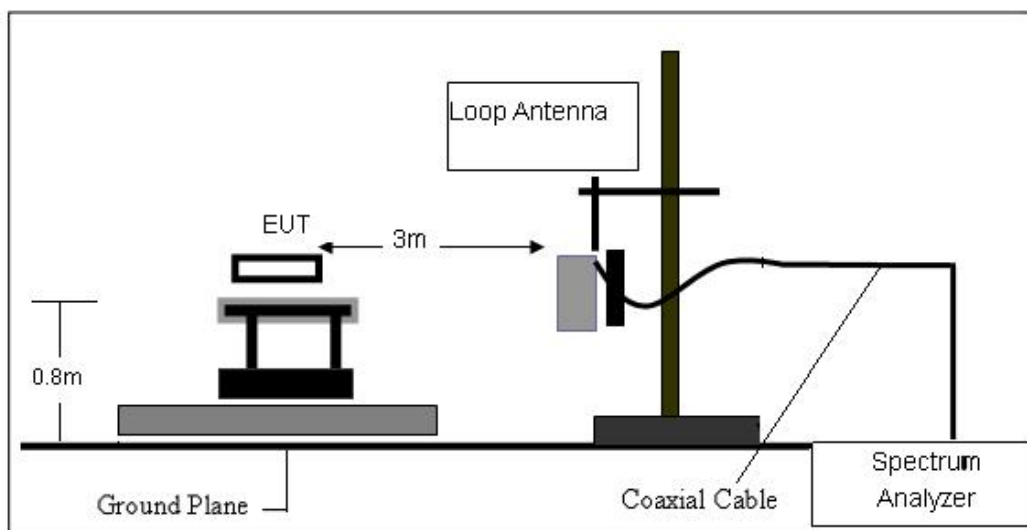

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

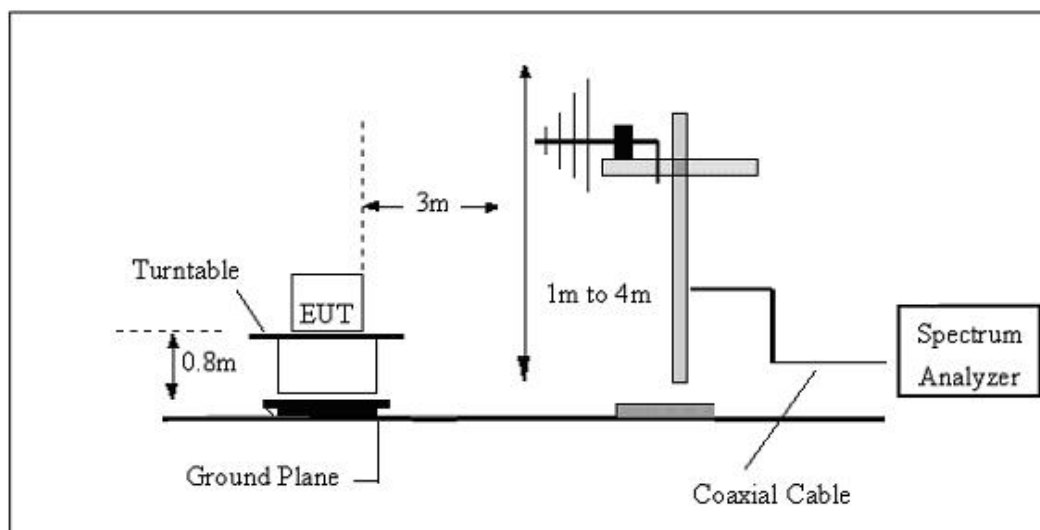

(C) Radiated Emission Test-Up Frequency Above 1GHz

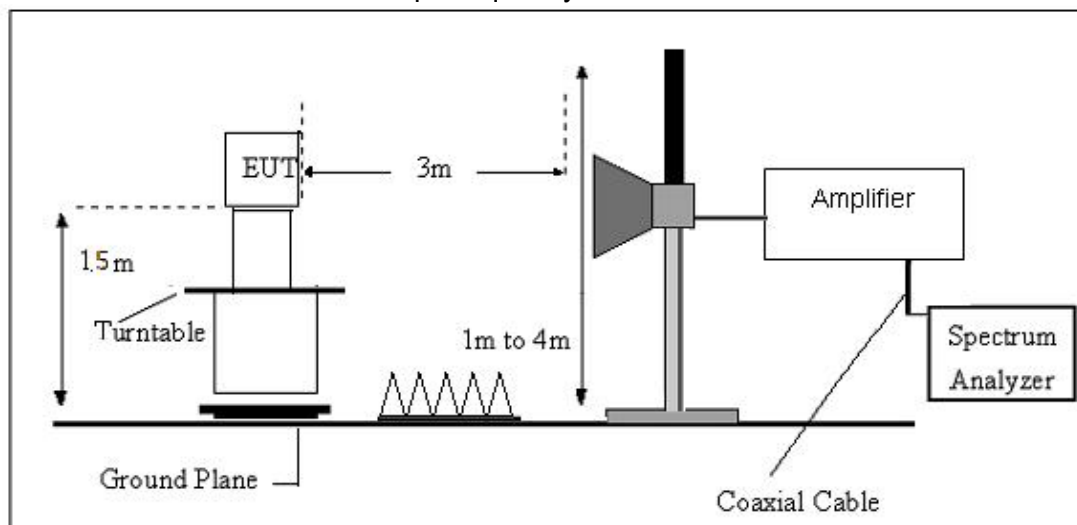

3.4 TEST RESULTS

Temperature:	25℃	Relative Humidity:	60%
Test Mode:	ASK	Test Voltage:	DC 3V

For field strength of the fundamental signal

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	AverageL evel dBuV/m	Polarization	Limit AV	Margin
434.0650	84.45	-7.23	77.22	Horizontal	80.83	-3.61
869.1300	41.80	-7.23	34.57	Horizontal	60.60	-26.03

Notes: 1.Average emission Level = Peak Level+ Duty cycle factor

2.Duty cycle level please see clause 5.

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	AverageL evel dBuV/m	Polarization	Limit AV	Margin
433.9230	79.58	-7.23	72.35	Vertical	80.83	-8.48
869.1300	37.38	-7.23	30.15	Vertical	60.60	-30.45

Notes: 1.Average emission Level = Peak Level+ Duty cycle factor

2.Duty cycle level please see clause 5.

For spurious emission

(9KHz-30MHz)

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

(30MHZ-1000MHZ)

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 3V	Phase:	Horizontal
Test Mode:	ASK		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.6240	40.10	-11.12	28.98	40.00	-11.02	QP
2	81.7831	54.28	-32.26	22.02	40.00	-17.98	QP
3	154.8204	54.66	-32.25	22.41	43.50	-21.09	QP
4	374.6225	59.95	-32.03	27.92	46.00	-18.08	QP
5	434.0650	116.12	-31.67	84.45	100.83	-16.38	Peak
6	869.1300	73.24	-31.44	41.80	80.83	-39.03	Peak



1. Result = Reading + Corrected Factor Note :
2. The fundamental wave filtered out during the test.

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 3V	Phase:	Vertical
Test Mode:	ASK		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	36.0071	35.21	-11.37	23.84	40.00	-16.16	QP
2	70.6440	39.76	-19.73	20.03	40.00	-19.97	QP
3	155.0750	56.02	-32.24	23.78	43.50	-19.72	QP
4	253.4884	56.93	-32.15	24.78	46.00	-21.22	QP
5	433.9230	111.55	-31.97	79.58	100.83	-21.25	Peak
6	869.1300	68.82	-31.44	37.38	80.83	-43.45	Peak

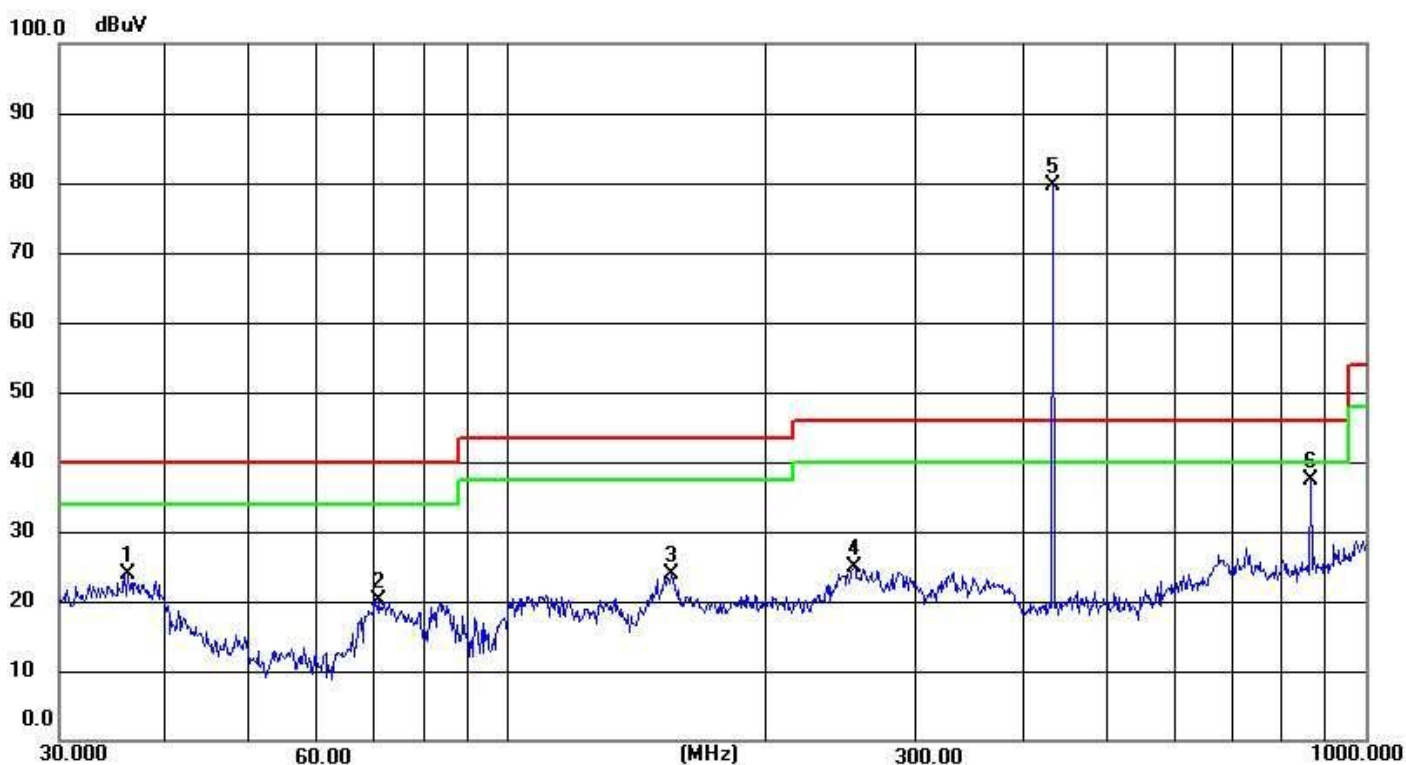

1. Result = Reading + Corrected Factor Note :
2. The fundamental wave filtered out during the test.

Freq. (MHz)	Ant.PoL H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1301.76	V	55.65	48.42	74	54	-18.35	-5.58
1735.68	V	53.46	46.23	80.82	60.82	-27.36	-14.59
2169.60	V	56.89	49.66	80.82	60.82	-23.93	-11.16
2603.52	V	51.58	44.35	80.82	60.82	-29.24	-16.47
1301.76	H	52.90	45.67	74	54	-21.10	-8.33
1735.68	H	54.78	47.55	80.82	60.82	-26.04	-13.27
2169.60	H	55.19	47.96	80.82	60.82	-25.63	-12.86
2603.52	H	52.25	45.02	80.82	60.82	-28.57	-15.80

Note: 1. Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

2: For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

3. Measuring frequencies from 9k~10th harmonic , No emission found between lowest internal used/generated frequency to 30MHz.

4. TRANSMITTER TIME


4.1 LIMIT

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released

4.2 TEST PROCEDURE


- The EUT's RF signal was coupled to spectrum analyzer by antenna connected to spectrum analyzer.
- Set the spectrum to zero span mode, and centered of EUT frequency.
- Measure the stop transmitting time after release EUT button

4.3 TEST SETUP

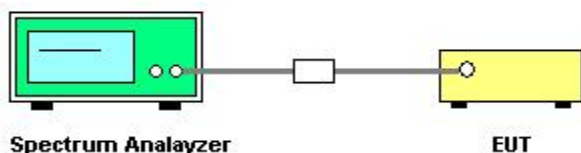

4.4 TEST RESULTS

Frequency(MHz)	Limit	Result
433.92	$\leq 5s$	Pass

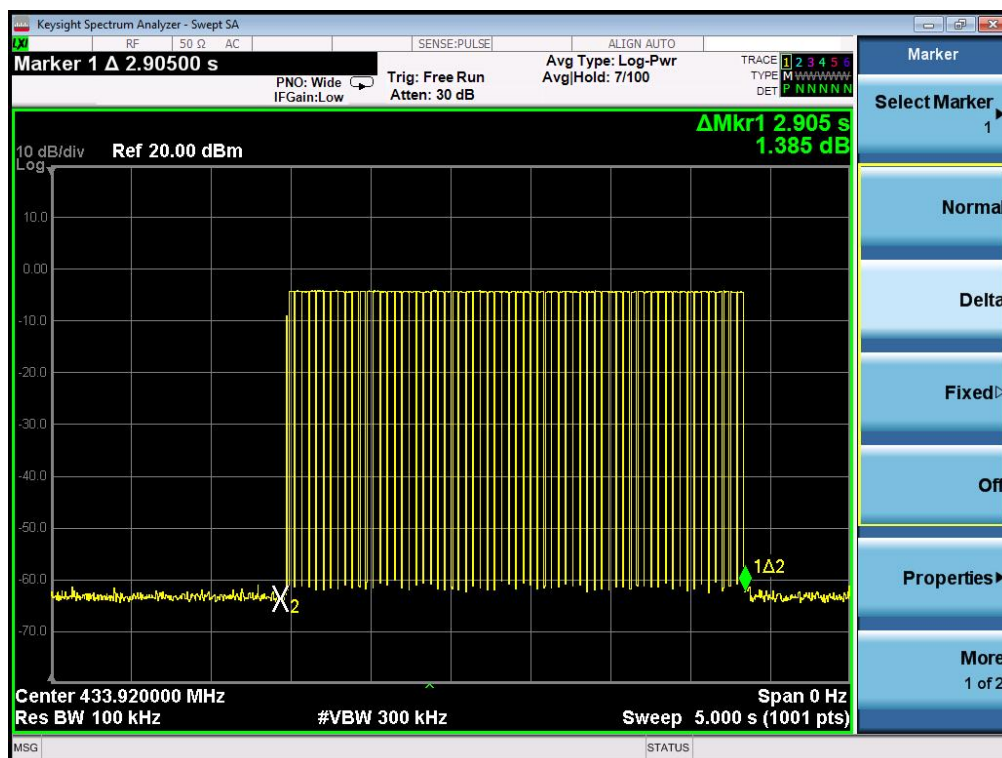

5. 20 DB BANDWIDTH TEST

5.1 LIMIT

The bandwidth of the emission shall be no wider than 0.25% of the center frequency of devices operation above 70MHz and below 900MHz.

5.2 TEST PROCEDURE


Connect EUT' s antenna output to spectrum analyzer by RF cable.

a.

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 3kHz RBW and 10kHz VBW. The 20dB bandwidth is defined as the total spectrum the

b. power of which is higher than peak power minus 20dB


5.3 TEST SETUP

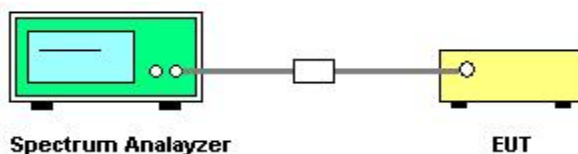

5.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	ASK	Test Voltage:	DC 3V

Frequency	20dB Bandwidth (KHz)	Result
433.92 MHz	14.48	PASS

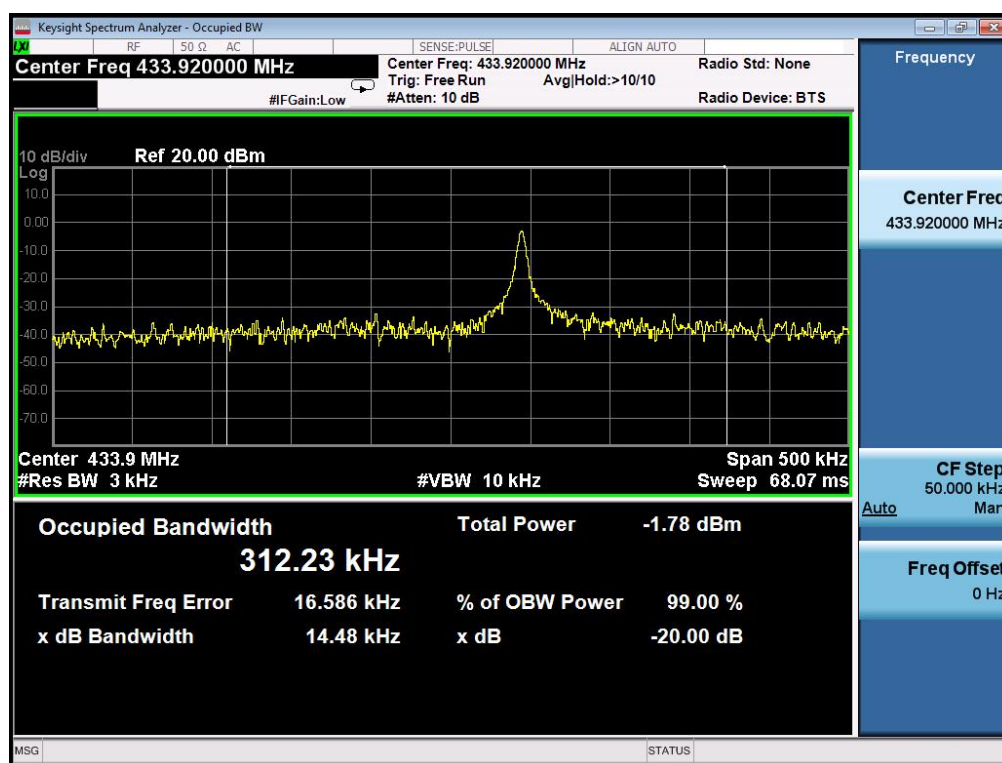

6. DUTY CYCLE

6.1 LIMIT

None: for reporting purposes only.


6.2 TEST PROCEDURE

Set the Centre frequency of the spectrum analyzer to the transmitting frequency;

- a. Set the span=0MHz, RBW=1MHz, VBW=3MHz, Sweep time=5.00ms;

Trace mode = Single hold

6.3 TEST SETUP

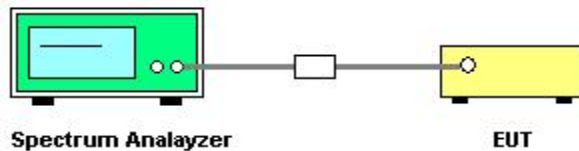

6.4 TEST RESULTS

Frequency	Duty Cycle
433.92 MHz	43.48 %

The duty cycle is simply the on time divided by the period:

The duration of one cycle = 44.53ms

Effective period of the cycle = $1.03 \times 15 + 0.355 \times 11 = 19.36\text{ms}$

Duty Cycle = $19.36\text{ms} / 44.53\text{ms} = 0.43476 = 43.48\%$

Duty Cycle Factor(dB)= $20\log(\text{duty cycle}(\%)) = -7.23\text{dB}$

Original test data

