

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
Report No.: RFBEIH-WTW-P23060517-1
FCC ID: 2BBDG-CHPU-NS-A01
Product: Canopy Hub
Brand: CANOPY
Model No.: CHPU-NS-A01
Received Date: 2023/6/20
Test Date: 2023/6/29 ~ 2023/7/27
Issued Date: 2023/8/11
Applicant: SNTNL LLC
Address: 1 American Road, Detroit, Michigan, United States 48126
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories
Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
Test Location: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
FCC Registration / 198487 / TW2021
Designation Number:

Approved by: _____

Jeremy Lin

Jeremy Lin / Project Engineer

, Date: _____

2023/8/11

This test report consists of 48 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Annie Chang / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description	7
3.2 Antenna Description of EUT	7
3.3 Channel List	8
3.4 Test Mode Applicability and Tested Channel Detail	9
3.5 Duty Cycle of Test Signal	10
3.6 Test Program Used and Operation Descriptions	11
3.7 Connection Diagram of EUT and Peripheral Devices	11
3.8 Configuration of Peripheral Devices and Cable Connections	11
4 Test Instruments	12
4.1 RF Output Power	12
4.2 Power Spectral Density	12
4.3 6 dB Bandwidth	12
4.4 Conducted Out of Band Emissions	12
4.5 Unwanted Emissions below 1 GHz	13
4.6 Unwanted Emissions above 1 GHz	14
5 Limits of Test Items.....	15
5.1 RF Output Power	15
5.2 Power Spectral Density	15
5.3 6 dB Bandwidth	15
5.4 Conducted Out of Band Emissions	15
5.5 Unwanted Emissions below 1 GHz	15
5.6 Unwanted Emissions above 1 GHz	15
6 Test Arrangements	16
6.1 RF Output Power	16
6.1.1 Test Setup	16
6.1.2 Test Procedure	16
6.2 Power Spectral Density	16
6.2.1 Test Setup	16
6.2.2 Test Procedure	16
6.3 6 dB Bandwidth	17
6.3.1 Test Setup	17
6.3.2 Test Procedure	17
6.4 Conducted Out of Band Emissions	17
6.4.1 Test Setup	17
6.4.2 Test Procedure	17
6.5 Unwanted Emissions below 1 GHz	18
6.5.1 Test Setup	18
6.5.2 Test Procedure	19
6.6 Unwanted Emissions above 1 GHz	20
6.6.1 Test Setup	20
6.6.2 Test Procedure	20
7 Test Results of Test Item	21
7.1 RF Output Power	21
7.2 Power Spectral Density	23
7.3 6 dB Bandwidth	25
7.4 Conducted Out of Band Emissions	27
7.5 Unwanted Emissions below 1 GHz	30



7.6	Unwanted Emissions above 1 GHz.....	32
8	Pictures of Test Arrangements	47
9	Information of the Testing Laboratories	48

Release Control Record

Issue No.	Description	Date Issued
RFBEIH-WTW-P23060517-1	Original release.	2023/8/11

1 Certificate

Product: Canopy Hub

Brand: CANOPY

Test Model: CHPU-NS-A01

Sample Status: Engineering sample

Applicant: SNTNL LLC

Test Date: 2023/6/29 ~ 2023/7/27

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement ANSI C63.10-2013

procedure: KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	N/A	Power supply is 12Vdc from battery.
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -8.0 dB at 34.07 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -1.0 dB at 2390.00, 2483.50 MHz
15.203	Antenna Requirement	Pass	Antenna connector is ipex not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.63 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.38 dB
	30 MHz ~ 1 GHz	5.7 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 6 GHz	4.83 dB
	6 GHz ~ 18 GHz	5.37 dB
	18 GHz ~ 40 GHz	5.24 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	Canopy Hub
Brand	CANOPY
Test Model	CHPU-NS-A01
Status of EUT	Engineering sample
Power Supply Rating	12.8Vdc from internal battery or 12-24Vdc from Car battery
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	Up to 72.2 Mbps
Operating Frequency	2.412 GHz ~ 2.462 GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20): 11
Output Power	382.825 mW (25.83 dBm)

Note:

1. There are Bluetooth, WLAN (2.4 GHz & 5 GHz) and WWAN technologies used for the EUT.

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (5 GHz)	Bluetooth
2	WLAN (2.4 GHz)	Bluetooth
3	WWAN (LTE Band 12)	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Gain (dBi)	Antenna Type	Connector Type
3.51	PIFA	ipex

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a SISO function:

2.4 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11b	1TX	1RX
802.11g	1TX	1RX
802.11n (HT20)	1TX	1RX

3.3 Channel List

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT can be used in the following ways: XYZ 3-axis. Pre-scan in these ways and find the worst case as a representative test condition. 2. For Unwanted Emission below/ above 1 GHz has Input 12V=5A / Input 24V=2.5A of power supply. Pre-scan these modes and find the worst case as a representative test condition.
Worst Case:	1. X/ Y/ Z Worst Condition: X Axis for Unwanted Emission above 1GHz and Unwanted Emission below 1GHz. 2. For Unwanted Emission below/above 1 GHz Input 12V=5A is the worst case of power supply.

Following channel(s) was (were) selected for the final test as listed below:


Test Item	Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power / Power Spectral Density	802.11b	1, 6, 11	DBPSK	1Mb/s
	802.11g	1, 6, 11	BPSK	6Mb/s
	802.11n (HT20)	1, 6, 11	BPSK	MCS0
6 dB Bandwidth / Conducted Out of Band Emissions	802.11b	1, 6, 11	DBPSK	1Mb/s
	802.11g	1, 6, 11	BPSK	6Mb/s
	802.11n (HT20)	1, 6, 11	BPSK	MCS0
Unwanted Emissions below 1 GHz	802.11g	6	BPSK	6Mb/s
Unwanted Emissions above 1 GHz	802.11b	1, 6, 11	DBPSK	1Mb/s
	802.11g	1, 6, 11	BPSK	6Mb/s
	802.11n (HT20)	1, 6, 11	BPSK	MCS0

3.5 Duty Cycle of Test Signal


802.11b: Duty cycle = 8.614 ms / 8.706 ms x 100% = 98.9%

802.11g: Duty cycle = 5.398 ms / 5.5 ms x 100% = 98.1%


802.11n (HT20): Duty cycle = 5.001 ms / 5.105 ms x 100% = 98.0%

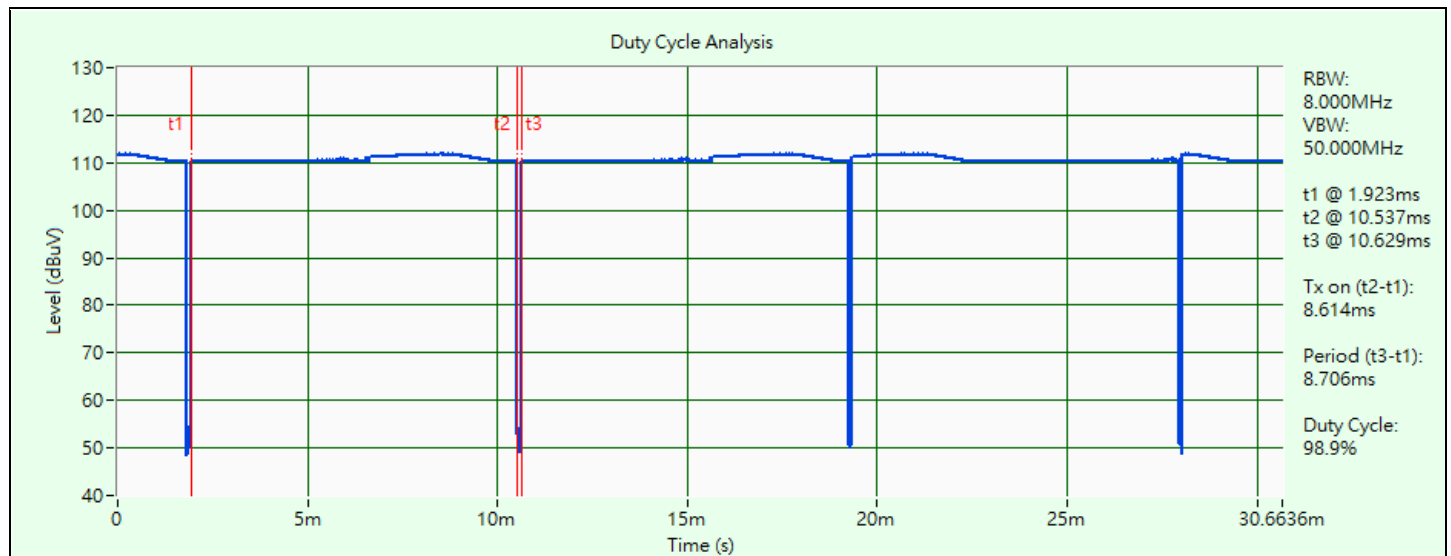

802.11b

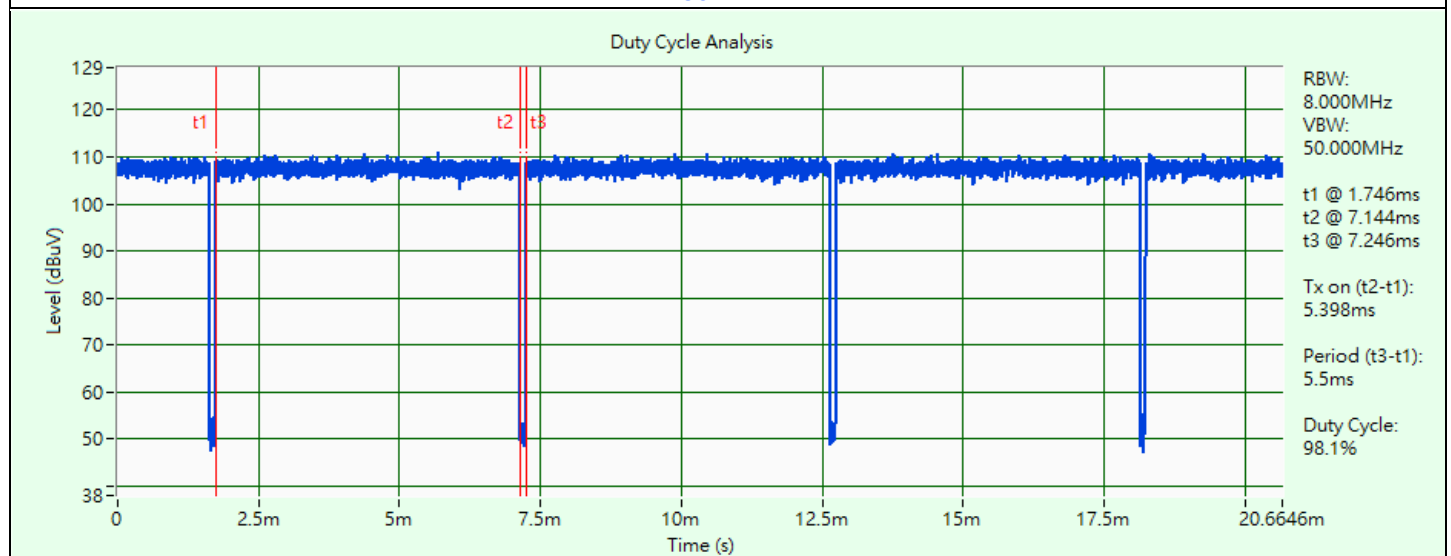

802.11g

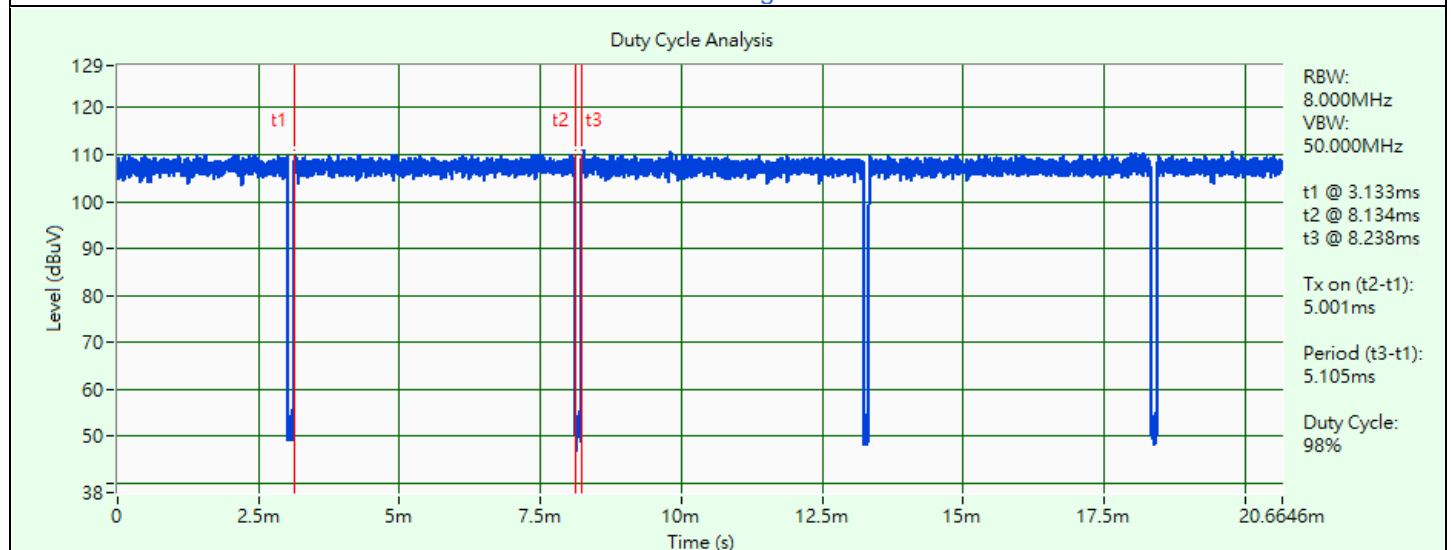


802.11n (HT20)

3.6 Test Program Used and Operation Descriptions

Controlling software (teratorm v4.80) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

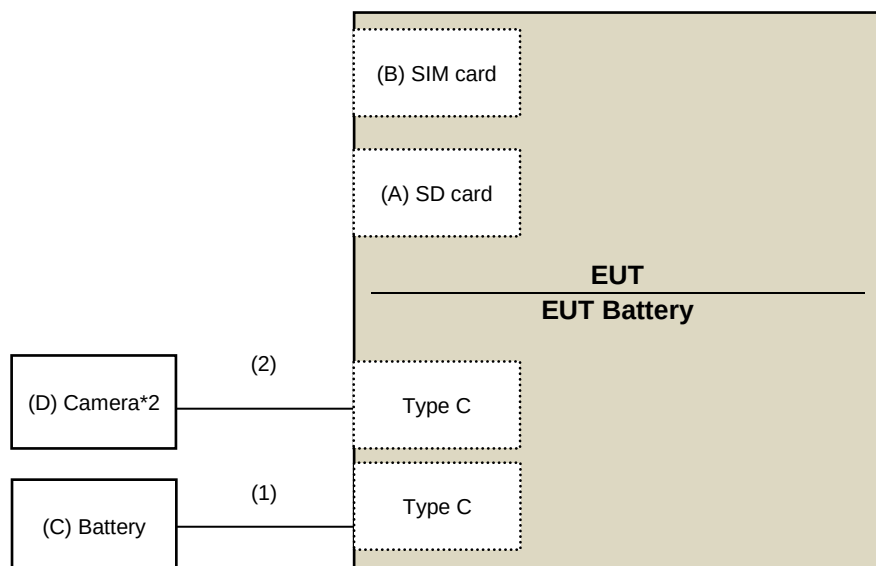

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	SD card	SanDisk	256G	N/A	N/A	Provided by Lab
B	SIM card	N/A	N/A	N/A	N/A	Provided by Lab
C	Battery	GS	GG20LH2	N/A	N/A	Provided by Lab
D	Camera*2	CANOPY	CSSU-TS-A01	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	Battery DC cable	1	3	Y	0	Supplied by applicant
2	Type C cable	2	2.9	N	0	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Power Meter Anritsu	ML2495A	0842014	2023/5/5	2024/5/4
Pulse Power Sensor Anritsu	MA2411B	0738404	2023/5/5	2024/5/4
PXA Signal Analyzer Keysight	N9030A	MY54490260	2023/7/13	2024/7/12
Signal Analyzer R&S	FSV40	101042	2022/9/5	2023/9/4
		101544	2023/5/9	2024/5/8
Temperature & Humidity Chamber Terchy	MHU-225AU	920409	2023/6/26	2024/6/25
True RMS Multimeter FLUKE	179	89610322	2022/10/3	2023/10/2
USB Wideband Power Sensor Keysight	U2021XA	U2021XA_001	2023/6/6	2024/6/5

Notes:

1. The test was performed in LK - Oven
2. Tested Date: 2023/7/27

4.2 Power Spectral Density

Refer to section 4.1 to get information of the instruments.

4.3 6 dB Bandwidth

Refer to section 4.1 to get information of the instruments.

4.4 Conducted Out of Band Emissions

Refer to section 4.1 to get information of the instruments.

4.5 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
* Loop Antenna EMCI	LPA600	270	2021/9/2	2023/9/1
Bi_Log Antenna Schwarzbeck	VULB 9168	137	2022/10/21	2023/10/20
Coupling / Decoupling Network Schwarzbeck	CDNE-M2	00097	2023/5/25	2024/5/24
	CDNE-M3	00091	2023/5/25	2024/5/24
MXE EMI Receiver Agilent	N9038A	MY51210129	2023/3/24	2024/3/23
		MY51210137	2023/6/5	2024/6/4
Preamplifier EMCI	EMC001340	980269	2023/6/27	2024/6/26
Preamplifier HP	8447D	2432A03504	2023/2/16	2024/2/15
RF Coaxial Cable Pacific	8D-FB	Cable-CH6-02	2023/6/27	2024/6/26
Signal Analyzer R&S	FSV40	101544	2023/5/9	2024/5/8
Software BVADT	Radiated_V7.7.1.1.1	N/A	N/A	N/A
	Radiated_V8.7.08	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

- * The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA
- The test was performed in Linkou 966 Chamber 6 (CH 6).
- Tested Date: 2023/7/3

4.6 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Band Pass Filter Micro-Tronics	BRM17690	005	2023/5/25	2024/5/24
Boresight antenna tower fixture BV	BAF-02	6	N/A	N/A
High Pass Filter Wainwright	WHK 3.1/18G-10SS	SN 8	2023/5/25	2024/5/24
Horn Antenna EMCO	3115	00028257	2022/11/13	2023/11/12
Horn Antenna ETS-Lindgren	3117-PA	00215857	2022/11/13	2023/11/12
Horn Antenna Schwarzbeck	BBHA 9170	212	2022/10/20	2023/10/19
MXE EMI Receiver Agilent	N9038A	MY51210129	2023/3/24	2024/3/23
		MY51210137	2023/6/5	2024/6/4
Notch Filter Micro-Tronics	BRC50703-01	010	2023/5/25	2024/5/24
Preamplifier EMCI	EMC0126545	980076	2023/2/16	2024/2/15
	EMC184045B	980175	2022/9/3	2023/9/2
		980235	2023/2/16	2024/2/15
Preamplifier HP	8449B	3008A01201	2023/2/16	2024/2/15
RF Coaxial Cable EM	EM102-KMKM-3.5+1M	EM102-KMKM-3.5+1M-01	2022/7/7 2023/7/6	2023/7/6 2024/7/5
RF Coaxial Cable EMCI	EMC104	190801	2022/7/7 2023/7/6	2023/7/6 2024/7/5
		190804	2022/7/7 2023/7/6	2023/7/6 2024/7/5
RF Coaxial Cable HUBER+SUHNER	SF-104	Cable-CH6-01	2022/7/7 2023/7/6	2023/7/6 2024/7/5
Signal Analyzer R&S	FSV40	101042	2022/9/5	2023/9/4
		101544	2023/5/9	2024/5/8
Software BVADT	Radiated_V7.7.1.1.1	N/A	N/A	N/A
	Radiated_V8.7.08	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

1. The test was performed in Linkou 966 Chamber 6 (CH 6).
2. Tested Date: 2023/6/29 ~ 2023/7/26

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

5.4 Conducted Out of Band Emissions

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

5.5 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.6 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup



6.1.2 Test Procedure

Peak Power:


A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup




6.2.2 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: 3 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

6.3 6 dB Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Conducted Out of Band Emissions

6.4.1 Test Setup



6.4.2 Test Procedure

MEASUREMENT PROCEDURE REF

- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


MEASUREMENT PROCEDURE OOBE

- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.


6.5 Unwanted Emissions below 1 GHz

6.5.1 Test Setup

For Radiated emission below 30 MHz

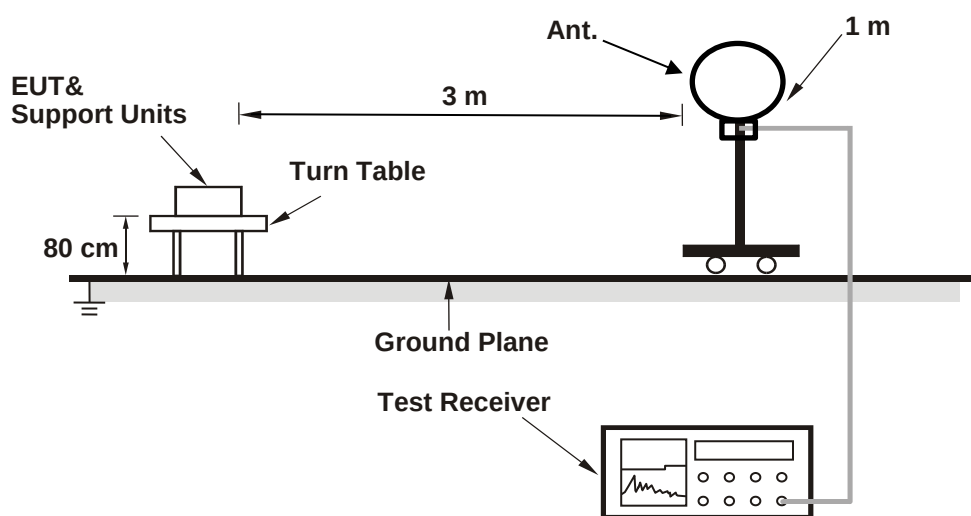

For Radiated emission above 30 MHz

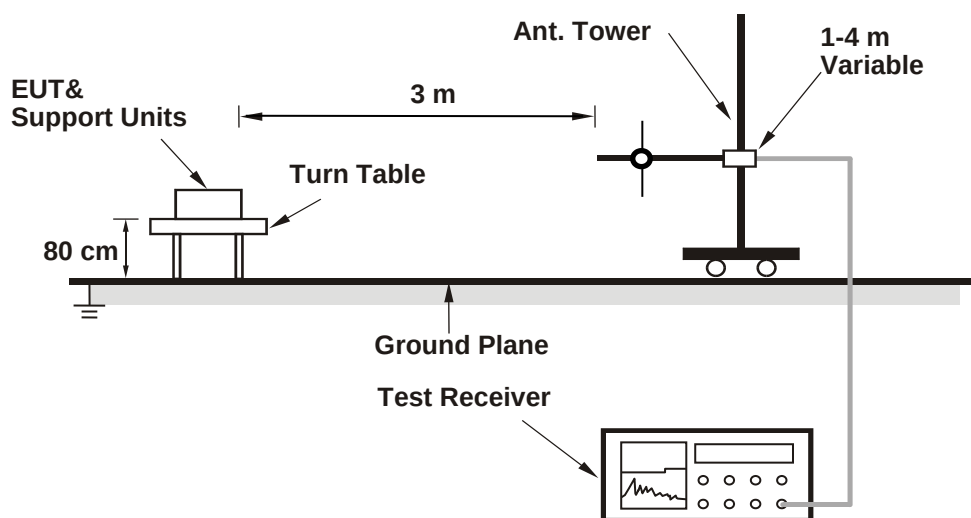

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.6 Unwanted Emissions above 1 GHz

6.6.1 Test Setup

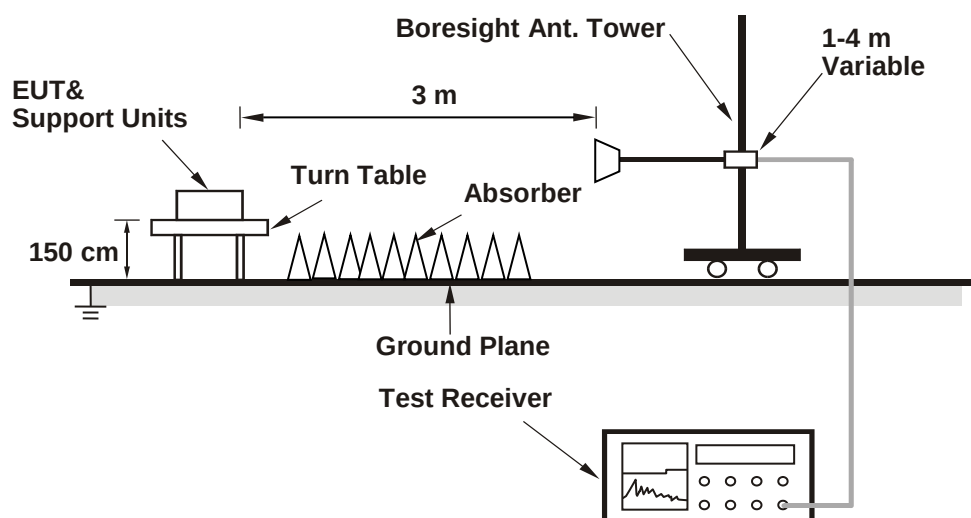

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	12 Vdc	Environmental Conditions:	25°C, 76% RH	Tested By:	Dalen Dai
--------------	--------	---------------------------	--------------	------------	-----------

For Peak Power

802.11b

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	191.867	22.83	30	Pass
6	2437	107.152	20.30	30	Pass
11	2462	84.333	19.26	30	Pass

Note: The antenna gain is 3.51 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	214.783	23.32	30	Pass
6	2437	382.825	25.83	30	Pass
11	2462	211.349	23.25	30	Pass

Note: The antenna gain is 3.51 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	194.089	22.88	30	Pass
6	2437	363.915	25.61	30	Pass
11	2462	202.768	23.07	30	Pass

Note: The antenna gain is 3.51 dBi < 6 dBi, so the output power limit shall not be reduced.

For Average Power

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	107.895	20.33
6	2437	51.642	17.13
11	2462	40.179	16.04

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	52.119	17.17
6	2437	116.95	20.68
11	2462	50.234	17.01

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	39.264	15.94
6	2437	113.763	20.56
11	2462	39.994	16.02

7.2 Power Spectral Density

Input Power:	12 Vdc	Environmental Conditions:	25°C, 76% RH	Tested By:	Dalen Dai
--------------	--------	---------------------------	--------------	------------	-----------

802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
1	2412	-2.41	8	Pass
6	2437	-4.58	8	Pass
11	2462	-5.76	8	Pass

Note: The antenna gain is 3.51 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11g

Channel	Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
1	2412	-7.44	8	Pass
6	2437	-4.6	8	Pass
11	2462	-7.14	8	Pass


Note: The antenna gain is 3.51 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11n (HT20)

Channel	Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
1	2412	-9.08	8	Pass
6	2437	-3.54	8	Pass
11	2462	-9.25	8	Pass

Note: The antenna gain is 3.51 dBi < 6 dBi, so the power density limit shall not be reduced.

Spectrum Plot of Maximum Value

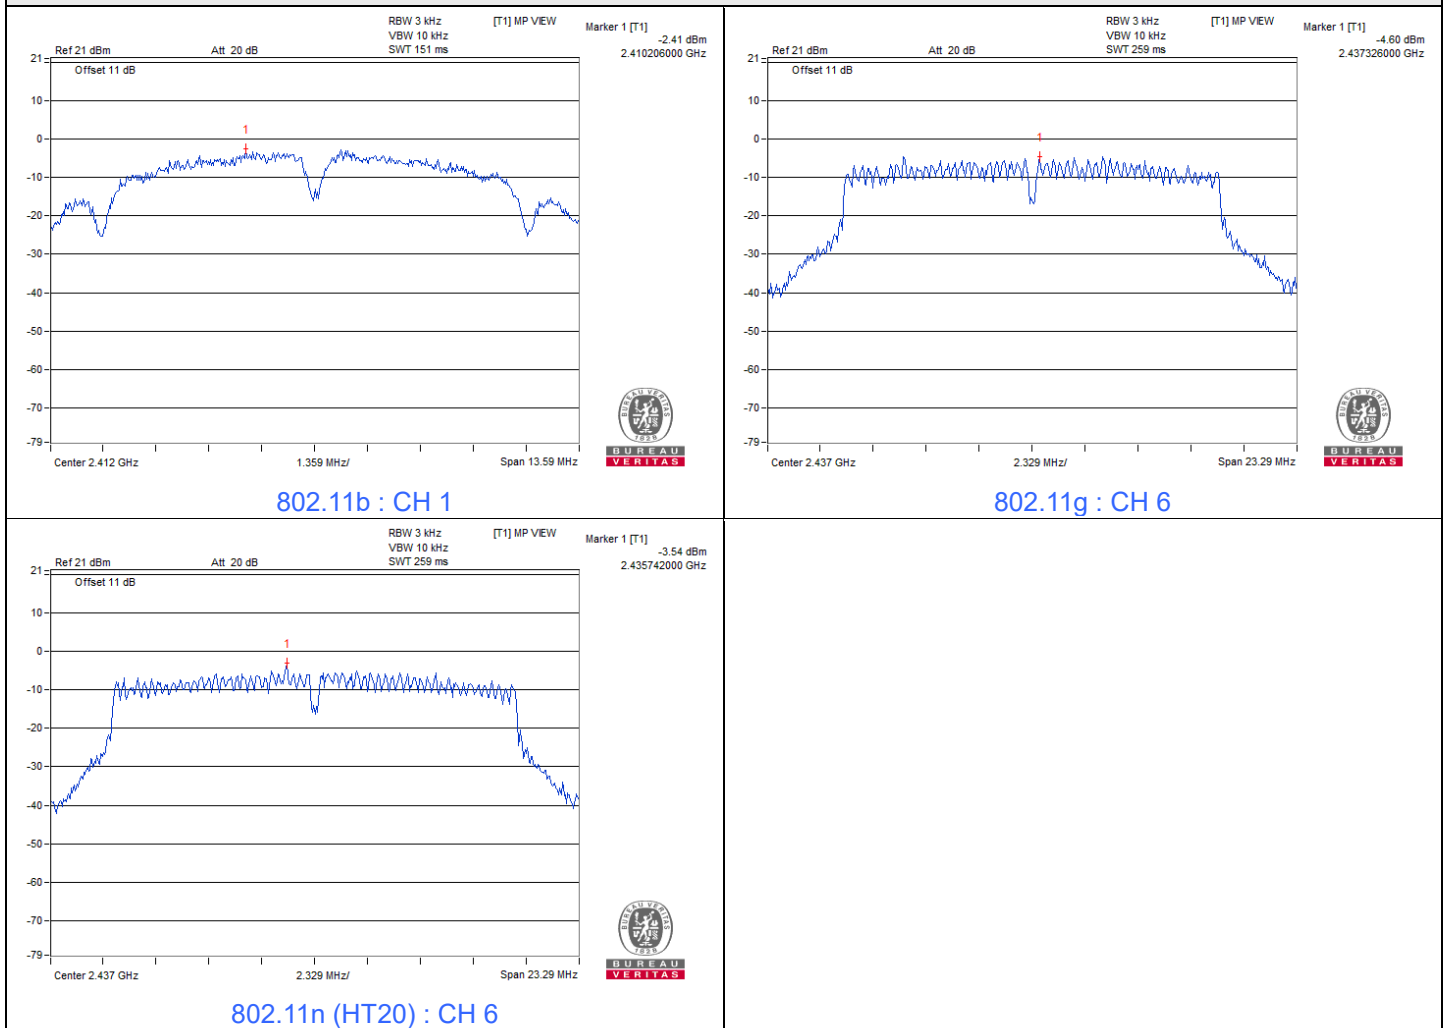

7.3 6 dB Bandwidth

Input Power:	12 Vdc	Environmental Conditions:	25°C, 76% RH	Tested By:	Dalen Dai
--------------	--------	---------------------------	--------------	------------	-----------

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	9.06	0.5	Pass
6	2437	8.6	0.5	Pass
11	2462	8.57	0.5	Pass





802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	15.89	0.5	Pass
6	2437	15.53	0.5	Pass
11	2462	15.83	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	15.59	0.5	Pass
6	2437	15.53	0.5	Pass
11	2462	15.76	0.5	Pass


Spectrum Plot of Minimum Value

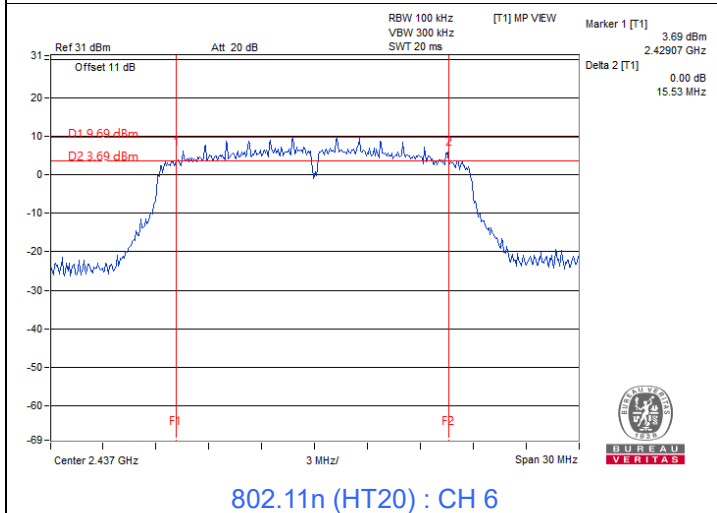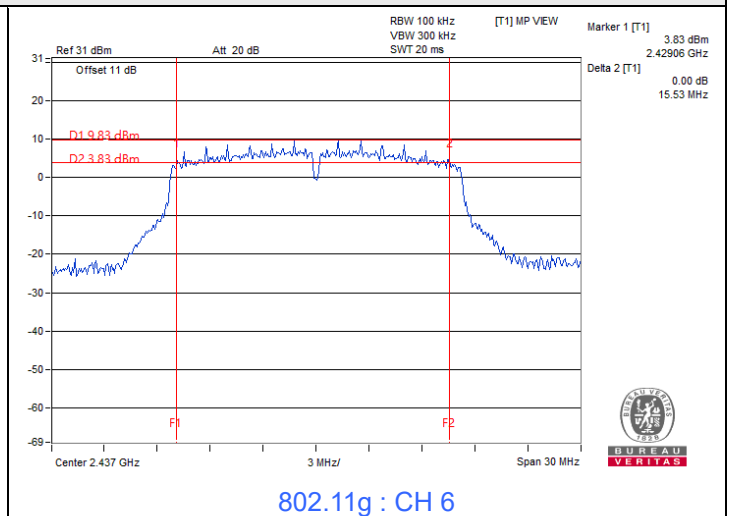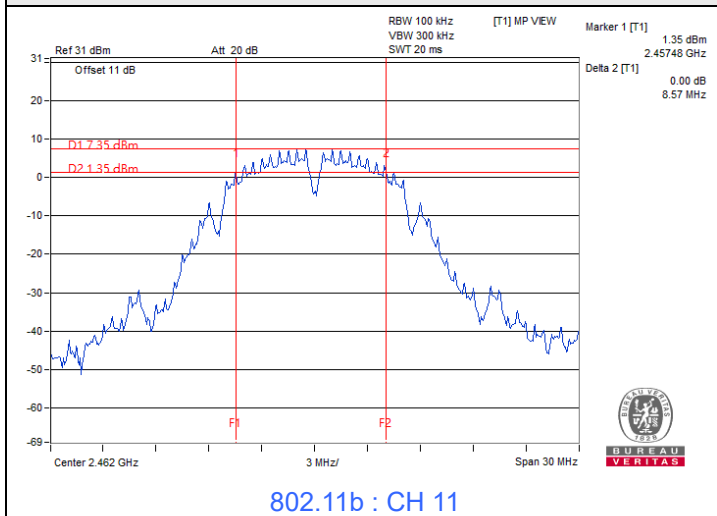


7.4 Conducted Out of Band Emissions

Input Power:	12 Vdc	Environmental Conditions:	25°C, 76% RH	Tested By:	Dalen Dai
--------------	--------	---------------------------	--------------	------------	-----------


802.11b

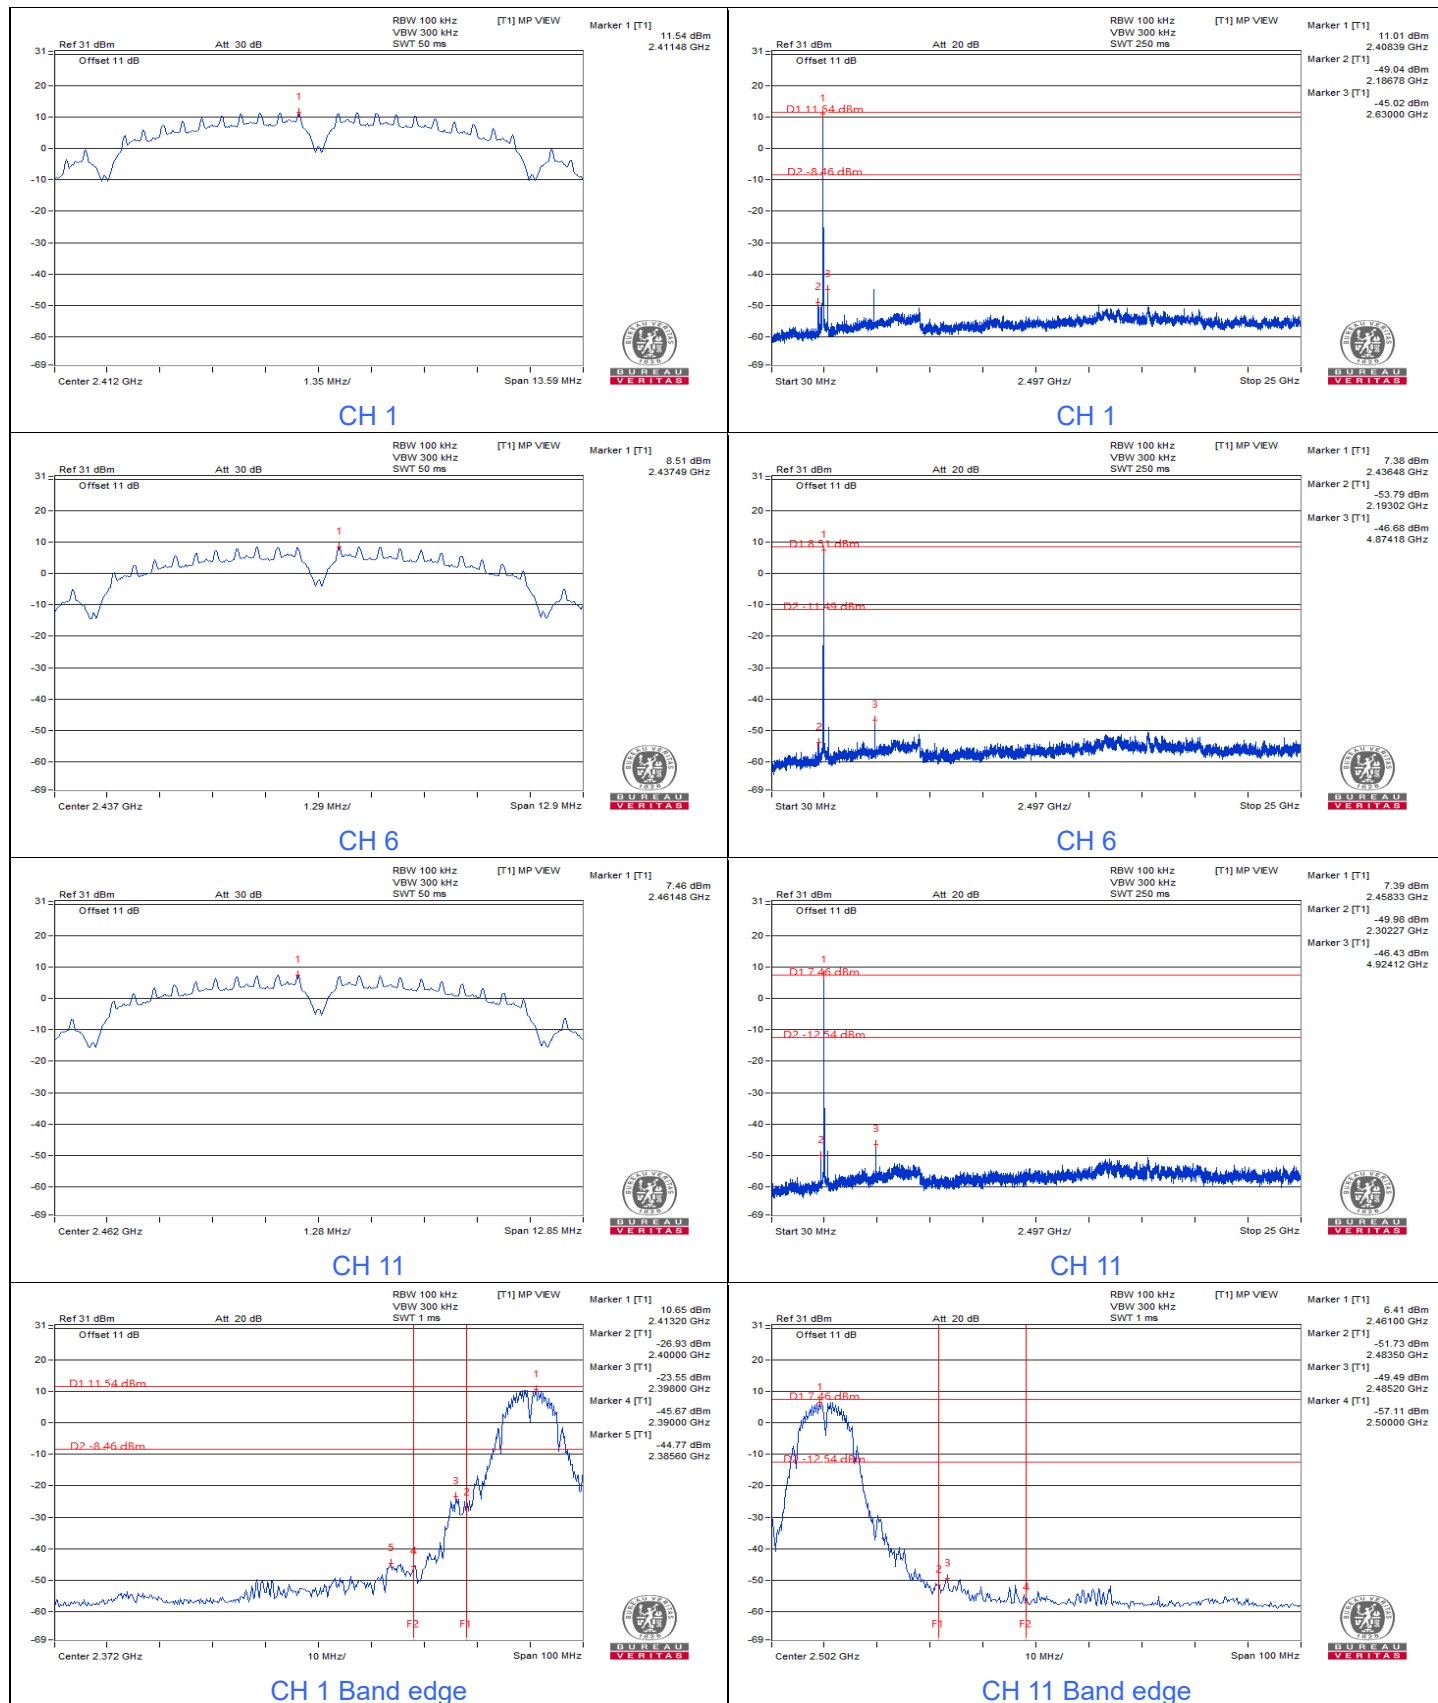

802.11g

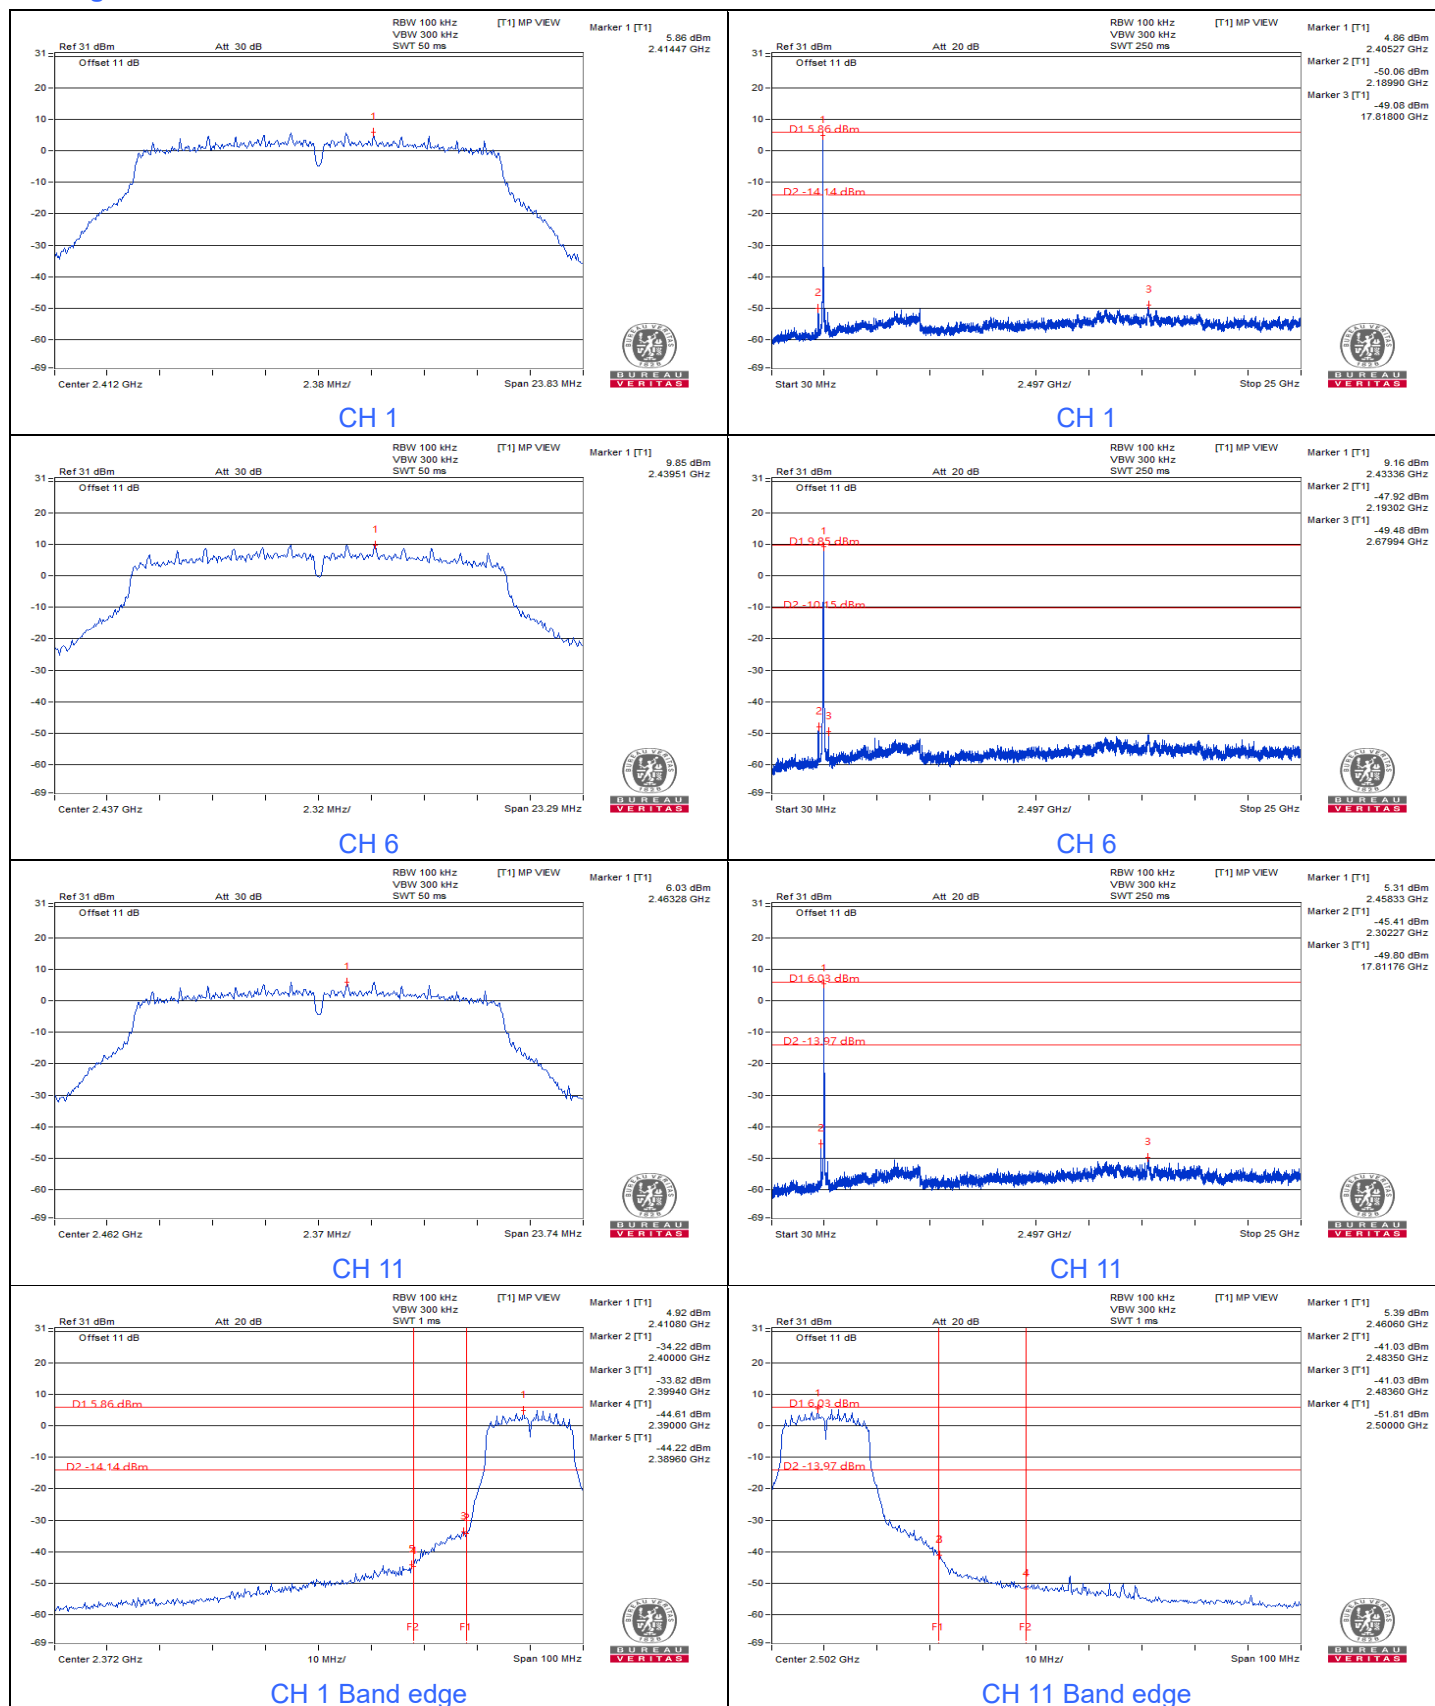

802.11n (HT20)

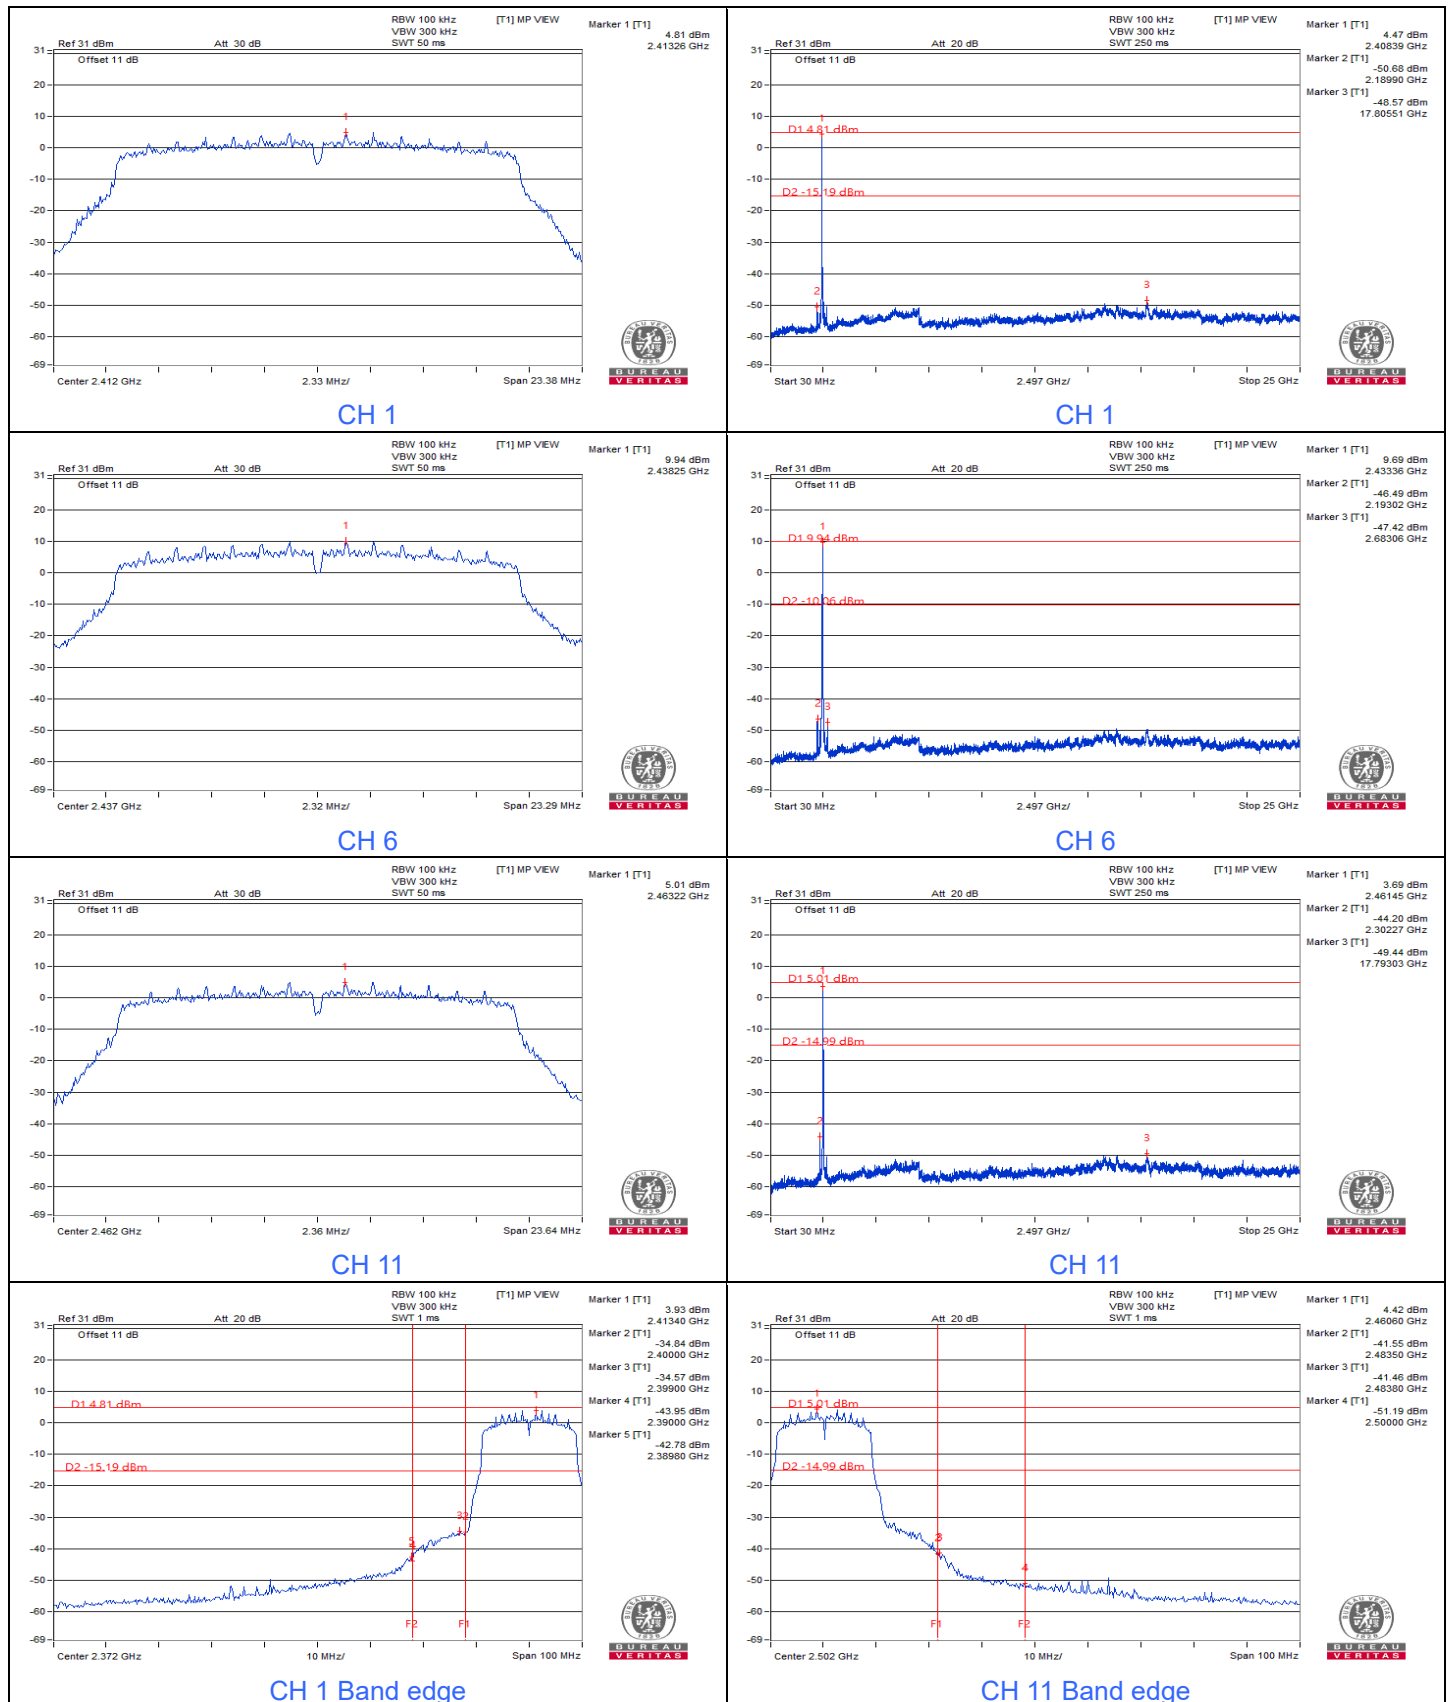


7.5 Unwanted Emissions below 1 GHz

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	12 Vdc	Environmental Conditions	22°C, 67% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.58	25.0 QP	40.0	-15.0	1.77 H	157	35.6	-10.6
2	150.47	24.3 QP	43.5	-19.2	1.46 H	92	32.4	-8.1
3	277.50	22.3 QP	46.0	-23.7	1.18 H	127	29.1	-6.8
4	359.99	27.3 QP	46.0	-18.7	1.24 H	293	32.3	-5.0
5	480.03	29.3 QP	46.0	-16.7	1.56 H	36	31.3	-2.0
6	528.00	30.0 QP	46.0	-16.0	1.80 H	310	31.2	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

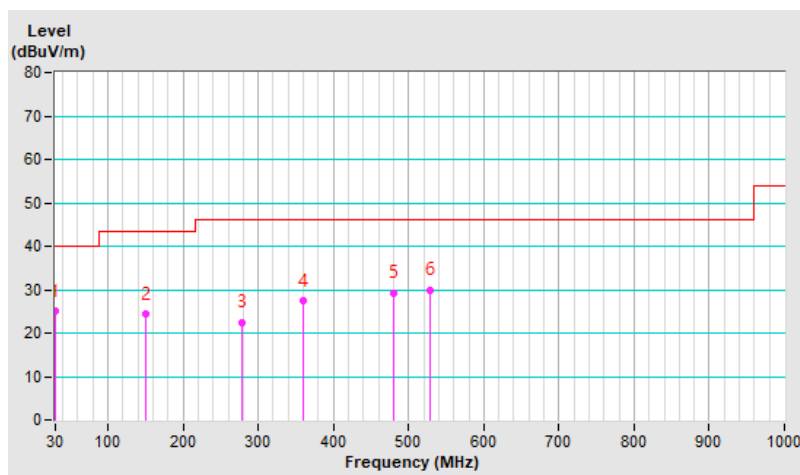


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	12 Vdc	Environmental Conditions	22°C, 67% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.07	32.0 QP	40.0	-8.0	1.73 V	279	42.3	-10.3
2	64.29	28.8 QP	40.0	-11.2	1.05 V	274	38.7	-9.9
3	145.87	27.3 QP	43.5	-16.2	1.43 V	360	35.6	-8.3
4	196.99	24.2 QP	43.5	-19.3	1.89 V	219	35.1	-10.9
5	288.41	22.5 QP	46.0	-23.5	1.67 V	281	28.9	-6.4
6	373.43	23.5 QP	46.0	-22.5	1.54 V	360	28.1	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

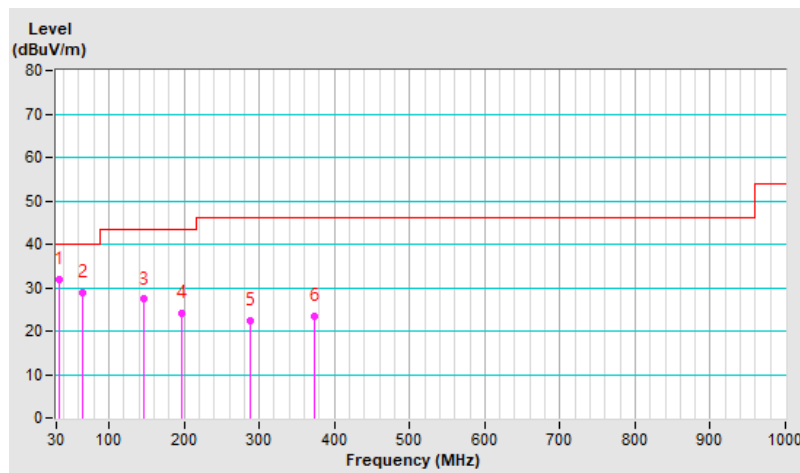

7.6 Unwanted Emissions above 1 GHz

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	12 Vdc	Environmental Conditions	18.1°C, 65.2% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.49 H	33	59.6	12.7
2	2390.00	51.5 AV	54.0	-2.5	1.49 H	33	38.8	12.7
3	*2412.00	113.7 PK			1.49 H	33	100.8	12.9
4	*2412.00	110.5 AV			1.49 H	33	97.6	12.9
5	4824.00	57.5 PK	74.0	-16.5	2.01 H	39	44.2	13.3
6	4824.00	51.3 AV	54.0	-2.7	2.01 H	39	38.0	13.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.0 PK	74.0	-5.0	1.19 V	123	56.3	12.7
2	2390.00	47.8 AV	54.0	-6.2	1.19 V	123	35.1	12.7
3	*2412.00	109.3 PK			1.19 V	123	96.4	12.9
4	*2412.00	106.1 AV			1.19 V	123	93.2	12.9
5	4824.00	57.1 PK	74.0	-16.9	1.25 V	156	43.8	13.3
6	4824.00	50.9 AV	54.0	-3.1	1.25 V	156	37.6	13.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	12 Vdc	Environmental Conditions	18.1°C, 65.2% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.4 PK			1.16 H	39	96.4	13.0
2	*2437.00	106.2 AV			1.16 H	39	93.2	13.0
3	4874.00	58.5 PK	74.0	-15.5	1.99 H	41	44.9	13.6
4	4874.00	52.8 AV	54.0	-1.2	1.99 H	41	39.2	13.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.0 PK			1.52 V	129	92.0	13.0
2	*2437.00	101.8 AV			1.52 V	129	88.8	13.0
3	4874.00	58.1 PK	74.0	-15.9	1.58 V	162	44.5	13.6
4	4874.00	52.4 AV	54.0	-1.6	1.58 V	162	38.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	12 Vdc	Environmental Conditions	18.1°C, 65.2% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.9 PK			3.17 H	37	94.8	13.1
2	*2462.00	104.2 AV			3.17 H	37	91.1	13.1
3	2483.50	66.3 PK	74.0	-7.7	3.17 H	37	53.2	13.1
4	2483.50	45.9 AV	54.0	-8.1	3.17 H	37	32.8	13.1
5	4924.00	58.9 PK	74.0	-15.1	1.96 H	43	45.2	13.7
6	4924.00	52.8 AV	54.0	-1.2	1.96 H	43	39.1	13.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.6 PK			2.87 V	127	90.5	13.1
2	*2462.00	100.4 AV			2.87 V	127	87.3	13.1
3	2483.50	64.5 PK	74.0	-9.5	2.87 V	127	51.4	13.1
4	2483.50	44.9 AV	54.0	-9.1	2.87 V	127	31.8	13.1
5	4924.00	58.5 PK	74.0	-15.5	1.20 V	160	44.8	13.7
6	4924.00	52.4 AV	54.0	-1.6	1.20 V	160	38.7	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	12 Vdc	Environmental Conditions	18.1°C, 65.2% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.7 PK	74.0	-4.3	1.49 H	37	57.0	12.7
2	2390.00	53.0 AV	54.0	-1.0	1.49 H	37	40.3	12.7
3	*2412.00	113.3 PK			1.49 H	37	100.4	12.9
4	*2412.00	103.3 AV			1.49 H	37	90.4	12.9
5	4824.00	54.5 PK	74.0	-19.5	2.01 H	40	41.2	13.3
6	4824.00	41.7 AV	54.0	-12.3	2.01 H	40	28.4	13.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.0 PK	74.0	-8.0	1.18 V	126	53.3	12.7
2	2390.00	49.5 AV	54.0	-4.5	1.18 V	126	36.8	12.7
3	*2412.00	109.0 PK			1.18 V	126	96.1	12.9
4	*2412.00	99.2 AV			1.18 V	126	86.3	12.9
5	4824.00	54.1 PK	74.0	-19.9	1.24 V	155	40.8	13.3
6	4824.00	41.3 AV	54.0	-12.7	1.24 V	155	28.0	13.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	12 Vdc	Environmental Conditions	18.1°C, 65.2% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	1.16 H	37	53.7	12.7
2	2390.00	52.5 AV	54.0	-1.5	1.16 H	37	39.8	12.7
3	*2437.00	116.0 PK			1.16 H	37	103.0	13.0
4	*2437.00	106.0 AV			1.16 H	37	93.0	13.0
5	4874.00	61.5 PK	74.0	-12.5	1.88 H	41	47.9	13.6
6	4874.00	47.8 AV	54.0	-6.2	1.88 H	41	34.2	13.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.3 PK	74.0	-9.7	1.51 V	128	51.6	12.7
2	2390.00	50.9 AV	54.0	-3.1	1.51 V	128	38.2	12.7
3	*2437.00	111.8 PK			1.51 V	128	98.8	13.0
4	*2437.00	101.9 AV			1.51 V	128	88.9	13.0
5	4874.00	61.1 PK	74.0	-12.9	1.57 V	164	47.5	13.6
6	4874.00	47.4 AV	54.0	-6.6	1.57 V	164	33.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	12 Vdc	Environmental Conditions	18.1°C, 65.2% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.4 PK			3.19 H	37	99.3	13.1
2	*2462.00	102.9 AV			3.19 H	37	89.8	13.1
3	2483.50	70.4 PK	74.0	-3.6	3.19 H	37	57.3	13.1
4	2483.50	53.0 AV	54.0	-1.0	3.19 H	37	39.9	13.1
5	4924.00	55.5 PK	74.0	-18.5	1.98 H	42	41.8	13.7
6	4924.00	42.7 AV	54.0	-11.3	1.98 H	42	29.0	13.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.9 PK			2.89 V	126	94.8	13.1
2	*2462.00	97.9 AV			2.89 V	126	84.8	13.1
3	2483.50	67.9 PK	74.0	-6.1	2.89 V	126	54.8	13.1
4	2483.50	51.0 AV	54.0	-3.0	2.89 V	126	37.9	13.1
5	4924.00	55.1 PK	74.0	-18.9	2.95 V	159	41.4	13.7
6	4924.00	42.3 AV	54.0	-11.7	2.95 V	159	28.6	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11n (HT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	12 Vdc	Environmental Conditions	18.1°C, 65.2% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.9 PK	74.0	-3.1	1.48 H	31	58.2	12.7
2	2390.00	52.9 AV	54.0	-1.1	1.48 H	31	40.2	12.7
3	*2412.00	113.1 PK			1.48 H	31	100.2	12.9
4	*2412.00	102.3 AV			1.48 H	31	89.4	12.9
5	4824.00	53.9 PK	74.0	-20.1	2.00 H	46	40.6	13.3
6	4824.00	41.1 AV	54.0	-12.9	2.00 H	46	27.8	13.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.1 PK	74.0	-6.9	1.18 V	121	54.5	12.6
2	2390.00	49.7 AV	54.0	-4.3	1.18 V	121	37.1	12.6
3	*2412.00	108.7 PK			1.18 V	121	96.0	12.7
4	*2412.00	98.3 AV			1.18 V	121	85.6	12.7
5	4824.00	53.5 PK	74.0	-20.5	1.24 V	154	40.4	13.1
6	4824.00	40.7 AV	54.0	-13.3	1.24 V	154	27.6	13.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	12 Vdc	Environmental Conditions	18.1°C, 65.2% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.4 PK	74.0	-4.6	1.16 H	35	56.7	12.7
2	2390.00	52.9 AV	54.0	-1.1	1.16 H	35	40.2	12.7
3	*2437.00	116.9 PK			1.16 H	35	103.9	13.0
4	*2437.00	106.5 AV			1.16 H	35	93.5	13.0
5	4874.00	62.4 PK	74.0	-11.6	1.89 H	43	48.8	13.6
6	4874.00	48.7 AV	54.0	-5.3	1.89 H	43	35.1	13.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	1.53 V	125	55.1	12.7
2	2390.00	50.9 AV	54.0	-3.1	1.53 V	125	38.2	12.7
3	*2437.00	112.3 PK			1.53 V	125	99.3	13.0
4	*2437.00	102.3 AV			1.53 V	125	89.3	13.0
5	4874.00	62.0 PK	74.0	-12.0	1.59 V	158	48.4	13.6
6	4874.00	48.3 AV	54.0	-5.7	1.59 V	158	34.7	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11n (HT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	12 Vdc	Environmental Conditions	18.1°C, 65.2% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.5 PK			3.20 H	26	99.4	13.1
2	*2462.00	101.9 AV			3.20 H	26	88.8	13.1
3	2483.50	72.1 PK	74.0	-1.9	3.20 H	26	59.0	13.1
4	2483.50	52.9 AV	54.0	-1.1	3.20 H	26	39.8	13.1
5	4924.00	53.5 PK	74.0	-20.5	3.72 H	32	39.8	13.7
6	4924.00	40.7 AV	54.0	-13.3	3.72 H	32	27.0	13.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.1 PK			2.90 V	116	95.0	13.1
2	*2462.00	97.7 AV			2.90 V	116	84.6	13.1
3	2483.50	68.7 PK	74.0	-5.3	2.90 V	116	55.6	13.1
4	2483.50	49.8 AV	54.0	-4.2	2.90 V	116	36.7	13.1
5	4924.00	53.1 PK	74.0	-20.9	2.96 V	149	39.4	13.7
6	4924.00	40.3 AV	54.0	-13.7	2.96 V	149	26.6	13.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------------	-------------------------------	--

802.11b Channel 1

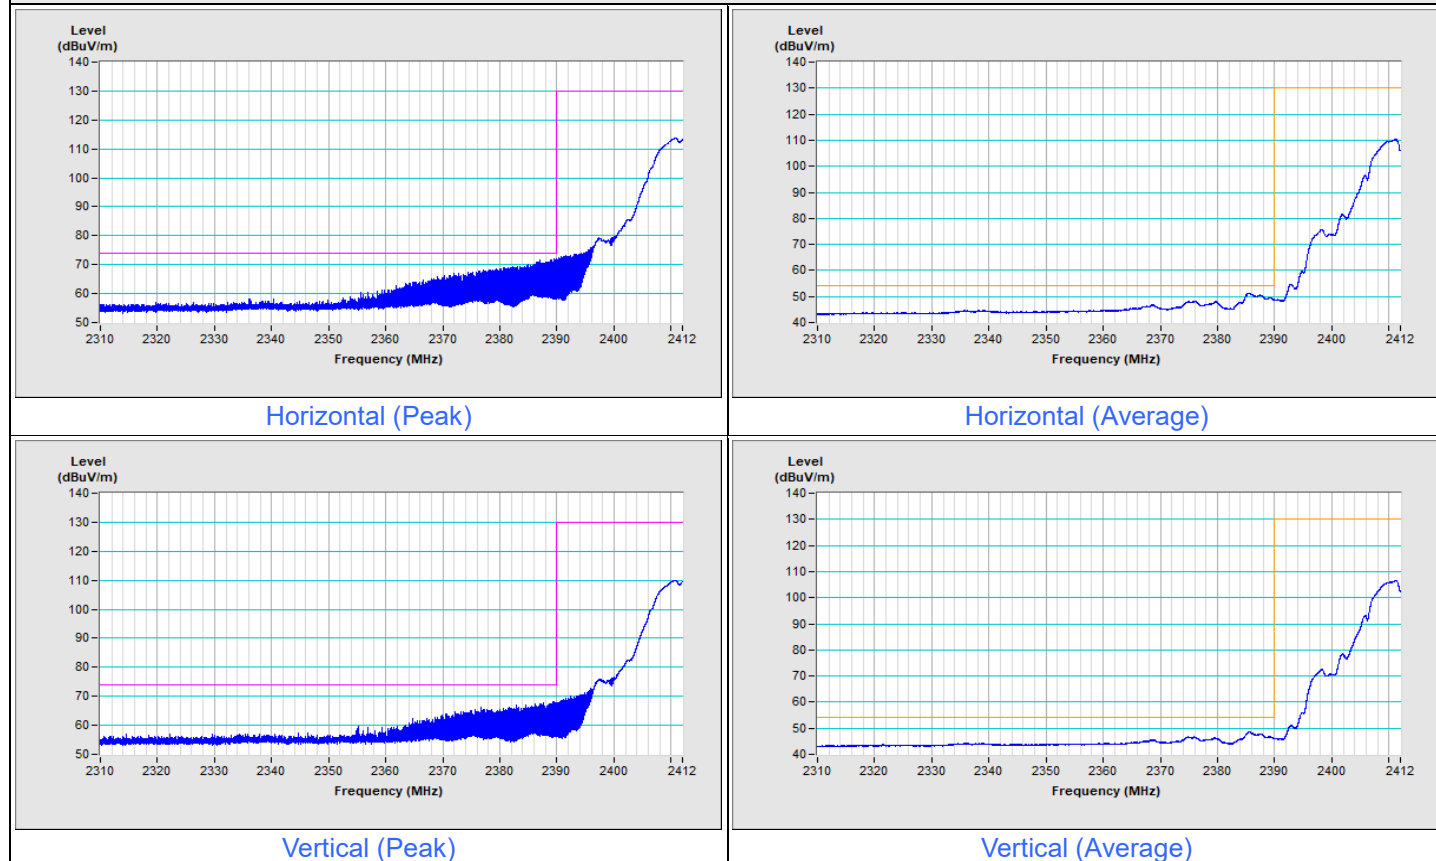


Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11b Channel 11

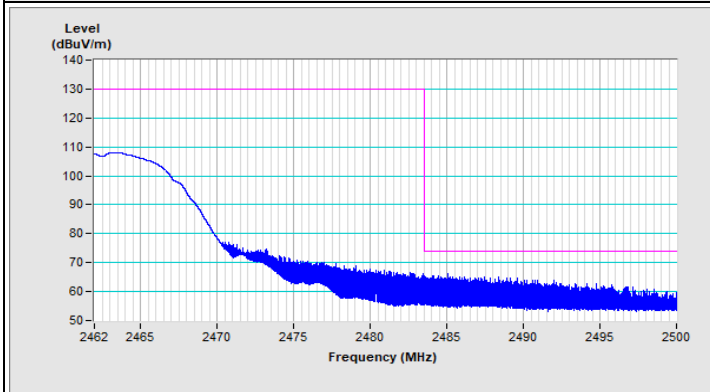


Horizontal (Peak)

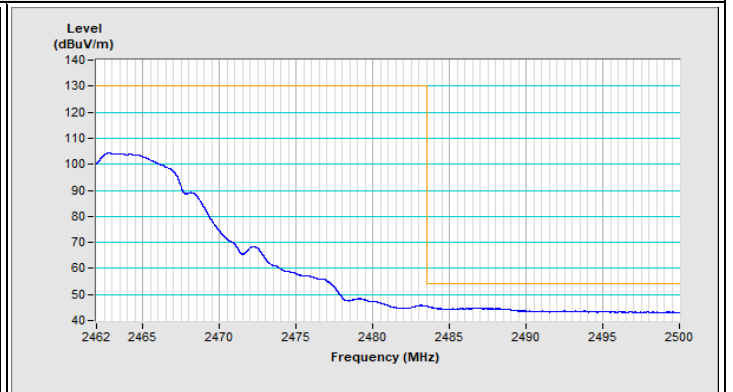

Horizontal (Average)

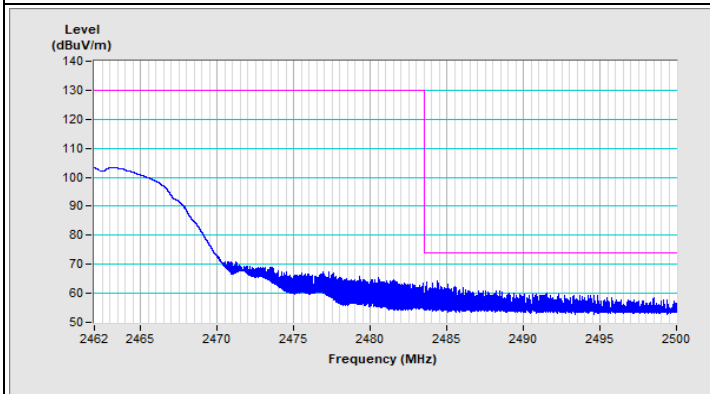


Vertical (Peak)

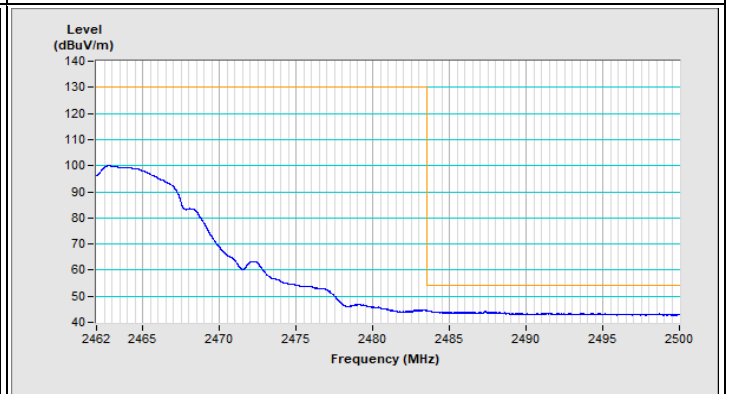


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------------	-------------------------------	--


802.11g Channel 1

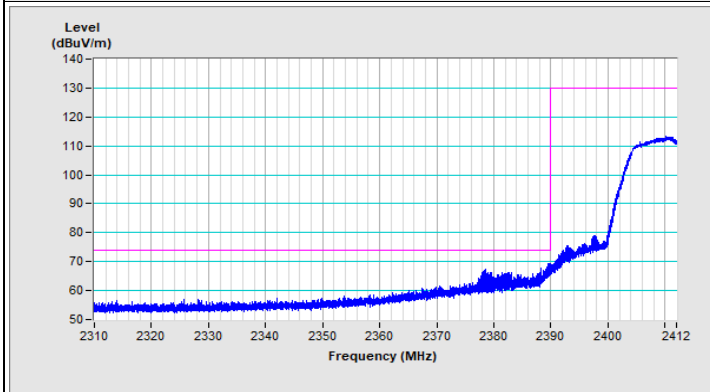


Horizontal (Peak)

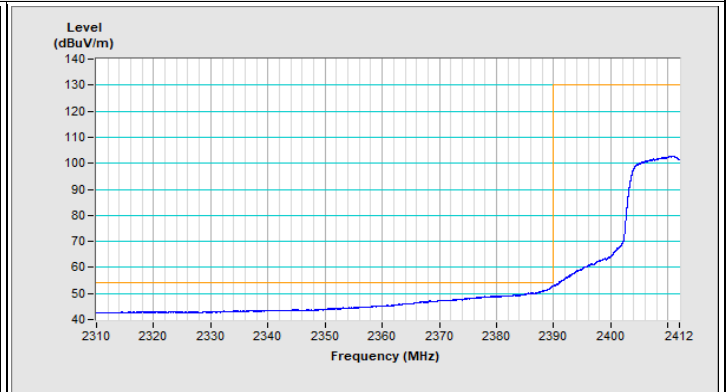

Horizontal (Average)

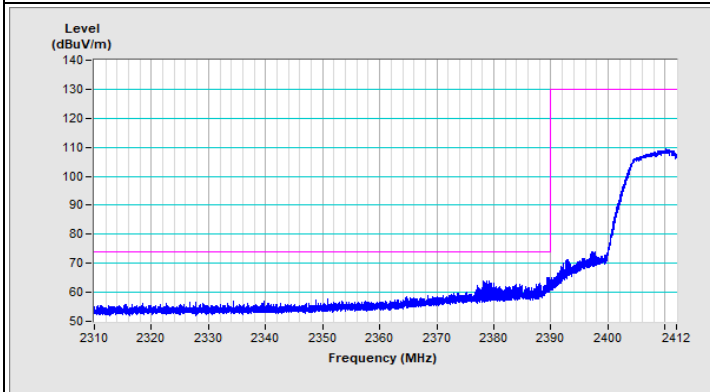


Vertical (Peak)

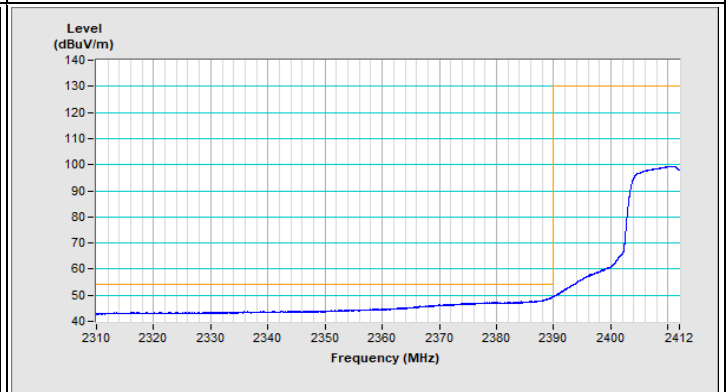


Vertical (Average)

Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11g Channel 11

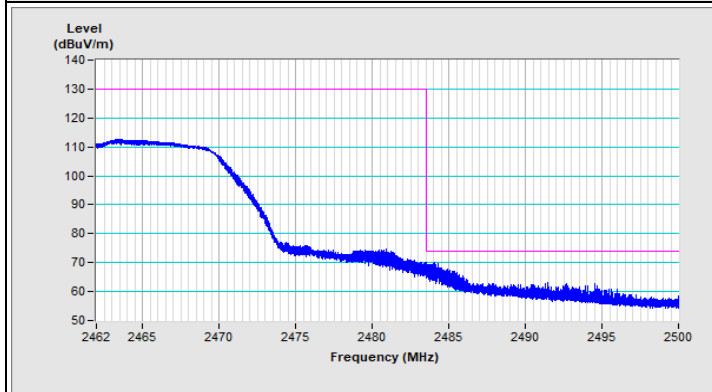


Horizontal (Peak)

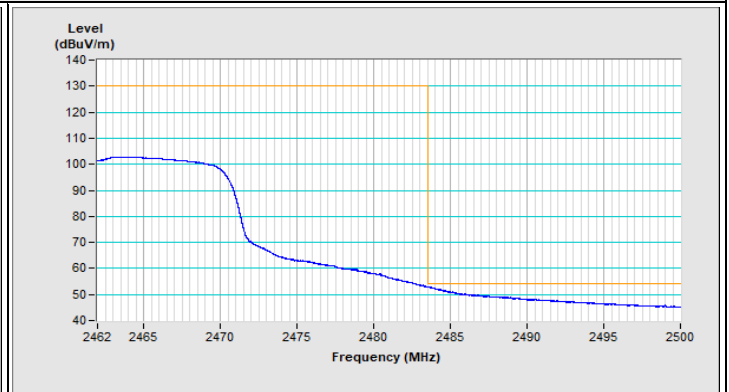

Horizontal (Average)

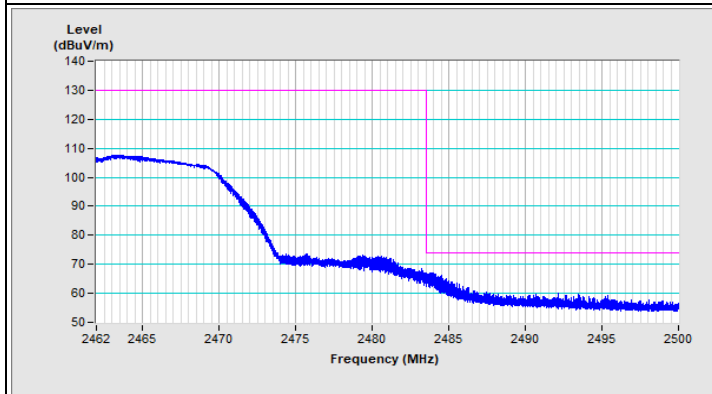


Vertical (Peak)

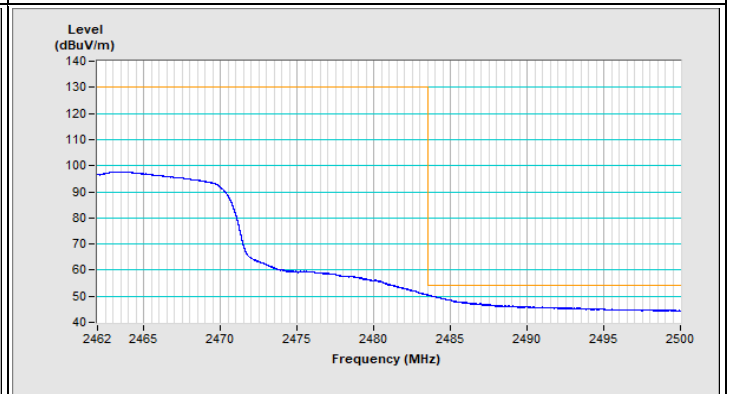


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------------	-------------------------------	--


802.11n (HT20) Channel 1

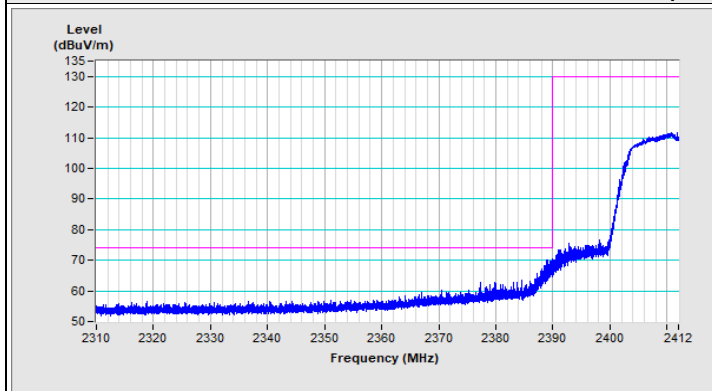


Horizontal (Peak)

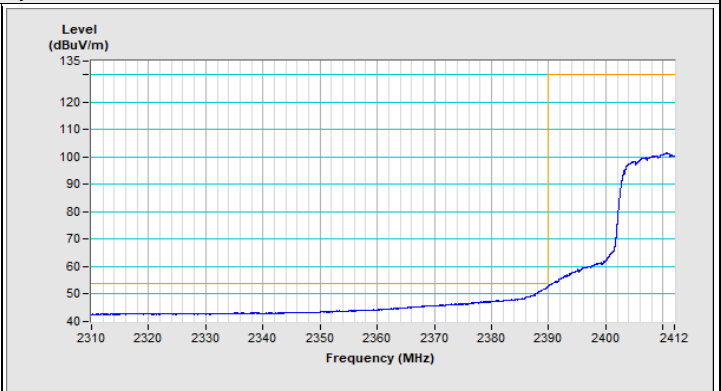

Horizontal (Average)

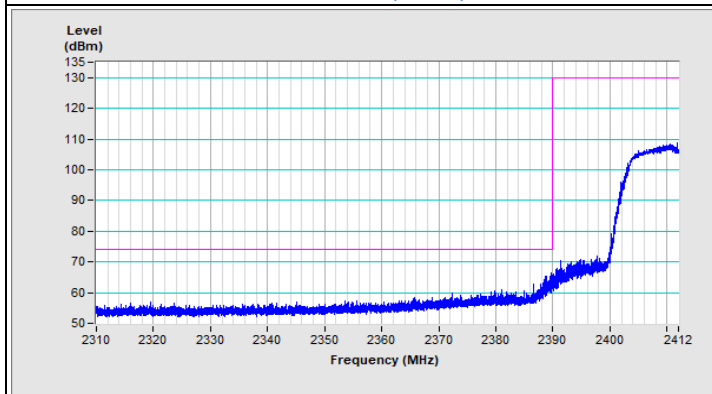


Vertical (Peak)

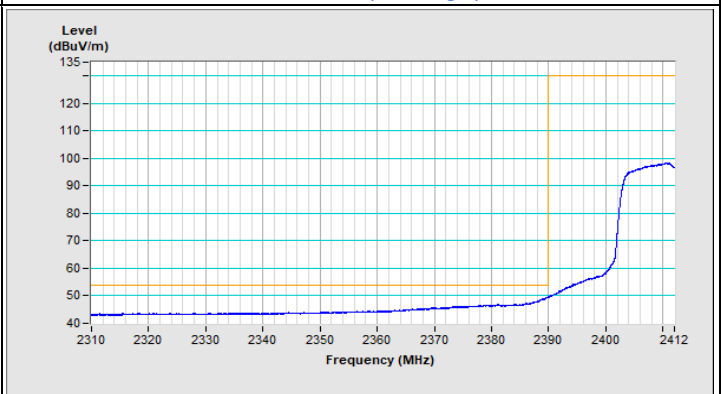


Vertical (Average)

Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11n (HT20) Channel 11

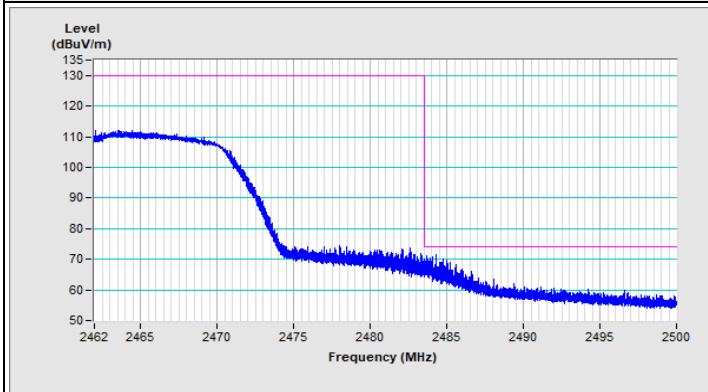


Horizontal (Peak)

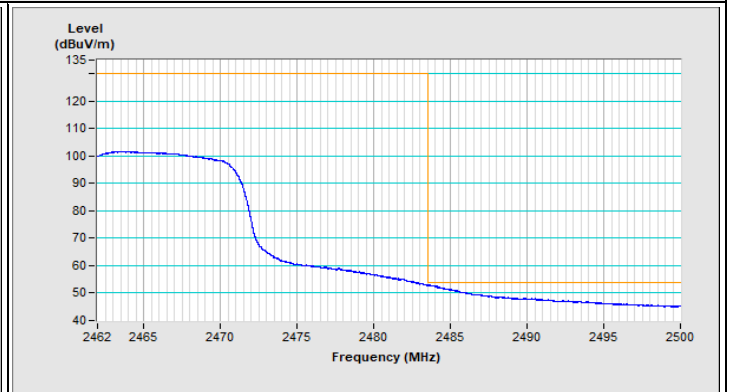

Horizontal (Average)

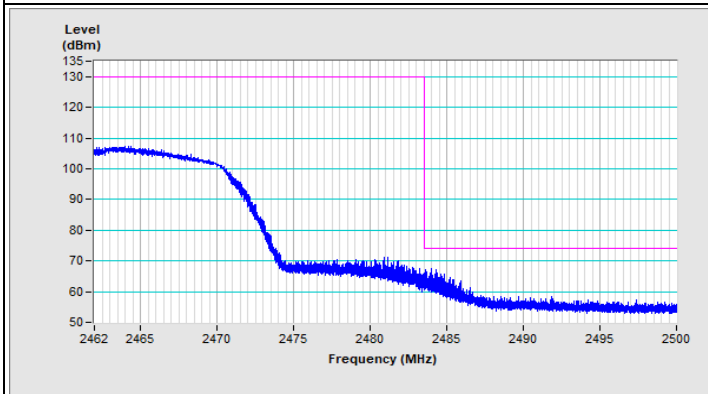

Vertical (Peak)

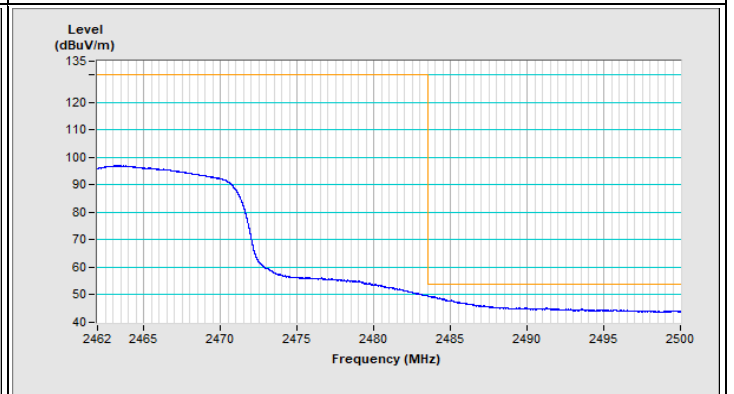

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---