

Huizhou Qitai Electronic Technology Co., LTD

SPECIFICATIONS SHEET

CUSTOMER : Dongguan kingtron electronics tech co.,LTD

E28-00021

DESCRIPTION :

CUSTOMER P/N :

PART NUMBER :

DATE OF APPLICATION : 2025-2-7

CLASSIFICATION OF SPEC. PRESENTATION. (Tick the relevant box "√")

☐ New application

✓ New part is added to accepted specification

☐ Revision of accepted specification

ACCEPTANCE STAMP



APPROVED BY

CHECK BY

PREPARE BY

冯欣

冯欣

ADDRESS : 3rd Floor, No. 181, Mingyue 2nd Road, Shiwan Town, Boluo County, Huizhou city

TELEPHONE : 0752-6668681

E-MAIL : 839689578@qq.com

Huizhou Qitai Electronic Technology Co., LTD

History For Revised Specification

CUSTOMER P/N :

E28-00021

Date	Revisor
-------------	----------------

[illegible]

APPROVED BY

CHECKED BY

PREPARED BY

DATE _____

PAGE

昆子奇

冯欣

2025-2-7


1 of 3

Huizhou Qitai Electronic Technology Co., LTD

CUSTOMER P/N :	Dongguan kingtron electronics tech co.,LTD
PART NUMBER :	E28-00021

1. DIMENSIONS : (Unit: mm)

Unit : mm

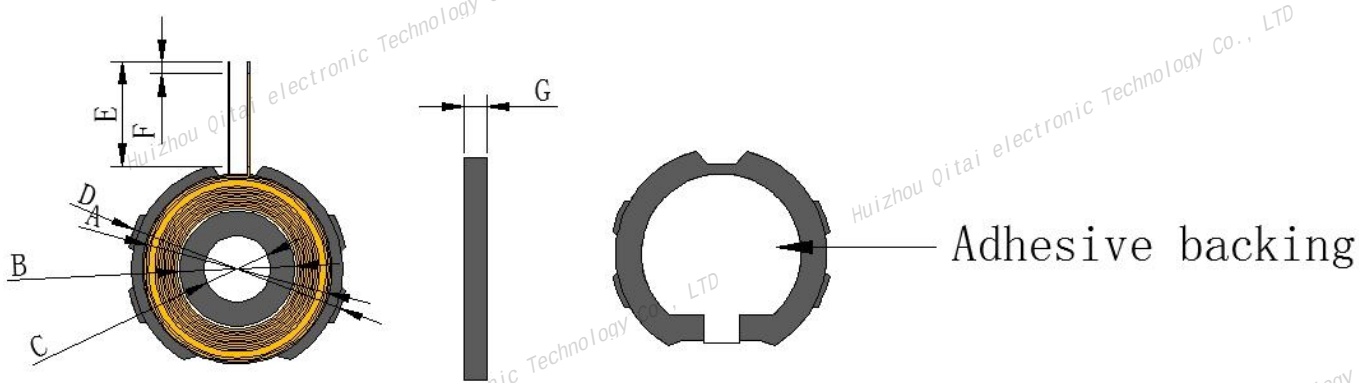

A	B	C	D	E	F	G	
21Max	14.5±0.5	7.5±0.5	24.5±1	7±1	2±1	2.6Max	

- 1. Back gel is $\phi 18\text{M}$ white b gel.
- 2. The magnetic sheet is hard magnetic.
- 3. Tape size: 25mm*2.0mm.
- 4. Magnet Gaussian: 3400GS $\pm 200\text{GS}$.

APPROVED BY	CHECKED BY	PREPARED BY	DATE
昆子奇		冯欣	2025-2-7

Huizhou Qitai Electronic Technology Co., LTD					
Specification					
CUSTOMER P/N :		Dongguan kingtron electronics tech co.,LTD			
PART NUMBER :		E28-00021			
2. WINDING DETAILS					
Coil1					
Turns	Wire Dia	Wdg. Type Spred/Close	Wdg.Direction	Intersect Yes/Not	
13TS	0. 08*24P (Hot Air stranded Wire)	Close	Inverse around	Yes	
3. ELECTRICAL CHARACTERISTICS:					
TEMPERATURE:25±10℃, RELATIVE HUMIDITY:65±10%					
NO.	TEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
Coil 1					
1.	IND	S-F	7.85uh±0.15	100kHz/V	UC2906A
2.	Q	S-F	26Min	100kHz/V	UC2906A
3.	DCR	S-F	145m Ω Max	100kHz/V	UC2906A
					
APPROVED BY	CHECKED BY	PREPARED BY	DATE		
昆子奇		冯欣	2025-2-7		