

FCC TEST REPORT

FCC ID: 2BBFL-SE-70

On Behalf of

Shenzhen SaiFeng Electronic Technology Co., Ltd

Bluetooth headphones

Model No.:SE-70

Prepared for : Shenzhen SaiFeng Electronic Technology Co., Ltd
Address : Community, Ban Tin Street, Longgang District, Shenzhen, China

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2506266-C01-R01
Date of Receipt : June 20, 2025
Date of Test : June 20, 2025 to Aug. 14, 2025
Date of Report : Sept. 2, 2025
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Model list	8
2.3. Accessories of Device (EUT)	8
2.4. Tested Supporting System Details	8
2.5. Block Diagram of connection between EUT and simulators	8
2.6. Test Mode Description	9
2.7. Software test version and power setting information	9
2.8. Test Conditions	10
2.9. Test Facility	10
2.10. Measurement Uncertainty	10
2.11. Test Equipment List	11
3. Maximum Peak Output Power	12
3.1. Limit	12
3.2. Test Procedure	12
3.3. Test Setup	12
3.4. Test Result	13
4. Bandwidth	14
4.1. Limit	14
4.2. Test Procedure	14
4.3. Test Result	14
5. Carrier Frequency Separation	38
5.1. Limit	38
5.2. Test Procedure	38
5.3. Test Result	38
6. Number Of Hopping Channel	50
6.1. Limit	50
6.2. Test Procedure	50
6.3. Test Result	50
7. Dwell Time	56
7.1. Test limit	56
7.2. Test Procedure	56
7.3. Test Result	56
8. OUT-OF-BAND EMISSIONS	76
8.1. Test Limits	76
8.2. Test Procedure	76
8.3. Test Setup	76
8.4. Test Results	76
9. RADIATED EMISSIONS	127
9.1. Limit	127

9.2. Block Diagram of Test setup	130
9.3. Test Procedure	131
9.4. Test Results	131
10. Band Edge Test	146
10.1. Block Diagram of Test Setup	146
10.2. Test Limit	146
10.3. Test Procedure	146
10.4. Test Results	147
11. Power Line Conducted Emissions	153
11.1. Block Diagram of Test Setup	153
11.2. Limit	153
11.3. Test Procedure	153
11.4. Test Results	154
12. Frequency stability	155
12.1. Test limit	155
12.2. Test Procedure	155
12.3. Test Setup	155
12.4. Test Results	155
13. Antenna Requirements	156
13.1. Limit	156
13.2. Result	156
14. Photos of test setup	157
15. Photos of EUT	157

TEST REPORT DECLARATION

Applicant : Shenzhen SaiFeng Electronic Technology Co., Ltd
Address : Community, Ban Tin Street, Longgang District, Shenzhen, China
Manufacturer : Shenzhen SaiFeng Electronic Technology Co., Ltd
Address : Community, Ban Tin Street, Longgang District, Shenzhen, China
EUT Description : Bluetooth headphones
(A) Model No. : SE-70
(B) Trademark : /

Measurement Standard Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10:2013

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part 15C requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....: Felix Pang
Test Engineer 
Approved by (name + signature).....: Simple Guan
Project Manager 
Date of issue.....: Sept. 2, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	Sept. 2, 2025	Initial released Issue	Felix Pang



1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1), RSS-247(5.4 b), ANSI C63.10 :2013	P
20 dB Bandwidth	FCC Part 15: 15.215, RSS-247(5.1 a), ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1), RSS-247(5.1 b), ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii), RSS-247(5.1 d),ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii), RSS-247(5.1 d),ANSI C63.10 :2013	P
Radiated Spurious Emission	FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10 :2013	P
Out-of-band Emissions	FCC Part 15: 15.247(d), RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10 :2013	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d), RSS-Gen(6.13), RSS-247(5.5), ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207, RSS-GEN(8.8),ANSI C63.10 :2013	N/A
Frequency stability	RSS-GEN(6.11)	N/A
Antenna requirement	FCC Part 15: 15.203, RSS-GEN(6.8)	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty. 5. Measurement method usage KDB 558074 D01 15.247 Meas Guidance v05r02.		

2. General Information

2.1. Description of Device (EUT)

Product Name : Bluetooth headphones
Model No. : SE-70
Diff : /
Power supply : Input: DC 5 V/300 mA or DC 3.7 V powered by battery

Radio Technology : Bluetooth BR&EDR

Operation frequency : 2402-2480MHz

Channel No. : 79 channels

Channel Separation : 1MHz

Modulation : GFSK, $\pi/4$ -DQPSK, 8DPSK

Antenna Type : PCB antenna, maximum gain is 1.46dBi

PMN : N/A

HVIN : N/A

Software version : YL_YL_OWS-17_AB5636D_SE-70

Hardware version/FVIN : OWS-17-V1.0 5636D-L
OWS-17-V1.0 5636D-R

Note : 1. Antenna information is provided by applicant.
Testing lab is not responsible for the accuracy of the information.
2. The RF chips of the left and right earphones are the same, with differences in circuit layout. Perform all tests on the left and right earphones.

2.2. Model list

/

2.3. Accessories of Device (EUT)

Accessories 1 : N/A

Manufacturer : N/A

Model : N/A


Rating : N/A

2.4. Tested Supporting System Details


No.	Description	Manufacturer	Model	Serial Number
1	Laptop	Lenovo (Beijing) Co., Ltd	ThinkPad E480	N/A
2	USB serial port board	Shenzhen Ai-Thinker Technology Co., Ltd	/	N/A

2.5. Block Diagram of connection between EUT and simulators


Radiated Emission(30MHz-1GHz)



Radiated Emission(above 1GHz)



RF Conducted Test



2.6. Test Mode Description

The test software used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK / Pi/4-DQPSK / 8DPSK Carrier Tx Mode	CH0	2402
	CH39	2441
	CH78	2480
GFSK / Pi/4-DQPSK / 8DPSK hopping on Tx Mode	CH0 to CH78	2402 to 2480
GFSK / Pi/4-DQPSK / 8DPSK hopping off Tx Mode	CH0	2402
	CH39	2441
	CH78	2480

2.7. Software test version and power setting information

Software testing version	BT_Tool.exe		
Mode	The client 's preset testing software is used to control the operation of EUT in continuous transmission mode and select the testing channel, wireless mode:		
Power level setup by client			
Mode	Channel	Frequency (MHz)	Soft Set
GFSK, Pi/4-DQPSK, 8DPSK	CH0	2402	TX level is set as defaults value.
	CH39	2441	TX level is set as defaults value.
	CH78	2480	TX level is set as defaults value.

2.8. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

2.9. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

2.10. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.17dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	2.74dB(Polarize: V)
	2.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB(Polarize: V)
	4.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	48.24KHz
Uncertainty for conducted RF Power	0.41dB
Occupied-Bandwidth	968Hz

2.11. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2024.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2024.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2024.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2024.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G18 G-45dB	SK202203290 1	/	2024.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118G -45	SK202001080 1	/	2024.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02- 1111533-Fz	/	2024.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P00 8	/	2024.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2024.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2024.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	202211251638	/	2024.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2024.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2024.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2024.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2024.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2024.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2024.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer		Version			
RE	EZ_EMG	Farad		PSI-3A1			
CE	EZ_EMG	Farad		PSI-3A1			
RF	RTS	TACHOY		V1.0.0			

3. Maximum Peak Output Power

3.1. Limit

Please refer FCC part 15.247 & RSS-247.


For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The measurement procedure is based on 11.9.1.3 PKPM1 Peak power meter method.

The transmitter output is connected to the RF Power meter. The Power meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Left earphone				
Mode	Test channel	Peak Output Power (dBm)	Peak Output Power Limit (dBm)	Result
GFSK	Lowest	-1.74	30.00	Pass
	Middle	-1.99		
	Highest	-3.81		
$\pi/4$ DQPSK	Lowest	0.41	30.00	Pass
	Middle	0.16		
	Highest	-1.66		
8DPSK	Lowest	1.06	30.00	Pass
	Middle	0.83		
	Highest	-1.03		

Right earphone				
Mode	Test channel	Peak Output Power (dBm)	Peak Output Power Limit (dBm)	Result
GFSK	Lowest	3.3	30.00	Pass
	Middle	3.39		
	Highest	1.6		
$\pi/4$ DQPSK	Lowest	5.53	30.00	Pass
	Middle	5.56		
	Highest	3.77		
8DPSK	Lowest	6.24	30.00	Pass
	Middle	6.26		
	Highest	4.5		

4. Bandwidth

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in RSS-GEN, FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


Left earphone				
Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Verdict
1-DH5	2402	Ant1	0.955	Pass
1-DH5	2441	Ant1	0.938	Pass
1-DH5	2480	Ant1	0.949	Pass
2-DH5	2402	Ant1	1.283	Pass
2-DH5	2441	Ant1	1.316	Pass
2-DH5	2480	Ant1	1.31	Pass
3-DH5	2402	Ant1	1.292	Pass
3-DH5	2441	Ant1	1.301	Pass
3-DH5	2480	Ant1	1.3	Pass



Test Graphs



-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1


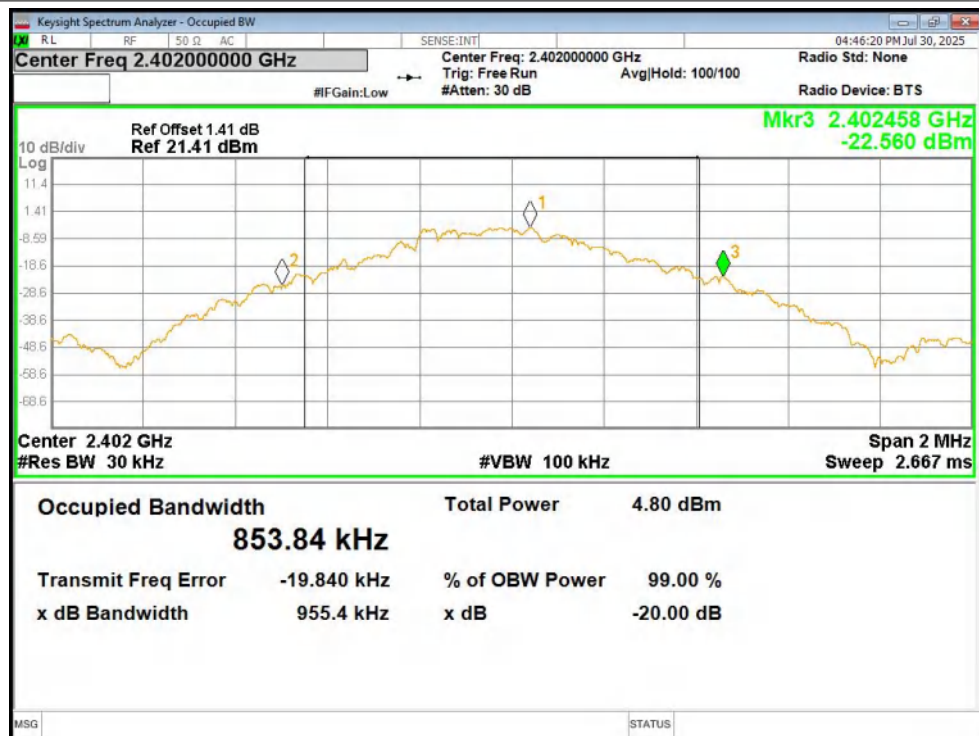



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

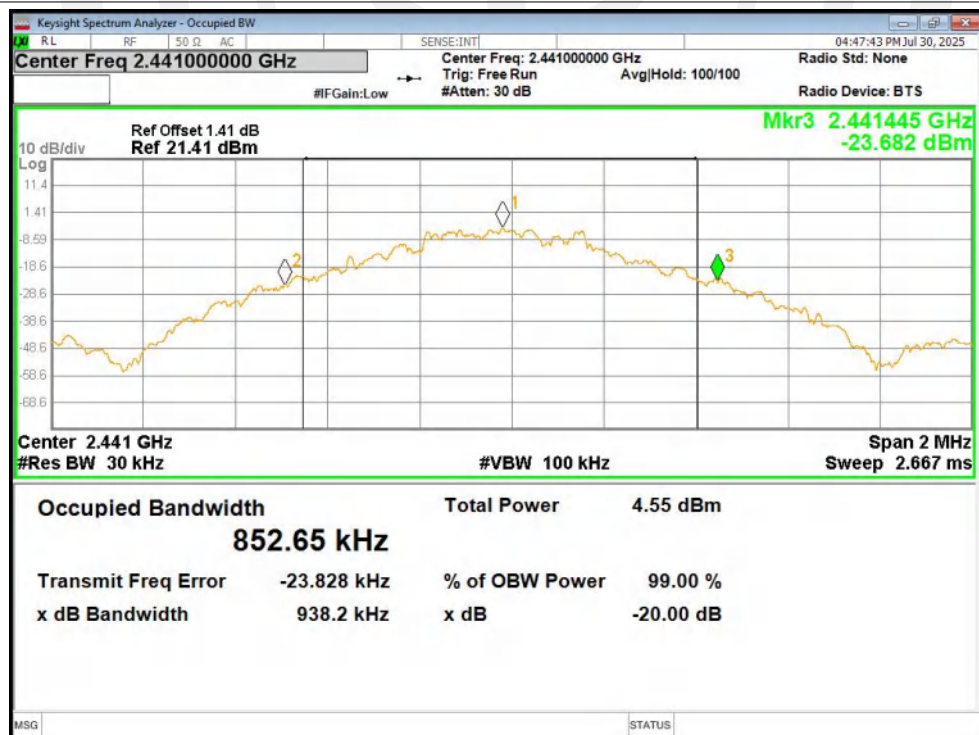

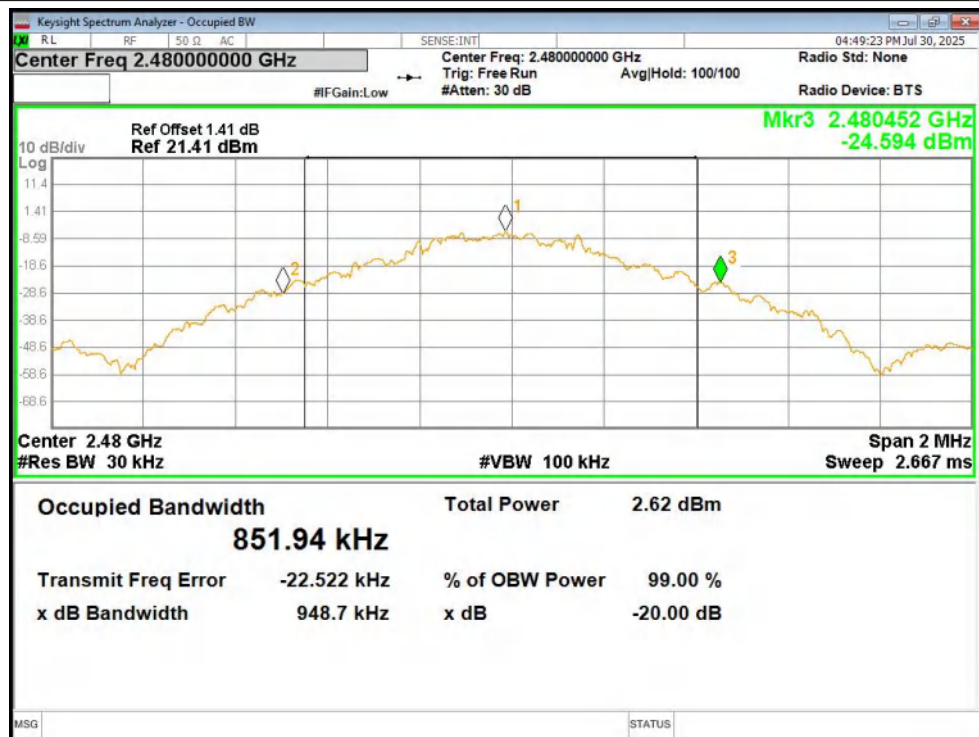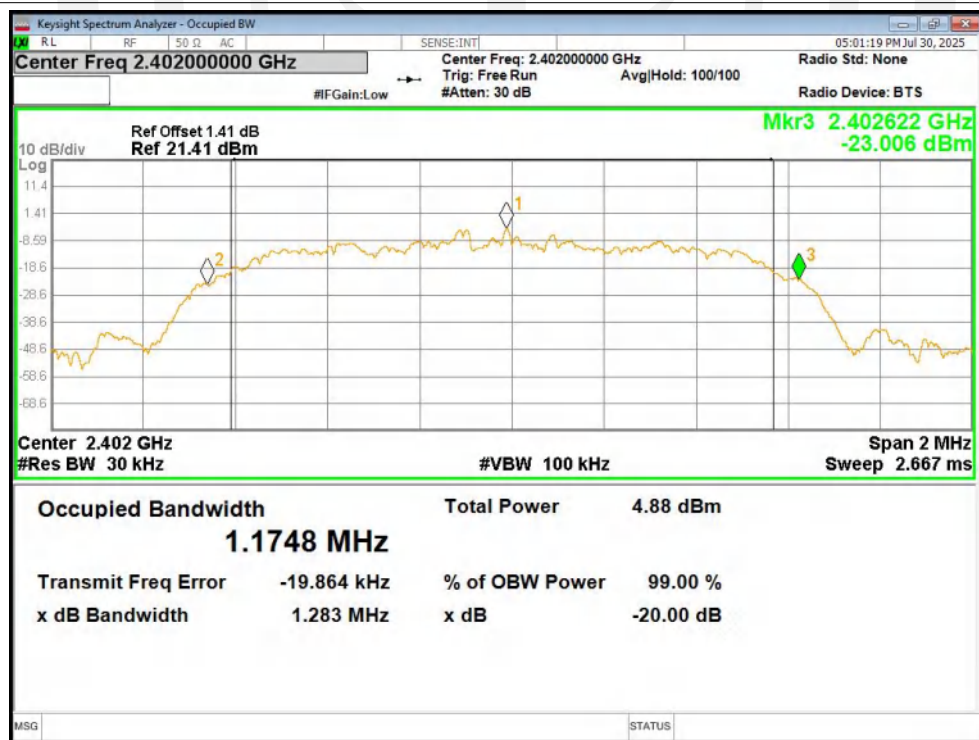
-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1**-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1**

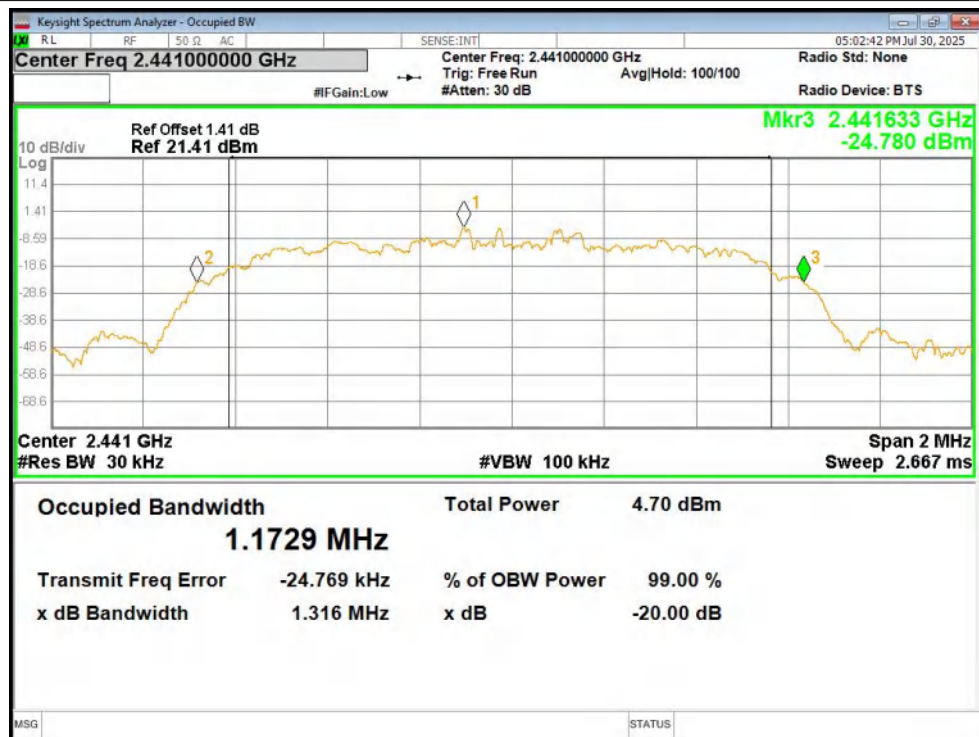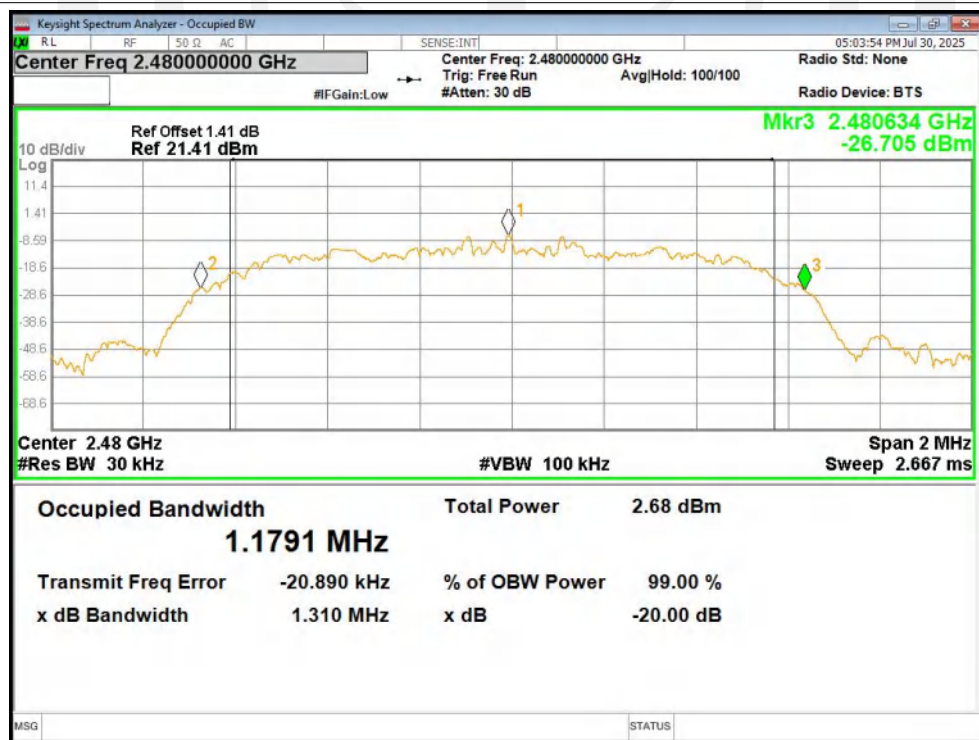-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1**-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1**

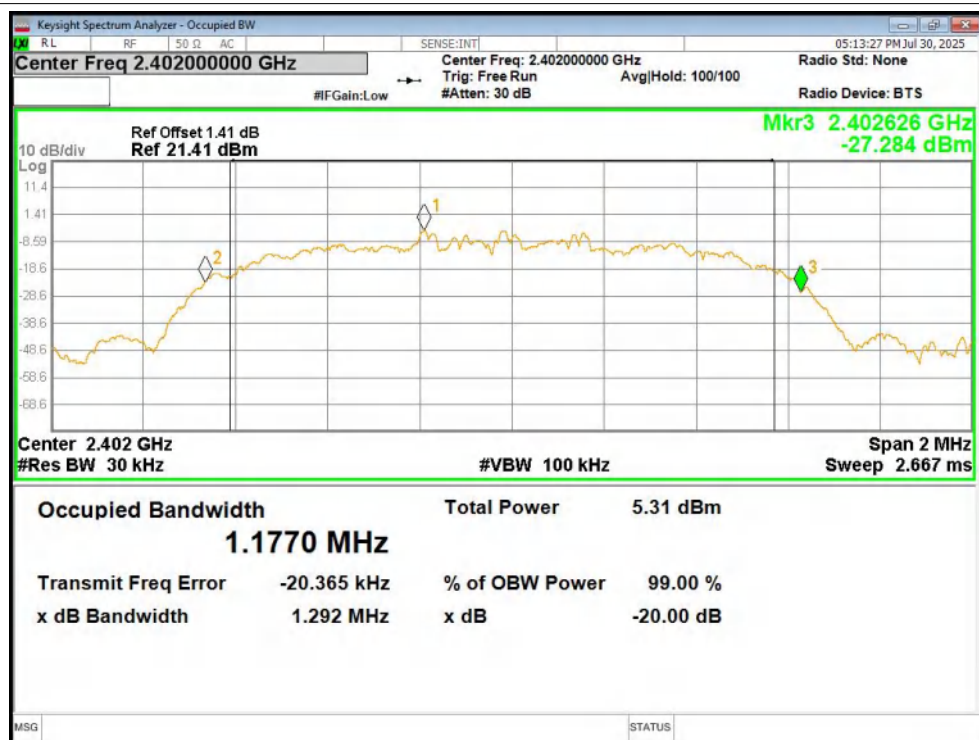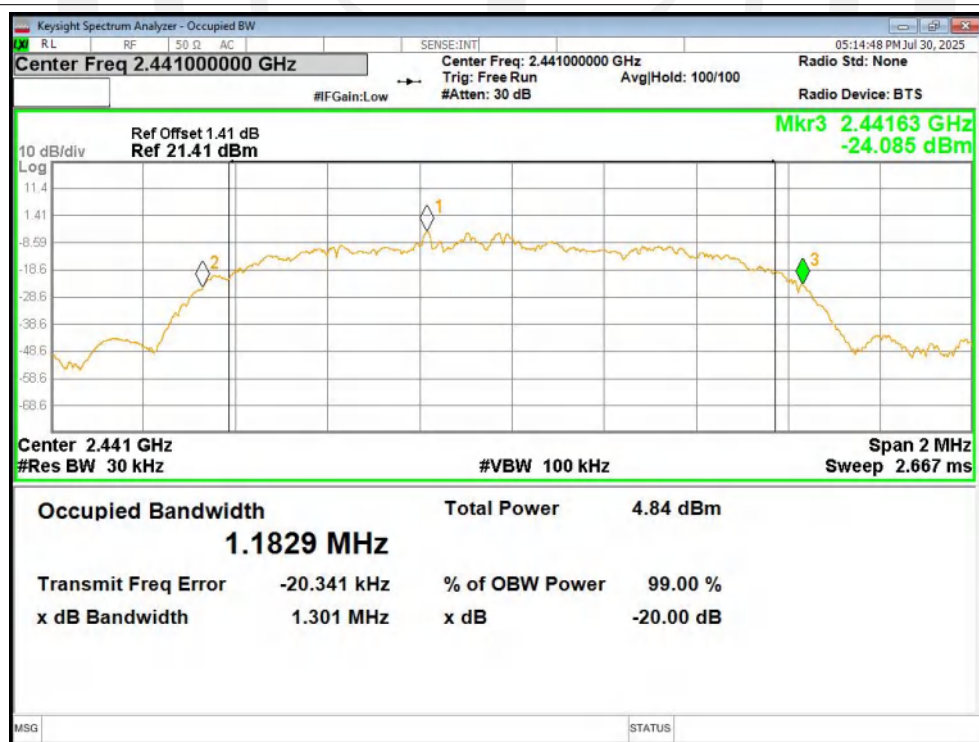-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1**-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1**

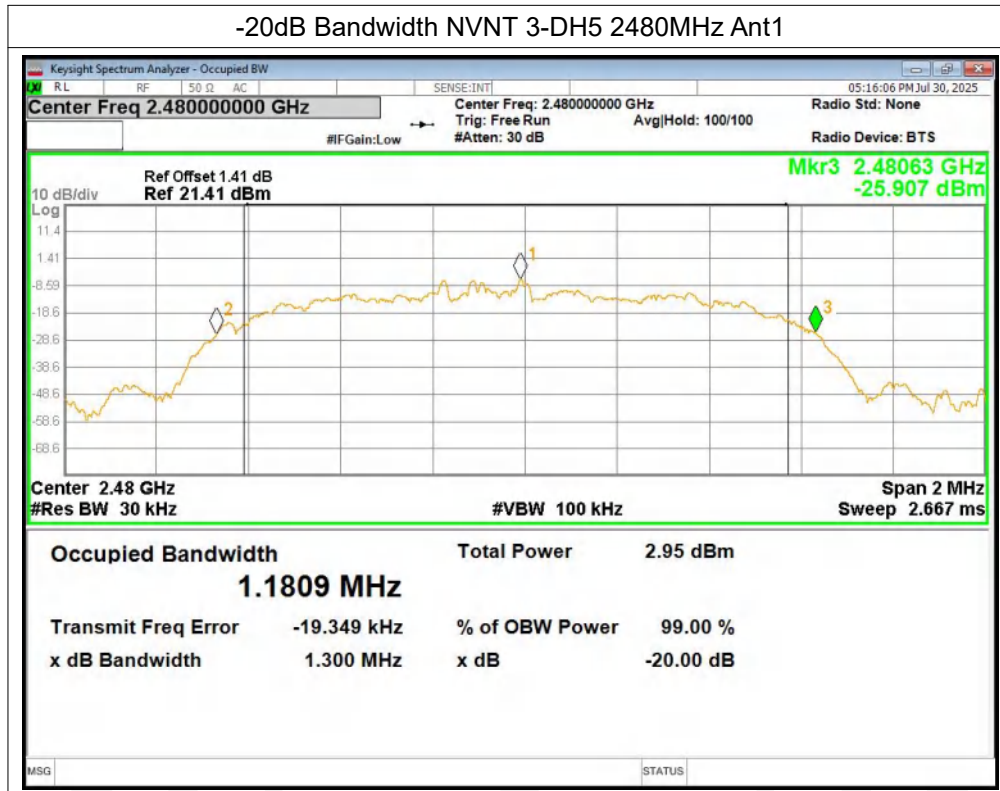


Right earphone				
Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Verdict
1-DH5	2402	Ant1	0.941	Pass
1-DH5	2441	Ant1	0.948	Pass
1-DH5	2480	Ant1	0.951	Pass
2-DH5	2402	Ant1	1.313	Pass
2-DH5	2441	Ant1	1.319	Pass
2-DH5	2480	Ant1	1.324	Pass
3-DH5	2402	Ant1	1.292	Pass
3-DH5	2441	Ant1	1.315	Pass
3-DH5	2480	Ant1	1.298	Pass

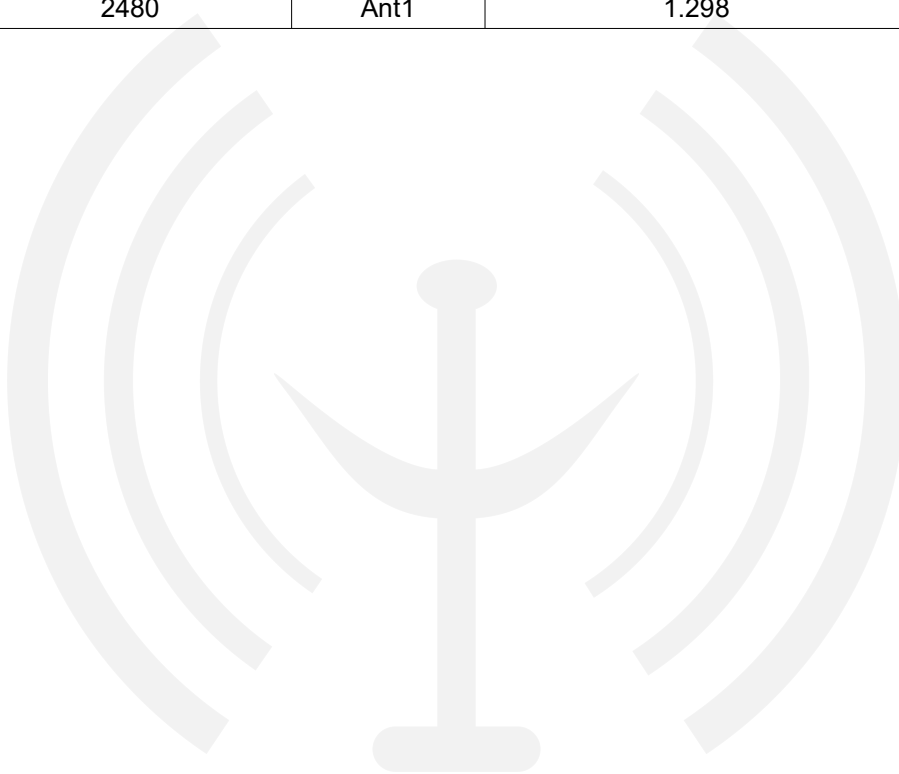




Test Graphs



-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1


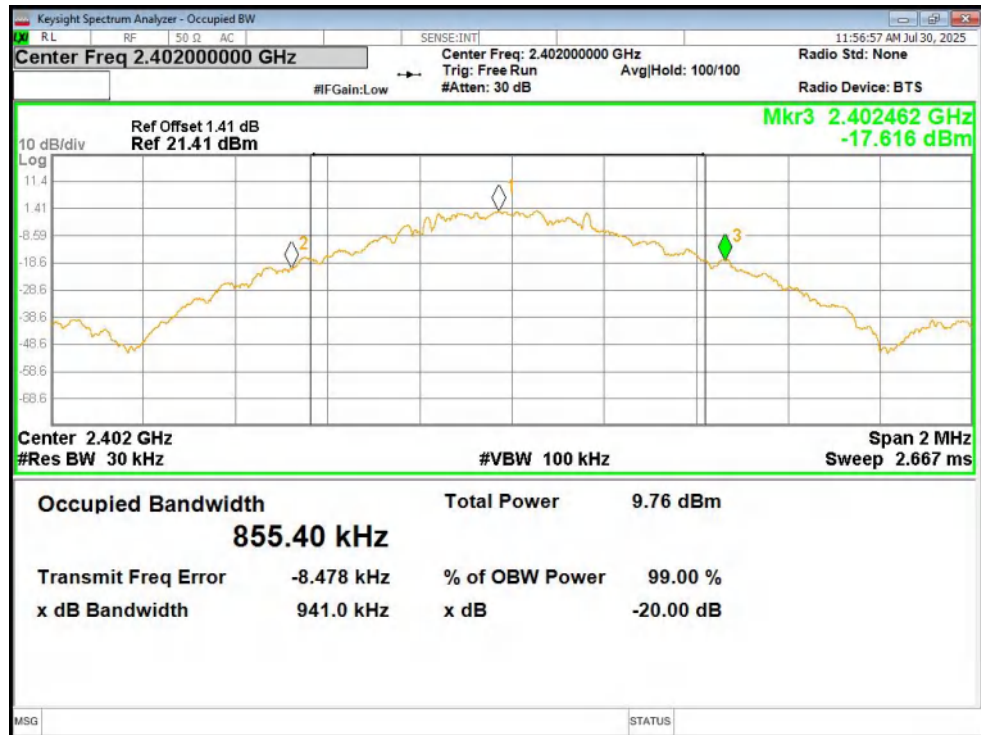



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

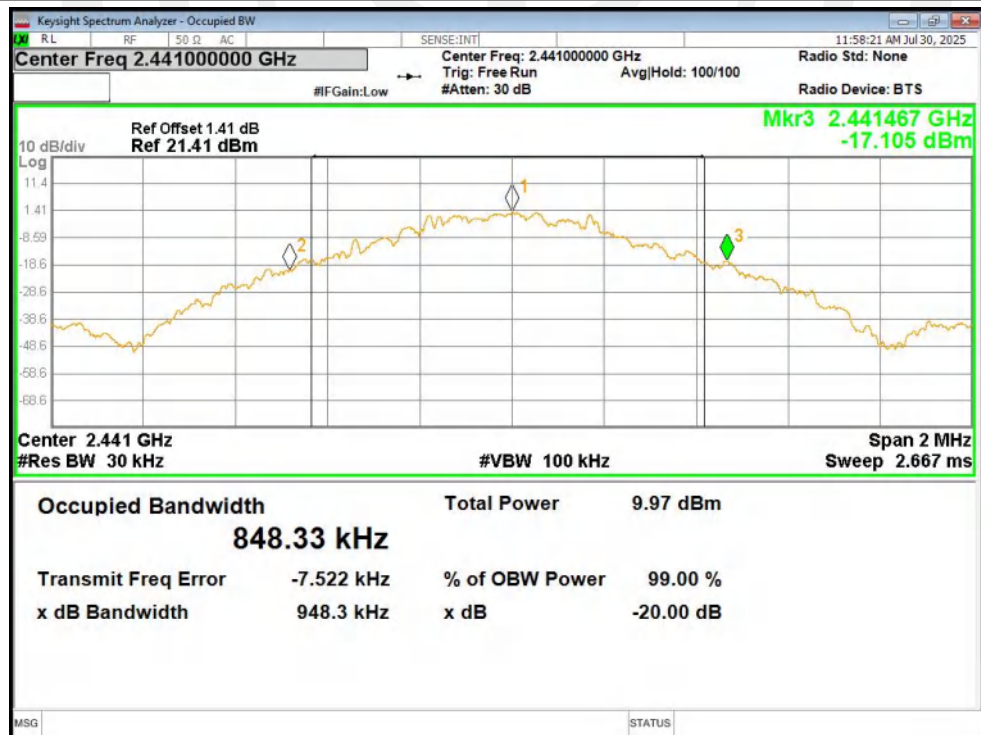

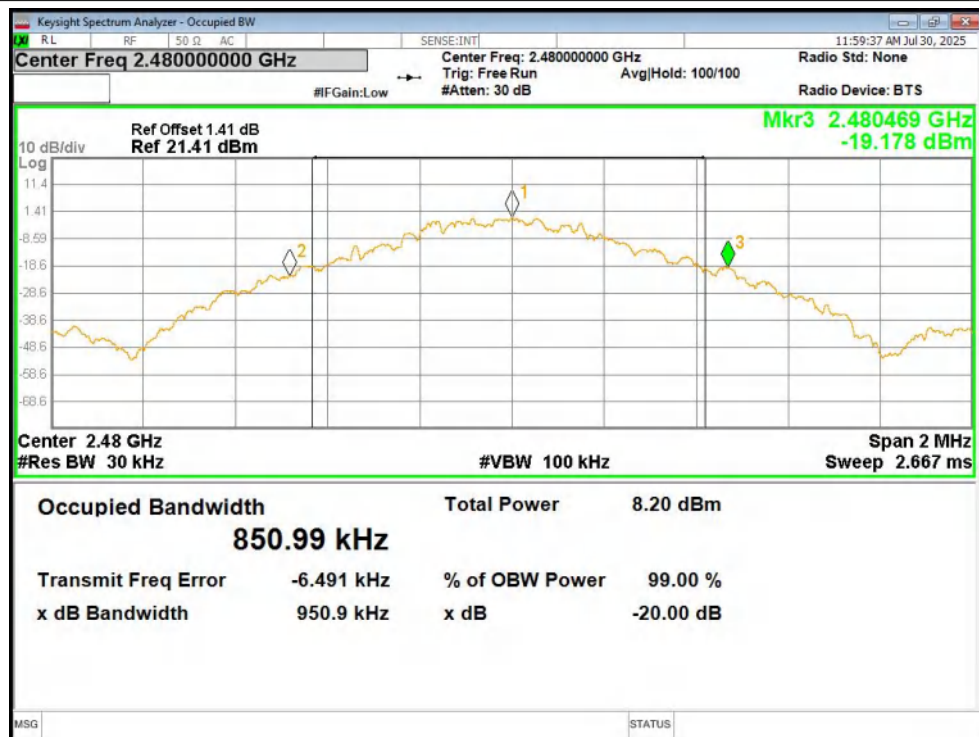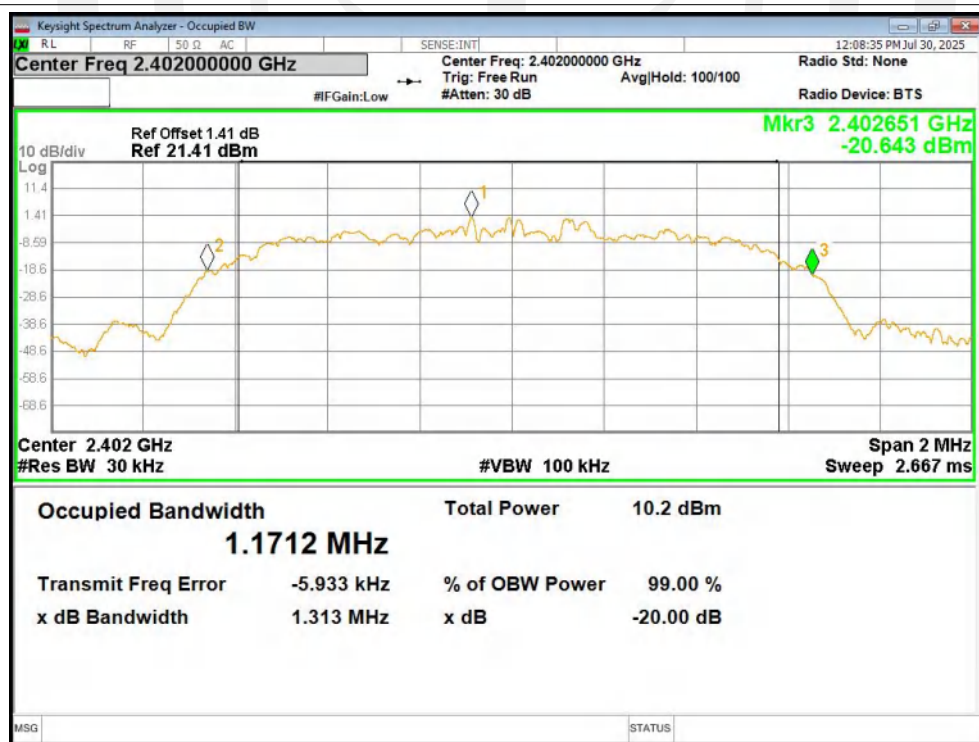
-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1**-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1**

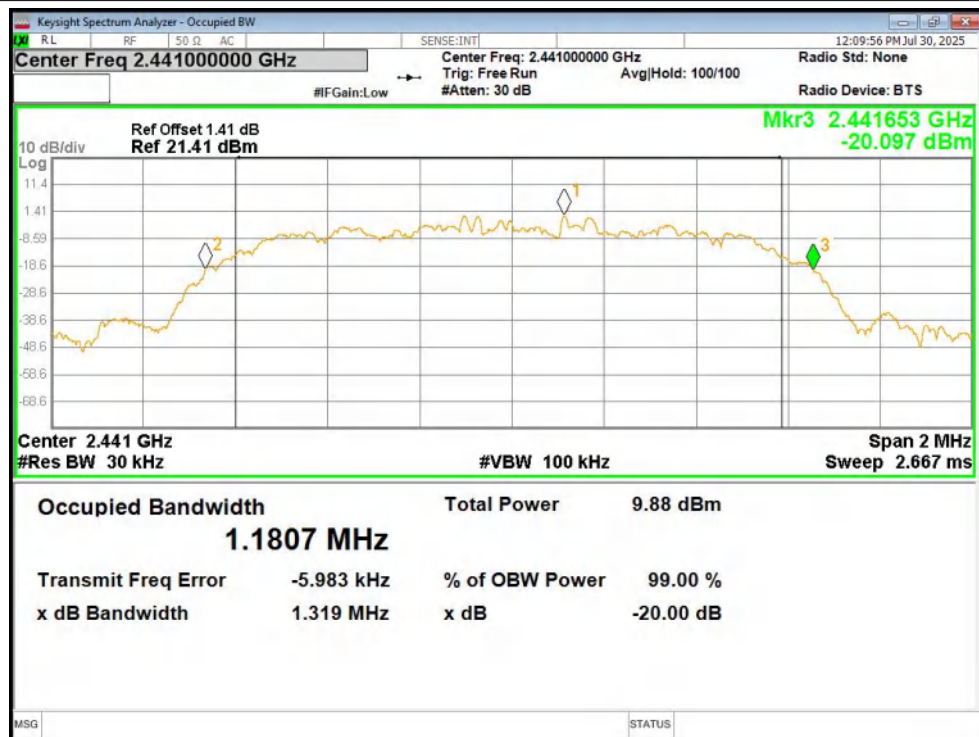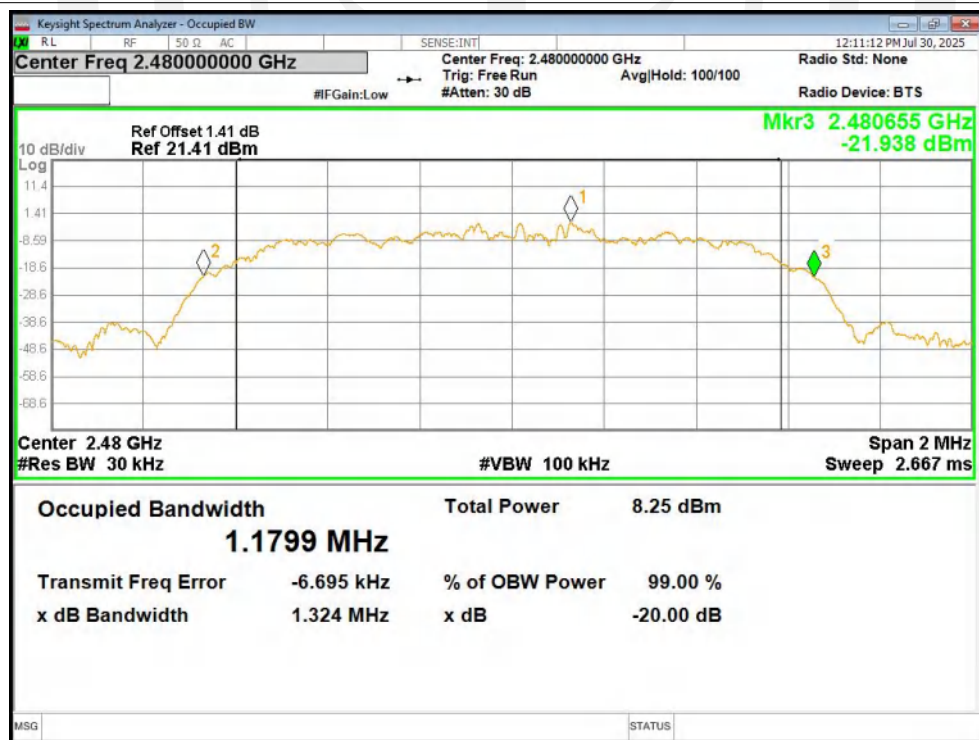-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1**-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1**

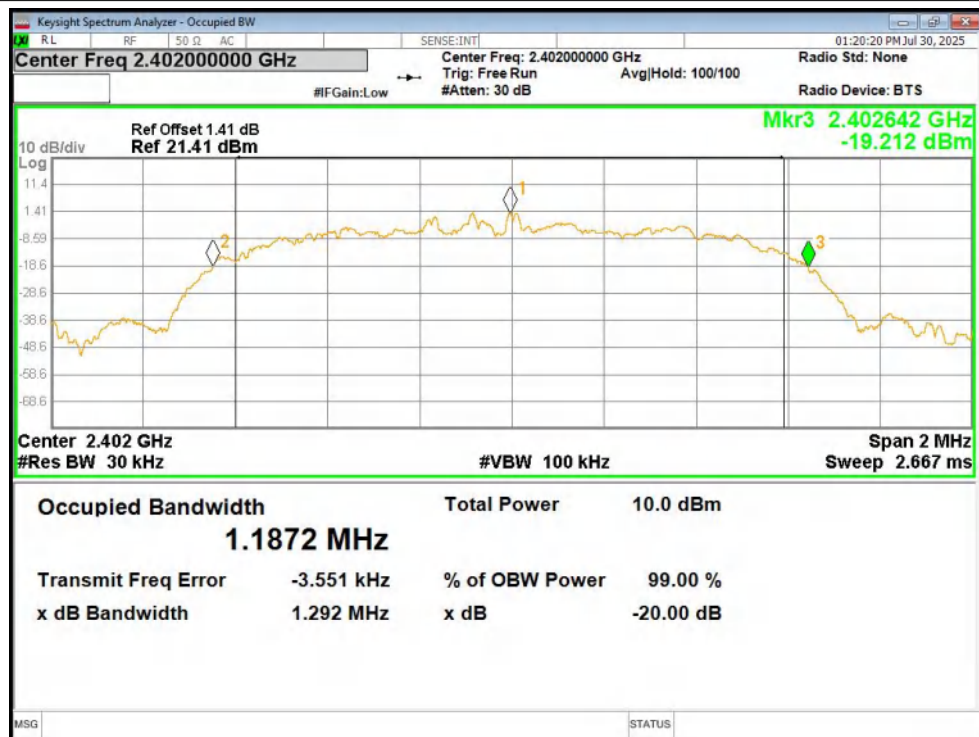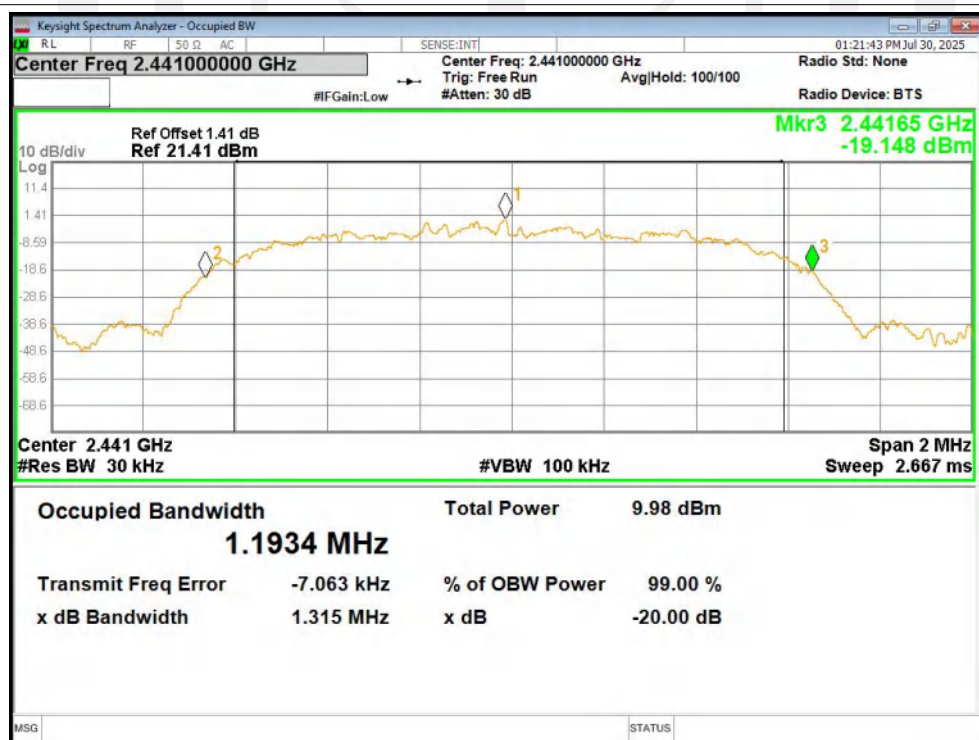-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1**-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1**

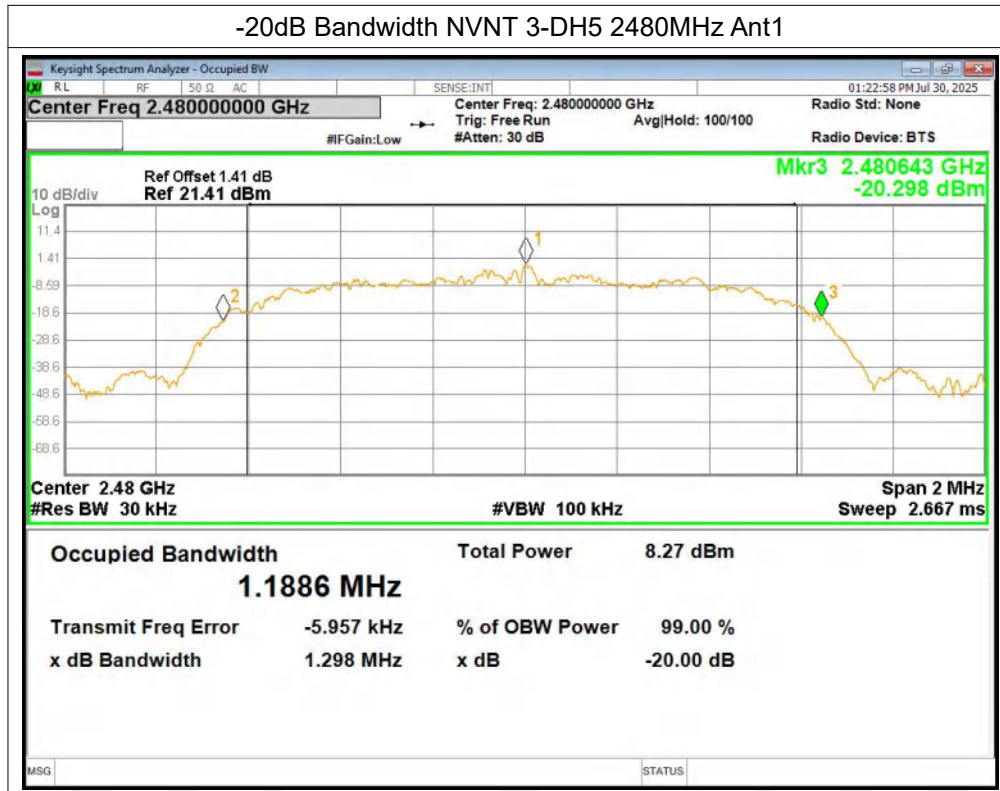


Left earphone			
Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
1-DH5	2402	Ant1	0.854
1-DH5	2441	Ant1	0.855
1-DH5	2480	Ant1	0.85
2-DH5	2402	Ant1	1.179
2-DH5	2441	Ant1	1.18
2-DH5	2480	Ant1	1.176
3-DH5	2402	Ant1	1.189
3-DH5	2441	Ant1	1.182
3-DH5	2480	Ant1	1.185

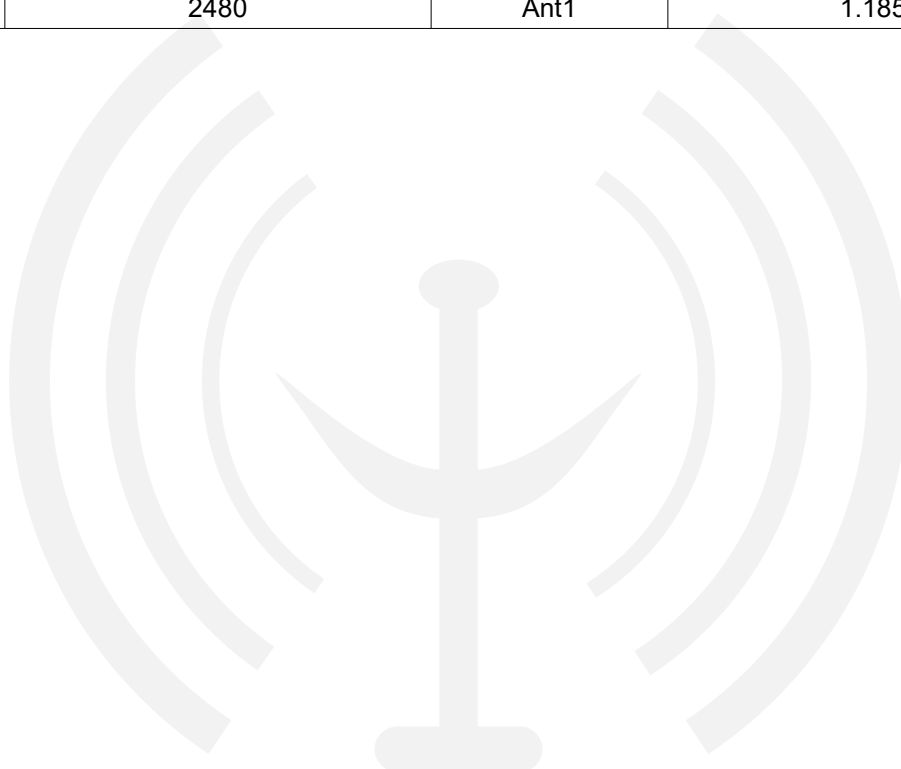

Test Graphs


OBW NVNT 1-DH5 2402MHz Ant1

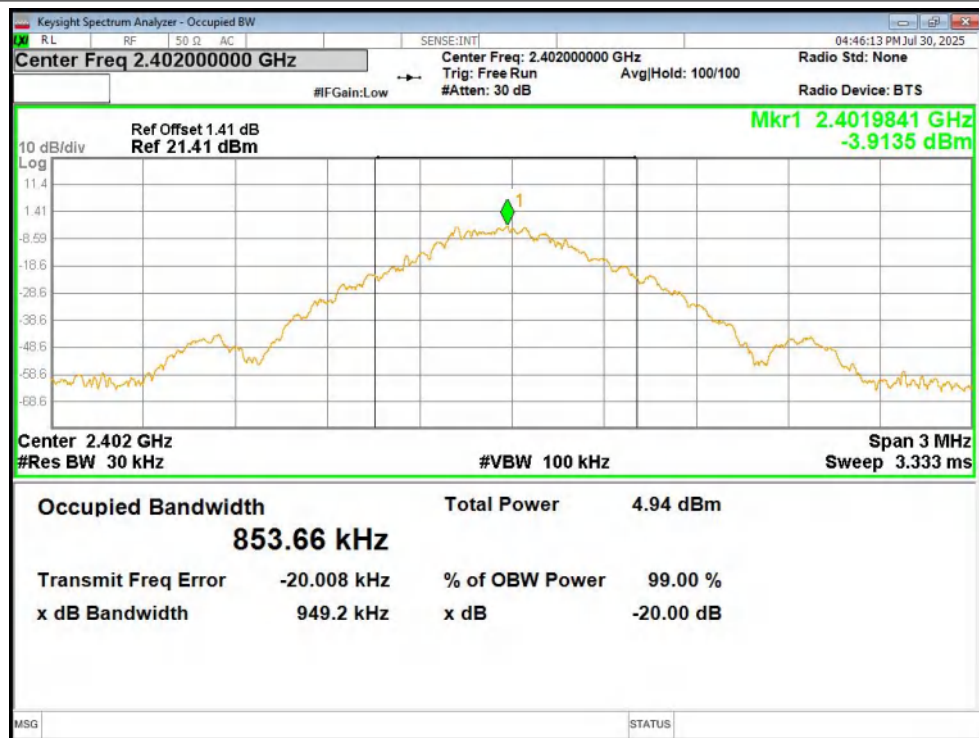


OBW NVNT 1-DH5 2441MHz Ant1




OBW NVNT 1-DH5 2480MHz Ant1

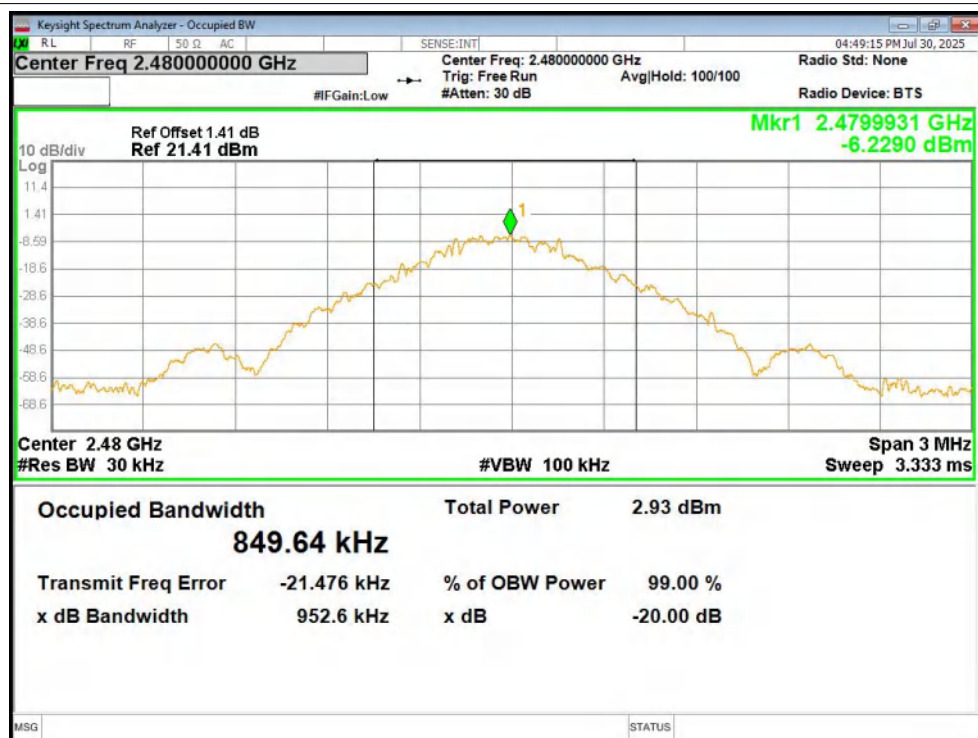


OBW NVNT 2-DH5 2402MHz Ant1

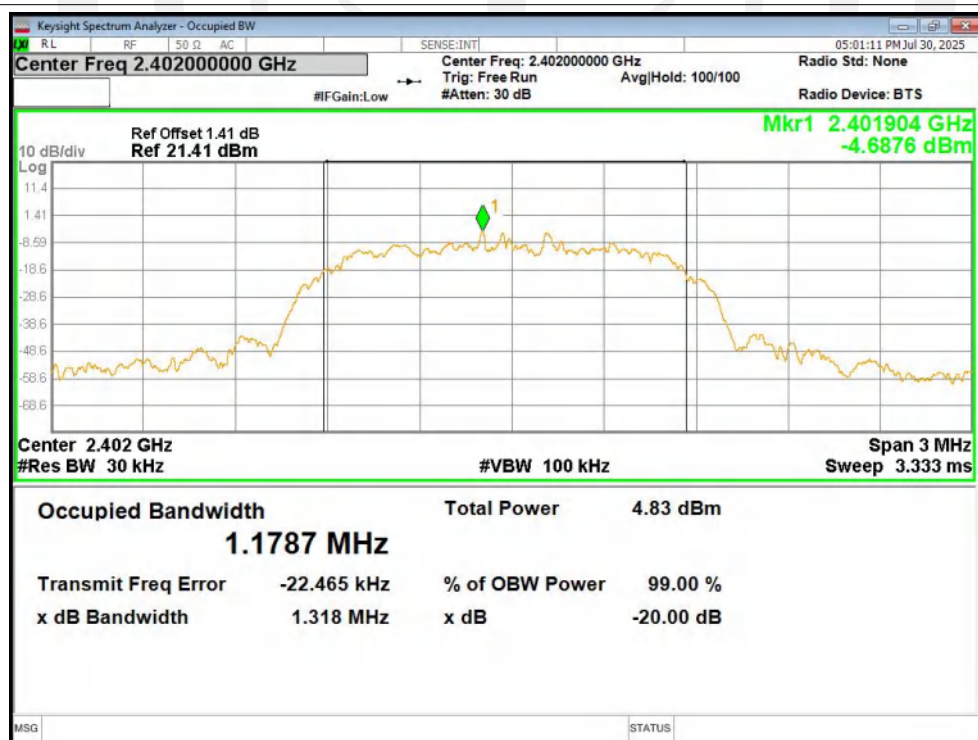


OBW NVNT 2-DH5 2441MHz Ant1

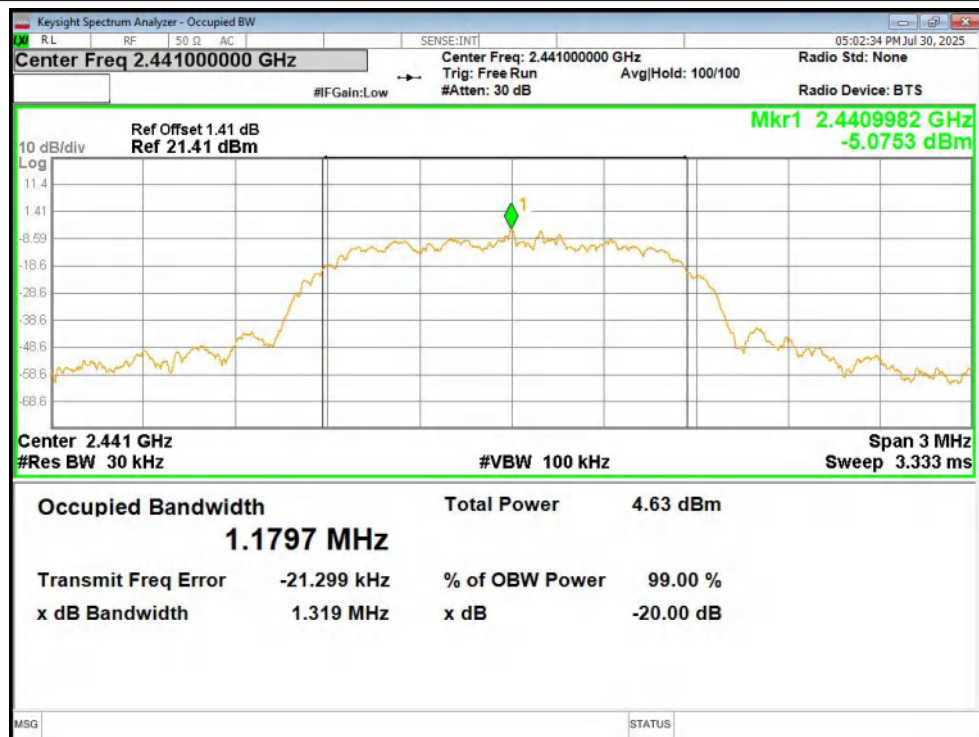


OBW NVNT 2-DH5 2480MHz Ant1

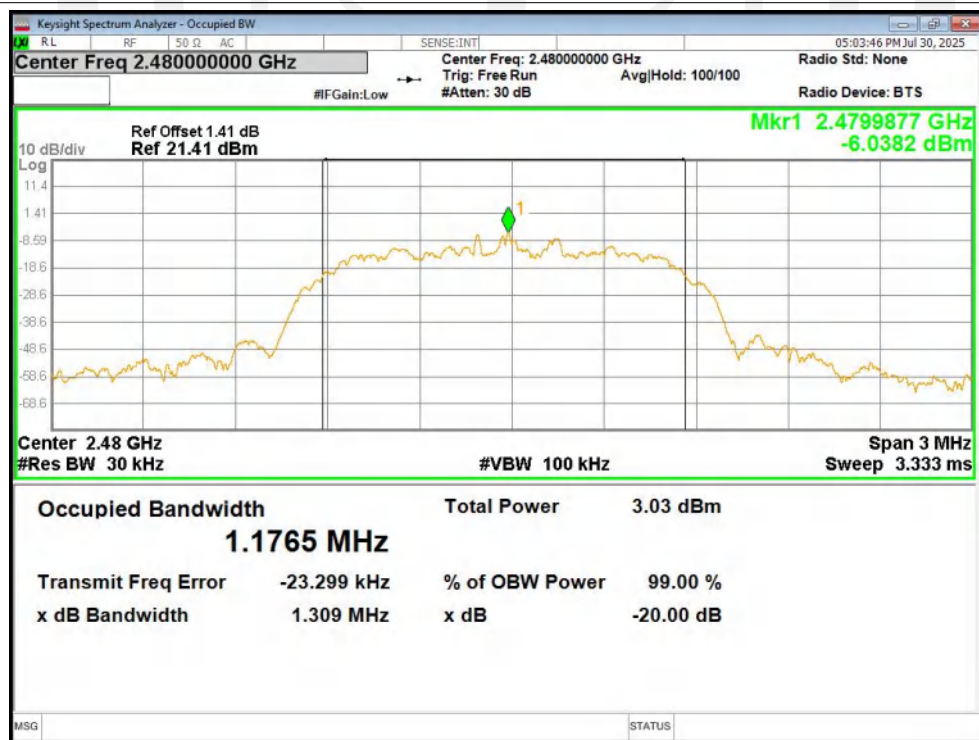


OBW NVNT 3-DH5 2402MHz Ant1

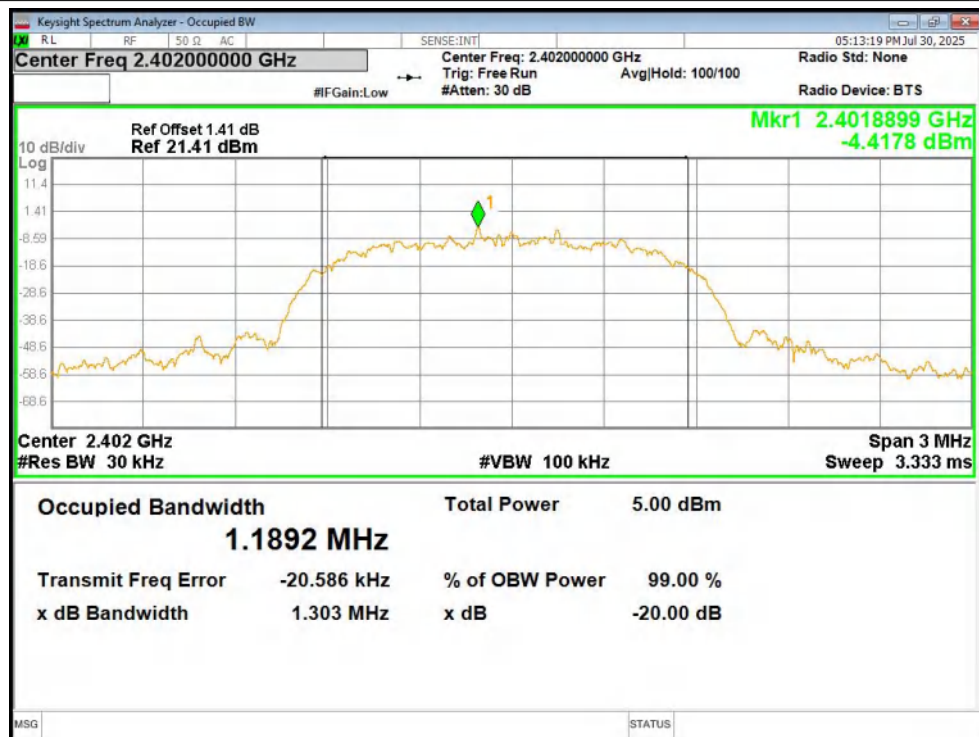


OBW NVNT 3-DH5 2441MHz Ant1

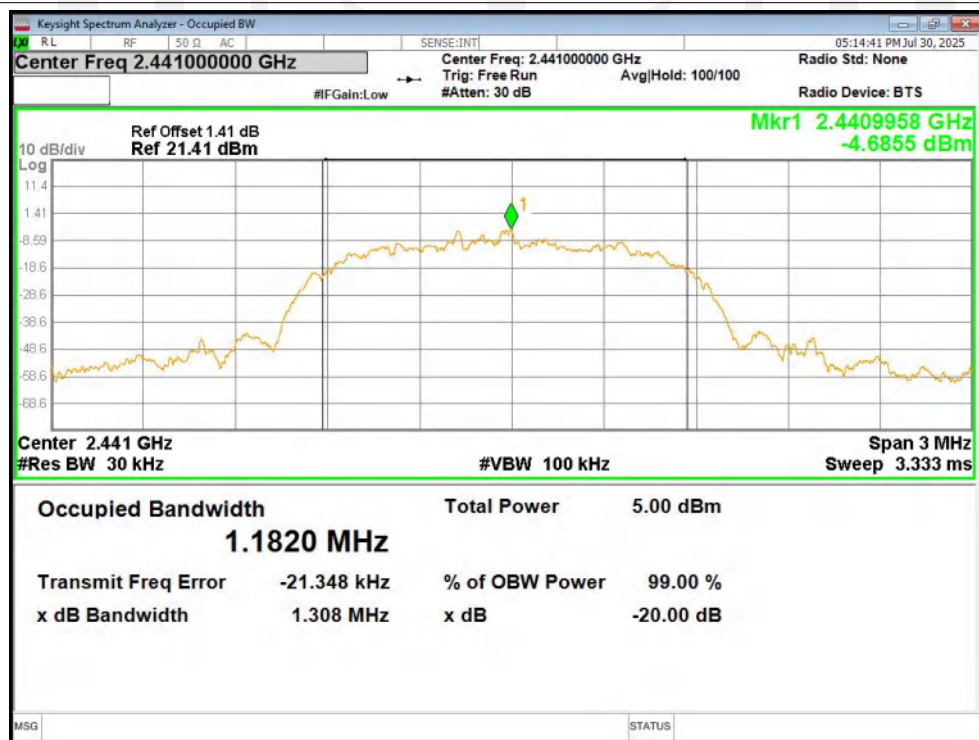

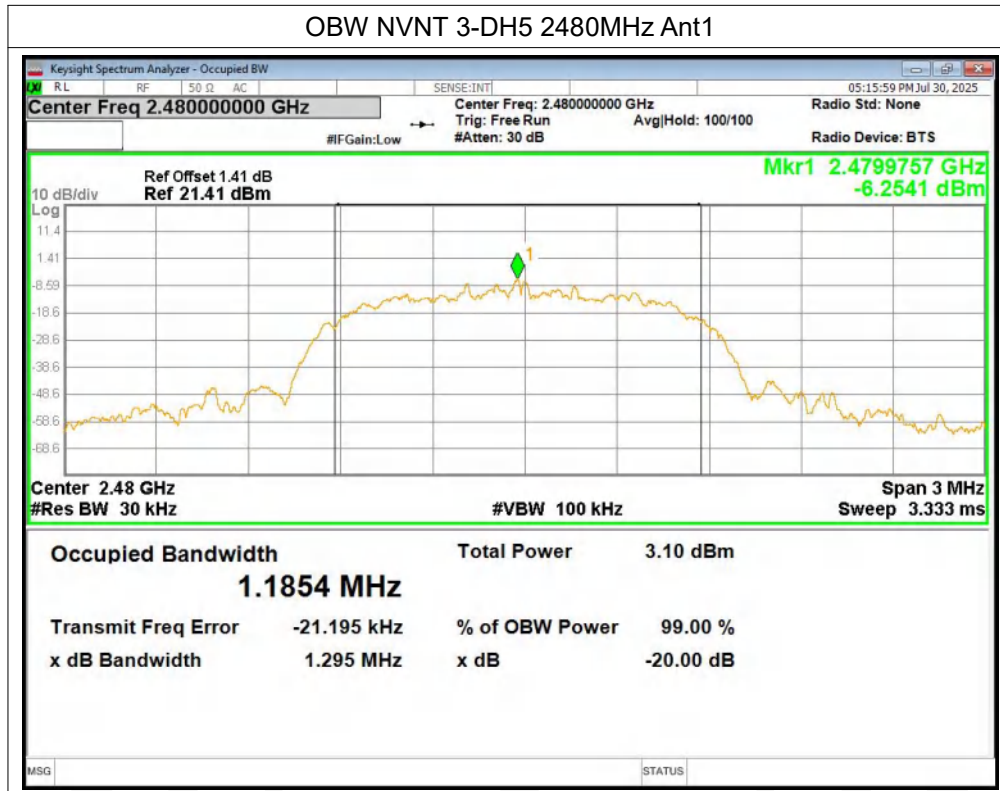


Right earphone			
Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
1-DH5	2402	Ant1	0.848
1-DH5	2441	Ant1	0.853
1-DH5	2480	Ant1	0.851
2-DH5	2402	Ant1	1.173
2-DH5	2441	Ant1	1.175
2-DH5	2480	Ant1	1.183
3-DH5	2402	Ant1	1.172
3-DH5	2441	Ant1	1.182
3-DH5	2480	Ant1	1.176

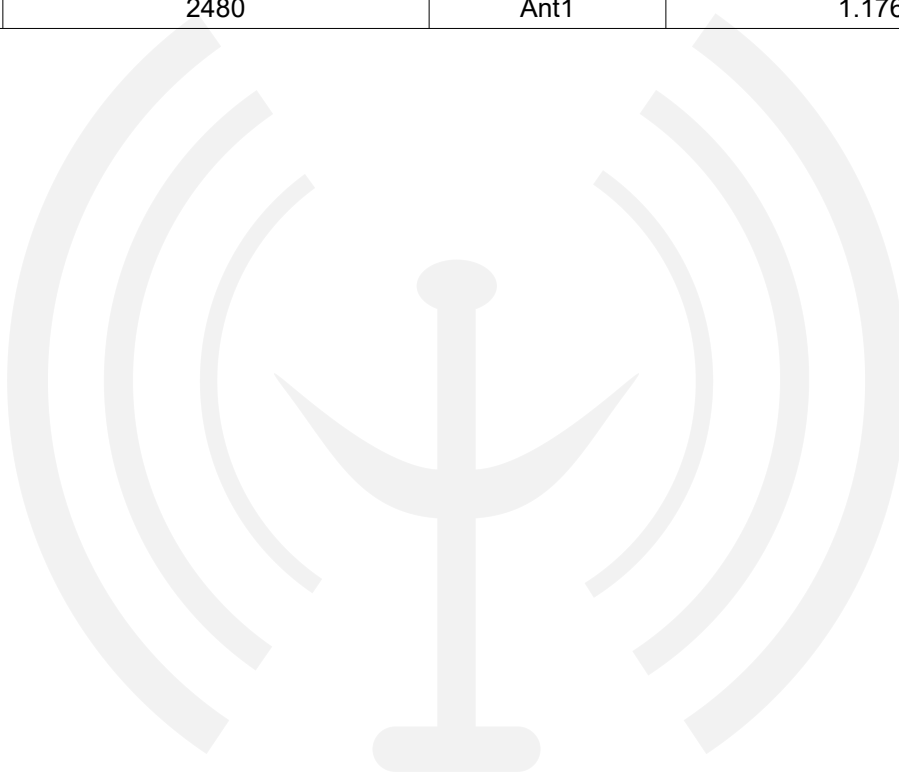


Test Graphs


OBW NVNT 1-DH5 2402MHz Ant1

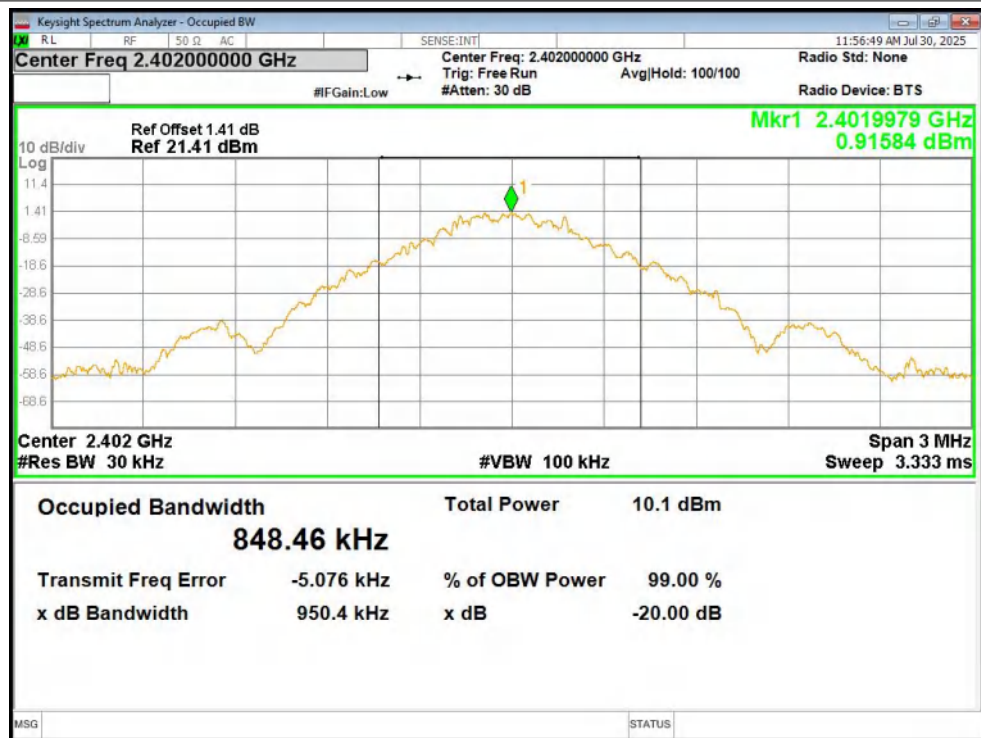


OBW NVNT 1-DH5 2441MHz Ant1

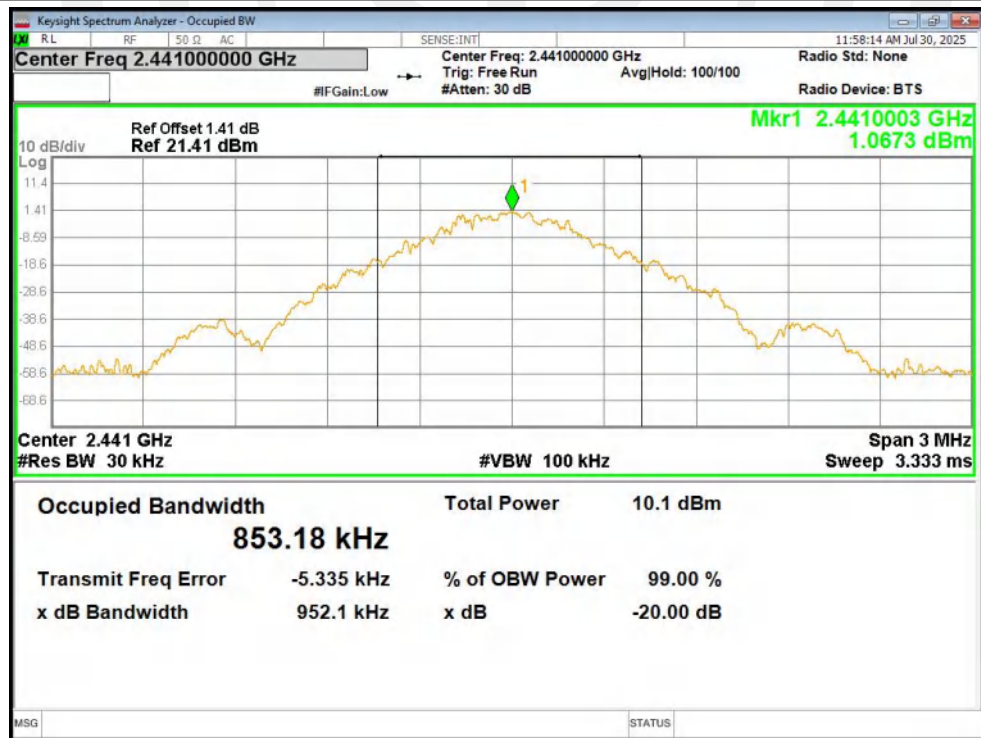


OBW NVNT 1-DH5 2480MHz Ant1

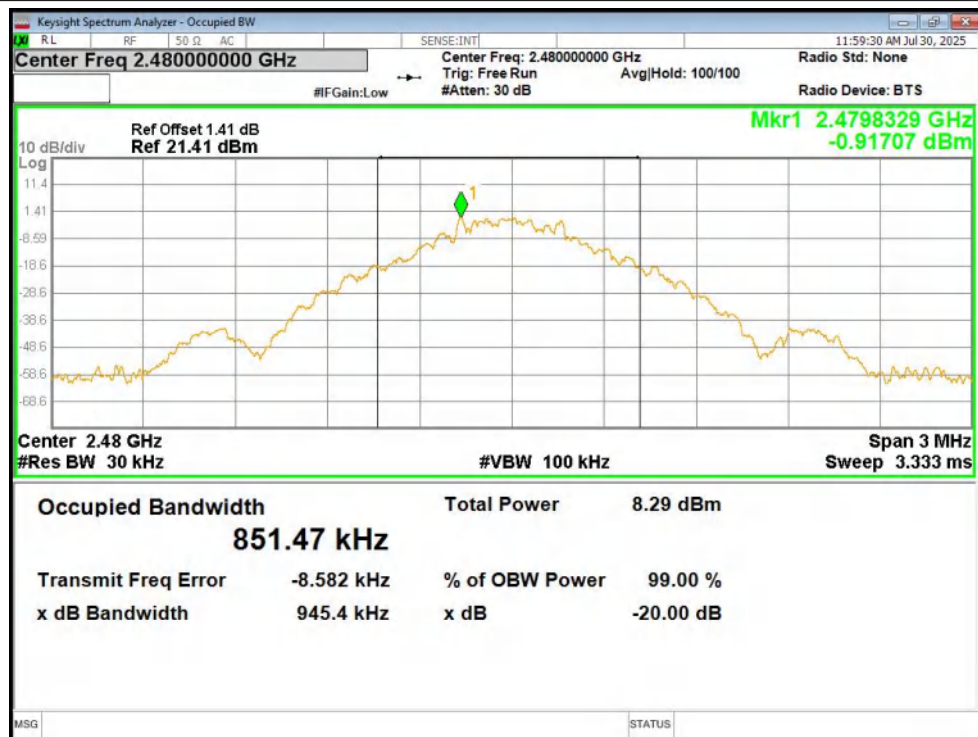


OBW NVNT 2-DH5 2402MHz Ant1

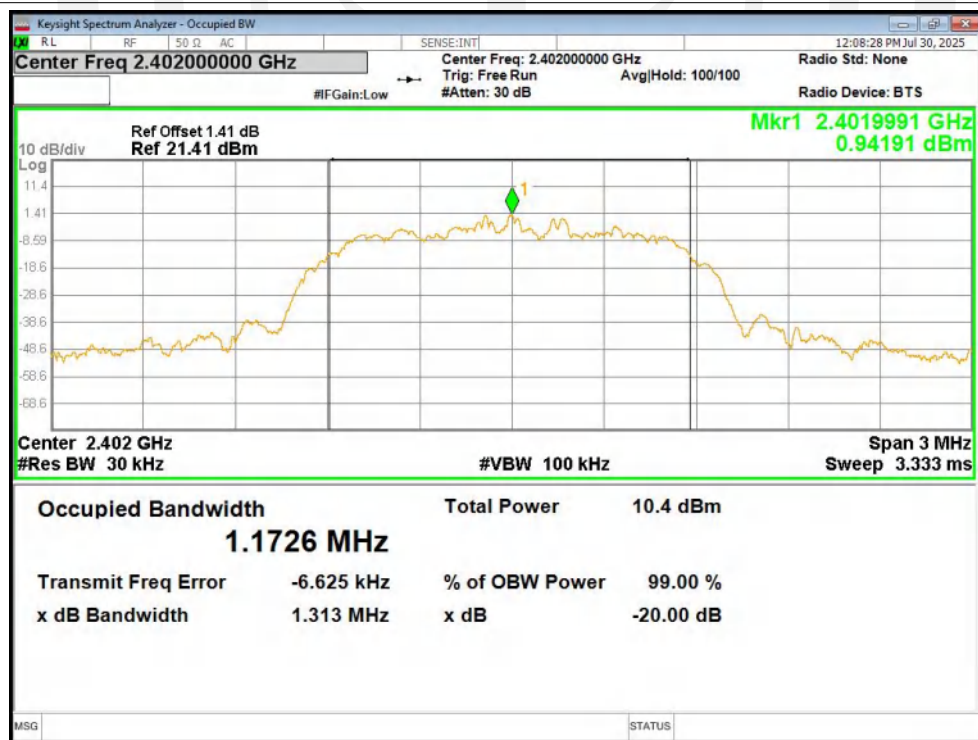


OBW NVNT 2-DH5 2441MHz Ant1

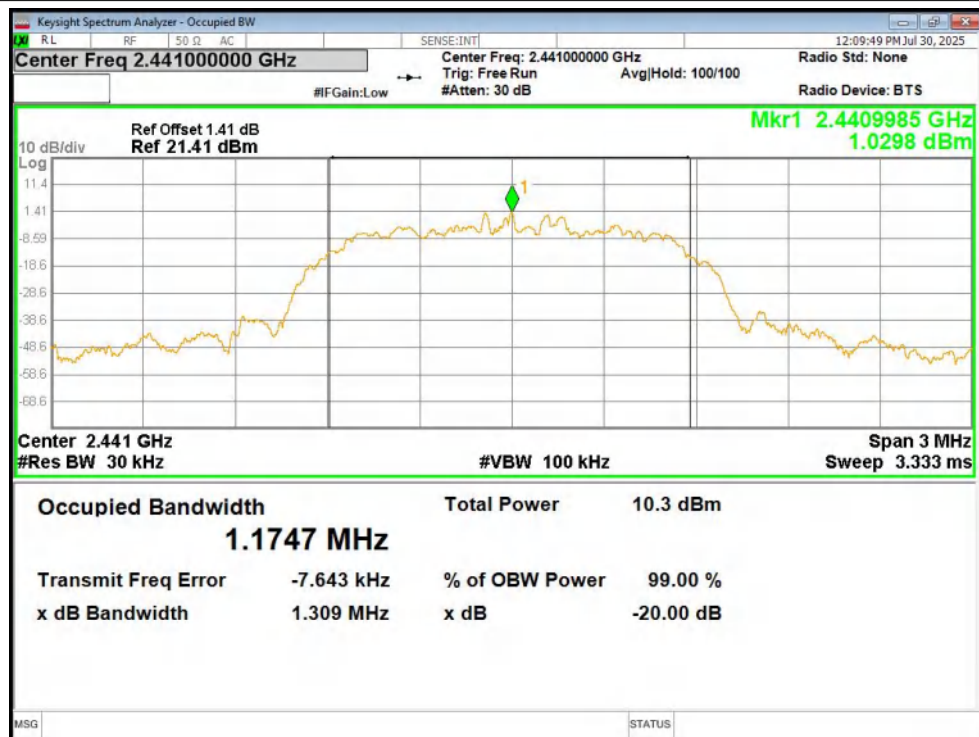


OBW NVNT 2-DH5 2480MHz Ant1

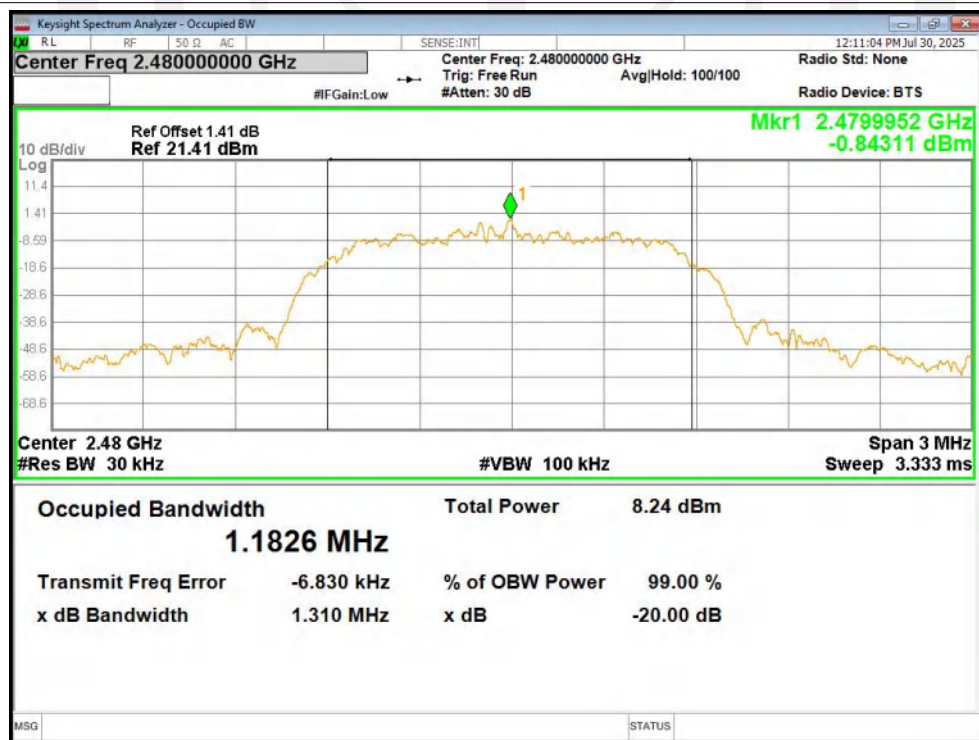


OBW NVNT 3-DH5 2402MHz Ant1

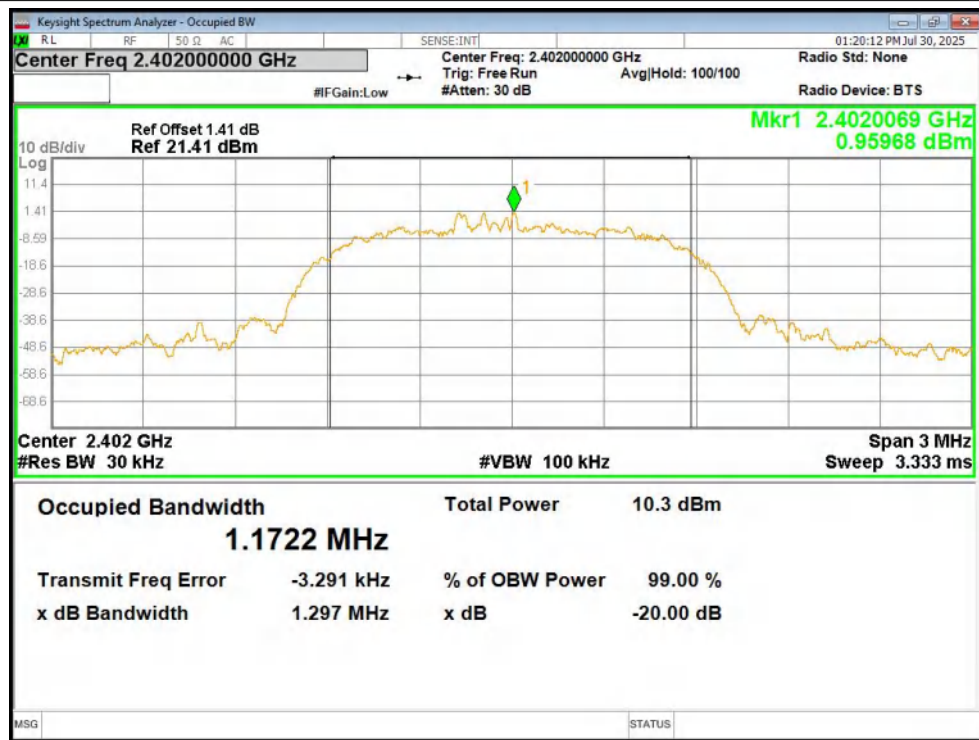

OBW NVNT 3-DH5 2441MHz Ant1

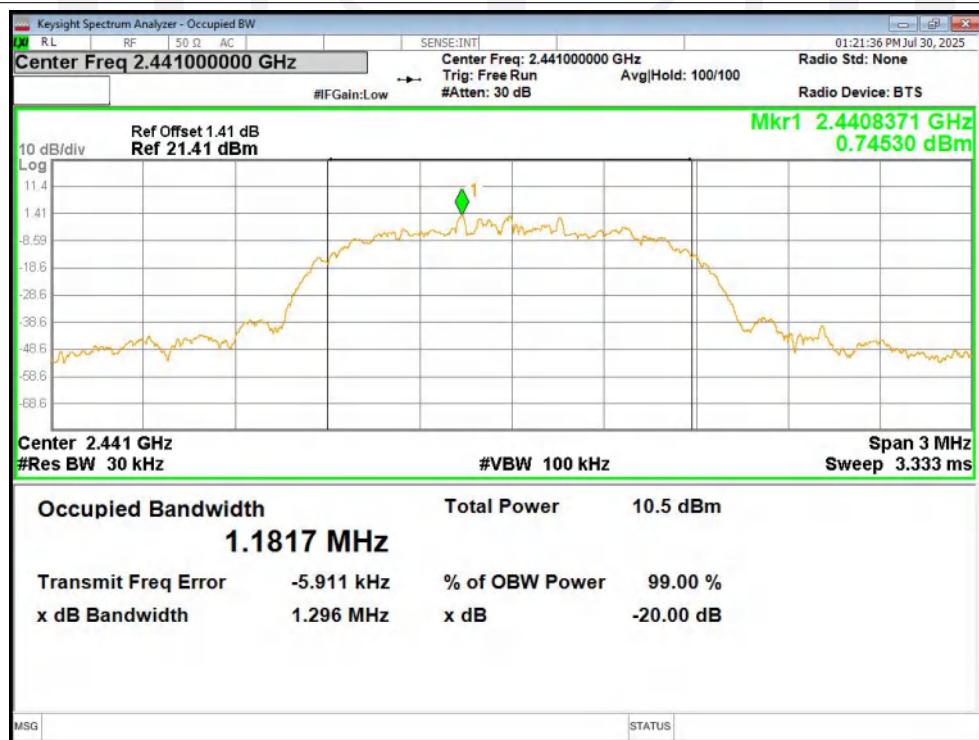

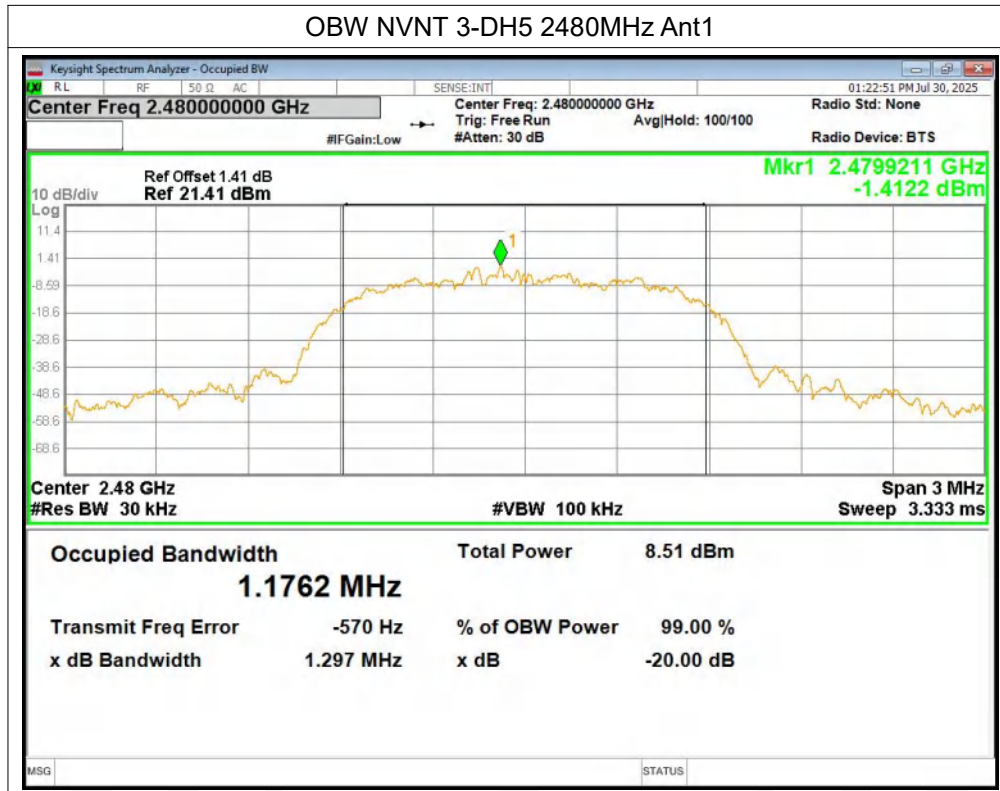

5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW
Please refer FCC part 15.247 & RSS-247.

5.2. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:


GFSK	Set the RBW = 300 kHz. Set the VBW = 300 kHz.
Π/4-DQPSK	Set the RBW = 100 kHz. Set the VBW = 100 kHz.
8DPSK	Set the RBW = 100 kHz. Set the VBW = 100 kHz.

5.3. Test Result


Left earphone						
Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
1-DH5	Ant1	2401.81	2402.804	0.994	0.637	Pass
1-DH5	Ant1	2440.998	2441.97	0.972	0.625	Pass
1-DH5	Ant1	2478.976	2479.972	0.996	0.633	Pass
2-DH5	Ant1	2402.0892	2403.15	1.0608	0.855	Pass
2-DH5	Ant1	2440.9826	2442.0928	1.1102	0.877	Pass
2-DH5	Ant1	2478.902	2480.0148	1.1128	0.873	Pass
3-DH5	Ant1	2401.967	2402.9836	1.0166	0.861	Pass
3-DH5	Ant1	2440.9826	2441.9836	1.001	0.867	Pass
3-DH5	Ant1	2478.8942	2479.877	0.9828	0.867	Pass

Test Graphs


CFS NVNT 1-DH5 2402MHz Ant1

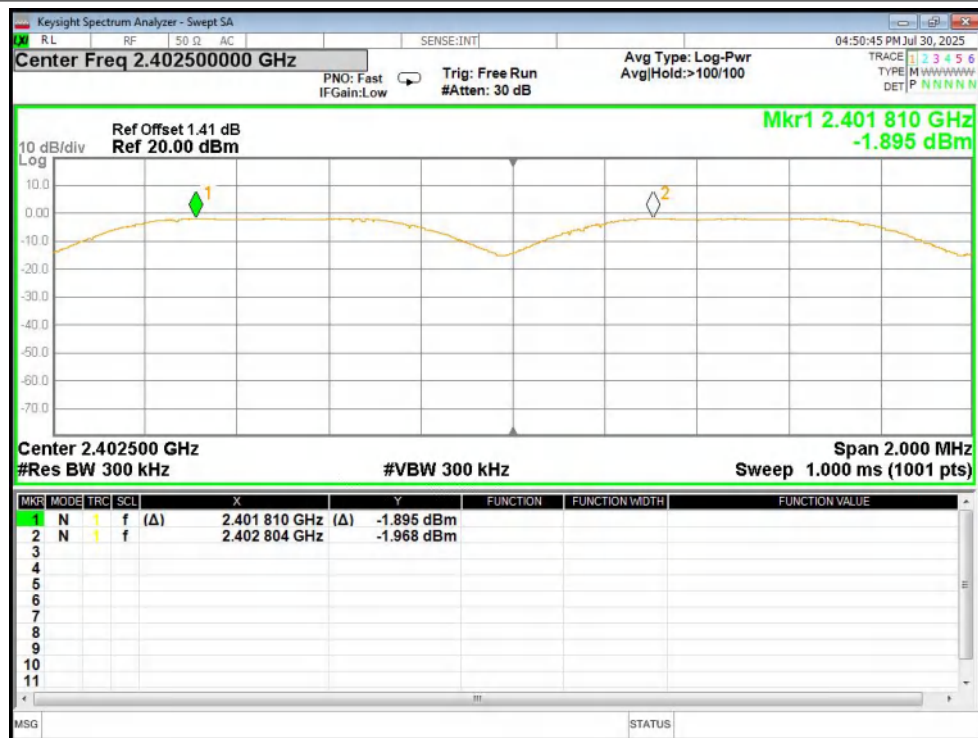

CFS NVNT 1-DH5 2441MHz Ant1

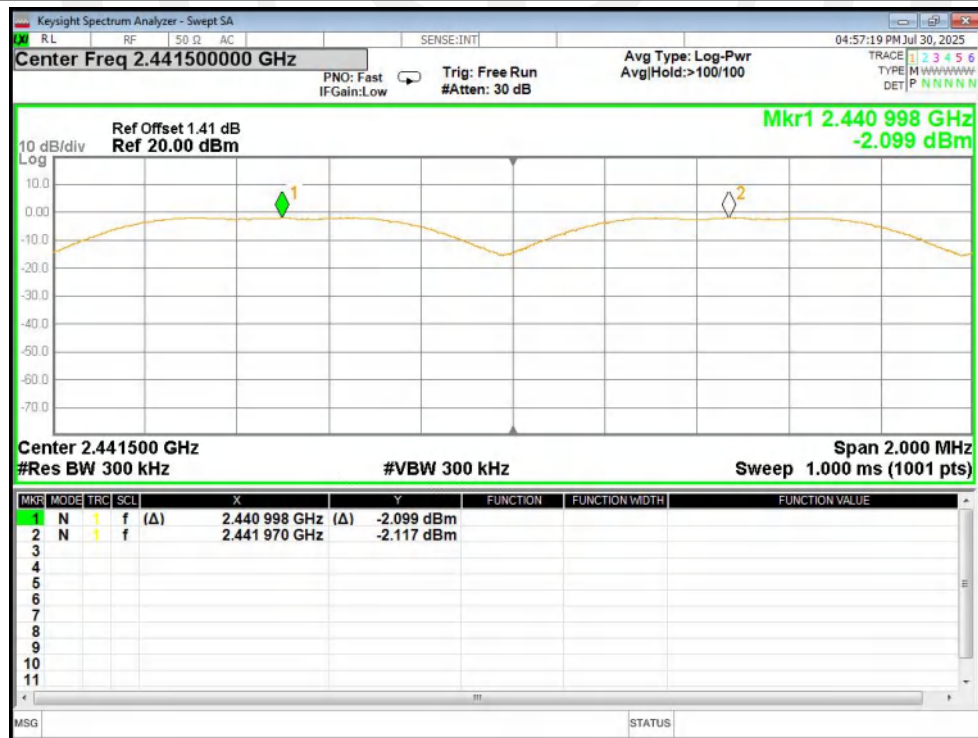


CFS NVNT 1-DH5 2480MHz Ant1

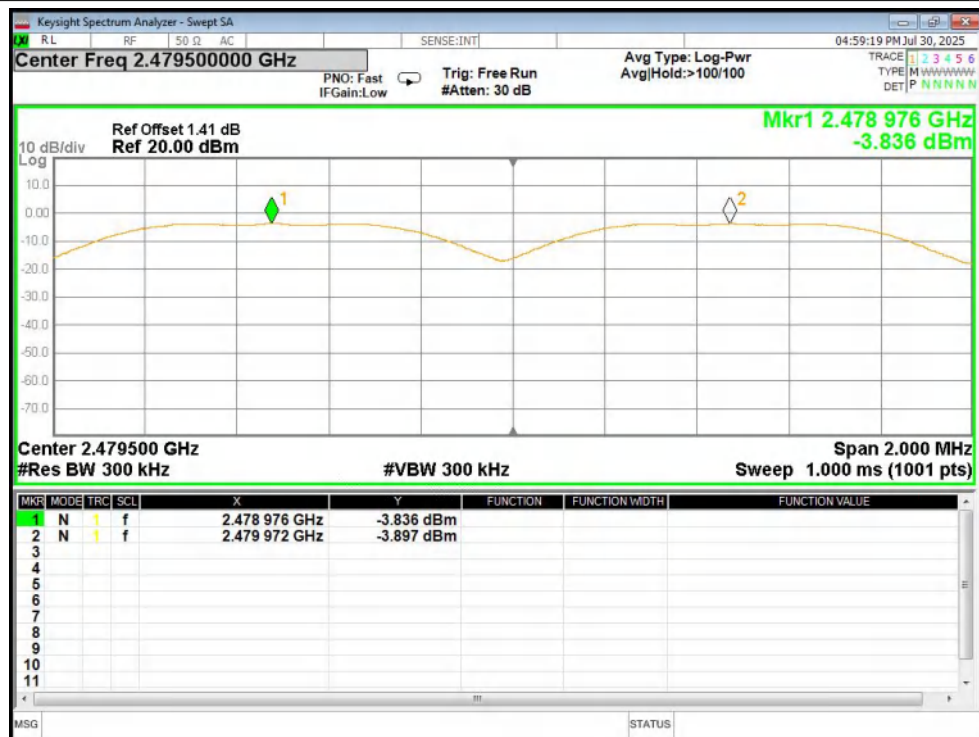

CFS NVNT 2-DH5 2402MHz Ant1




CFS NVNT 2-DH5 2441MHz Ant1

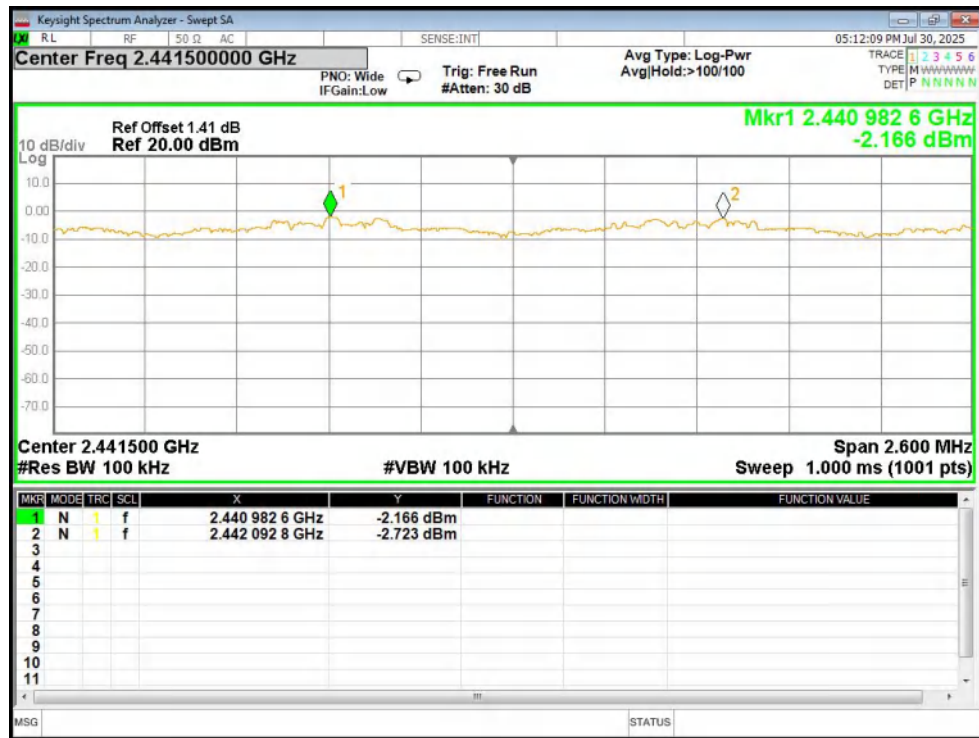


CFS NVNT 2-DH5 2480MHz Ant1




CFS NVNT 3-DH5 2402MHz Ant1

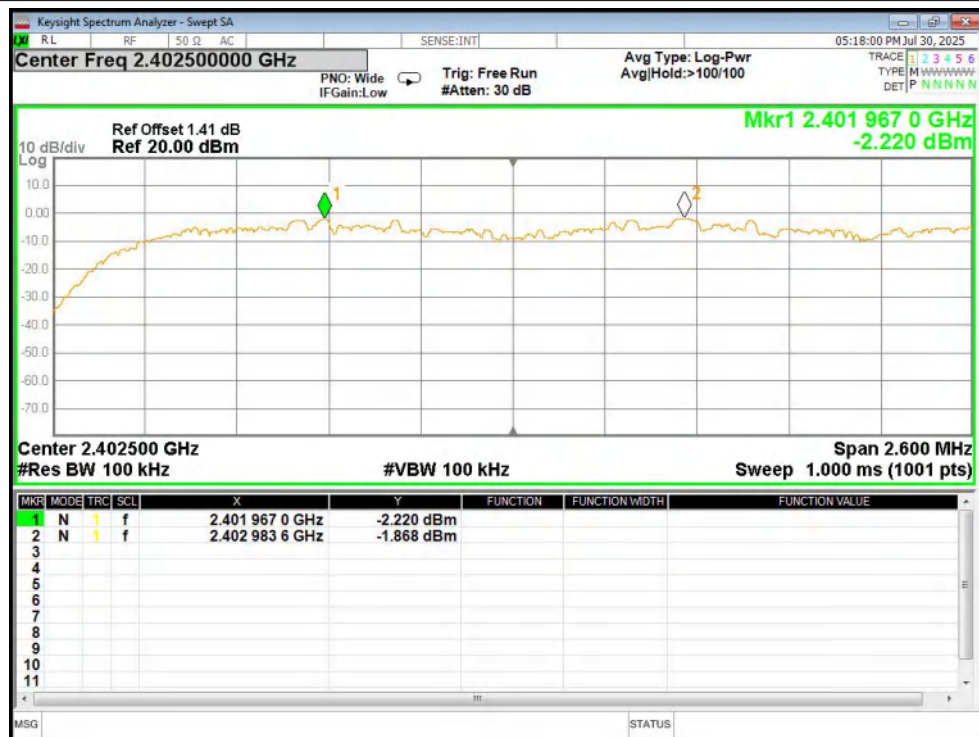

CFS NVNT 3-DH5 2441MHz Ant1

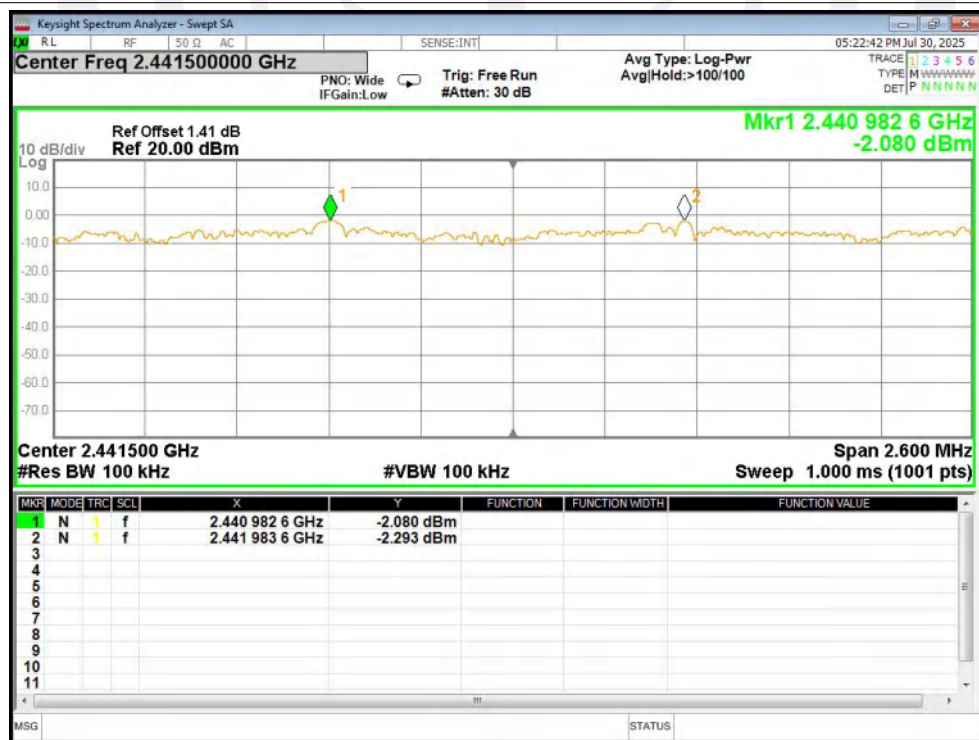

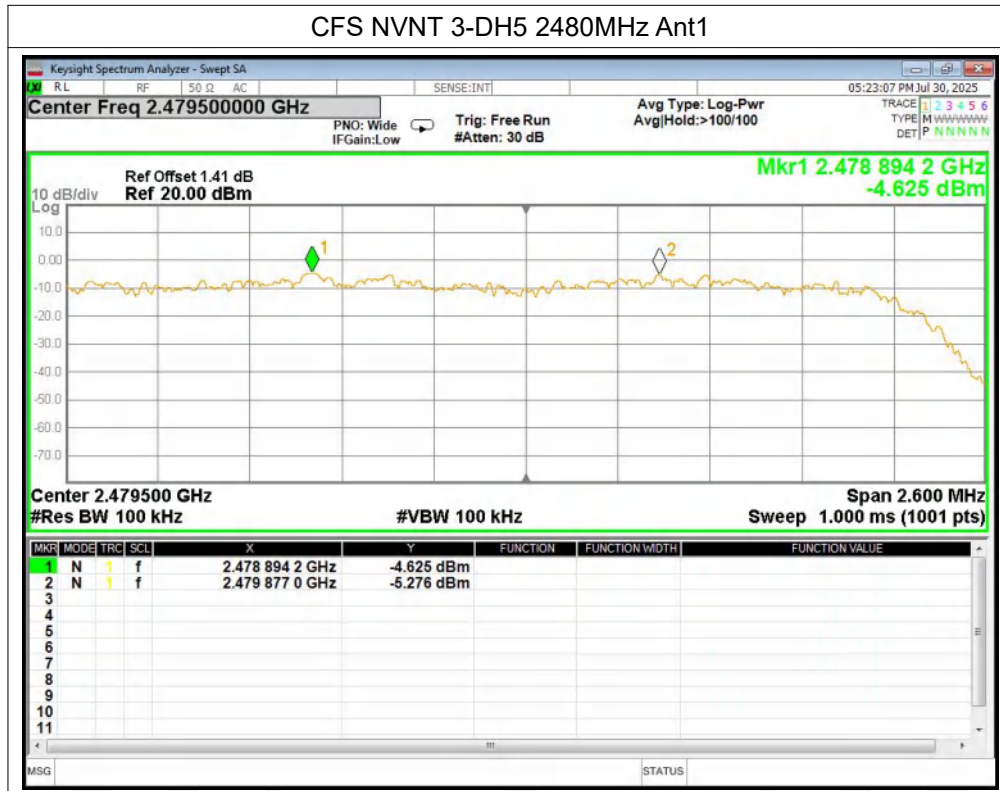


Right earphone						
Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
1-DH5	Ant1	2401.83	2403.168	1.338	0.627	Pass
1-DH5	Ant1	2440.832	2441.824	0.992	0.632	Pass
1-DH5	Ant1	2478.824	2479.822	0.998	0.634	Pass
2-DH5	Ant1	2402.0138	2403.0044	0.9906	0.875	Pass
2-DH5	Ant1	2440.9176	2442.0408	1.1232	0.879	Pass
2-DH5	Ant1	2478.9904	2480.1604	1.17	0.883	Pass
3-DH5	Ant1	2401.9956	2403.0044	1.0088	0.861	Pass
3-DH5	Ant1	2440.8396	2441.8406	1.001	0.877	Pass
3-DH5	Ant1	2478.8396	2480.1734	1.3338	0.865	Pass




Test Graphs


CFS NVNT 1-DH5 2402MHz Ant1

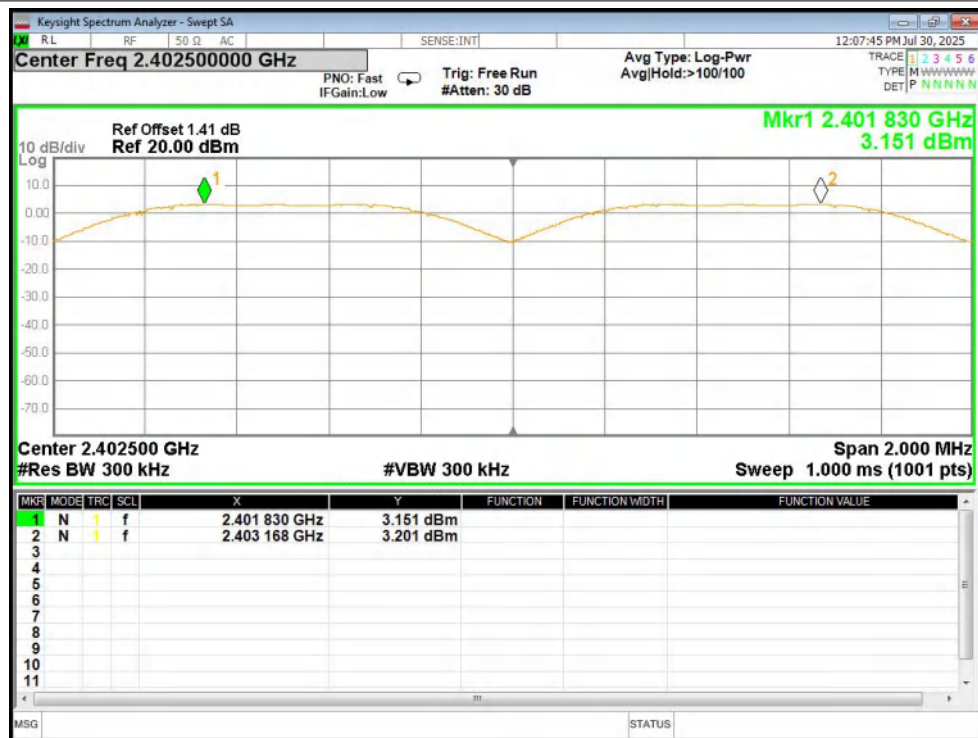


CFS NVNT 1-DH5 2441MHz Ant1

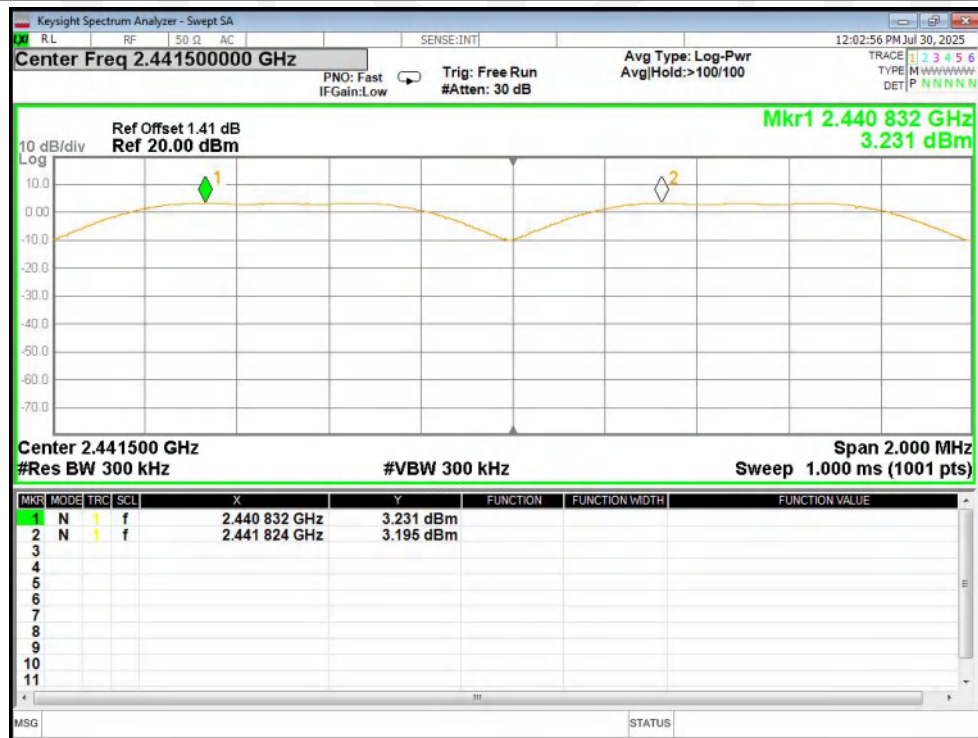


CFS NVNT 1-DH5 2480MHz Ant1

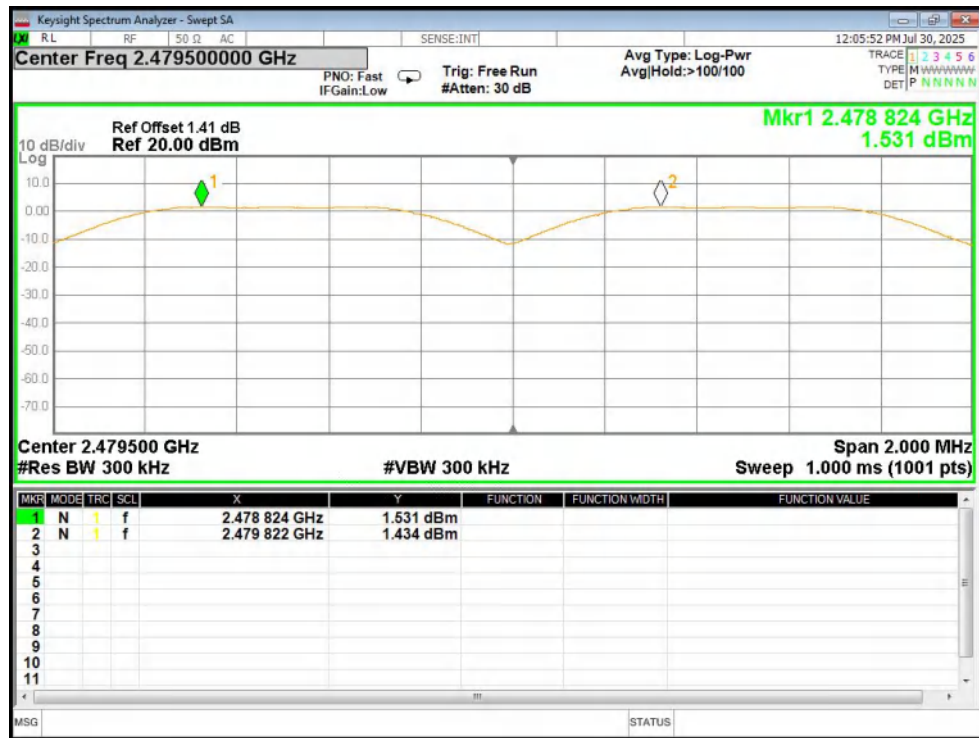

CFS NVNT 2-DH5 2402MHz Ant1

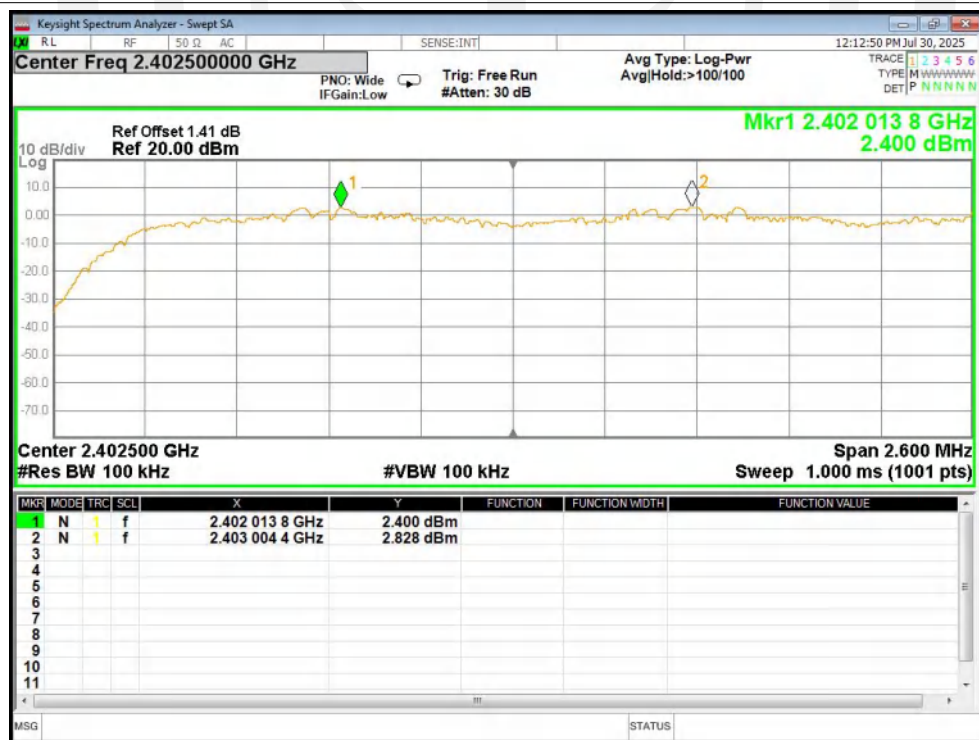


CFS NVNT 2-DH5 2441MHz Ant1

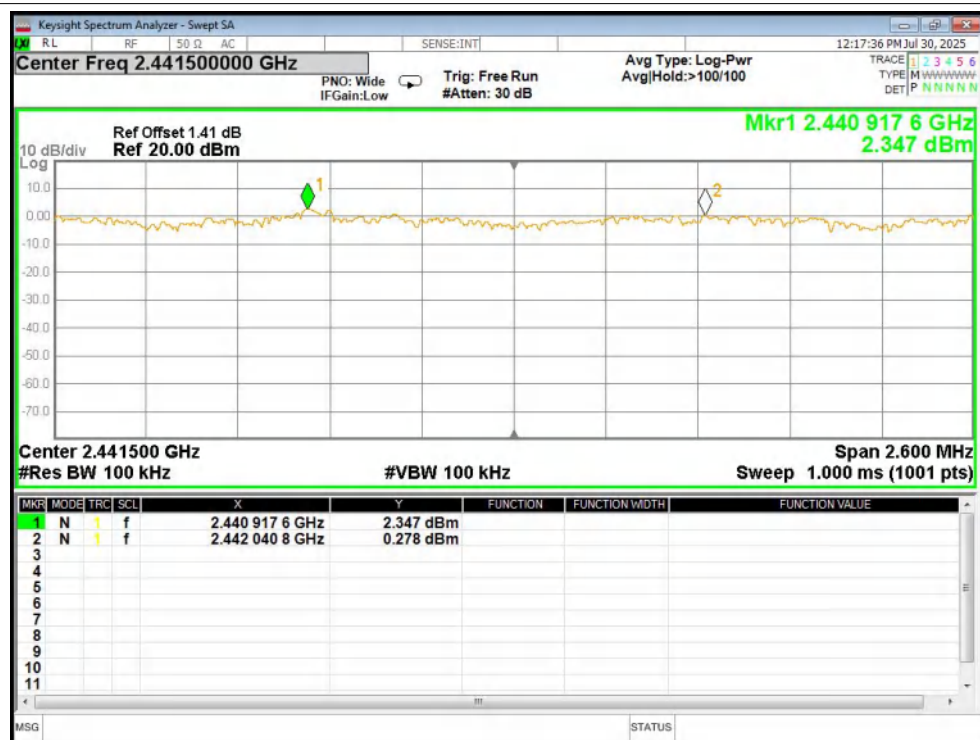


CFS NVNT 2-DH5 2480MHz Ant1




CFS NVNT 3-DH5 2402MHz Ant1

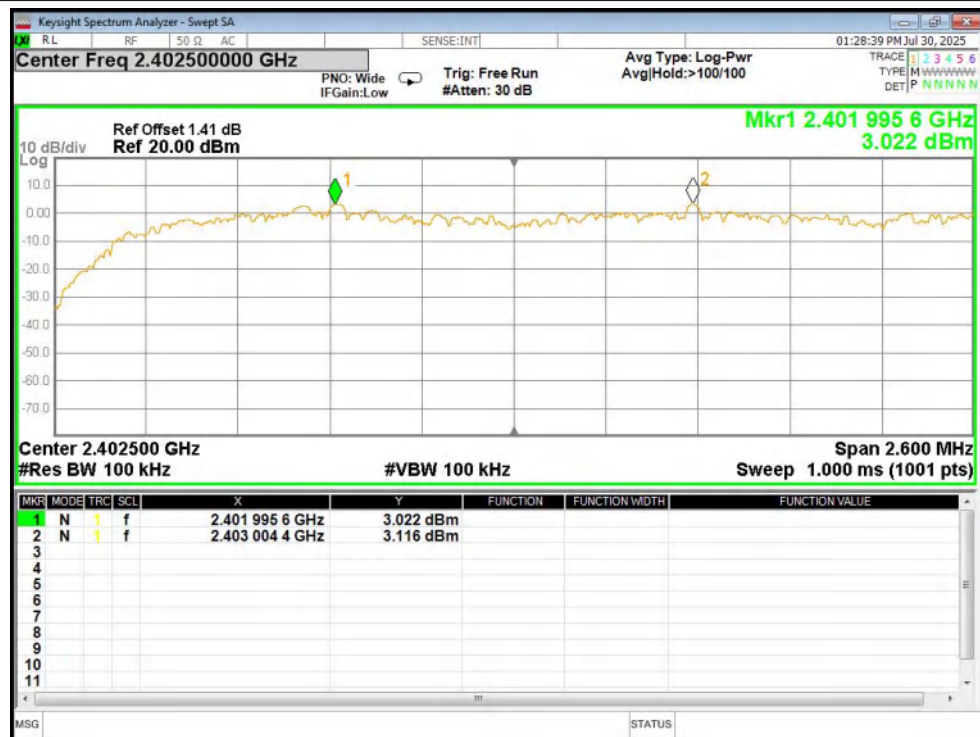

CFS NVNT 3-DH5 2441MHz Ant1

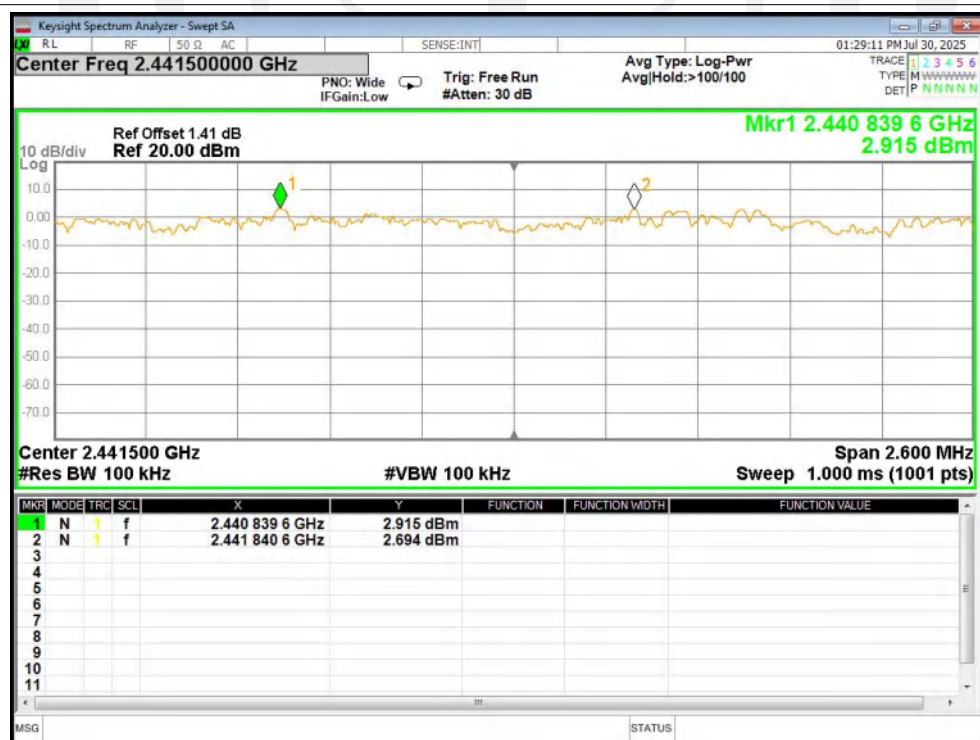

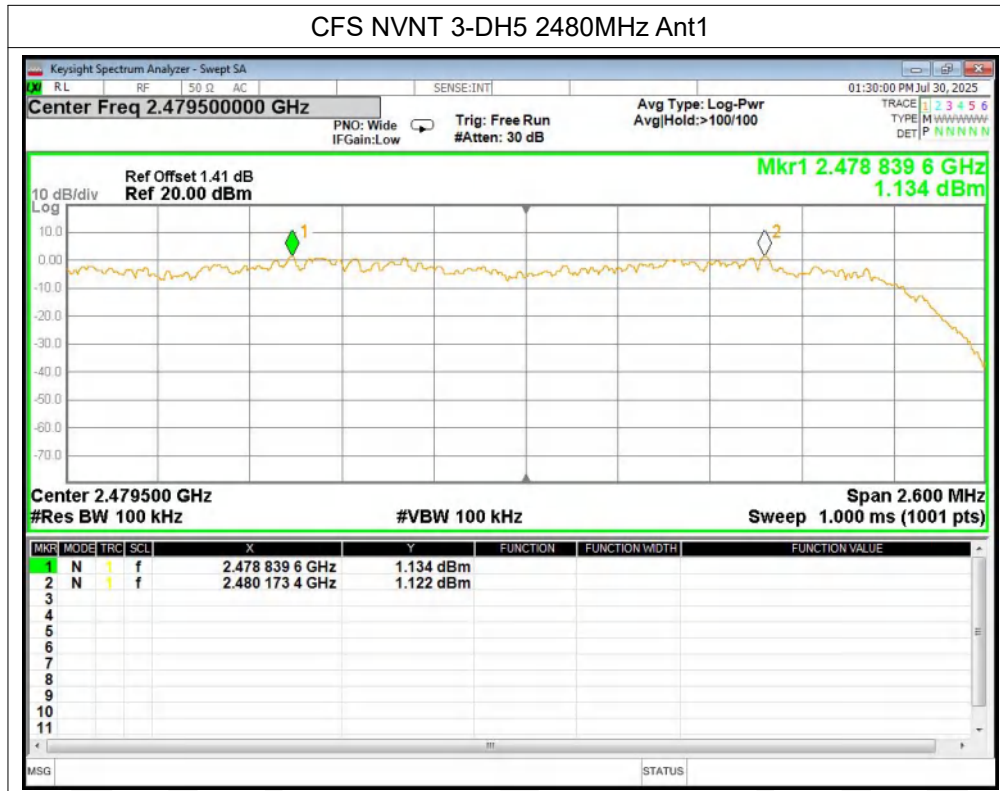

6. Number Of Hopping Channel

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Please refer FCC part 15.247 & RSS-247.

6.2. Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3. Test Result

Left earphone				
Mode	Antenna	Hopping Number	Limit	Verdict
1-DH5	Ant1	79	15	Pass
2-DH5	Ant1	79	15	Pass
3-DH5	Ant1	79	15	Pass


Test Graphs

Hopping No. NVNT 1-DH5 Ant1

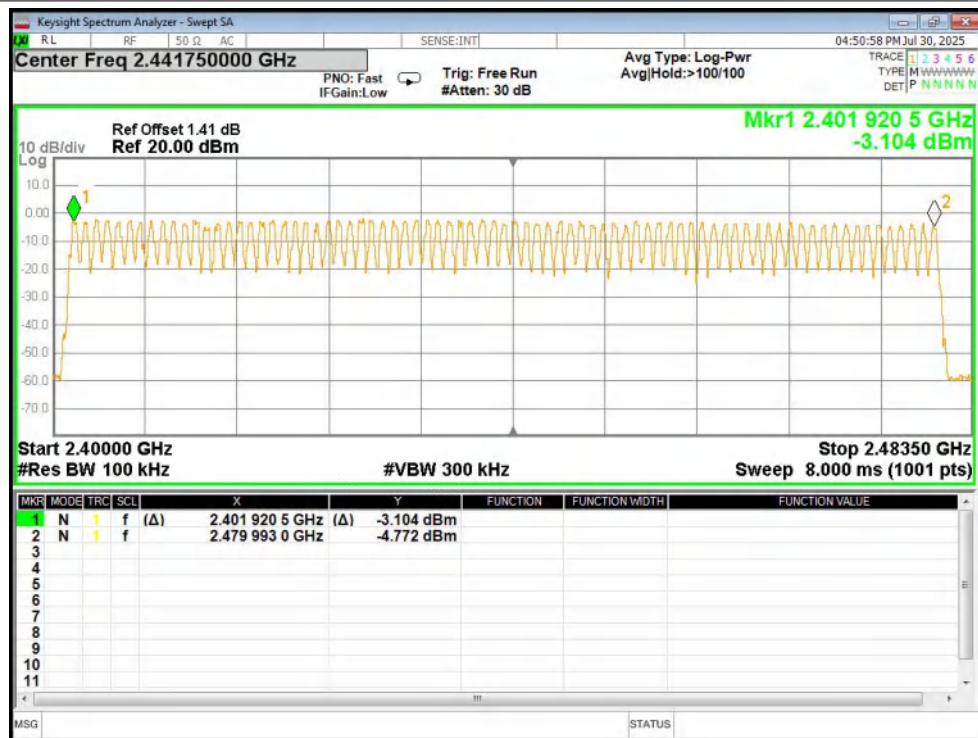

Hopping No. NVNT 2-DH5 Ant1



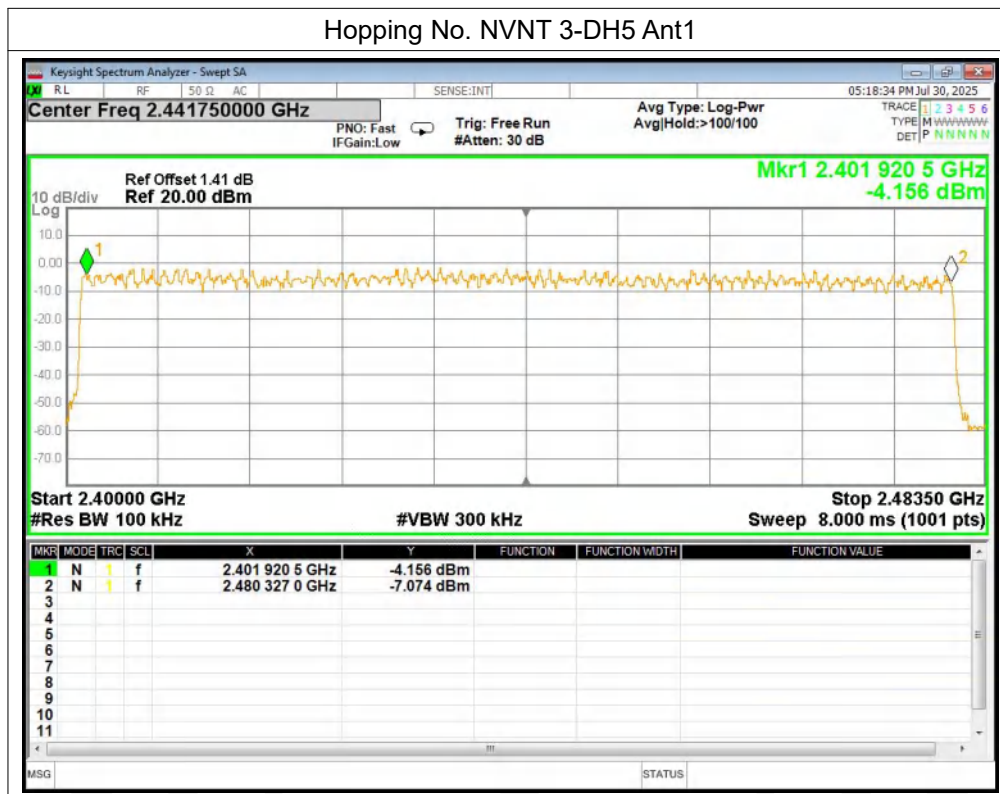


Right earphone				
Mode	Antenna	Hopping Number	Limit	Verdict
1-DH5	Ant1	79	15	Pass
2-DH5	Ant1	79	15	Pass
3-DH5	Ant1	79	15	Pass




Test Graphs

Hopping No. NVNT 1-DH5 Ant1

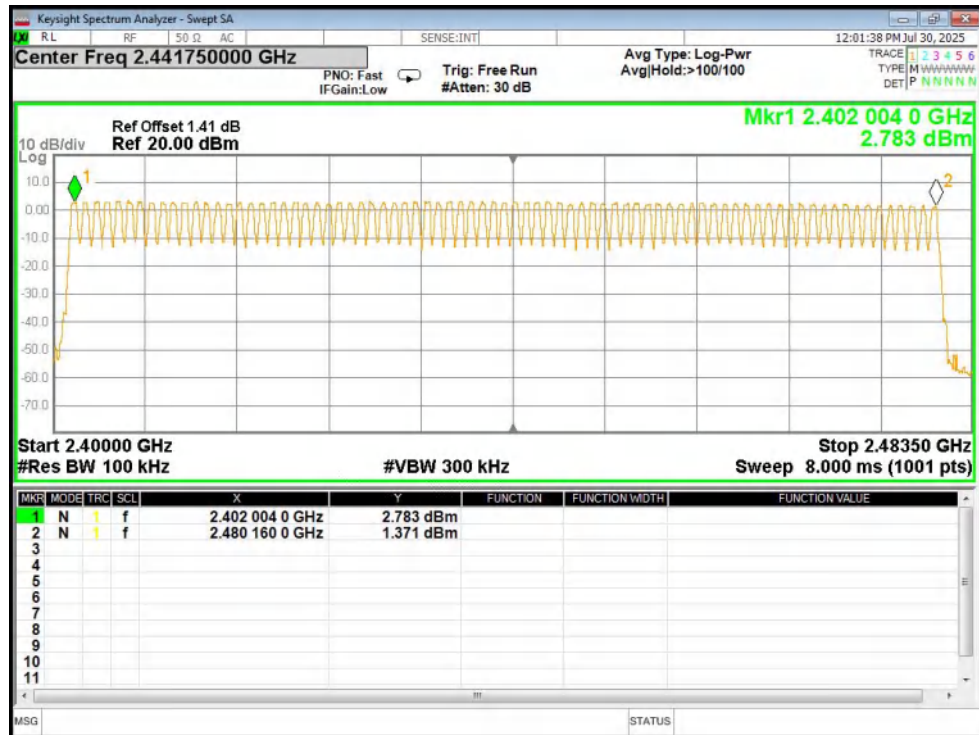

Hopping No. NVNT 2-DH5 Ant1



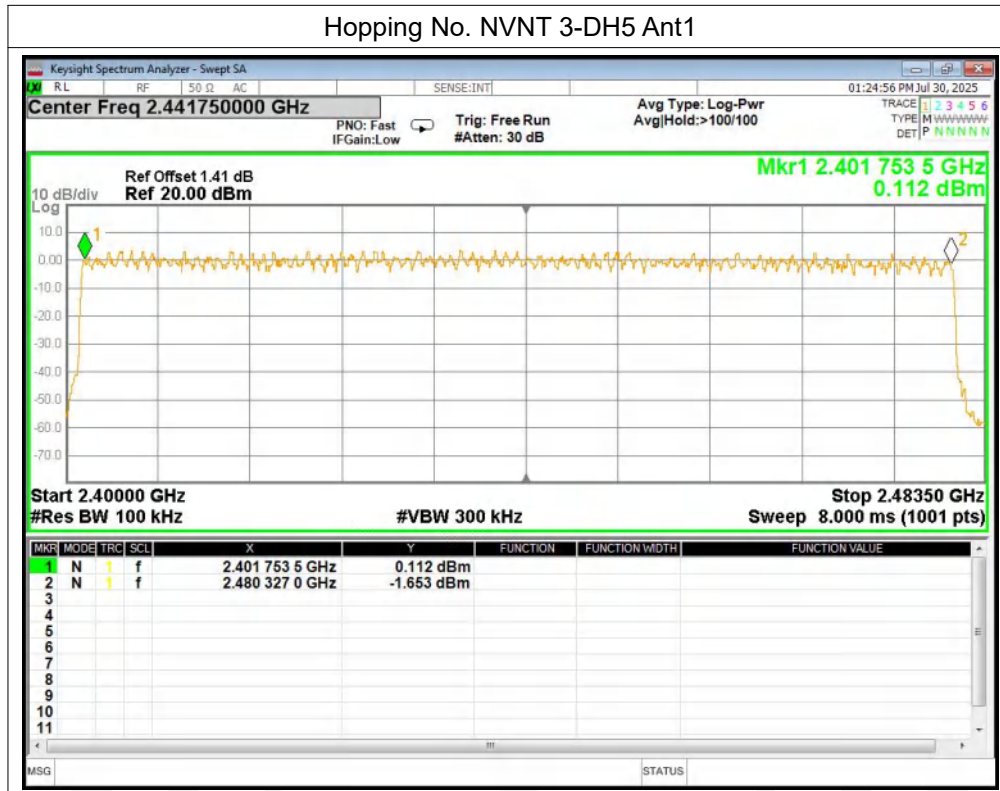

7. Dwell Time

7.1. Test limit

Please refer FCC part 15.247 & RSS-247.

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.2.6. The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

7.2.7. Dwell Time=Pulse Time* Hops Number

7.3. Test Result


Left earphone								
Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2441	Ant1	0.4	126.8	317	31600	400	Pass
1-DH3	2441	Ant1	1.655	268.11	162	31600	400	Pass
1-DH5	2441	Ant1	2.901	307.506	106	31600	400	Pass
2-DH1	2441	Ant1	0.409	129.244	316	31600	400	Pass
2-DH3	2441	Ant1	1.659	257.145	155	31600	400	Pass
2-DH5	2441	Ant1	2.907	313.956	108	31600	400	Pass
3-DH1	2441	Ant1	0.409	130.471	319	31600	400	Pass
3-DH3	2441	Ant1	1.659	268.758	162	31600	400	Pass
3-DH5	2441	Ant1	2.907	296.514	102	31600	400	Pass

Test Graphs

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst




Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

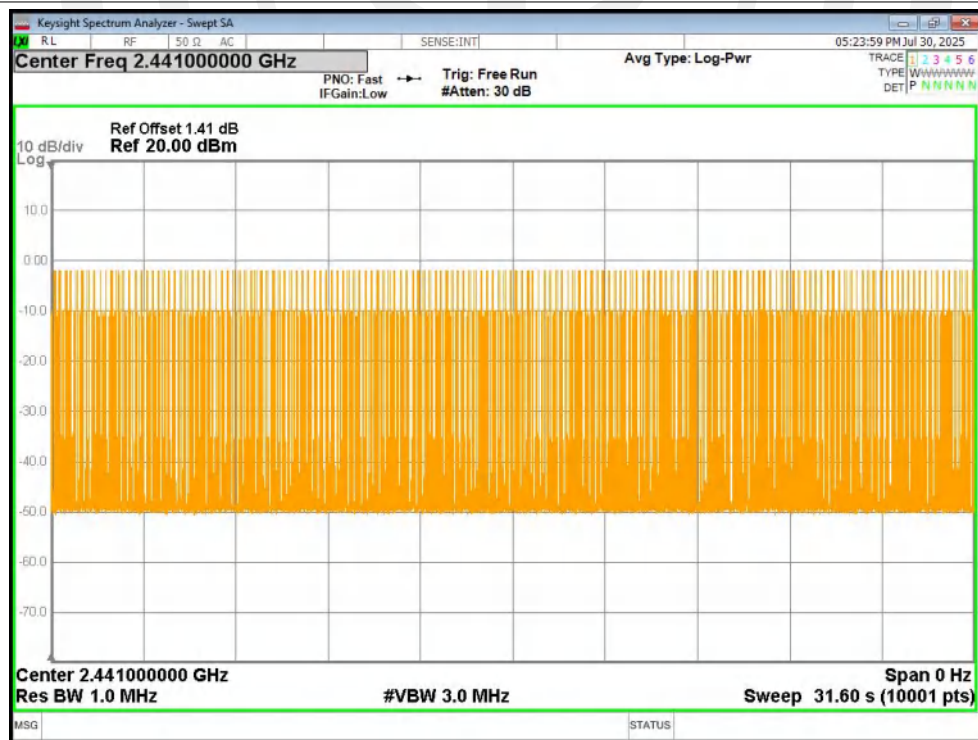

Dwell NVNT 1-DH3 2441MHz Ant1 One Burst




Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

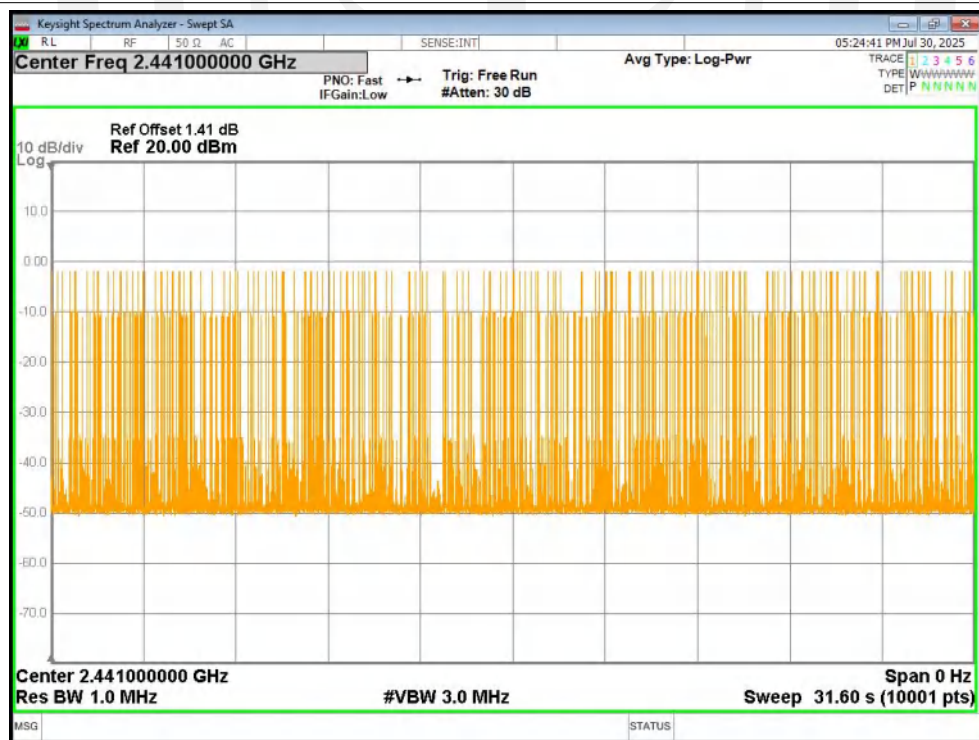

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst




Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

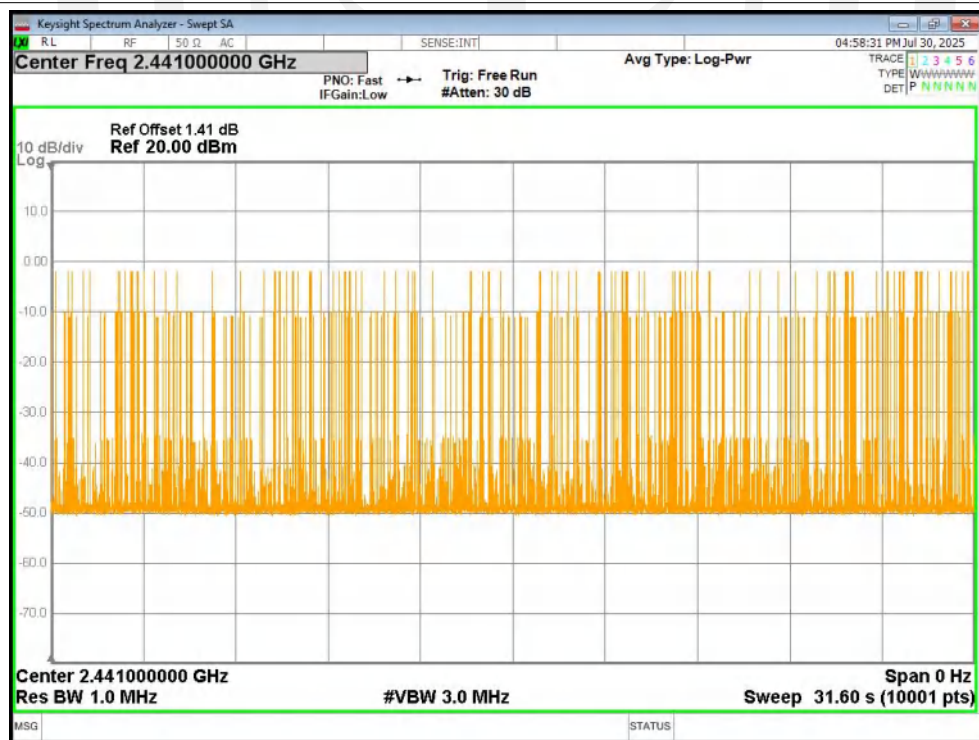

Dwell NVNT 2-DH1 2441MHz Ant1 One Burst




Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

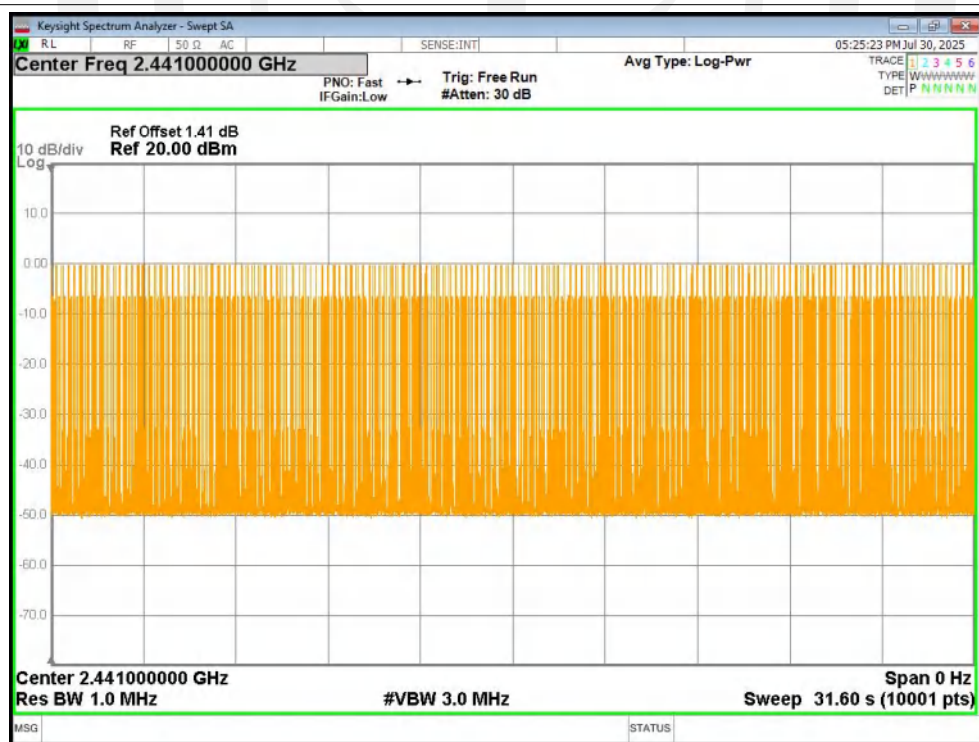

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst




Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

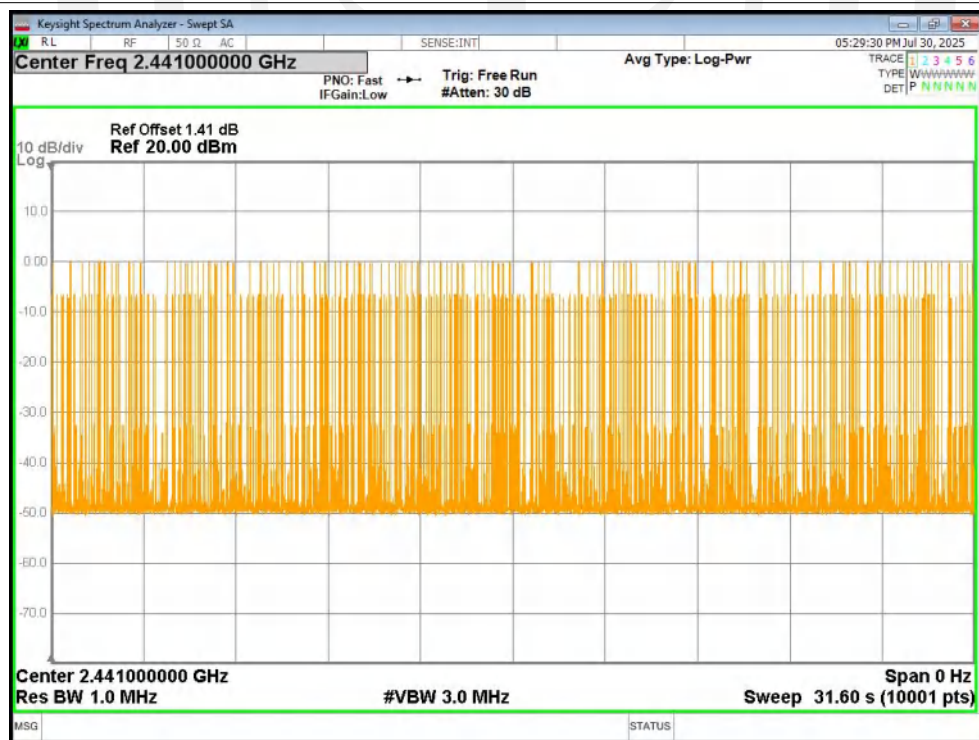

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst




Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

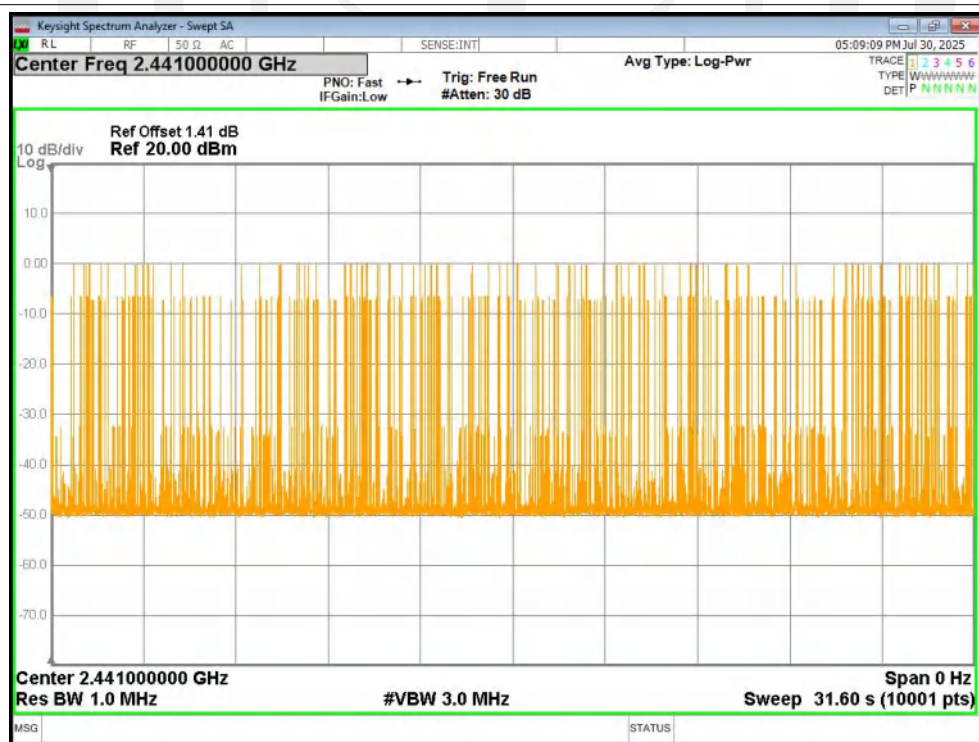

Dwell NVNT 3-DH1 2441MHz Ant1 One Burst




Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

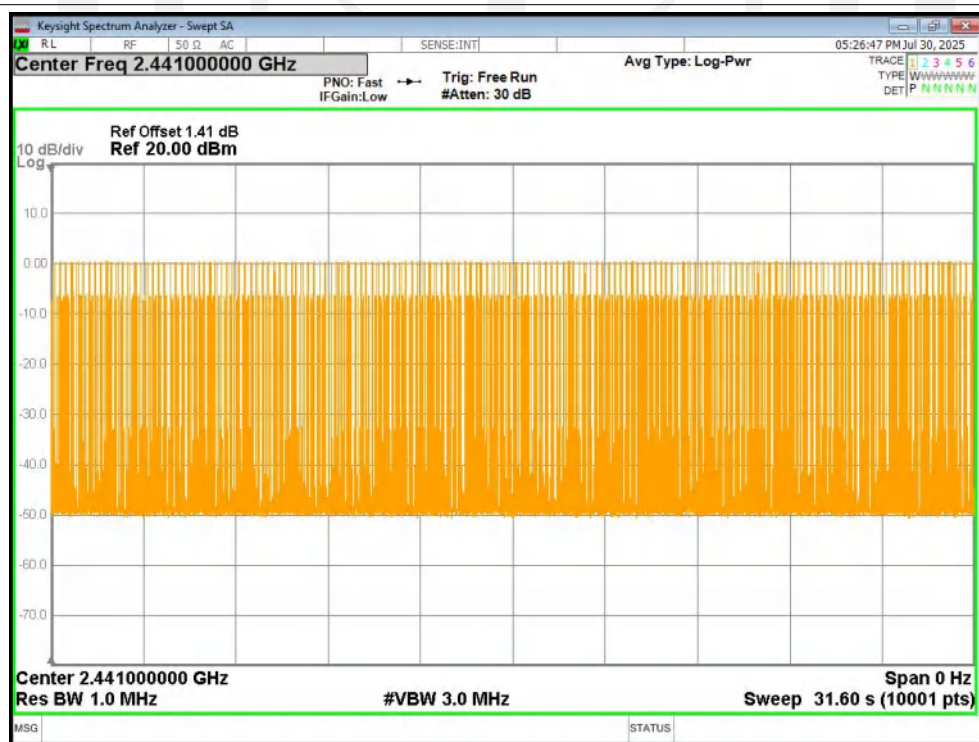

Dwell NVNT 3-DH3 2441MHz Ant1 One Burst




Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

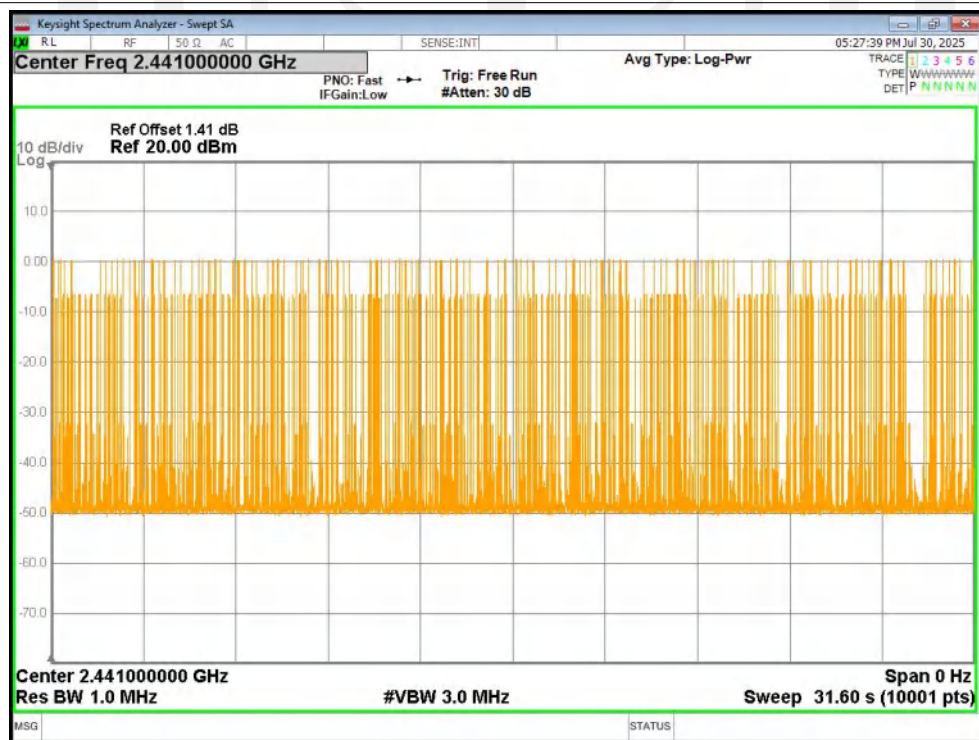

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst



Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

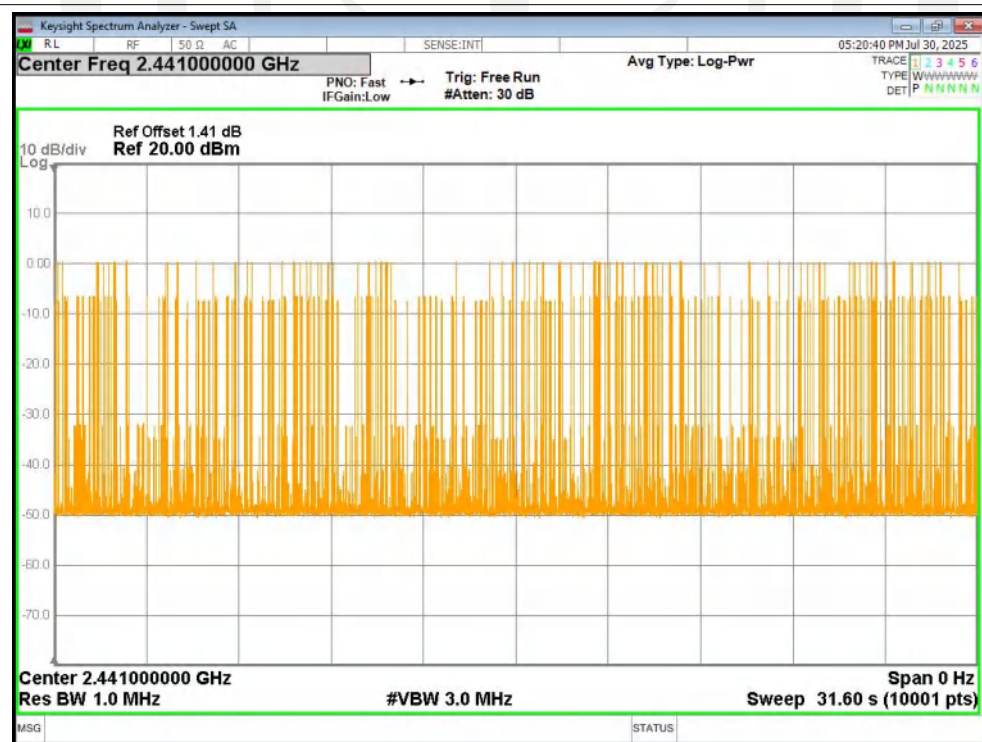

Right earphone								
Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2441	Ant1	0.4	126.4	316	31600	400	Pass
1-DH3	2441	Ant1	1.655	259.835	157	31600	400	Pass
1-DH5	2441	Ant1	2.905	296.31	102	31600	400	Pass
2-DH1	2441	Ant1	0.409	128.835	315	31600	400	Pass
2-DH3	2441	Ant1	1.641	269.124	164	31600	400	Pass
2-DH5	2441	Ant1	2.91	258.99	89	31600	400	Pass
3-DH1	2441	Ant1	0.407	129.019	317	31600	400	Pass
3-DH3	2441	Ant1	1.656	251.712	152	31600	400	Pass
3-DH5	2441	Ant1	2.91	317.19	109	31600	400	Pass




Test Graphs

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst




Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

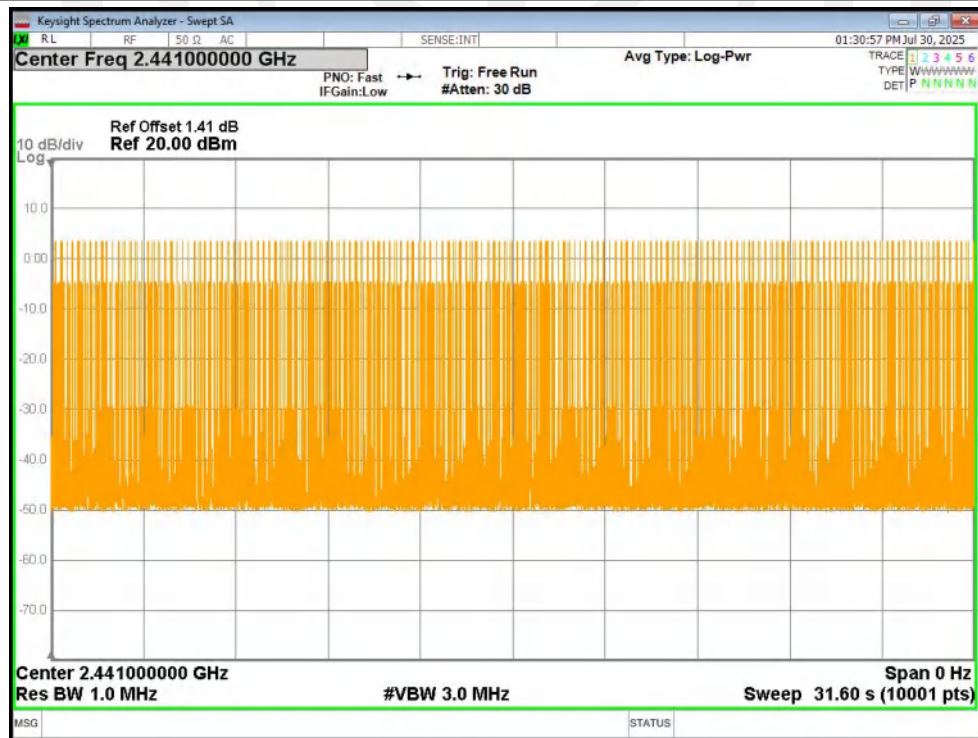

Dwell NVNT 1-DH3 2441MHz Ant1 One Burst




Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

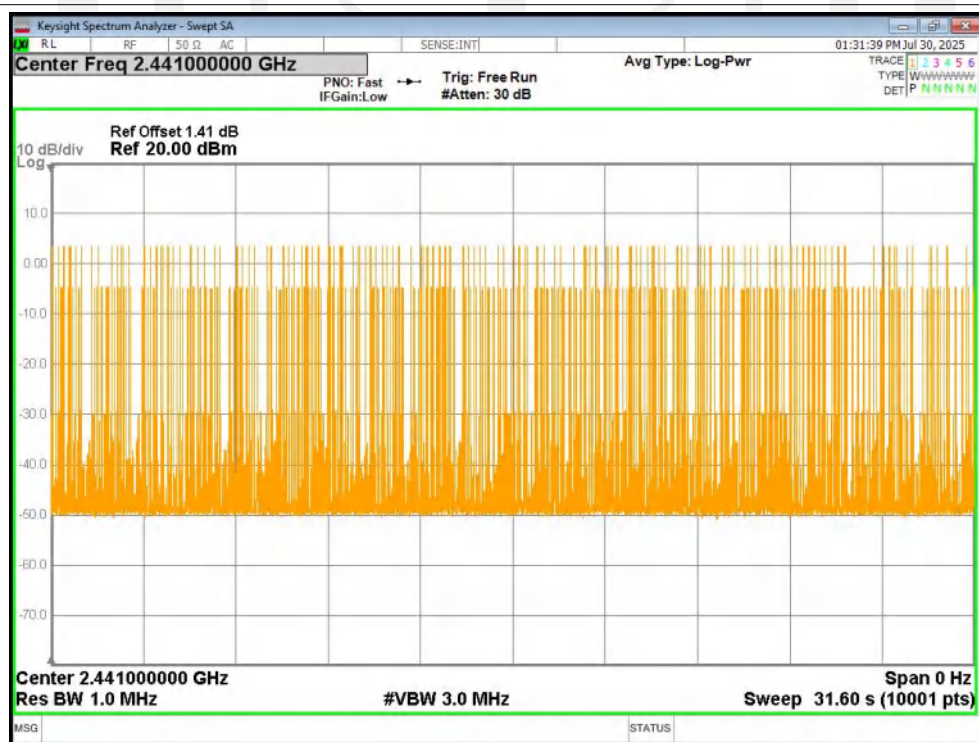

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst




Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

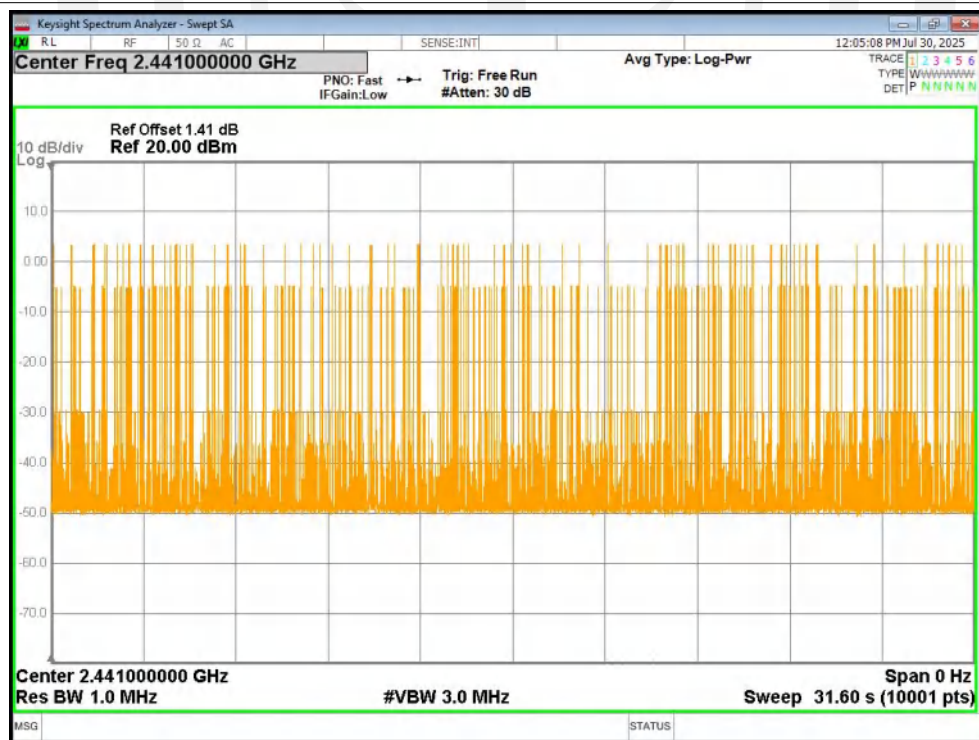

Dwell NVNT 2-DH1 2441MHz Ant1 One Burst




Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

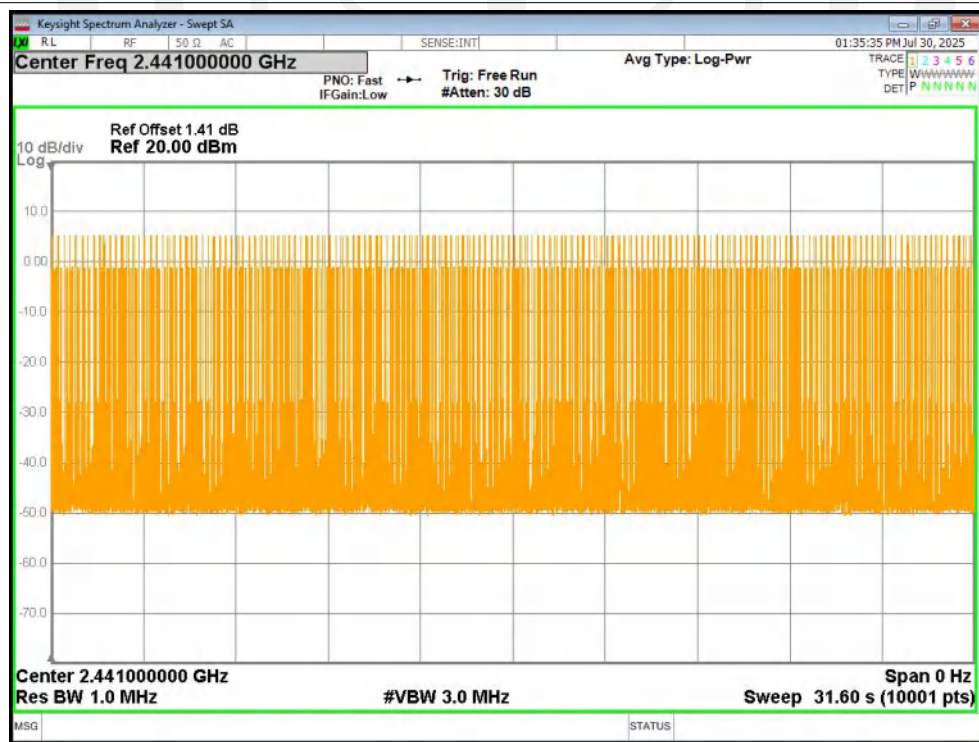

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst




Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

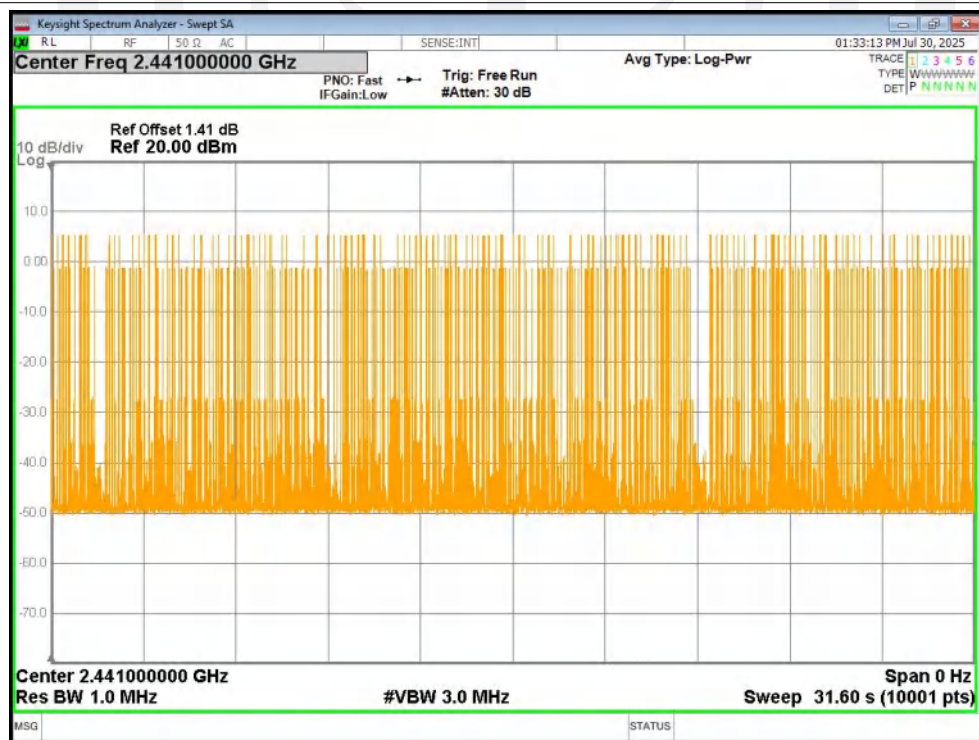

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst




Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

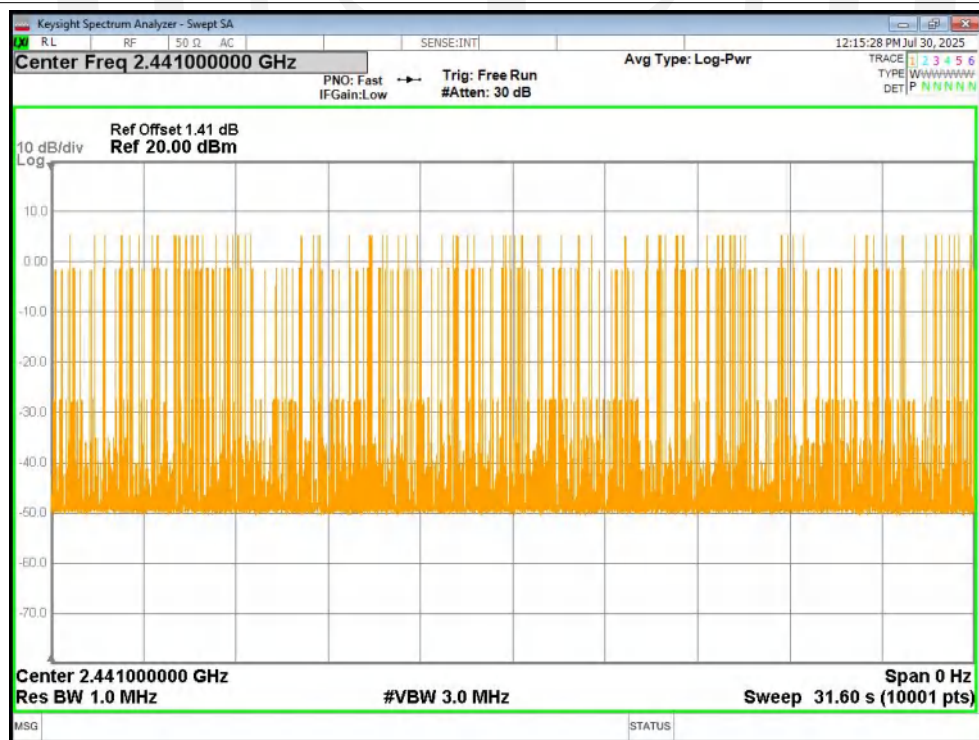

Dwell NVNT 3-DH1 2441MHz Ant1 One Burst




Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

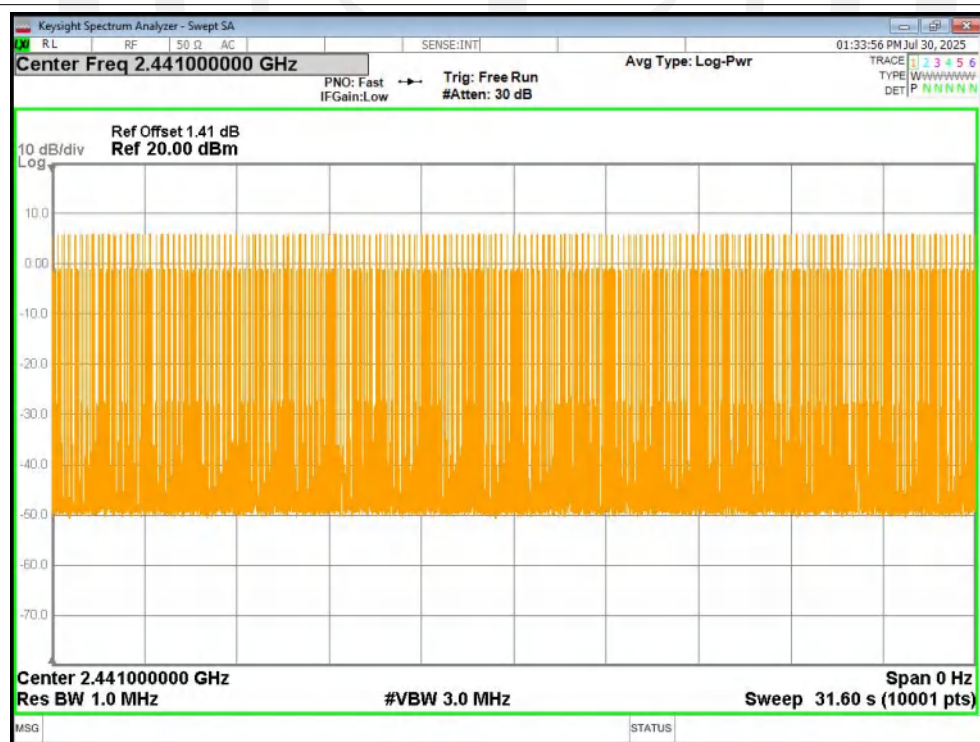


Dwell NVNT 3-DH3 2441MHz Ant1 One Burst




Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

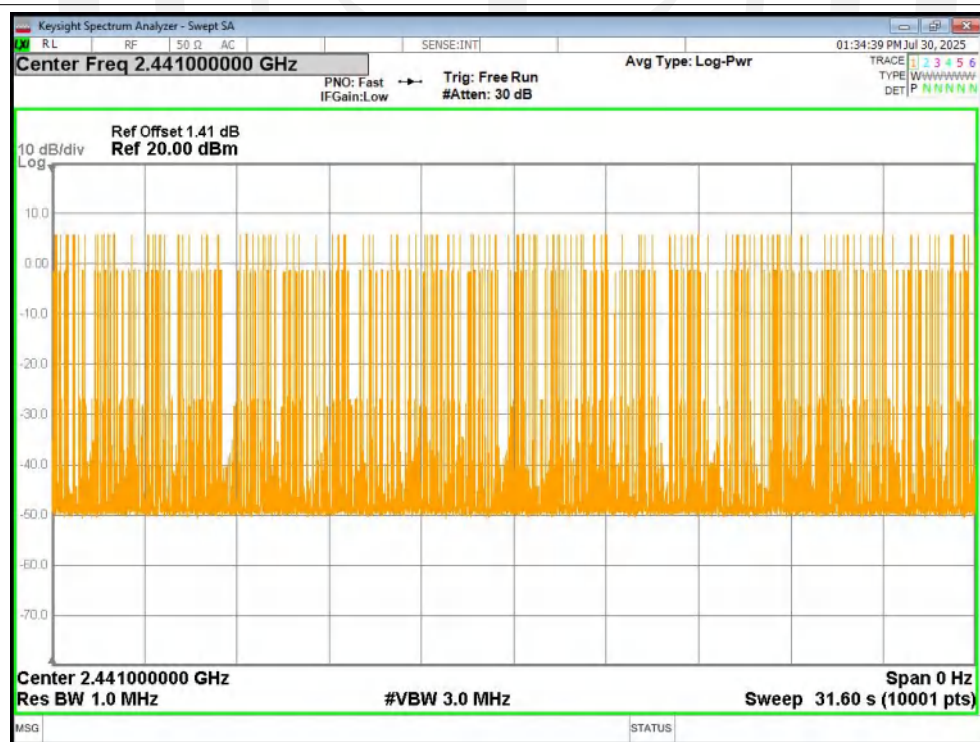

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

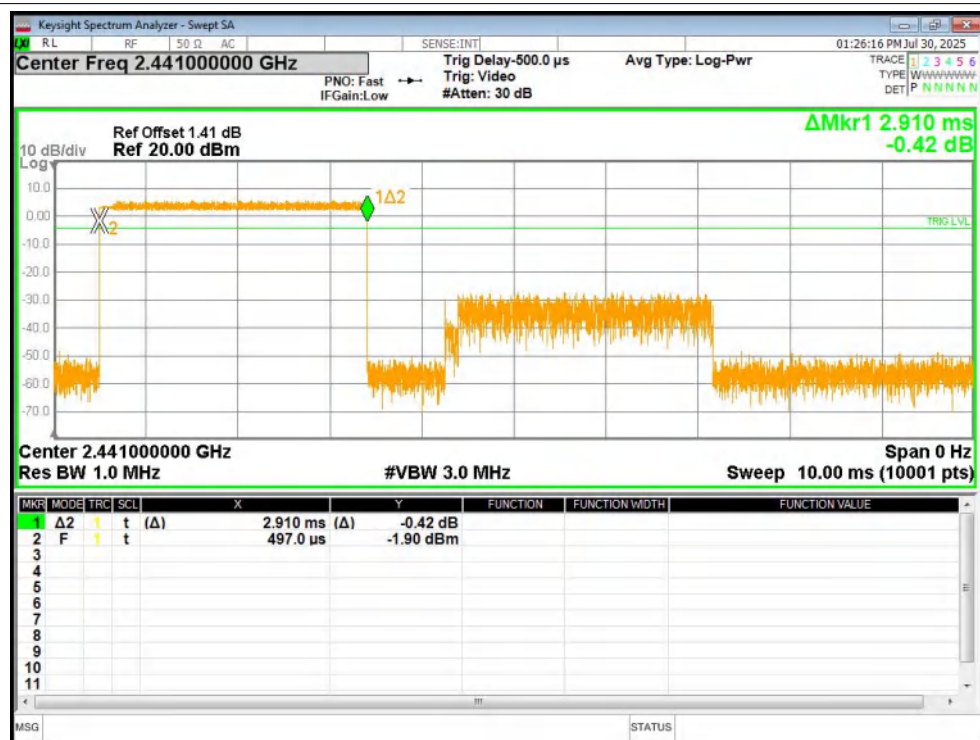

Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

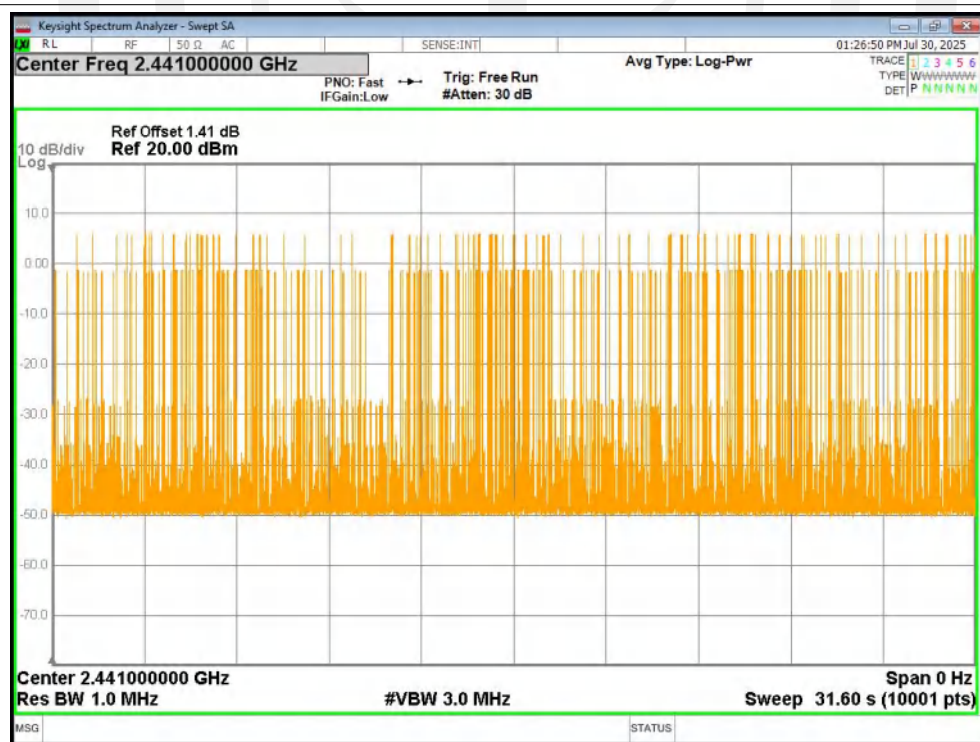

8. OUT-OF-BAND EMISSIONS

8.1. Test Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in FCC Part 15.209(a) is not required. Please refer section 15.247.

8.2. Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

8.3. Test Setup



8.4. Test Results

PASS.

The test results are listed in next pages.


Band Edge

Left earphone							
Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-54.19	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-53.29	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-53.08	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-53.31	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-54.25	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-54.25	-20	Pass




Test Graphs


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

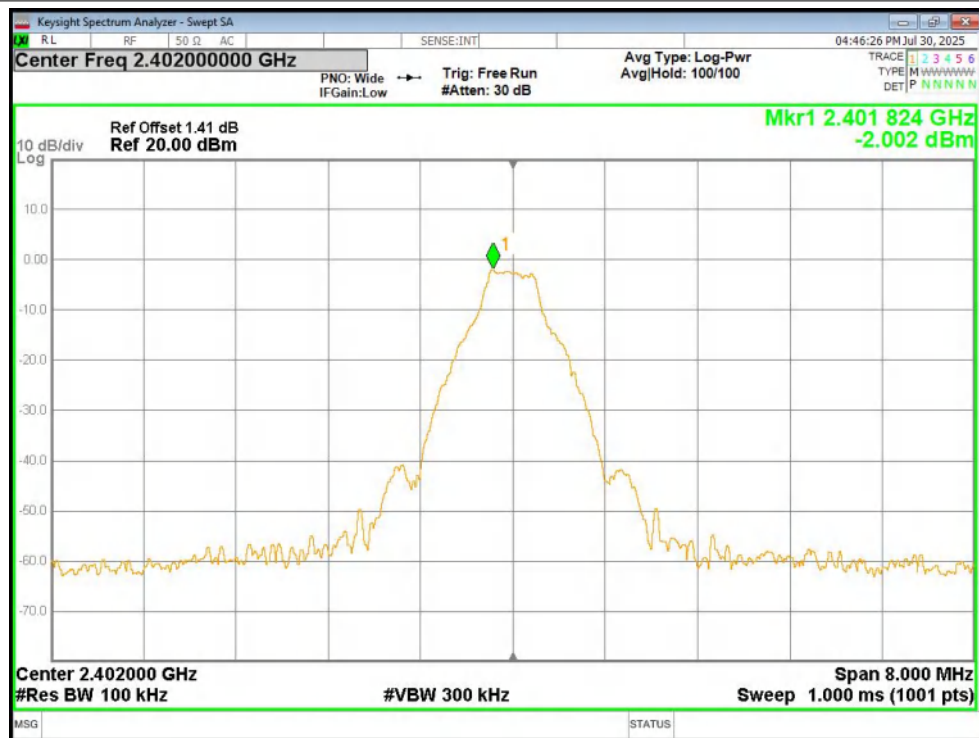


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

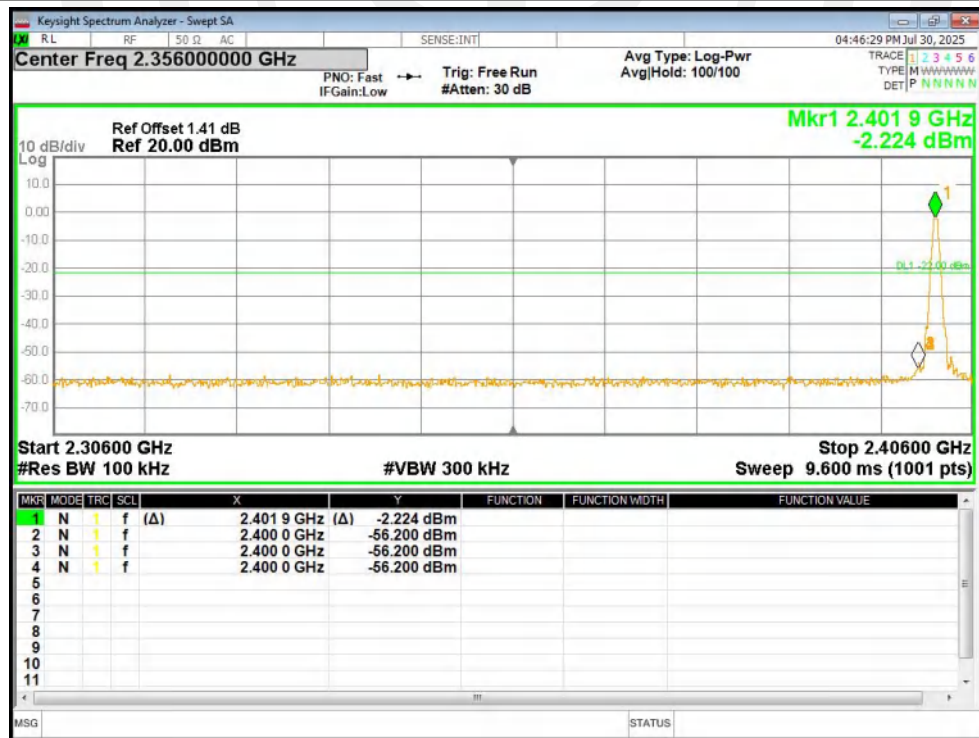


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

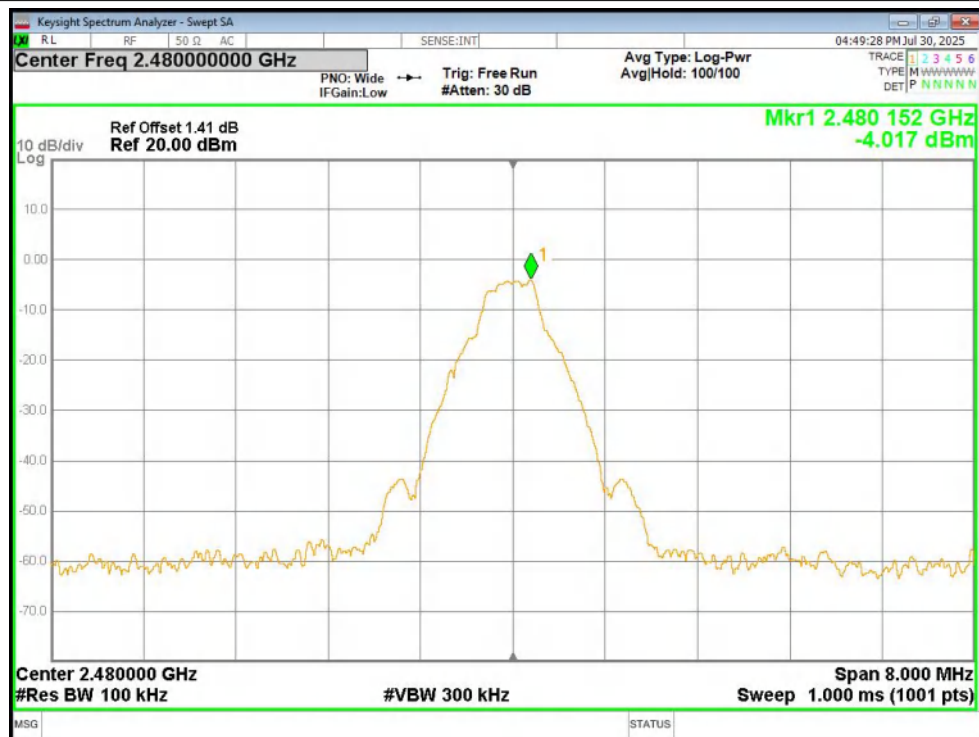


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

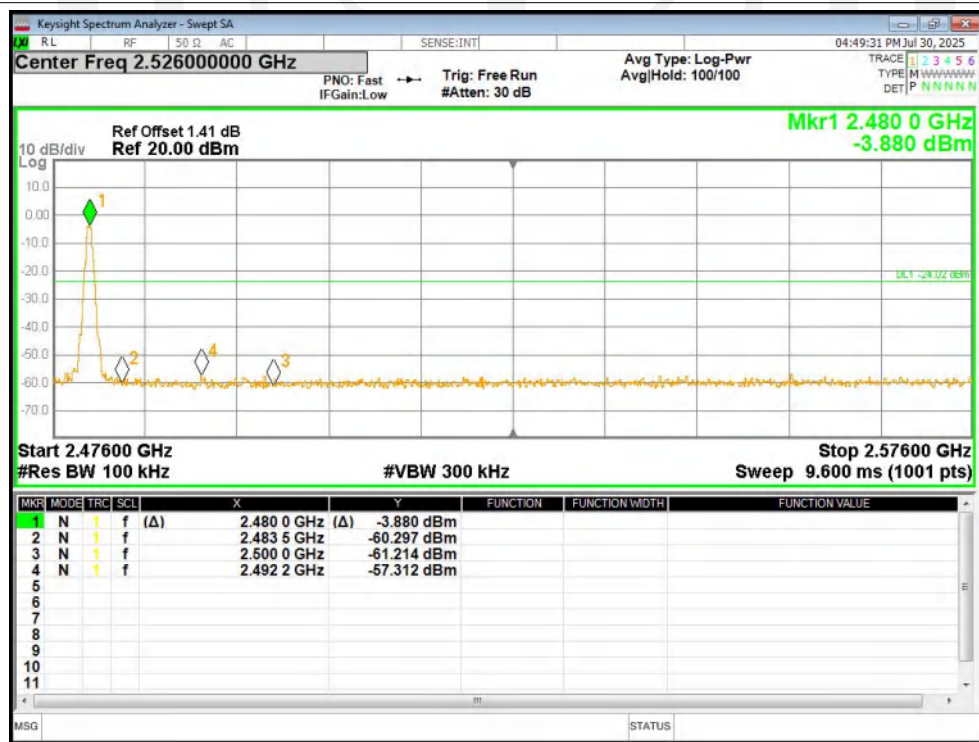


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

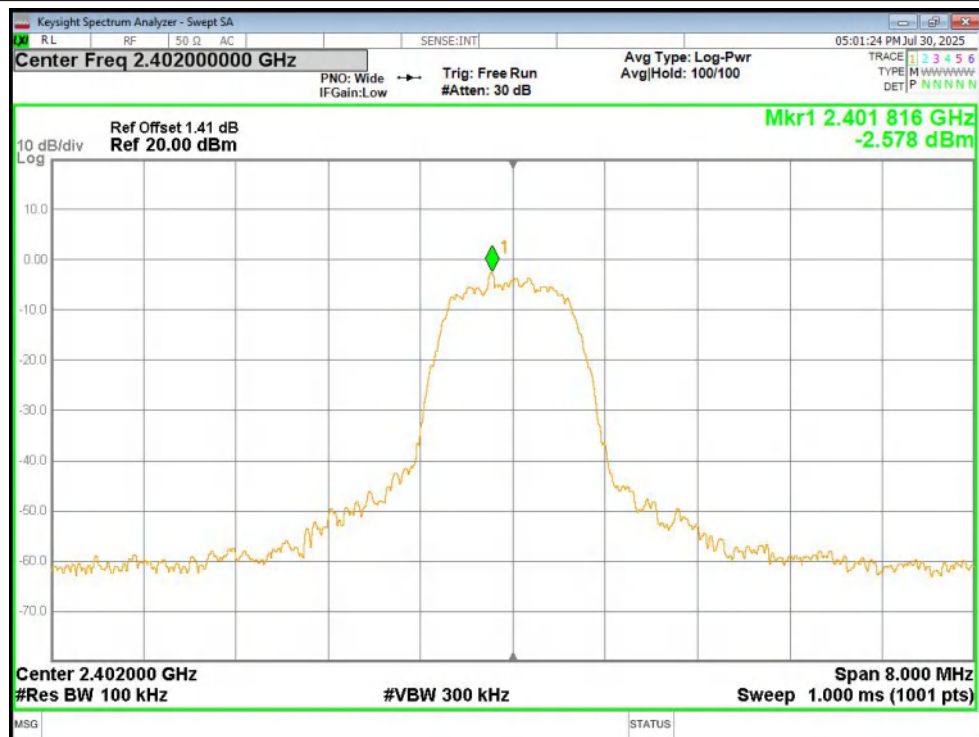

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

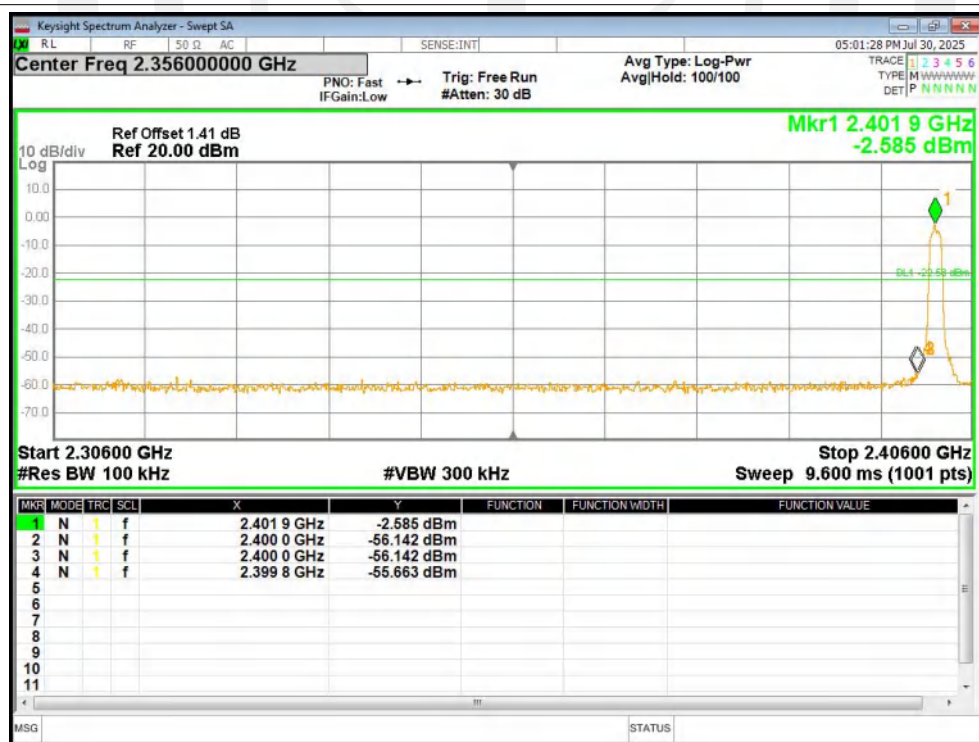

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

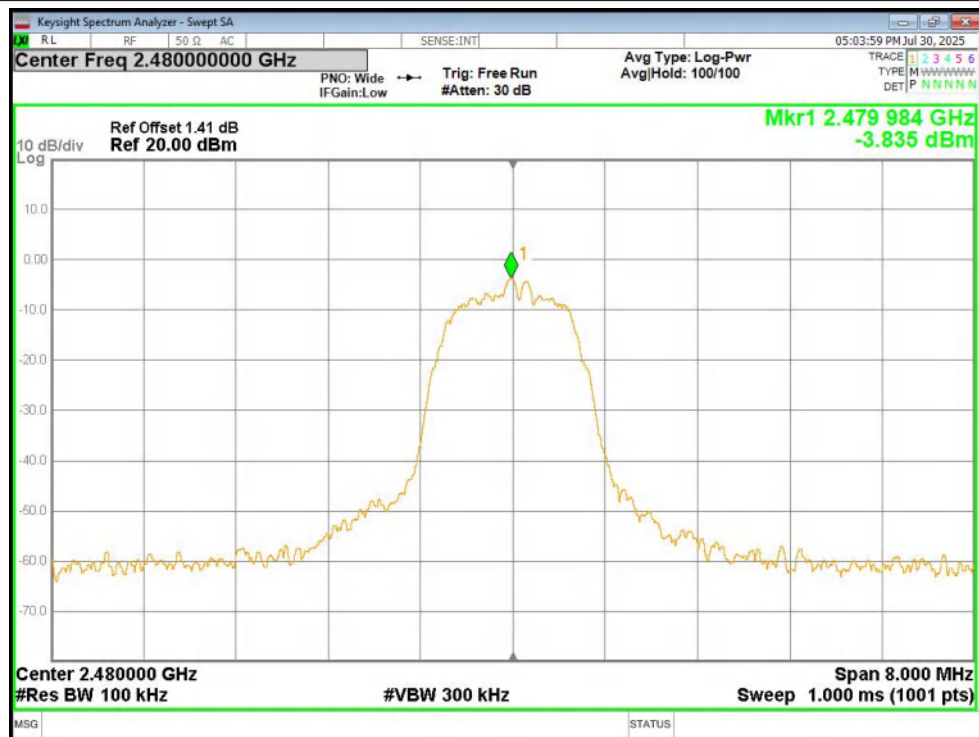

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

