

TEST REPORT

Applicant: Hefei Invispower Co., Ltd
Address: 2A, Yousi Tiancheng Industrial Park, No. 1800, Dabieshan Road, High-tech Zone, Hefei, P.R.China
Equipment Type: Wireless Charging module
Model Name: YG0050-12 (refer to section 2.3)
Brand Name: INVISPOWER
FCC ID: 2BBHYGKJ-PAHWPC
Test Standard: 47 CFR Part 15 Subpart B
ANSI C63.4-2014
Sample Arrival Date: Jan. 14, 2025
Test Date: Jan. 15, 2025 - Jan. 17, 2025
Date of Issue: Jul. 14, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Qiu Yongjing **Checked by:** Zong Liyao**Approved by:** Tolan Tu

(Testing Director)



Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Jul. 14, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	3
1.1	Test Laboratory	3
1.2	Test Location.....	3
2	PRODUCT INFORMATION.....	4
2.1	Applicant Information.....	4
2.2	Manufacturer Information	4
2.3	General Description for Equipment under Test (EUT)	4
2.4	Ancillary Equipment.....	4
2.5	Technical Information	4
3	SUMMARY OF TEST RESULTS.....	5
3.1	Test Standards	5
3.2	Verdict	5
3.3	Test Uncertainty	5
4	GENERAL TEST CONFIGURATIONS.....	6
4.1	Test Enclosure List.....	6
4.2	Test Configurations	6
4.3	Test Setups	7
5	TEST ITEMS.....	9
5.1	Emission Tests	9
ANNEX A	TEST RESULTS.....	14
A.1	Radiated Emission	14
A.2	Conducted Emission, AC Ports	18
ANNEX B	TEST SETUP PHOTOS	19
ANNEX C	EUT EXTERNAL PHOTOS	19

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input checked="" type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China <input type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Hefei Invispower Co., Ltd
Address	2A, Yousi Tiancheng Industrial Park, No. 1800, Dabieshan Road, High-tech Zone, Hefei, P.R.China

2.2 Manufacturer Information

Manufacturer	Hefei Invispower Co., Ltd
Address	2A, Yousi Tiancheng Industrial Park, No. 1800, Dabieshan Road, High-tech Zone, Hefei, P.R.China

2.3 General Description for Equipment under Test (EUT)

EUT Name	Wireless Charging module
Model Name Under Test	YG0050-12
Series Model Name	YG0050-01, YG0050-02, YG0050-03, YG0050-04, YG0050- 05, YG0050-06, YG0050-07, YG0050-08, YG0050-09, YG0050-10, YG0050-11, YG0050-13
Description of Model name differentiation	Their circuit design, layout and internal wiring are identical. Only with different appearance, location of DC fans, location of the power port and mounting options. (this information provided by the applicant)
Hardware Version	0.0.1
Software Version	4.00.00
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Note: Not applicable.

2.5 Technical Information

Network and Wireless connectivity	WPT
Classification of equipment	Class B
The highest internal frequency of EUT	<108MHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Remark
1	Radiated Emission	15.109	Pass	--
2	Conducted Emission, AC Ports	15.107	N/A	--

Note: This product does not have an AC port

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (30 MHz-1 GHz)-966#4	4.4 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Vehicle Battery	Camel	55530	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Wireless Charging Load	YBZ	N/A	WL-03	N/A	N/A	<input checked="" type="checkbox"/>
Clip line	N/A	N/A	N/A	0.5m	N/A	<input checked="" type="checkbox"/>

4.2 Test Configurations

All test modes of EUT are listed in the table below.


Test Mode Configuration	Description
Mode 1	<u>The Stand by Test Mode</u> EUT + Power supply line + Clip line + Vehicle Battery
Mode 2	<u>The WPT Test Mode</u> EUT + Power supply line + Clip line + Vehicle Battery + Load(5W)
Mode 3	<u>The WPT Test Mode</u> EUT + Power supply line + Clip line + Vehicle Battery + Load(15W)
Mode 4	<u>The WPT Test Mode</u> EUT + Power supply line + Clip line + Vehicle Battery + Load(50W)

Test Case	Test Mode Configuration	Worst Mode
Radiated Emission	Mode 1~Mode 4	4


Note: All operation modes were tested, but only test data of the worst mode was presented in this report.

4.3 Test Setups

Test Setup 1

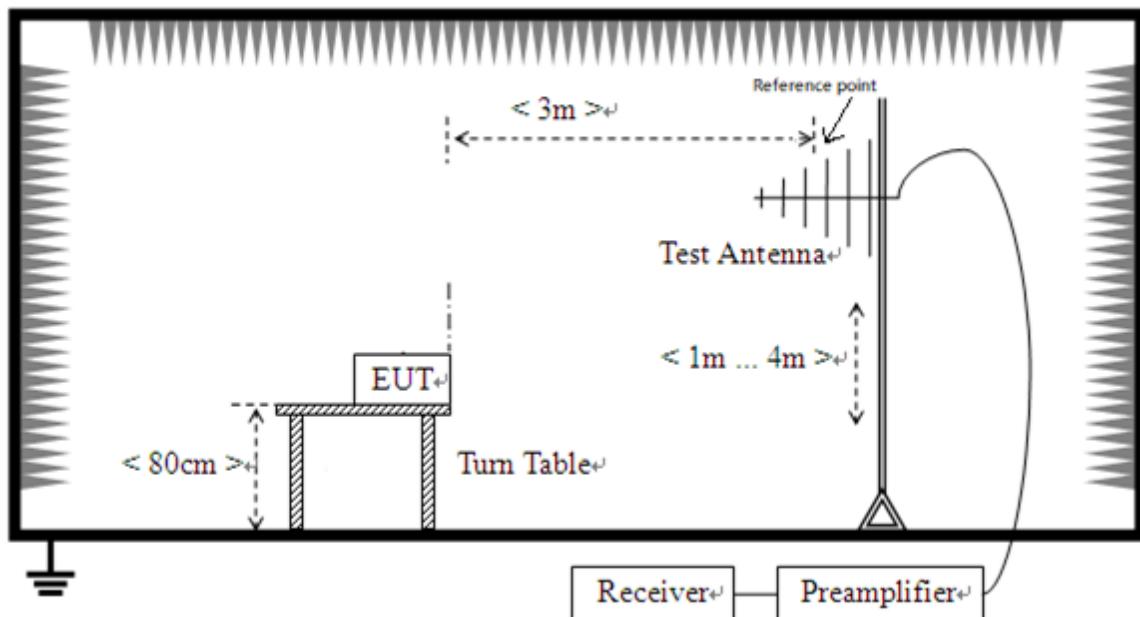


Radiated Emission (30 MHz-1 GHz)

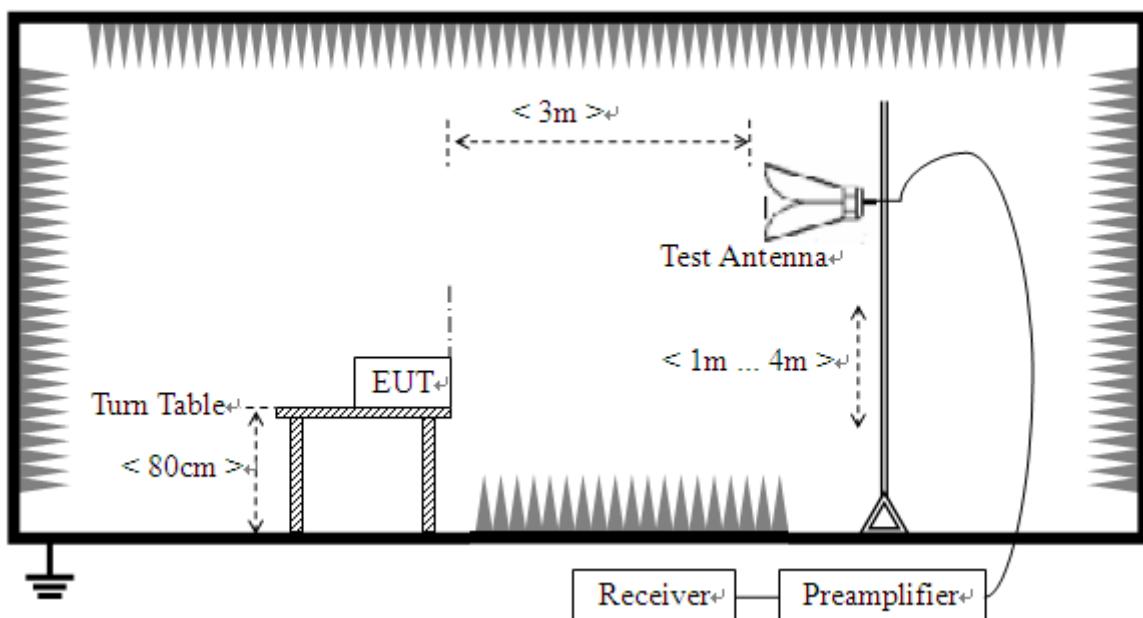

Radiated Emission (above 1 GHz)

Test Setup 2

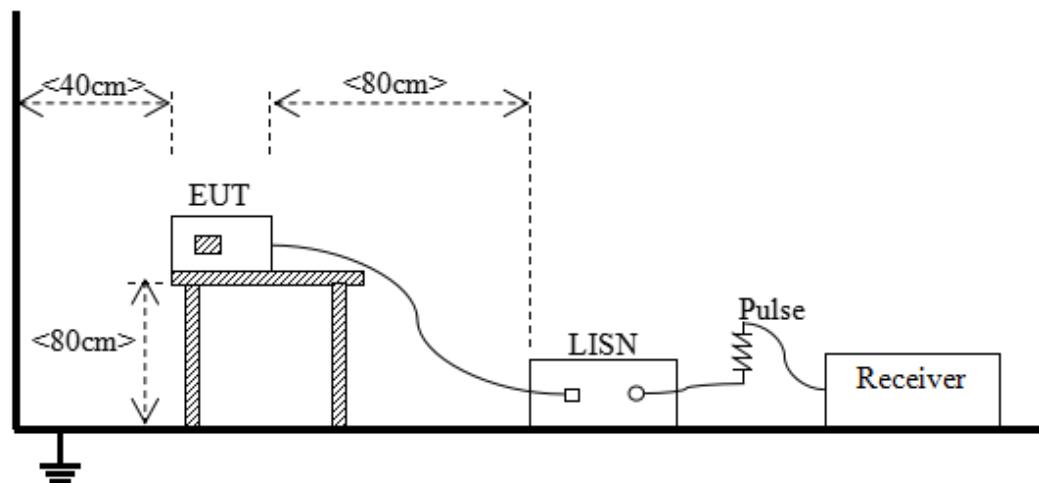

Conducted Emissions, AC Ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Field Strength (dB μ V/m)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

NOTE:

- 1) Field Strength (dB μ V/m) = 20*log [Field Strength (μ V/m)].
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength (μ V/m)	Field Strength Average (dB μ V/m)	Field Strength Peak (dB μ V/m)	Field Strength Average (dB μ V/m)	Field Strength Peak (dB μ V/m)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 * \log(d_{10m}/d_{3m})$$

Where:

L_{3m} is Average Class A limit at 3m;

L_{10m} is Average Class A limit at 10m;

d_{10m} is Measurement distance in 10m;

d_{3m} is Measurement distance in 3m.

For this case: $L_{3m} = 49.5 + 20 * \log(10/3) = 60$ (dB μ V/m).

Highest internal frequency (F _x)	Highest measurement frequency (F _M)
F _x ≤ 108 MHz	1 GHz
108 MHz ≤ F _x ≤ 500 MHz	2 GHz
500 MHz ≤ F _x ≤ 1 GHz	5 GHz
F _x ≥ 1 GHz	5 *F _x or 40 GHz, whichever is lower.

Note: F_x is Highest frequency generated or used in the device or on which the device operates or tunes.

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for f ≥ 1 GHz, 100 kHz for f < 1 GHz

VBW ≥ RBW

Sweep = auto

Detector function = peak for f < 1 GHz, peak & RMS Average for f ≥ 1 GHz

Trace = max hold

5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit - Results

5.1.2 Conducted Emission, AC Ports

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 2) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW \geq RBW

Sweep = 10ms

Detector function =peak & Average

Trace = max hold

5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit - Results

ANNEX A TEST RESULTS

A.1 Radiated Emission


Note 1: The symbol of “--” in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Sample No.	S03	Temperature	24.8°C
Humidity	56%RH	Pressure	101kPa
Test Engineer	He Shichang	Test Date	2025.01.17


Test Mode 4

1) Test Antenna Vertical, 30 MHz – 1 GHz

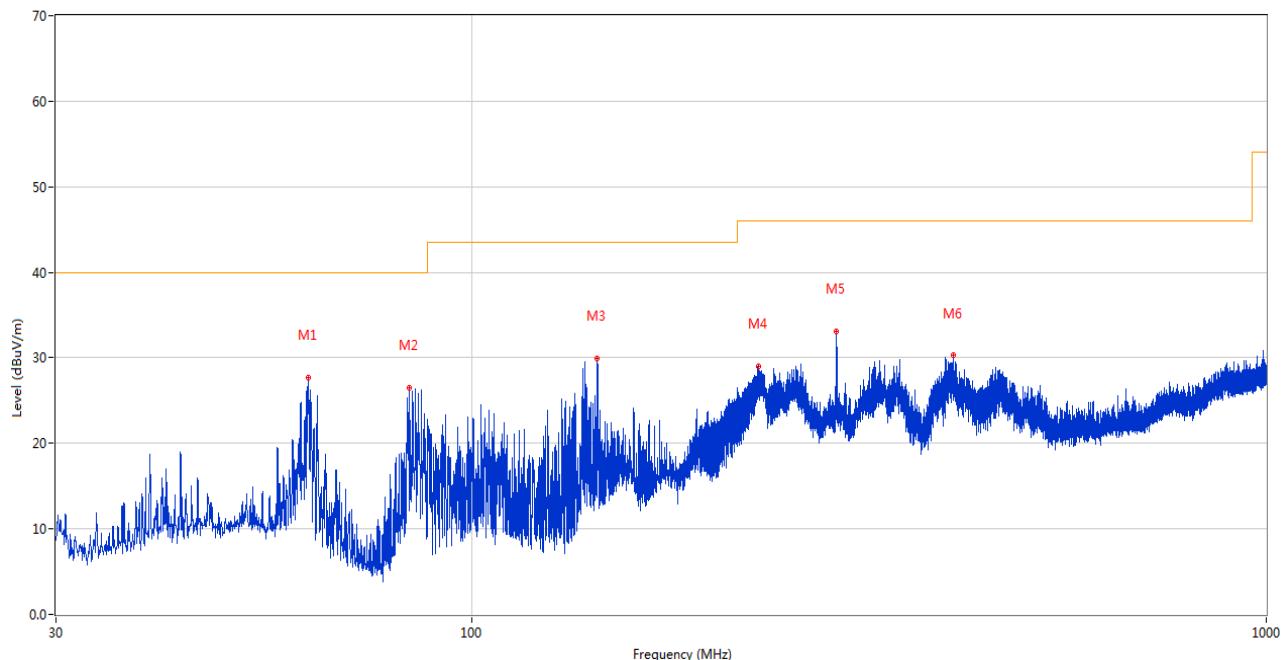

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	62.398	27.74	-26.59	40.0	12.26	Peak	114.20	100	Vertical	Pass
2	83.447	26.45	-30.77	40.0	13.55	Peak	125.70	100	Vertical	Pass
3	144.024	29.93	-29.67	43.5	13.57	Peak	310.90	100	Vertical	Pass
4	229.384	29.01	-25.26	46.0	16.99	Peak	109.80	100	Vertical	Pass
5	288.020	33.06	-23.25	46.0	12.94	Peak	356.10	200	Vertical	Pass
6	403.547	30.26	-20.36	46.0	15.74	Peak	358.30	200	Vertical	Pass

2) Test Antenna Horizontal, 30 MHz – 1 GHz

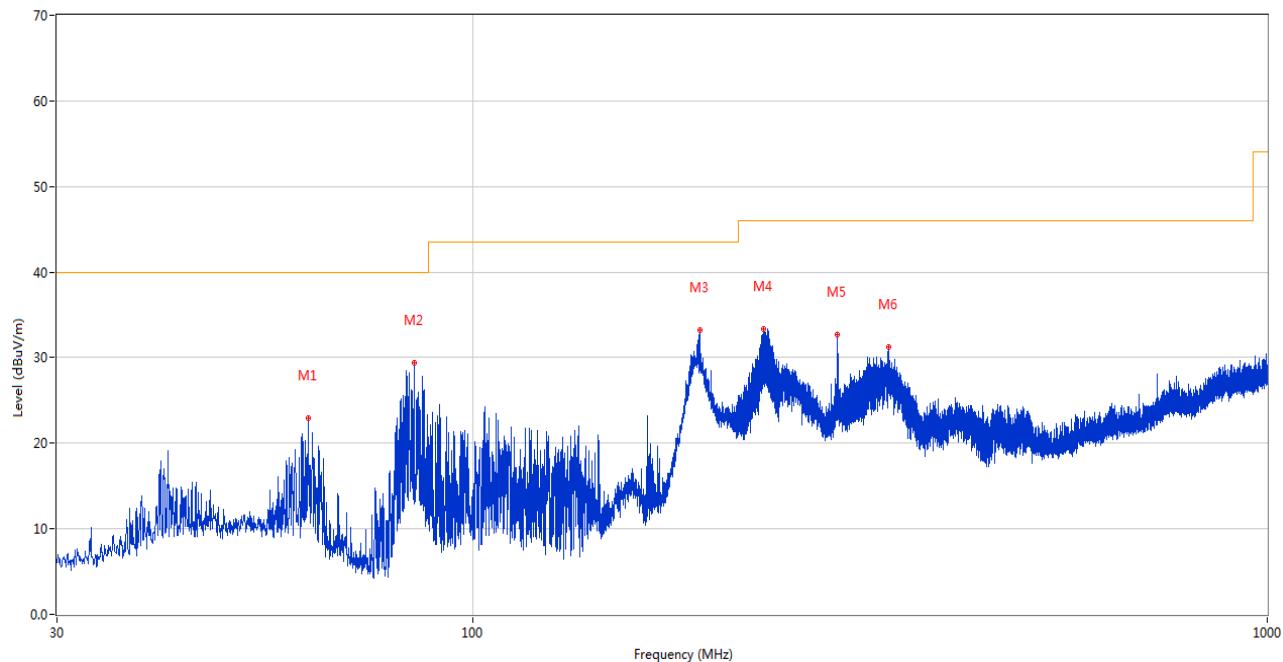

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	62.156	22.99	-26.47	40.0	17.01	Peak	50.00	200	Horizontal	Pass
2	84.417	29.35	-30.49	40.0	10.65	Peak	21.00	200	Horizontal	Pass
3	193.008	33.25	-26.11	43.5	10.25	Peak	153.80	200	Horizontal	Pass
4	232.633	33.38	-24.94	46.0	12.62	Peak	50.70	100	Horizontal	Pass
5	287.971	32.66	-23.26	46.0	13.34	Peak	83.20	100	Horizontal	Pass
6	333.513	31.24	-21.98	46.0	14.76	Peak	234.60	100	Horizontal	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330120	2024.08.01	2025.07.31	<input checked="" type="checkbox"/>
Amplifier (30-1GHz)	COM-MV	ZT30-1000M	B2017119081	2024.11.28	2025.11.27	<input checked="" type="checkbox"/>
Test Antenna-Bi-Log	SCHWARZB ECK	VULB 9168	9168-00867	2022.04.12	2025.04.11	<input checked="" type="checkbox"/>
Anechoic Chamber (#2)	YiHeng	9m*6m*6m	142	2024.07.21	2027.07.20	<input checked="" type="checkbox"/>
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		<input checked="" type="checkbox"/>

A.2 Conducted Emission, AC Ports

Note: Not applicable.

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2510533-AE-1.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2510533-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2510533-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--