

Acknowledgment

SPECIFICATION FOR APPROVAL

CUSTOMER: _____

PART NO. : 101.0213

DESCRIPTION: coil+hard ferrite sheet

SPECIFICATION: 15x38.5,0.08×105P, lead line length 50mm,
(measured from edge of ferrite sheet)

DATE: 20250731

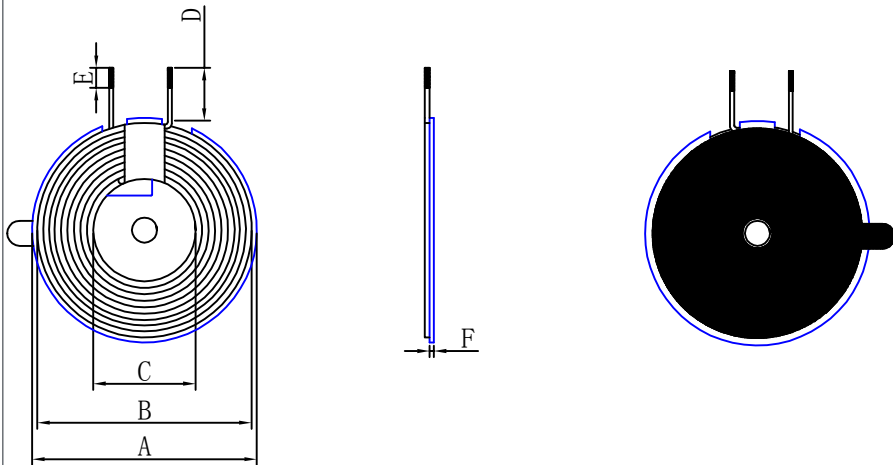
TRX APPROVAL		
Production	Audit	Recognition date
Xiaoxian Zeng	Zhihui Qiu	20250731
CUSTOMER APPROVAL		
Project	Approved	Recognition date
Result: ☐ Qualified ☐ Disqualified ☐ Other		

Dongguan city DFL Electronic Technology Co.,LTD

107 Xinfeng West Road, Shijie, Dongguan, Guangdong,

TEL: 0769-86016320 FAX: 0769-86372427

Dongguan city DFL Electronic Technology Co.,LTD

SPECIFICATION					
DESC :	Y15X38.5-50-FR		version Rev:A	Customer:	
				Description:	coil+hard ferrite sheet
				Date:	20250731
1、 DIMENSION:(mm) 				A	44.0±1.0
				B	38.5±2.0
				C	15.0±4.0
				D	50.0±4.0
				E	4.0±2.0
				F	1.0±0.2
				G	
				H	
				I	
				J	
				K	
				L	
				M	
				N	
				O	
				P	
				Note: 1. The coil is pasted with G44*1.0 hard ferrite 2. Wrap 8MM high-temperature tape around the coil outlet position. 3. Double-sided tape for ears attached to the back of the ferite sheet 4. The coil cannot be loosened	
2、 schematic diagram:					
3、 WindingSpecification:					
NO.	TERMINAL		WIRE	Turns	Winding Direction
1			0.08×105P Silk covered wire	10TS	Counterclockwise
4、 ELECTRICAL CHARACTERISTICS:					
TEMPERATURE:25±10°C,RELATIVE HUMIDITY:65±20%					
NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND.		6.8UH ± 10% with hard ferrite added	100KHz/1.0V	SHDA 1062
2	IND.				
3	Q value				
4	DCR				
PREPARED BY/DATE		CHECKED BY/DATE		CUSTOMEU/DATE	