

FCC Test Report

Report No.: RWAZ202300087C

Applicant: Shenzhen jinnaibo Electronic Co., Ltd.

Address: Floor 3, building L, Shasi hi tech park, Shasi Community, Shajing street, Baoan Shenzhen

Product Name: Car Navigation System

Product Model: XT892C

Multiple Models: XT891, XT811, XT892, XT812, XT891C, XT811C, XT812C, XT892SC, XT812SC, XT592, XT512, XT594, XT514, XT596, XT516, XTMGN272C, XTLY72C, XTF15072C, XTA372C, XTDA72C, XTTR72C, XTVW72C, XTJE72C, XTGMC72C, XTPG72C, XTPB72C, XTPS72C, XTB20072C, XTW21172C, XTW20372C, XTW20972C, XTE4672C, XTE9072C, XTE3972C, XTFC72C, XTFD72C, XTFYT50072C, XTPANDA72C, XTPUNTO72C, XTVW92C, XTB20082C, XTVW82C, MS92NV, MS12NV, MS94NV, MS14NV, MS96NV, MS16NV, MS94, MS14, MS98, MS18, MS9256, MS1256, BW3E9014, X5CCC14, B2B3NBT4, E60CIC84, E60CCC84, HPA584.GP, HPQ514.GP, GBZA14-15, GQ514L-917, GA4A514H-916, DW8114, DW8134, SPAccrodDW894, DW4Runner4.G, DW4Runner4.S, M3VWMT, M3B, GT694, GT614, GT698, GT618, GT698S, GT618S, DW8RUNNER12, DW9RUNNER14, DW8RAM14, DW9RAM14, DW9F15024-314, DW9F15024-521

Trade Mark: N/A

FCC ID: 2BBNO-XT892C

Standards: FCC CFR Title 47 Part 15C (§15.247)

Test Date: 2023-12-29 to 2024-01-19

Test Result: Complied

Report Date: 2024-01-23

Reviewed by:

Frank Yin

Approved by:

Jacob Kong

Frank Yin
Project Engineer

Jacob Kong
Manager

Prepared by:

World Alliance Testing and Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen,
Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

Announcement

1. This test report shall not be reproduced in full or partial, without the written approval of World Alliance Testing and Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
5. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

Revision History

Version No.	Issued Date	Description
00	2024-01-23	<i>Original</i>

Contents

1	General Information	5
1.1	Client Information	5
1.2	Product Description of EUT	5
1.3	Antenna information	5
1.4	Related Submittal(s)/Grant(s).....	6
1.5	Measurement Uncertainty	6
1.6	Laboratory Location.....	6
1.7	Test Methodology	6
2	Description of Measurement.....	7
2.1	Test Configuration.....	7
2.2	Test Auxiliary Equipment	8
2.3	Test Setup.....	8
2.4	Test Procedure	10
2.5	Measurement Method.....	11
2.6	Measurement Equipment	12
3	Test Results	13
3.1	Test Summary.....	13
3.2	Limit	14
3.3	AC Line Conducted Emissions Test Data.....	15
3.4	Radiated emission Test Data.....	16
3.5	RF Conducted Test Data	28
3.5.1	6 dB Emission Bandwidth and 99% Occupied Bandwidth.....	28
3.5.2	Maximum Conducted Peak Output Power.....	28
3.5.3	Power Spectral Density.....	29
3.5.4	100 kHz Bandwidth of Frequency Band Edge	29
3.5.5	Duty Cycle	29
4	Test Setup Photo.....	39
5	E.U.T Photo	40

1 General Information

1.1 Client Information

Applicant:	Shenzhen jinnaibo Electronic Co., Ltd.
Address:	Floor 3, building L, Shasi hi tech park, Shasi Community, Shajing street, Bao'an Shenzhen
Manufacturer:	Shenzhen jinnaibo Electronic Co., Ltd.
Address:	Floor 3, building L, Shasi hi tech park, Shasi Community, Shajing street, Bao'an Shenzhen

1.2 Product Description of EUT

The EUT is Car Navigation System that contains Classical Bluetooth(BDR/EDR), BLE, 2.4G and 5G WLAN radios, this report covers the full testing of the 2.4G WLAN radio.

Sample Serial Number	1P-1,1Q-1,1R-1RE test,1P-1 for RF test conducted test (assigned by WATC)
Sample Received Date	2023-12-22
Sample Status	Good Condition
Frequency Range	2412MHz - 2462MHz(802.11b, g, n-HT20) 2422MHz - 2452MHz(802.11n-HT40)
Maximum Conducted Peak Output Power	18.69dBm
Modulation Technology	DSSS, OFDM
Antenna Gain [#]	0.23dBi
Spatial Streams [#]	SISO (1TX, 1RX)
Power Supply	DC 12V
Adapter Information	N/A
Modification	Sample No Modification by the test lab

1.3 Antenna information

15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
Device Antenna information:	The Wi-Fi antenna is an external antenna which uses a unique antenna connector, please see product external photos for details.

1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment Class: DSS, FCC ID: 2BBNOXT892C
FCC Part 15, Subpart E, Equipment Class: NII, FCC ID: 2BBNOXT892C

1.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))	
AC Power Lines Conducted Emissions	± 3.14 dB	
Emissions, Radiated	Below 30MHz	± 2.78 dB
	Below 1GHz	± 4.84 dB
	Above 1GHz	± 5.44 dB
Emissions, Conducted	1.75 dB	
Conducted Power	0.74 dB	
Frequency Error	150Hz	
Bandwidth	0.34%	
Power Spectral Density	0.74 dB	

Note 1: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Note 2: The Decision Rule is based on simple acceptance with ISO Guide 98-4:2012 Clause 8.2 (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

1.6 Laboratory Location

World Alliance Testing and Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Tel: +86-755-29691511, Email: qa@wutc.com.cn

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.

1.7 Test Methodology

FCC CFR 47 Part 2

FCC CFR 47 Part 15

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2020

2 Description of Measurement

2.1 Test Configuration

Operating channels:					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442	/	/
3	2422	8	2447	/	/
4	2427	9	2452	/	/
5	2432	10	2457	/	/

According to ANSI C63.10-2020 chapter 5.6.1 Table 11 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

802.11b, 802.11g, 802.11n-HT20					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	6	2437	11	2462
802.11n-HT40					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
3	2422	6	2437	9	2452

Test Mode:					
Transmitting mode: Keep the EUT in continuous transmitting with modulation					
Exercise software [#] : SP_META V2.2052.0					
Mode	Worst-case Data rate	Powel Level Setting [#]			
		Low Channel	Middle Channel	High Channel	
802.11b	1Mbps	9	9	9	
802.11g	6Mbps	12	12	12	
802.11n-HT20	6.5Mbps	9	9	9	
802.11n-HT40	13.5Mbps	9	9	9	

The exercise software and the maximum power setting that provided by manufacturer.


Worst-Case Configuration:					
For radiated emission 9kHz-1GHz and above 18GHz were performed with the EUT transmits at the channel with highest output power as worst-case scenario.					
For EUT model: XT892C, XT812C, XTGMC72C, they use the same main board, but have difference appearance and a connector board, model XT892C was selected to full test, other two models was additional test radiated emissions below 1GHz.					

2.2 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
UNI-TREND Technology (CHINA) Co., Ltd.	DC Power Supply	UTP1310S	C221286498

2.3 Test Setup


1) Conducted emission measurement:



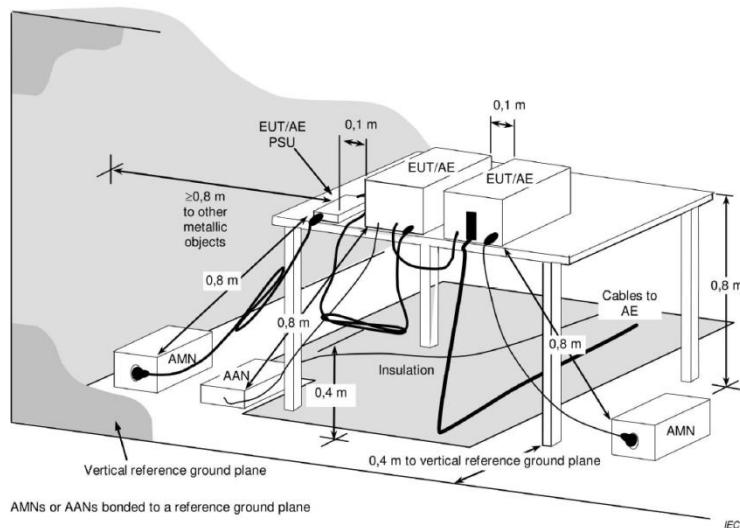


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.


2) Radiated emission measurement:

Below 30MHz (3m SAC)

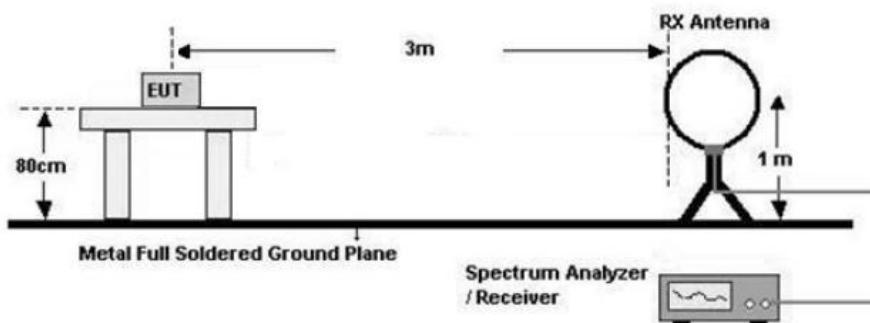

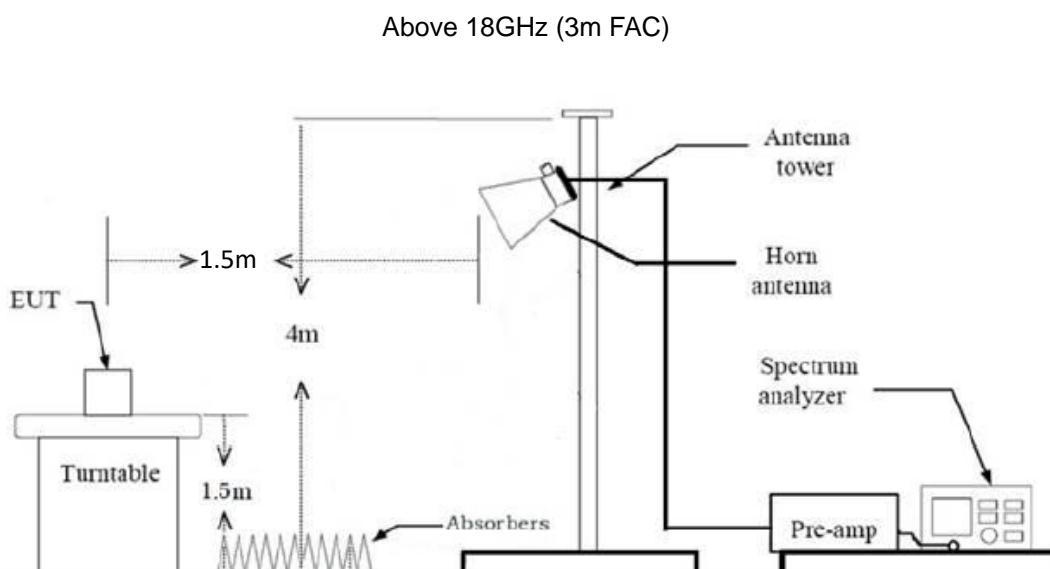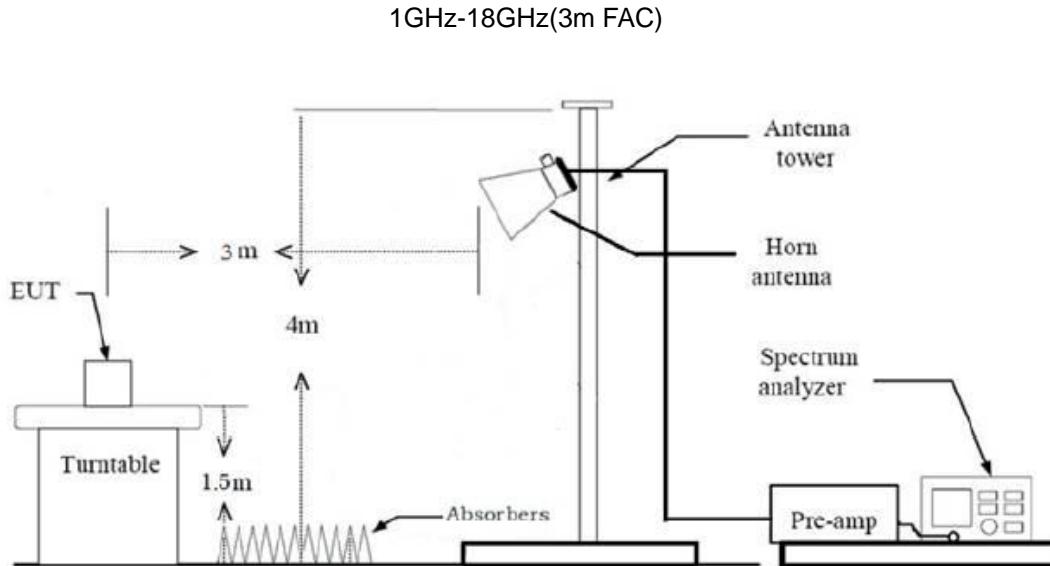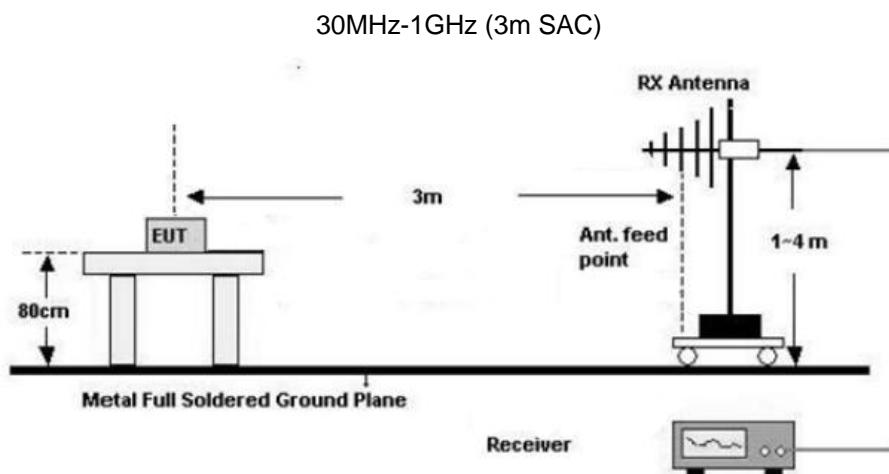

3) RF Conducted Test

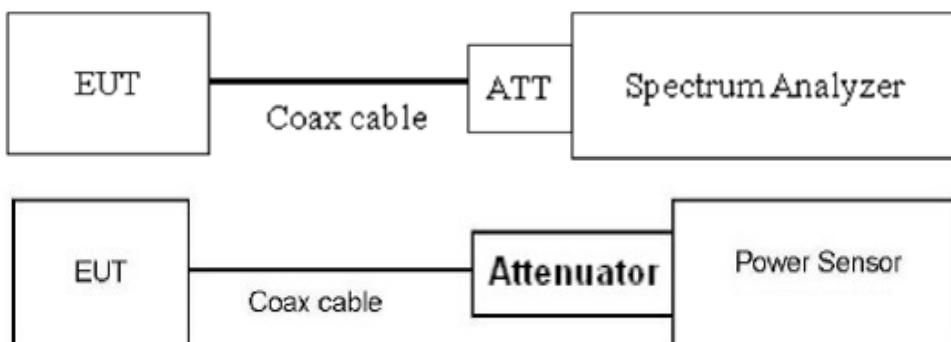

2.4 Test Procedure

Conducted emission:

1. The E.U.T is placed on a non-conducting table 40cm from the vertical ground plane and 80cm above the horizontal ground plane (Please refer to the block diagram of the test setup and photographs).
2. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
3. Line conducted data is recorded for both Line and Neutral

Radiated Emission Procedure:

a) For below 30MHz

1. All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz- 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were $40 \times \log(\text{test distance} / \text{specification distance})$.
2. Loop antenna use, investigation was done on the three antenna orientations (parallel, perpendicular, ground-parallel)

b) For 30MHz-1GHz:

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

c) For above 1GHz:

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m (1-18GHz) and 1.5 m (above 18GHz).

2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
4. Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

RF Conducted Test:

1. The antenna port of EUT was connected to the RF port of the test equipment (Power Meter or Spectrum analyzer) through Attenuator and RF cable.
2. The cable assembly insertion loss of 6.5dB (including 6.0 dB Attenuator and 0.5dB cable) was entered as an offset in the power meter. Note: Actual cable loss was unavailable at the time of testing, therefore a loss of 0.5dB was assumed as worst case. This was later verified to be true by laboratory. (if the RF cable provided by client, the cable loss declared by client)
3. The EUT is keeping in continuous transmission mode and tested in all modulation modes.

2.5 Measurement Method

Description of Test	Measurement Method
AC Line Conducted Emissions	ANSI C63.10-2020 Section 6.2
Maximum Conducted Output Power	ANSI C63.10-2020 Section 11.9.1.2 PKPM1 Peak power meter method or ANSI C63.10-2020 Section 11.9.2.3.2 Method AVGPM-G
Power Spectral Density	ANSI C63.10-2020 Section 11.10.2 Method PKPSD (peak PSD)
6 dB Emission Bandwidth	ANSI C63.10-2020 Section 11.8.1
99% Occupied Bandwidth	ANSI C63.10-2020 Section 6.9.3
100kHz Bandwidth of Frequency Band Edge	ANSI C63.10-2020 Section 6.10
Radiated emission	ANSI C63.10-2020 Section 11.11&11.12
Duty Cycle	ANSI C63.10-2020 Section 11.6

2.6 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2023/7/3	2024/7/2
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSV40-N	101608	2023/7/3	2024/7/2
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2023/7/12	2024/7/11
COM-POWER	preamplifier	PAM-118A	18040152	2023/8/21	2024/8/20
COM-POWER	Amplifier	PAM-840A	461306	2023/8/8	2024/8/7
ETS	Passive Loop Antenna	6512	29604	2023/7/7	2024/7/6
SCHWARZBECK	Log - periodic wideband antenna	VULB 9163	9163-872	2023/7/7	2024/7/6
Astro Antenna Ltd	Horn antenna	AHA-118S	3015	2023/7/6	2024/7/5
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2023/7/10	2024/7/9
Oulitong	Band Reject Filter	OBSF-2400-248 3.5-50N	OE02103119	2023/9/15	2024/9/14
N/A	Coaxial Cable	N/A	NO.9	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.10	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.11	2023/8/8	2024/8/7
Audix	Test Software	E3	191218 V9	/	/
RF Conducted Test					
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSU-26	200680/026	2023/7/12	2024/7/11
ANRITSU	USB Power Sensor	MA24418A	12620	2023/7/12	2024/7/11
narda	6dB attenuator	603-06-1	N/A	2023/7/26	2024/7/25

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

3 Test Results

3.1 Test Summary

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	N/A
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
-	99% Occupied Bandwidth	Report only
§15.247(d)	100kHz Bandwidth of Frequency Band Edge	Compliance
§15.205, §15.209, §15.247(d)	Radiated emission	Compliance
-	Duty Cycle	Report only

3.2 Limit

Test items	Limit
AC Line Conducted Emissions	See details §15.207 (a)
Conducted Output Power	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.
6dB Emission Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.
Power Spectral Density	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Spurious Emissions, 100kHz Bandwidth of Frequency Band Edge	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.3 AC Line Conducted Emissions Test Data

Not Applicable, the device is intended for vehicle use.

3.4 Radiated emission Test Data

9 kHz-30MHz:


Test Date:	2023-01-19	Test By:	Bard Huang
Environment condition:	Temperature: 24.1°C; Relative Humidity:60%; ATM Pressure: 100.9kPa		


For radiated emissions below 30MHz, there were no emissions found within 20dB of limit.

30MHz-1GHz:

Test Date:	2023-01-19	Test By:	Bard Huang
Environment condition:	Temperature: 24.1°C; Relative Humidity:60%; ATM Pressure: 100.9kPa		

Model: XT892C

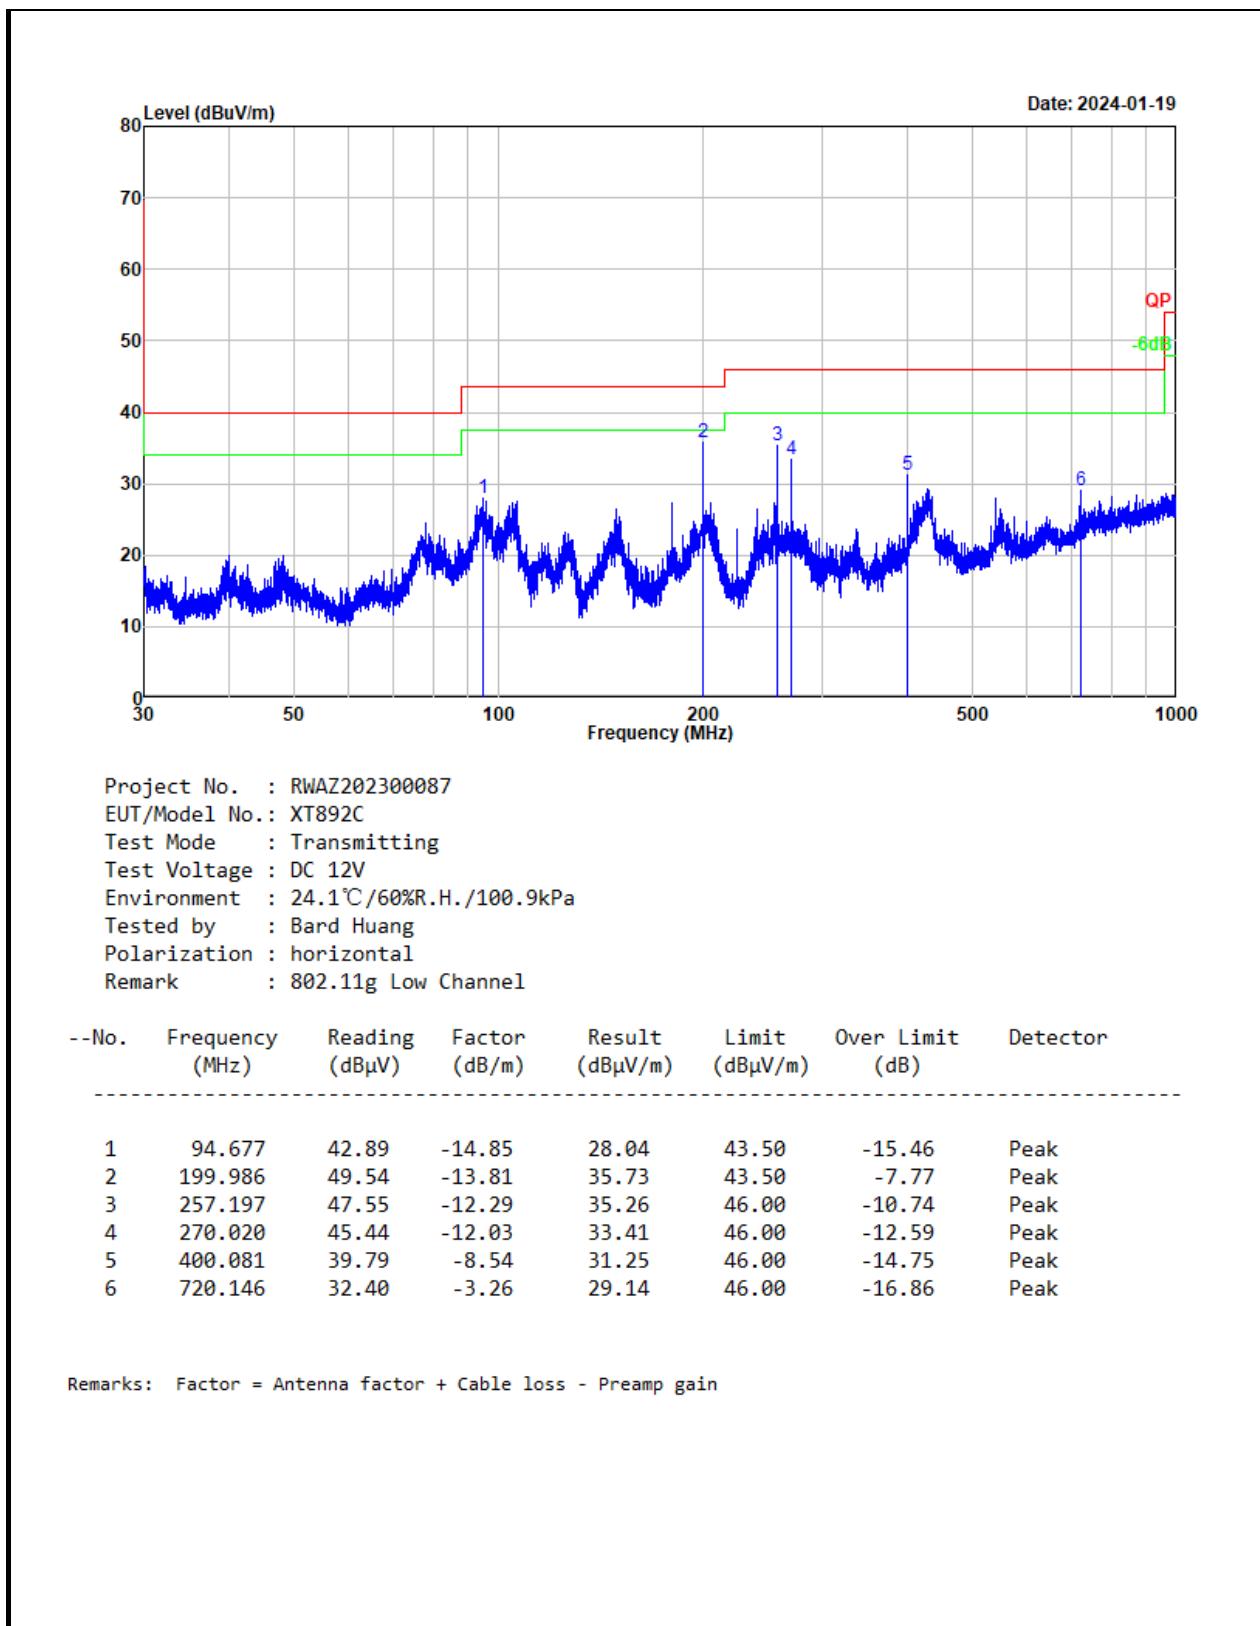

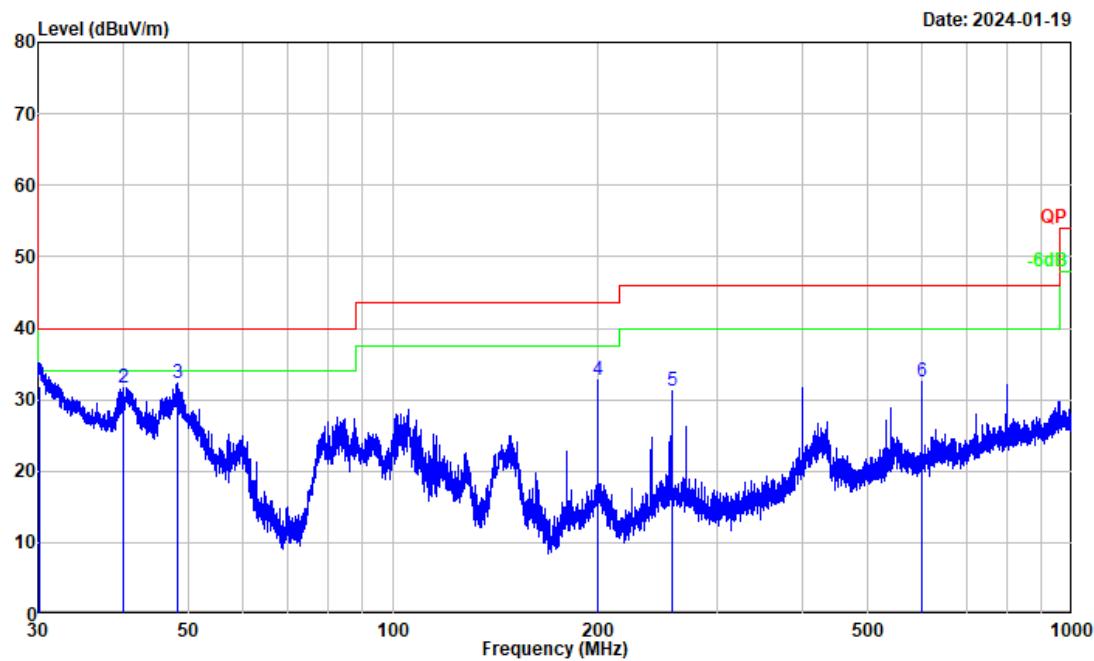



Project No. : RWAZ202300087
 EUT/Model No.: XT892C
 Test Mode : Transmitting
 Test Voltage : DC 12V
 Environment : 24.1°C/60%R.H./100.9kPa
 Tested by : Bard Huang
 Polarization : vertical
 Remark : 802.11g Low Channel

--No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Detector
1	30.145	46.99	-15.04	31.95	40.00	-8.05	QP
2	40.047	44.87	-13.11	31.76	40.00	-8.24	Peak
3	48.120	44.52	-12.17	32.35	40.00	-7.65	Peak
4	199.986	46.48	-13.81	32.67	43.50	-10.83	Peak
5	257.197	43.61	-12.29	31.32	46.00	-14.68	Peak
6	600.110	37.58	-5.05	32.53	46.00	-13.47	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

Model: XT812C

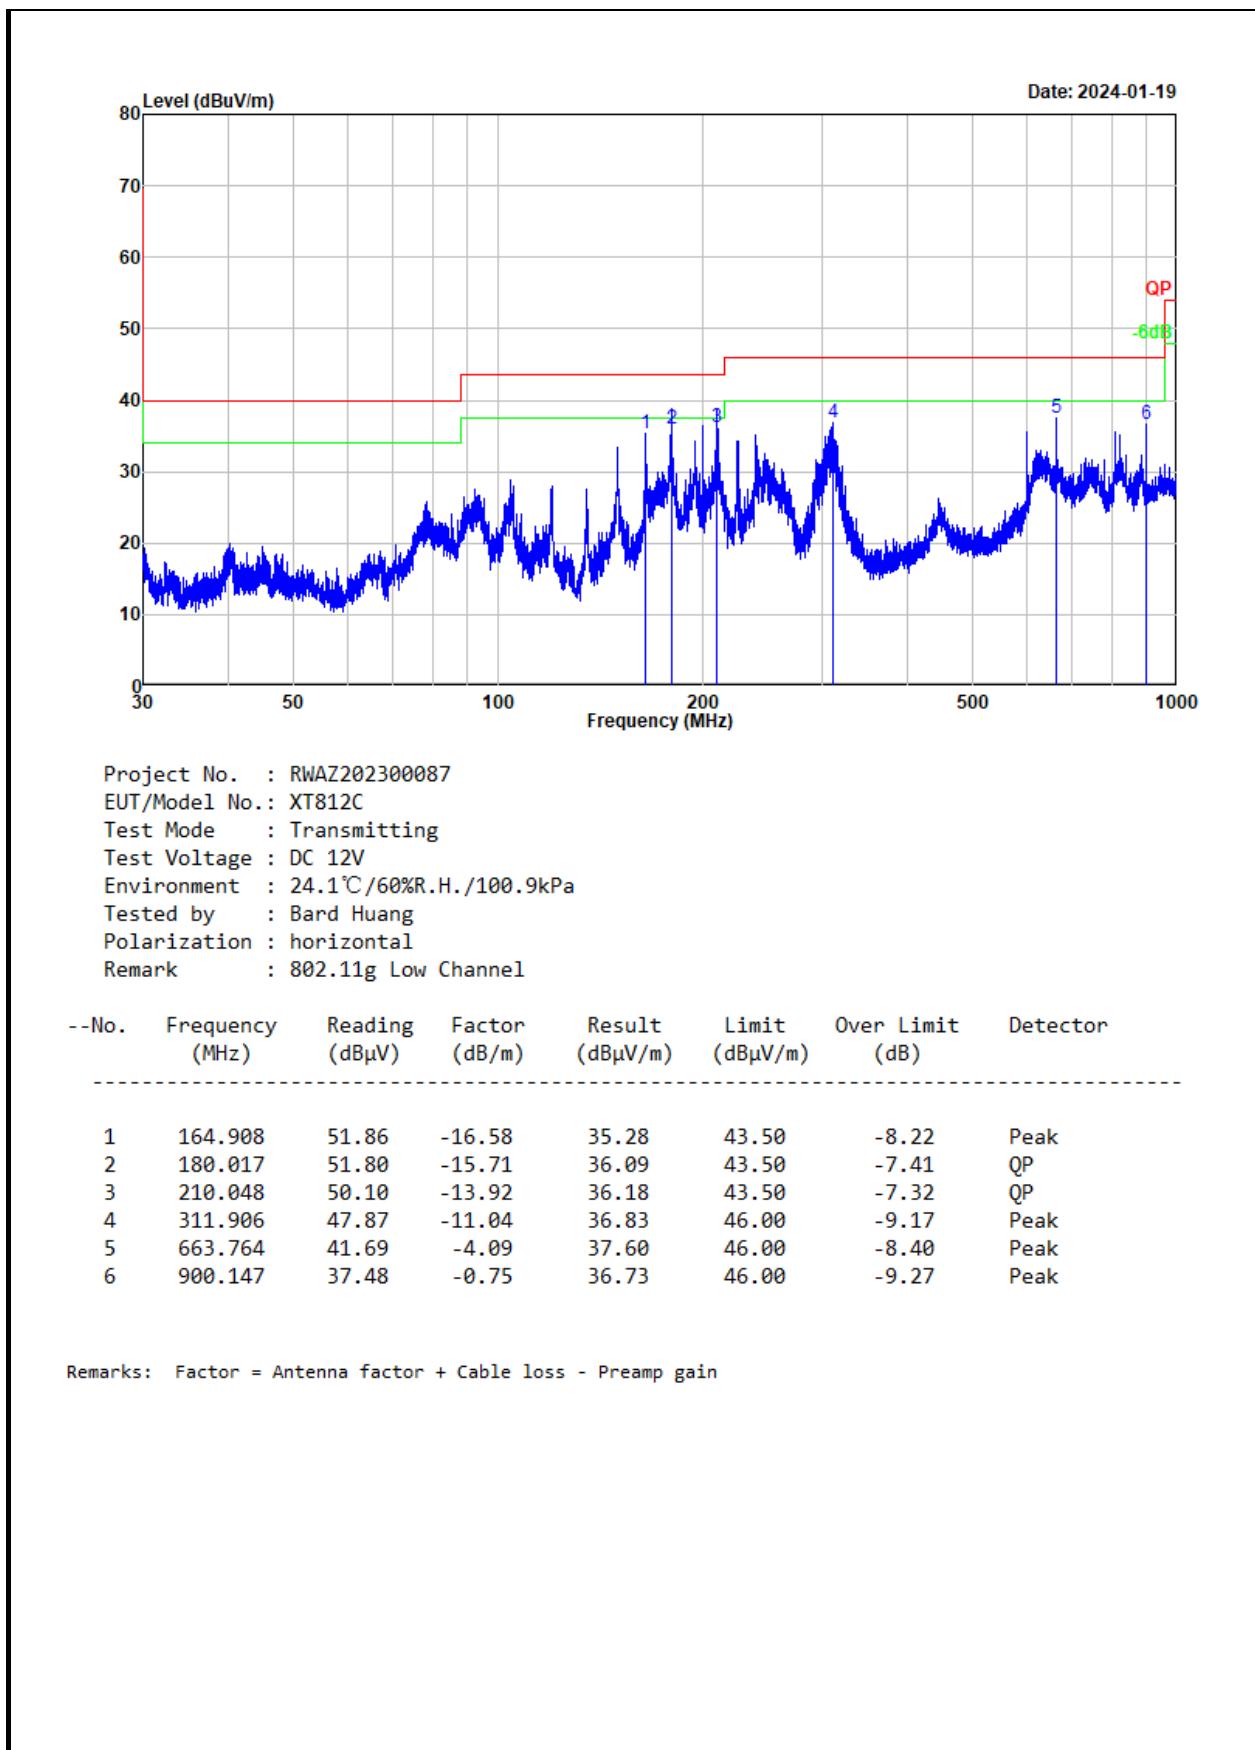

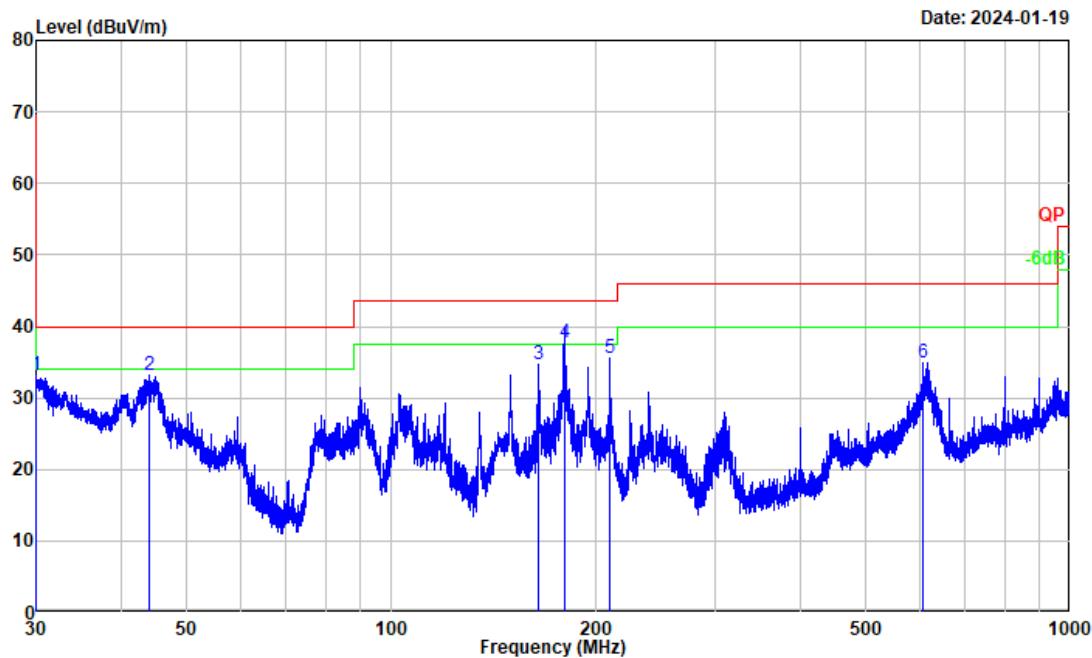


Project No. : RWAZ202300087
 EUT/Model No.: XT812C
 Test Mode : Transmitting
 Test Voltage : DC 12V
 Environment : 24.1°C/60%R.H./100.9kPa
 Tested by : Bard Huang
 Polarization : vertical
 Remark : 802.11g Low Channel

--No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Detector
1	30.013	48.24	-15.00	33.24	40.00	-6.76	Peak
2	44.062	45.35	-12.29	33.06	40.00	-6.94	Peak
3	165.052	51.28	-16.57	34.71	43.50	-8.79	Peak
4	179.938	53.50	-15.71	37.79	43.50	-5.71	QP
5	210.048	49.38	-13.92	35.46	43.50	-8.04	Peak
6	608.320	39.82	-4.82	35.00	46.00	-11.00	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain


Model: XTGMC72C

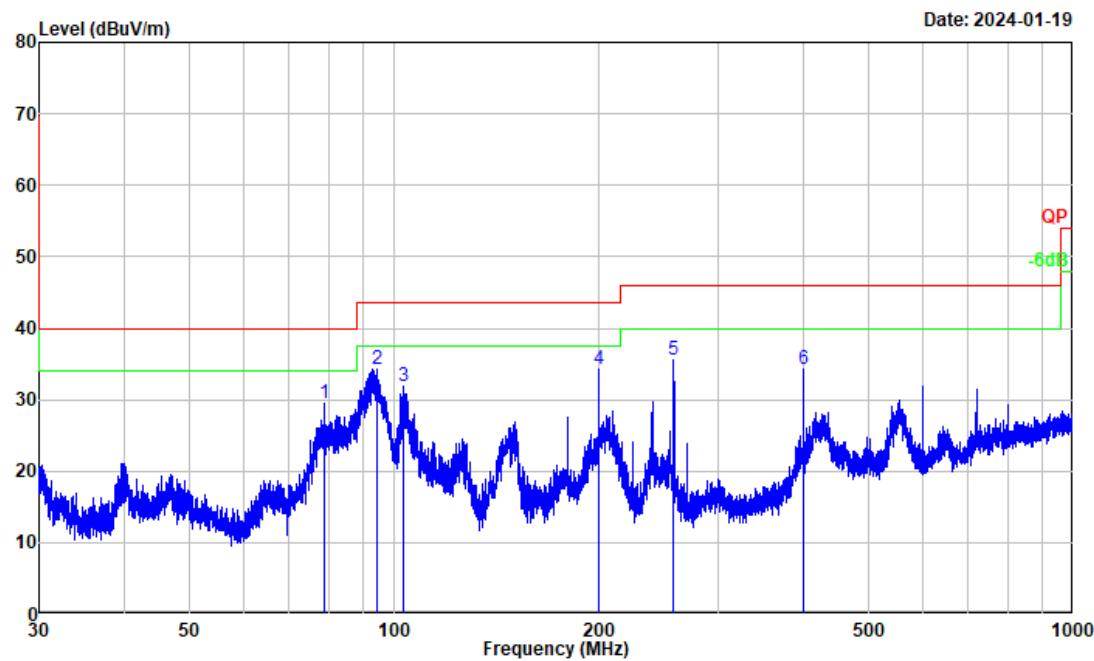

Project No. : RWAZ202300087
 EUT/Model No.: XTGMC72C
 Test Mode : Transmitting
 Test Voltage : DC 12V
 Environment : 24.1°C/60%R.H./100.9kPa
 Tested by : Bard Huang
 Polarization : horizontal
 Remark : 802.11g Low Channel

--No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Detector
1	78.965	47.64	-18.18	29.46	40.00	-10.54	Peak
2	94.553	49.08	-14.88	34.20	43.50	-9.30	Peak
3	103.216	45.97	-14.05	31.92	43.50	-11.58	Peak
4	199.986	48.09	-13.81	34.28	43.50	-9.22	Peak
5	258.100	47.85	-12.27	35.58	46.00	-10.42	Peak
6	400.081	42.87	-8.54	34.33	46.00	-11.67	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

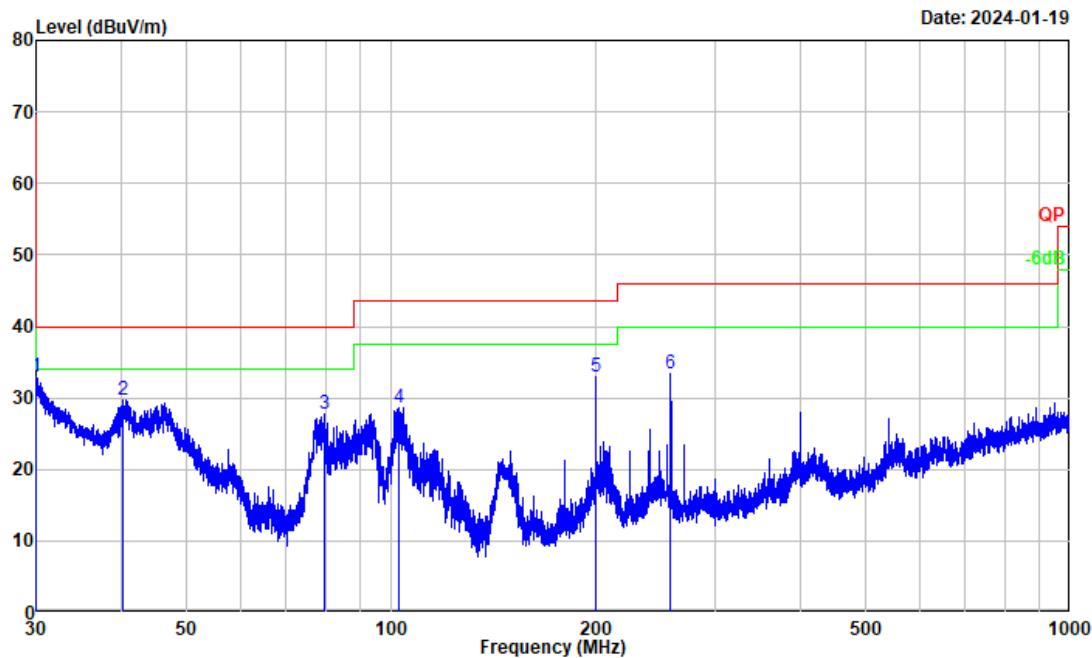

Project No. : RWAZ202300087
 EUT/Model No.: XTGMC72C
 Test Mode : Transmitting
 Test Voltage : DC 12V
 Environment : 24.1°C/60%R.H./100.9kPa
 Tested by : Bard Huang
 Polarization : vertical
 Remark : 802.11g Low Channel

--No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Detector
1	30.026	48.07	-15.01	33.06	40.00	-6.94	Peak
2	40.188	42.80	-13.06	29.74	40.00	-10.26	Peak
3	79.626	45.94	-18.12	27.82	40.00	-12.18	Peak
4	102.719	42.76	-14.07	28.69	43.50	-14.81	Peak
5	199.898	46.85	-13.81	33.04	43.50	-10.46	Peak
6	258.213	45.70	-12.27	33.43	46.00	-12.57	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

Remark:

Level = Reading + Factor

Factor = Antenna factor + Cable loss - Amplifier gain

Over Limit = Level - Limit

Above 1GHz:

Test Date:	2023-12-29	Test By:	Bard Huang
Environment condition:	Temperature: 23.8°C; Relative Humidity:48%; ATM Pressure: 101.5kPa		

Frequency (MHz)	Reading level (dB μ V)	Polar	Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
802.11b							
Low Channel							
2390.000	37.82	horizontal	8.25	46.07	54.00	-7.93	Average
2390.000	49.89	horizontal	8.25	58.14	74.00	-15.86	Peak
2390.000	37.61	vertical	8.25	45.86	54.00	-8.14	Average
2390.000	50.09	vertical	8.25	58.34	74.00	-15.66	Peak
2412.000	96.52	horizontal	8.23	104.75	/	/	Peak
7236.000	55.34	horizontal	3.26	58.60	84.75	-26.15	Peak
2412.000	98.48	vertical	8.23	106.71	/	/	Peak
7236.000	55.56	vertical	3.26	58.82	86.71	-27.89	Peak
Middle Channel							
7311.000	49.13	horizontal	3.02	52.15	54.00	-1.85	Average
7311.000	53.56	horizontal	3.02	56.58	74.00	-17.42	Peak
7311.000	49.70	vertical	3.02	52.72	54.00	-1.28	Average
7311.000	54.04	vertical	3.02	57.06	74.00	-16.94	Peak
High Channel							
2483.500	37.36	horizontal	8.25	45.61	54.00	-8.39	Average
2483.500	49.95	horizontal	8.25	58.20	74.00	-15.80	Peak
2483.500	37.42	vertical	8.25	45.67	54.00	-8.33	Average
2483.500	50.40	vertical	8.25	58.65	74.00	-15.35	Peak
7386.000	46.33	horizontal	3.09	49.42	54.00	-4.58	Average
7386.000	53.68	horizontal	3.09	56.77	74.00	-17.23	Peak
7386.000	48.35	vertical	3.09	51.44	54.00	-2.56	Average
7386.000	53.35	vertical	3.09	56.44	74.00	-17.56	Peak
802.11g							
Low Channel							
2389.060	42.66	horizontal	8.25	50.91	54.00	-3.09	Average
2389.060	53.70	horizontal	8.25	61.95	74.00	-12.05	Peak
2389.720	41.38	vertical	8.25	49.63	54.00	-4.37	Average
2389.720	53.67	vertical	8.25	61.92	74.00	-12.08	Peak

2412.000	94.90	horizontal	8.23	103.13	/	/	Peak
7236.000	58.61	horizontal	3.26	61.87	83.13	-21.26	Peak
2412.000	93.55	vertical	8.23	101.78	/	/	Peak
7236.000	59.69	vertical	3.26	62.95	81.78	-18.83	Peak
Middle Channel							
7311.000	41.02	horizontal	3.02	44.04	54.00	-9.96	Average
7311.000	59.24	horizontal	3.02	62.26	74.00	-11.74	Peak
7311.000	40.98	vertical	3.02	44.00	54.00	-10.00	Average
7311.000	60.11	vertical	3.02	63.13	74.00	-10.87	Peak
High Channel							
2483.500	40.13	horizontal	8.25	48.38	54.00	-5.62	Average
2483.500	57.06	horizontal	8.25	65.31	74.00	-8.69	Peak
2483.567	40.69	vertical	8.25	48.94	54.00	-5.06	Average
2483.567	55.84	vertical	8.25	64.09	74.00	-9.91	Peak
7386.000	45.70	horizontal	3.09	48.79	54.00	-5.21	Average
7386.000	61.73	horizontal	3.09	64.82	74.00	-9.18	Peak
7386.000	42.98	vertical	3.09	46.07	54.00	-7.93	Average
7386.000	62.44	vertical	3.09	65.53	74.00	-8.47	Peak
802.11n20							
Low Channel							
2389.600	38.85	horizontal	8.25	47.10	54.00	-6.90	Average
2389.600	61.26	horizontal	8.25	69.51	74.00	-4.49	Peak
2389.840	38.80	vertical	8.25	47.05	54.00	-6.95	Average
2389.840	57.36	vertical	8.25	65.61	74.00	-8.39	Peak
2412.000	97.03	horizontal	8.23	105.26	/	/	Peak
7236.000	58.51	horizontal	3.26	61.77	85.26	-23.49	Peak
2412.000	93.54	vertical	8.23	101.77	/	/	Peak
7236.000	54.88	vertical	3.26	58.14	81.77	-23.63	Peak
Middle Channel							
7311.000	38.60	horizontal	3.02	41.62	54.00	-12.38	Average
7311.000	54.16	horizontal	3.02	57.18	74.00	-16.82	Peak
7311.000	38.42	vertical	3.02	41.44	54.00	-12.56	Average
7311.000	53.02	vertical	3.02	56.04	74.00	-17.96	Peak
High Channel							
2484.267	40.03	horizontal	8.25	48.28	54.00	-5.72	Average
2484.267	55.03	horizontal	8.25	63.28	74.00	-10.72	Peak
2483.500	39.52	vertical	8.25	47.77	54.00	-6.23	Average
2483.500	51.56	vertical	8.25	59.81	74.00	-14.19	Peak

7386.000	39.85	horizontal	3.09	42.94	54.00	-11.06	Average
7386.000	55.97	horizontal	3.09	59.06	74.00	-14.94	Peak
7386.000	39.94	vertical	3.09	43.03	54.00	-10.97	Average
7386.000	57.64	vertical	3.09	60.73	74.00	-13.27	Peak
802.11n40							
Low Channel							
2388.719	42.76	horizontal	8.25	51.01	54.00	-2.99	Average
2388.719	61.02	horizontal	8.25	69.27	74.00	-4.73	Peak
2388.929	39.99	vertical	8.25	48.24	54.00	-5.76	Average
2388.929	57.80	vertical	8.25	66.05	74.00	-7.95	Peak
7266.000	48.27	horizontal	3.14	51.41	74.00	-22.59	Peak
7266.000	48.58	vertical	3.14	51.72	74.00	-22.28	Peak
Middle Channel							
7311.000	37.19	horizontal	3.02	40.21	54.00	-13.79	Average
7311.000	52.18	horizontal	3.02	55.20	74.00	-18.80	Peak
7311.000	37.26	vertical	3.02	40.28	54.00	-13.72	Average
7311.000	48.67	vertical	3.02	51.69	74.00	-22.31	Peak
High Channel							
2487.709	40.50	horizontal	8.26	48.76	54.00	-5.24	Average
2487.709	55.42	horizontal	8.26	63.68	74.00	-10.32	Peak
2484.032	39.89	vertical	8.25	48.14	54.00	-5.86	Average
2484.032	53.77	vertical	8.25	62.02	74.00	-11.98	Peak
7356.000	38.91	horizontal	3.10	42.01	54.00	-11.99	Average
7356.000	52.94	horizontal	3.10	56.04	74.00	-17.96	Peak
7356.000	38.66	vertical	3.10	41.76	54.00	-12.24	Average
7356.000	52.88	vertical	3.10	55.98	74.00	-18.02	Peak

Remark:

Corrected Amplitude= Reading level + corrected Factor

Corrected Factor = Antenna factor + Cable loss – Amplifier gain


Margin = Corrected Amplitude – Limit


For the test result of Peak below the Peak limit more than 20dB, which can compliance with the average limit, just the Peak level was recorded.

The emission levels of other frequencies that were lower than the limit 20dB not show in test report.

For emissions in 18GHz-25GHz range, all emissions were investigated and in the noise floor level.

Test plot for example as below:

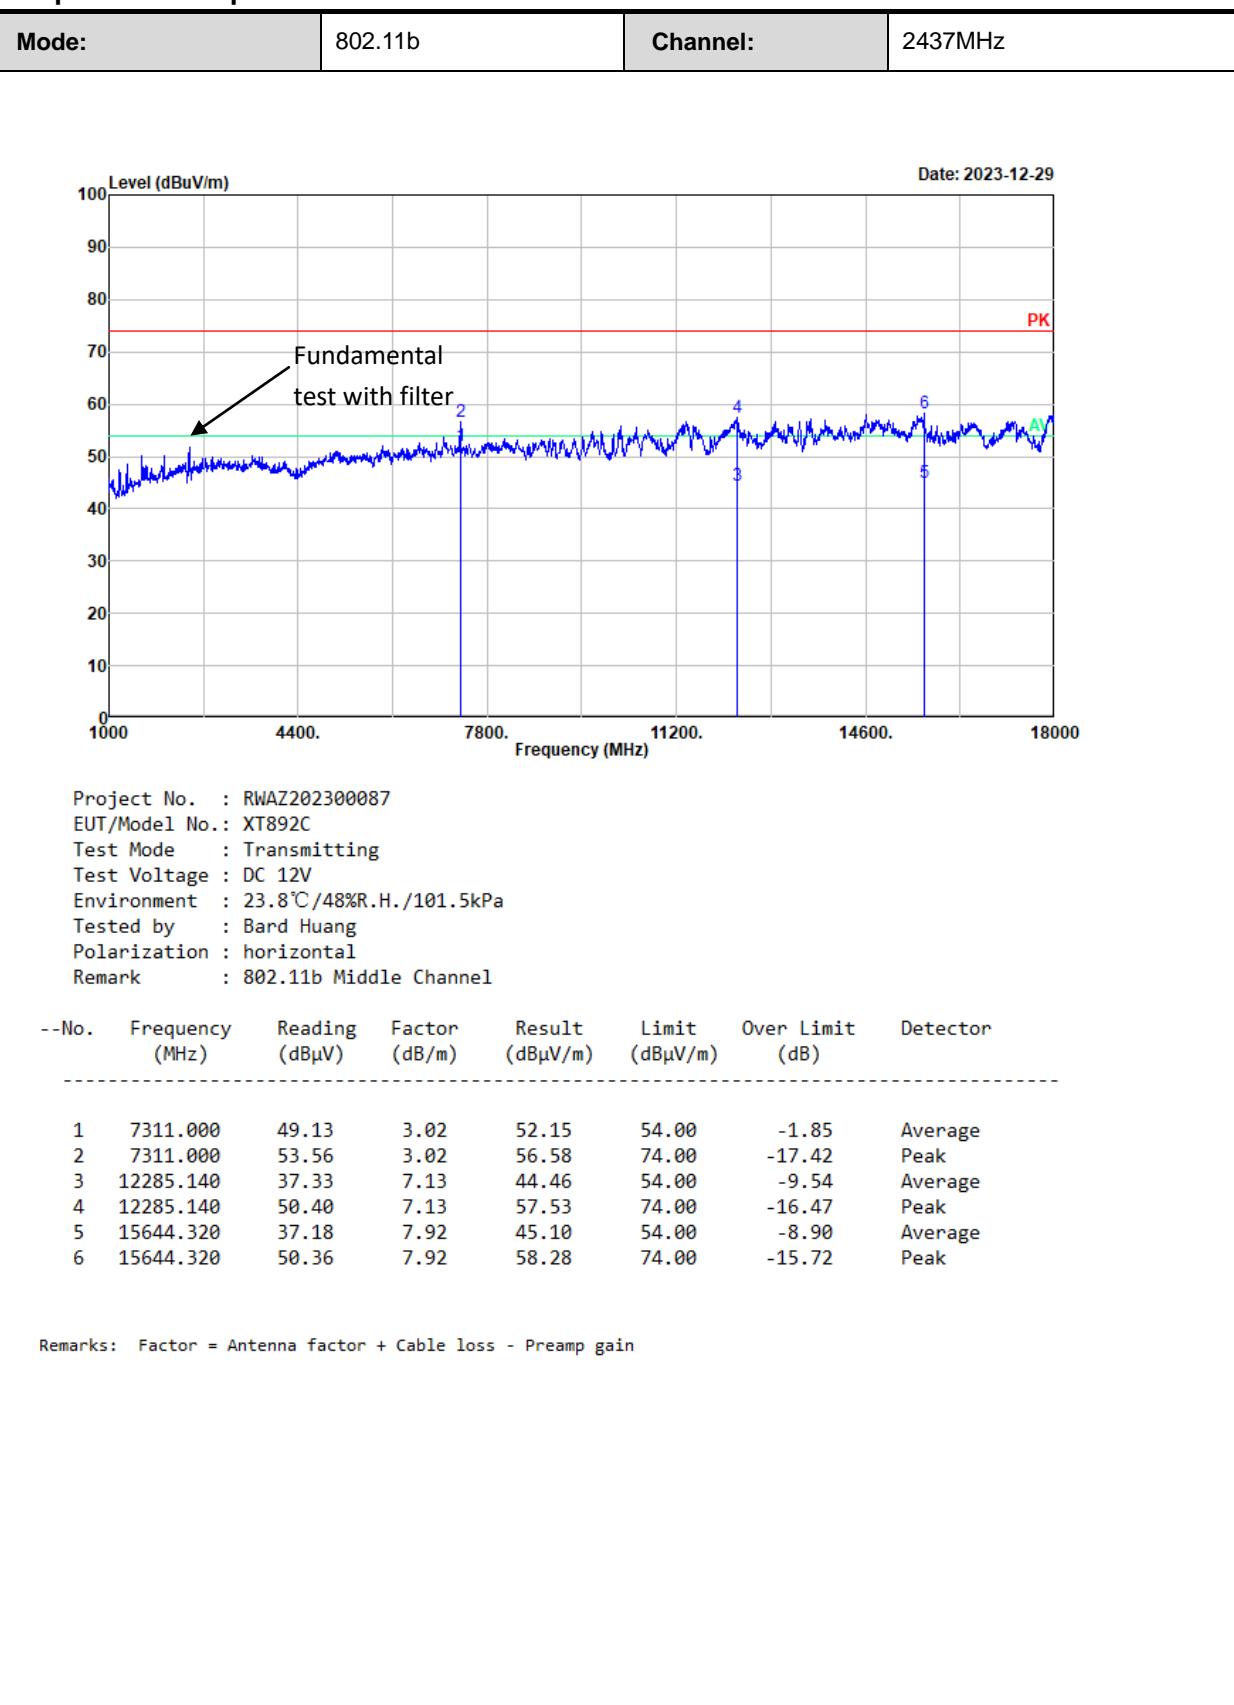

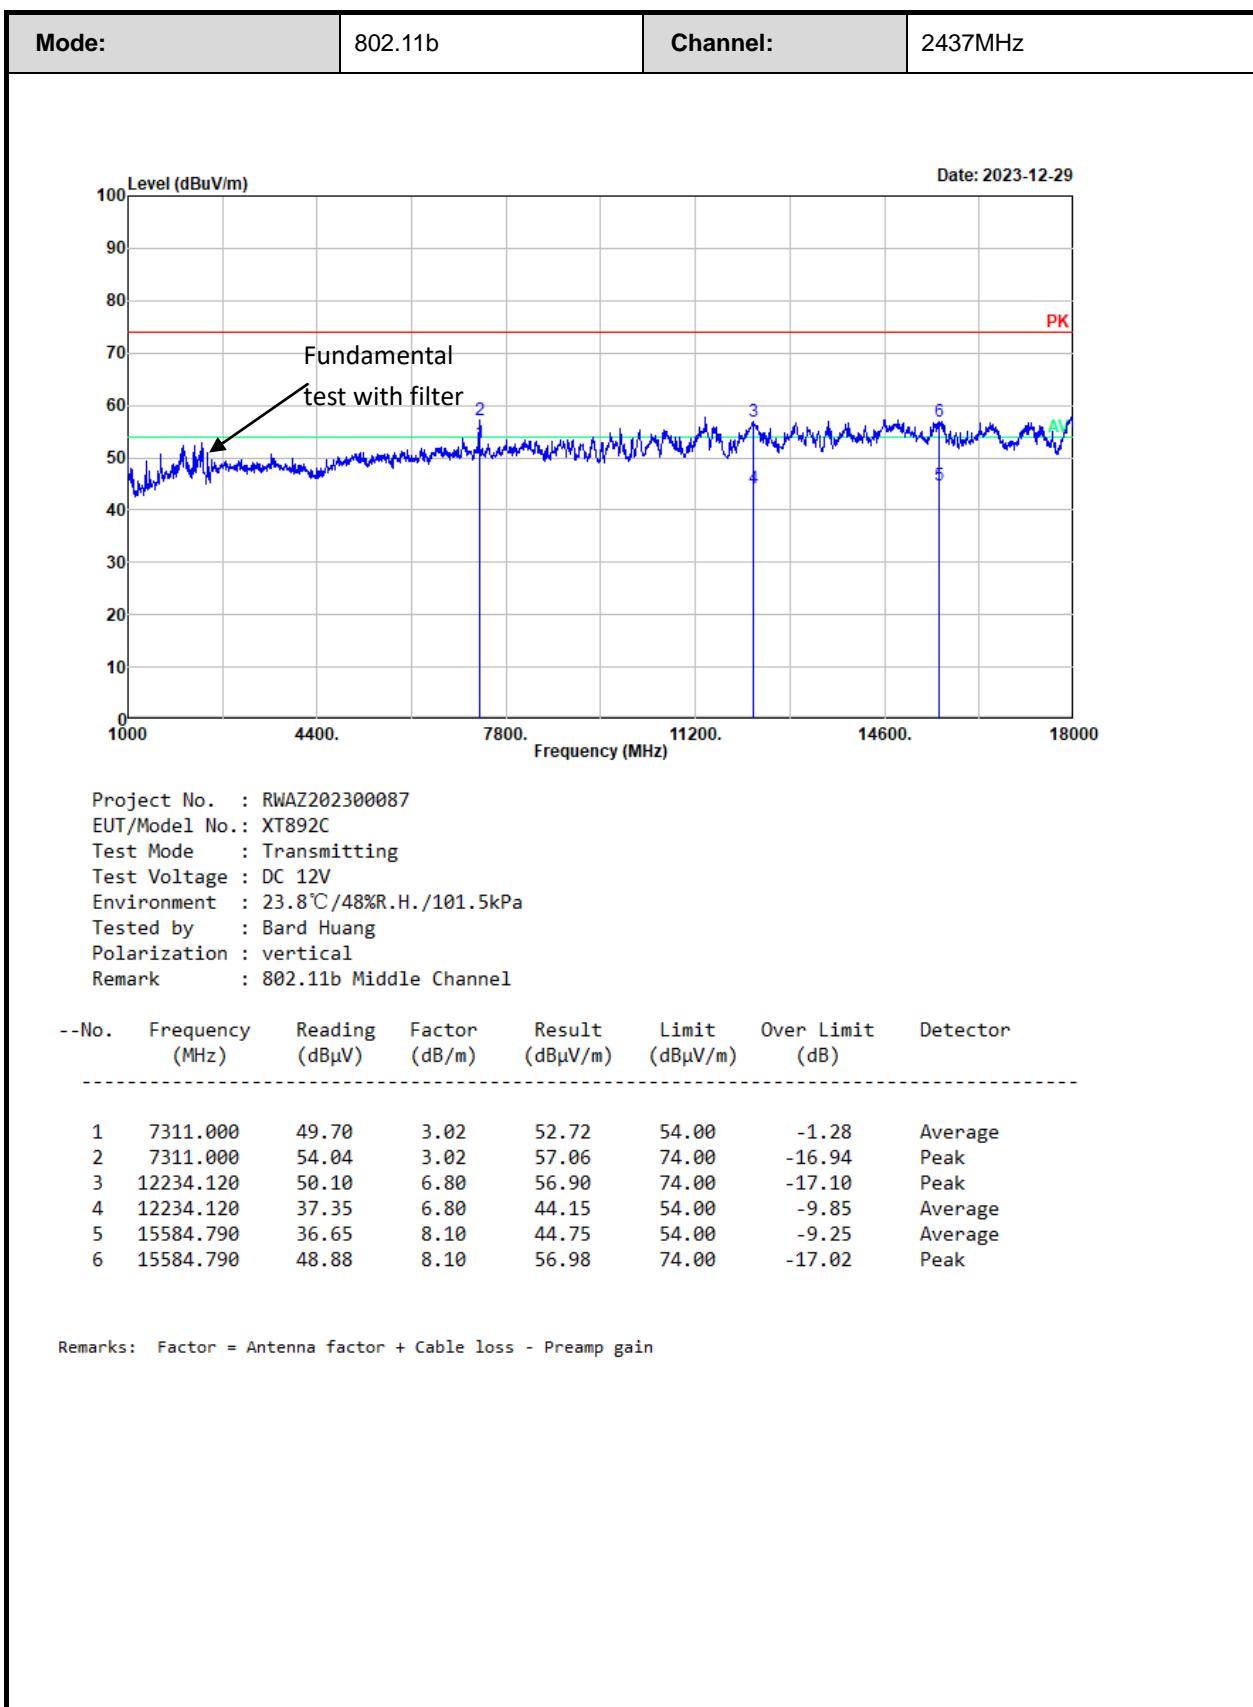

3.5 RF Conducted Test Data

Test Date:	2024-01-02	Test By:	Baylor Li
Environment condition:	Temperature: 20.5°C; Relative Humidity:42%; ATM Pressure: 101kPa		

3.5.1 6 dB Emission Bandwidth and 99% Occupied Bandwidth

Test Mode	Antenna	Channel	6dB BW [MHz]	99% OBW[MHz]	6dB BW Limit[MHz]	Verdict
11B	Ant1	2412	10.080	14.240	0.5	pass
		2437	10.000	14.240	0.5	pass
		2462	9.920	14.320	0.5	pass
11G	Ant1	2412	16.640	17.280	0.5	pass
		2437	16.640	17.280	0.5	pass
		2462	16.640	17.280	0.5	pass
11N20SISO	Ant1	2412	17.840	17.920	0.5	pass
		2437	17.920	17.920	0.5	pass
		2462	17.920	17.840	0.5	pass
11N40SISO	Ant1	2422	36.640	36.480	0.5	pass
		2437	36.640	36.480	0.5	pass
		2452	36.640	36.320	0.5	pass

3.5.2 Maximum Conducted Peak Output Power

Test Mode	Antenna	Channel [MHz]	Result [dBm]	Limit [dBm]	Verdict
11B SISO	Ant1	2412	11.02	30	Pass
		2437	11.32	30	Pass
		2462	11.01	30	Pass
11G SISO	Ant1	2412	18.69	30	Pass
		2437	18.58	30	Pass
		2462	18.41	30	Pass
11N20 SISO	Ant1	2412	16.25	30	Pass
		2437	15.67	30	Pass
		2462	15.77	30	Pass
11N40 SISO	Ant1	2422	15.60	30	Pass
		2437	15.72	30	Pass
		2452	15.95	30	Pass

3.5.3 Power Spectral Density

Test Mode	Antenna	Channel [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B SISO	Ant1	2412	-16.93	8	Pass
		2437	-16.41	8	Pass
		2462	-16.29	8	Pass
11G SISO	Ant1	2412	-17.59	8	Pass
		2437	-17.74	8	Pass
		2462	-18.15	8	Pass
11N20 SISO	Ant1	2412	-19.92	8	Pass
		2437	-20.01	8	Pass
		2462	-20.49	8	Pass
11N40 SISO	Ant1	2422	-22.56	8	Pass
		2437	-21.86	8	Pass
		2452	-22.77	8	Pass

3.5.4 100 kHz Bandwidth of Frequency Band Edge

Test Mode	Antenna	Channel	Result	Limit	Verdict
11B SISO	Ant1	2412	Refer test plot	Refer test plot	Pass
		2462	Refer test plot	Refer test plot	Pass
11G SISO	Ant1	2412	Refer test plot	Refer test plot	Pass
		2462	Refer test plot	Refer test plot	Pass
11N20 SISO	Ant1	2412	Refer test plot	Refer test plot	Pass
		2462	Refer test plot	Refer test plot	Pass
11N40 SISO	Ant1	2422	Refer test plot	Refer test plot	Pass
		2452	Refer test plot	Refer test plot	Pass


3.5.5 Duty Cycle


Test Mode	Antenna	Channel	Ton (ms)	Ton+off (ms)	Duty Cycle [%]	1/T	VBW setting* [Hz]
11B	Ant1	2437	100	100	100	/	10
11G	Ant1	2437	100	100	100	/	10
11N20	Ant1	2437	100	100	100	/	10
11N40	Ant1	2437	100	100	100	/	10

Note*: Radiated emission test with average value, the Spectrum analyzer VBW setting information.


Test Plots:


6 dB Emission Bandwidth:

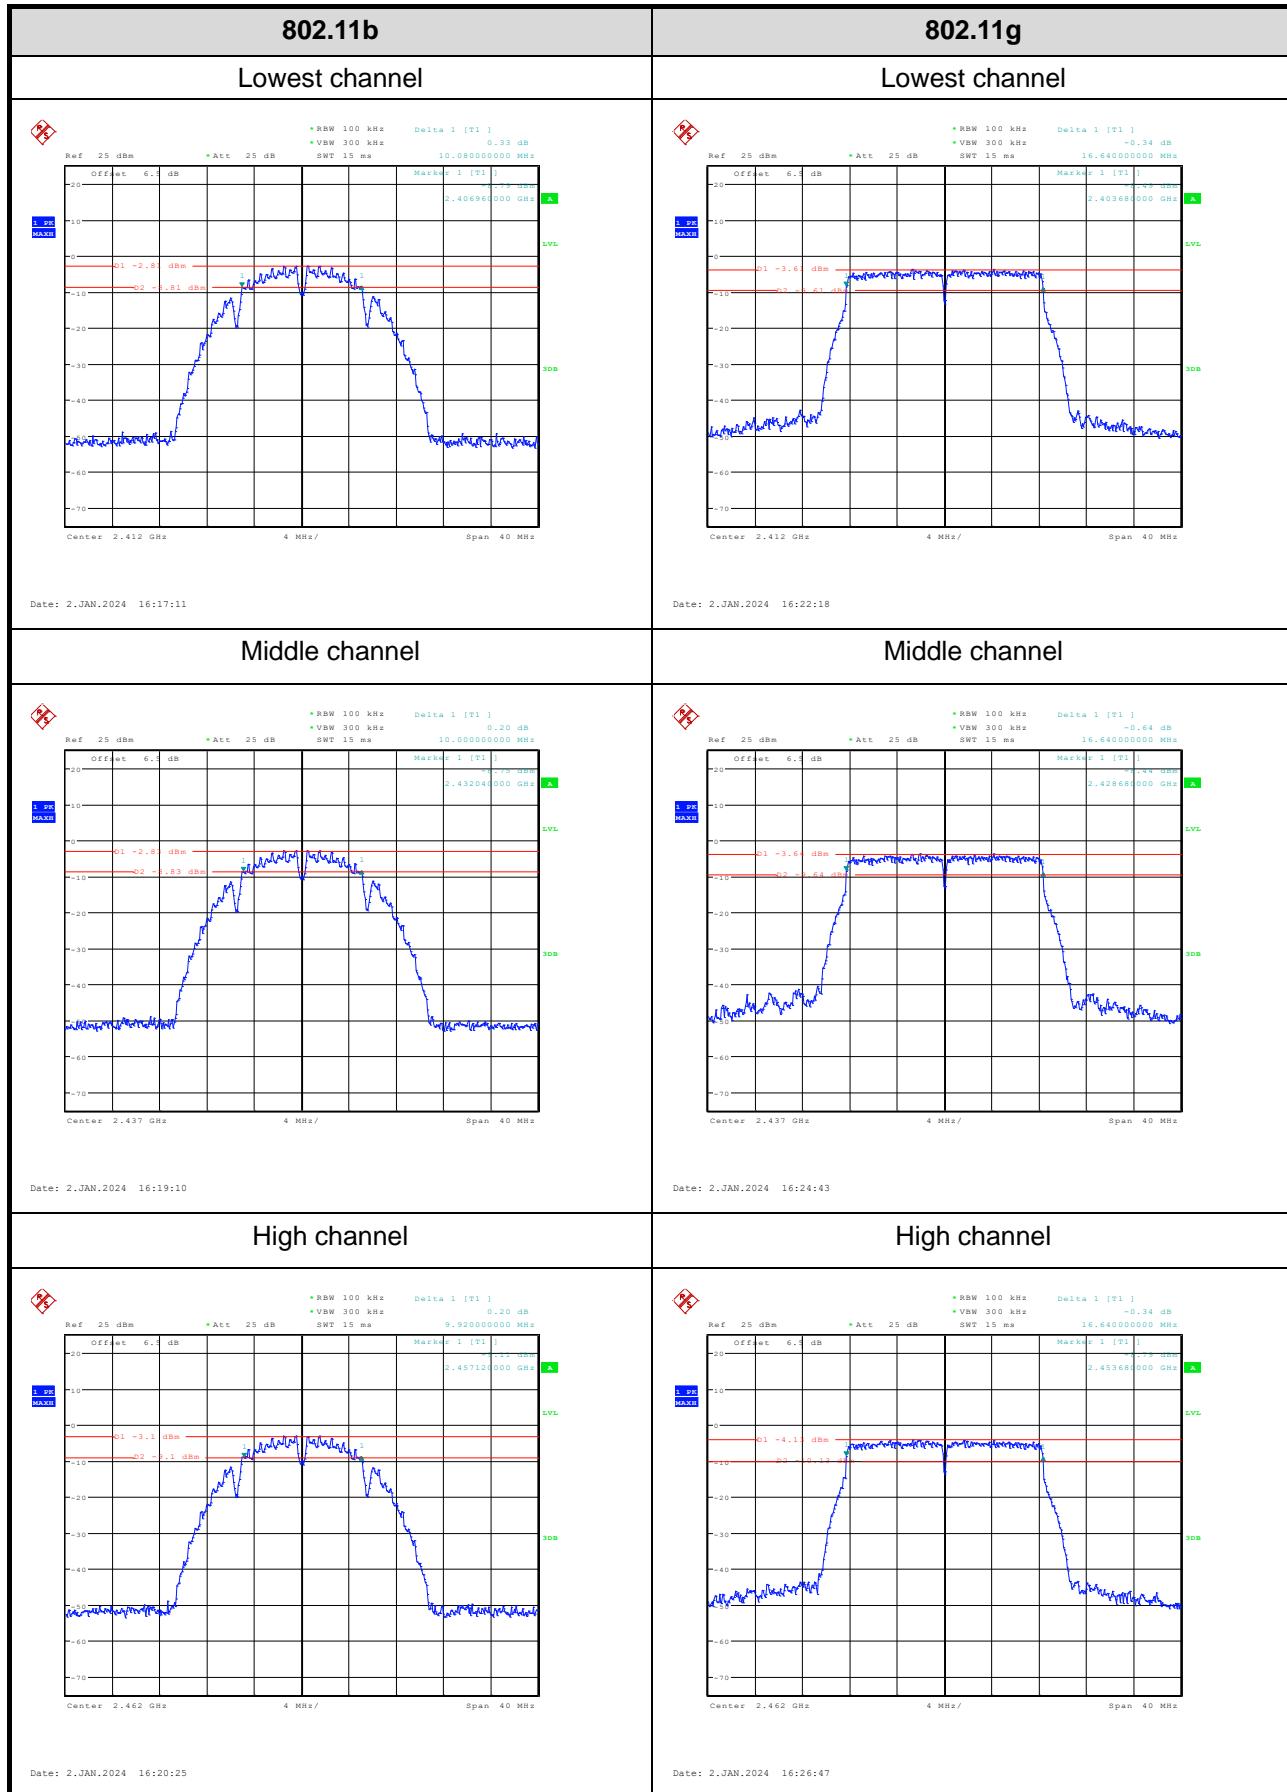


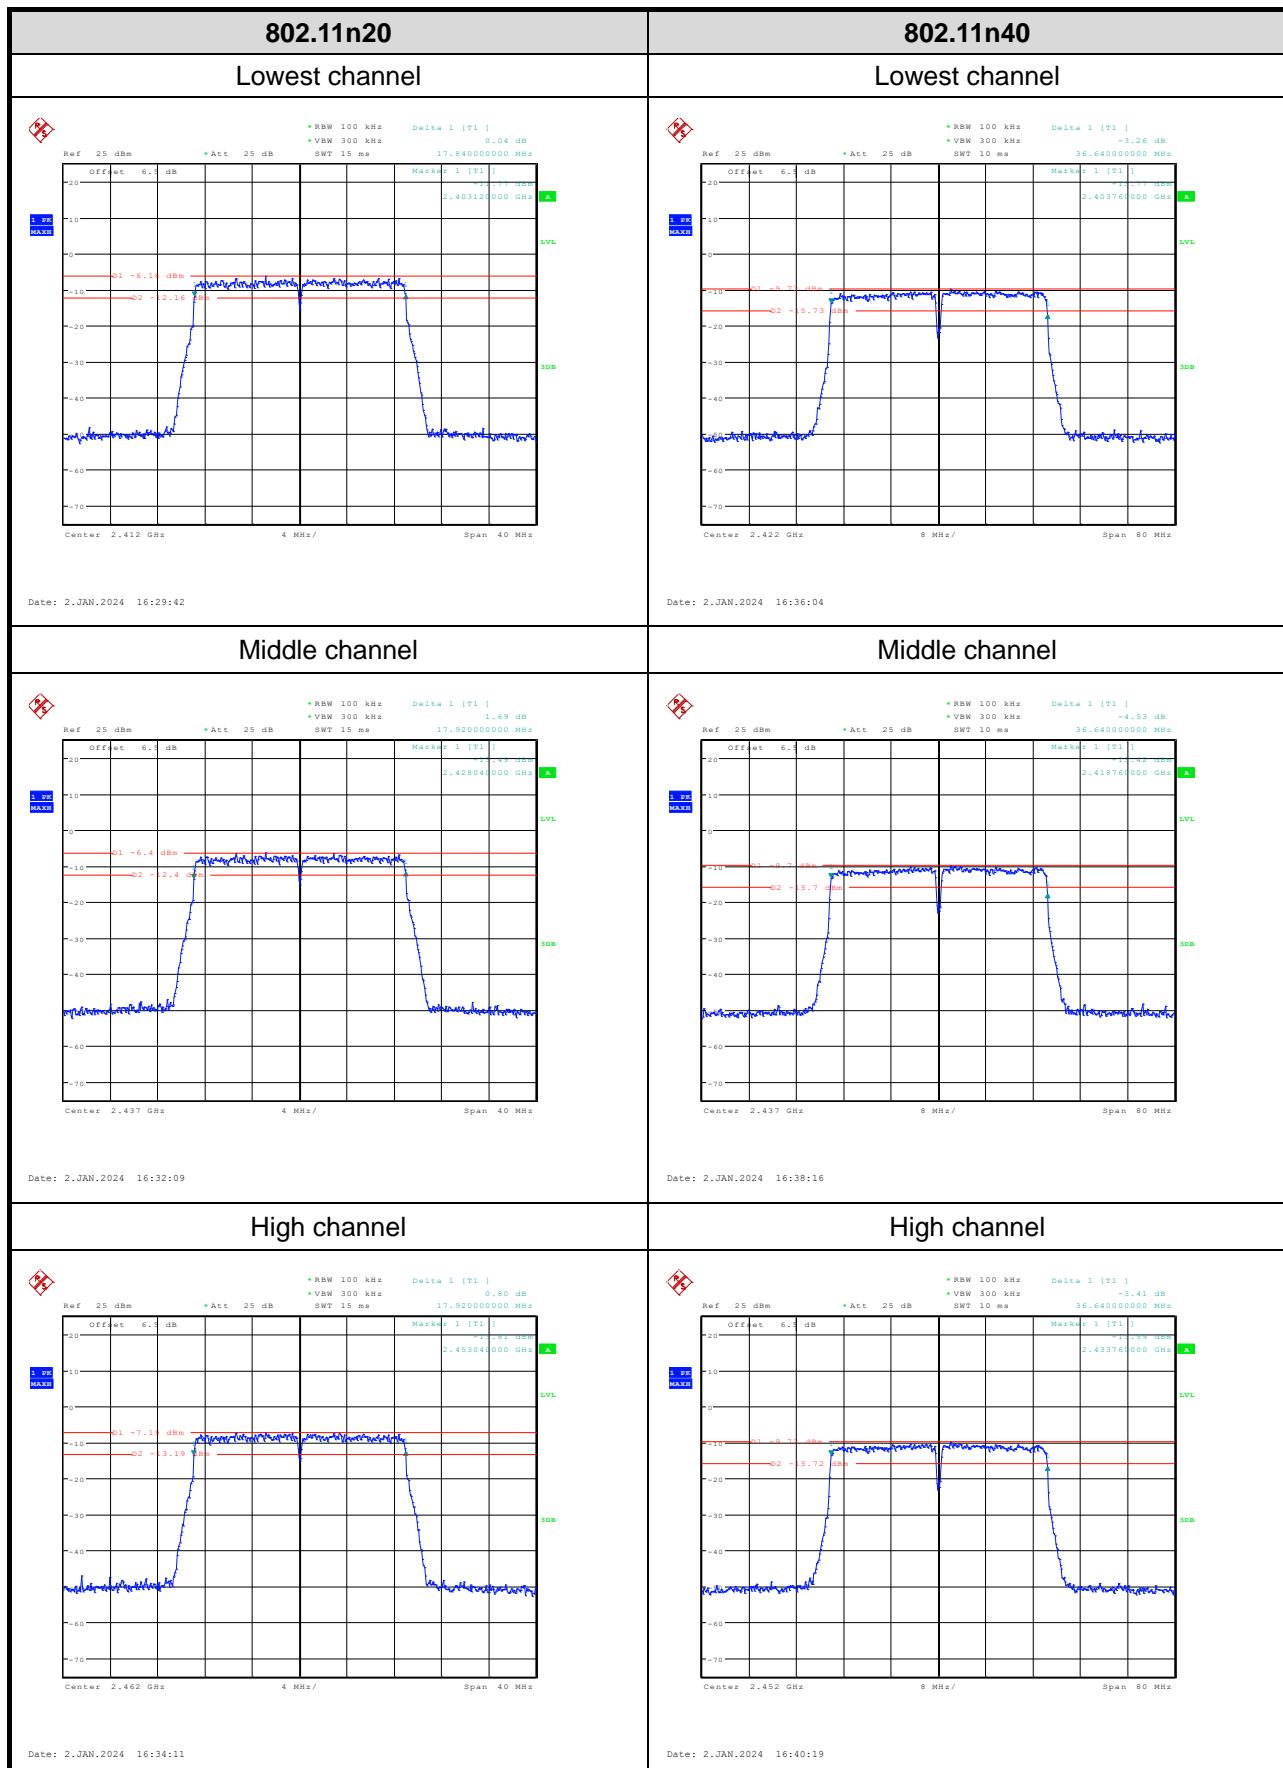


99% Occupied Bandwidth:

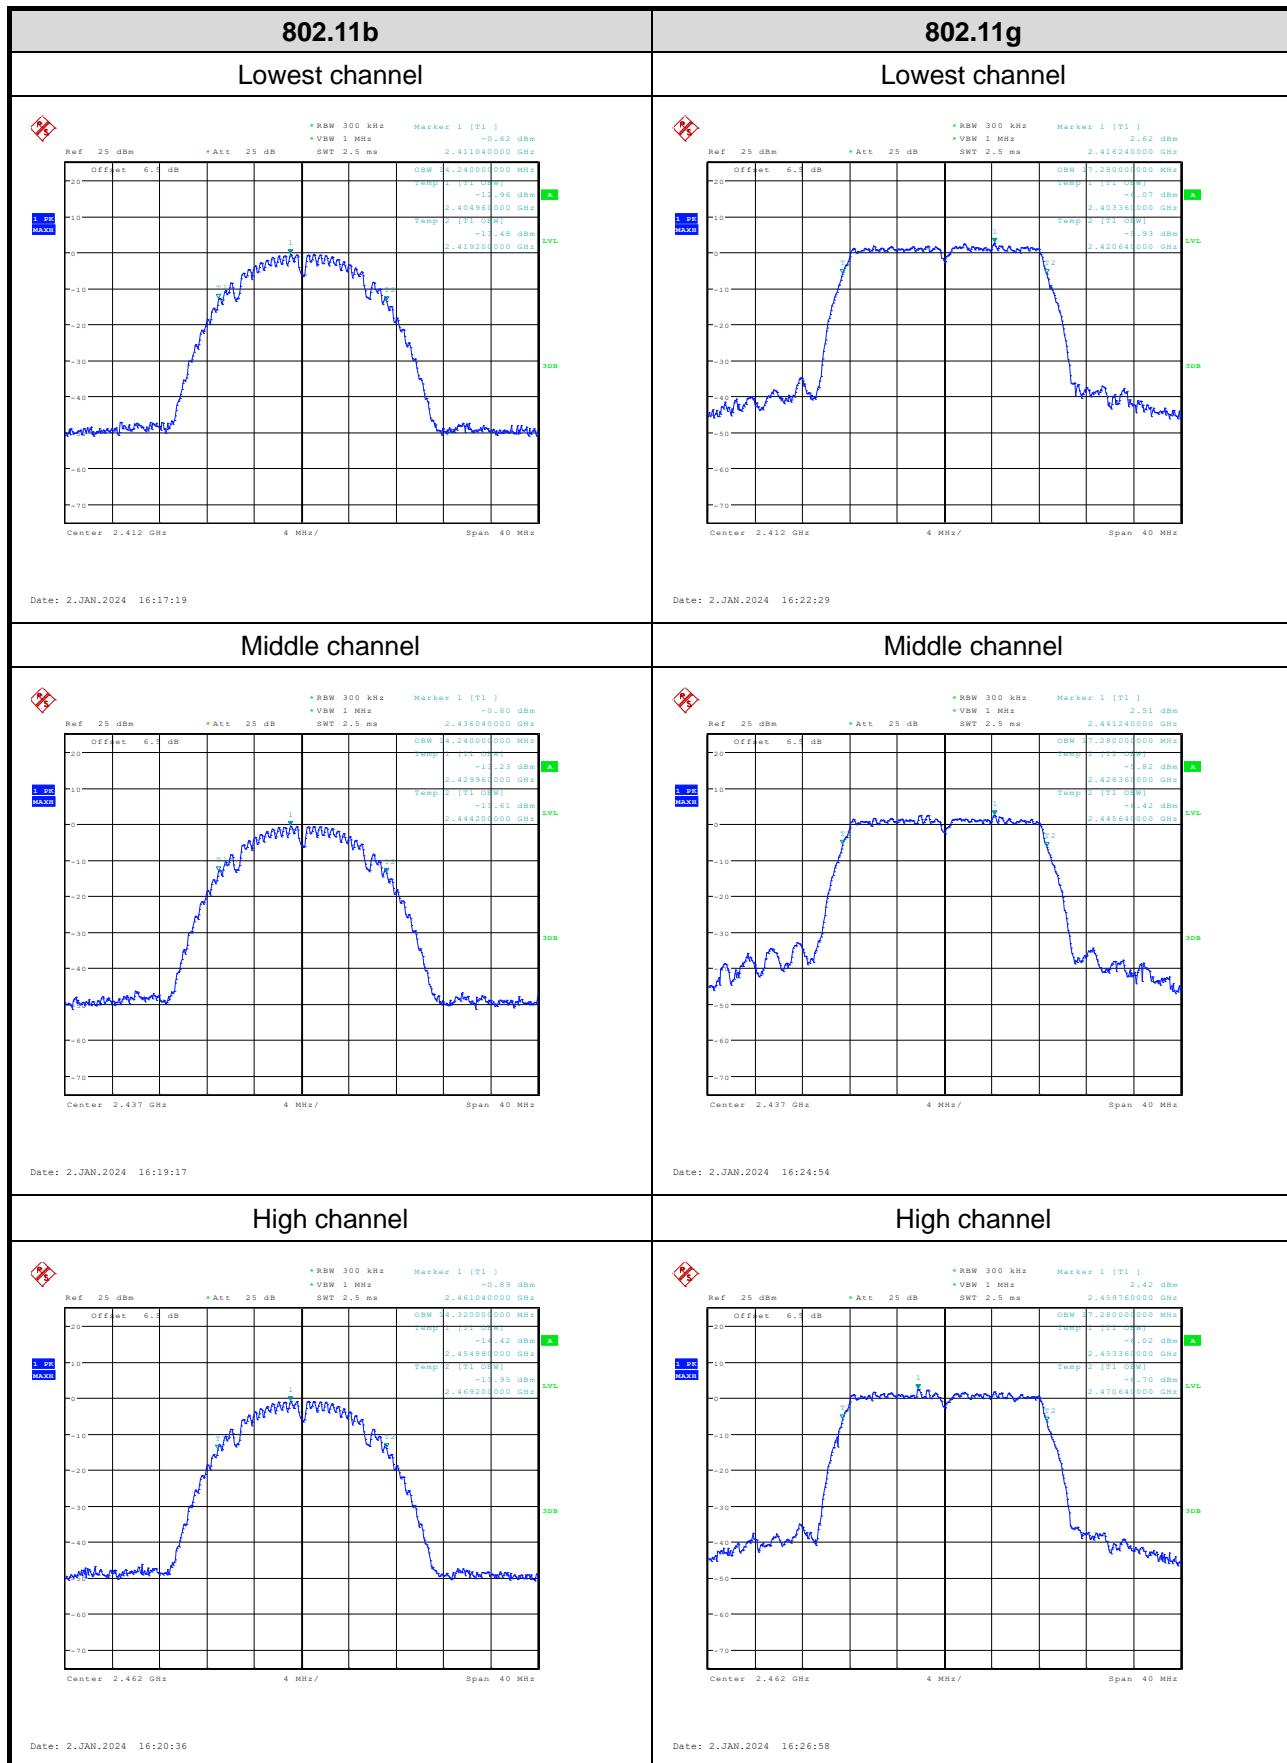

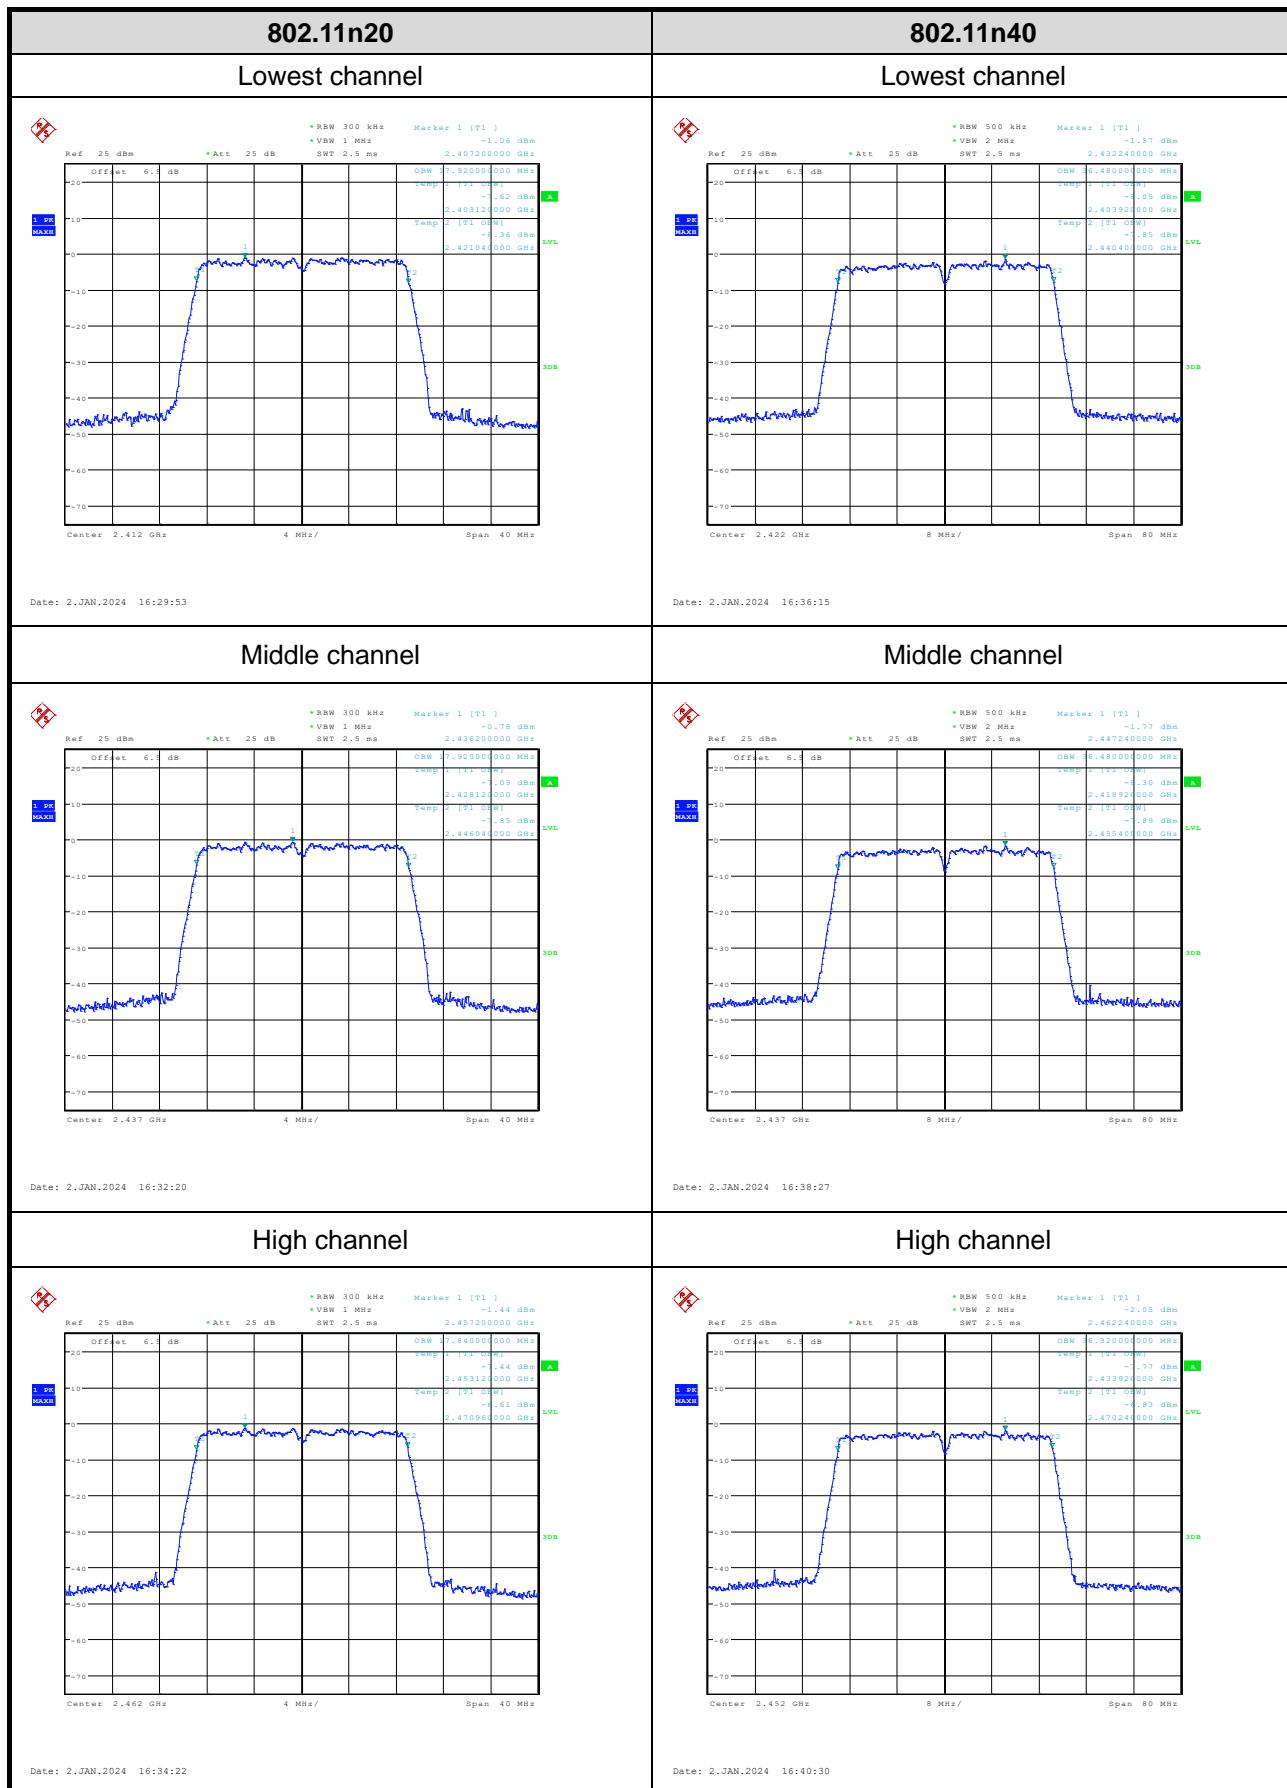

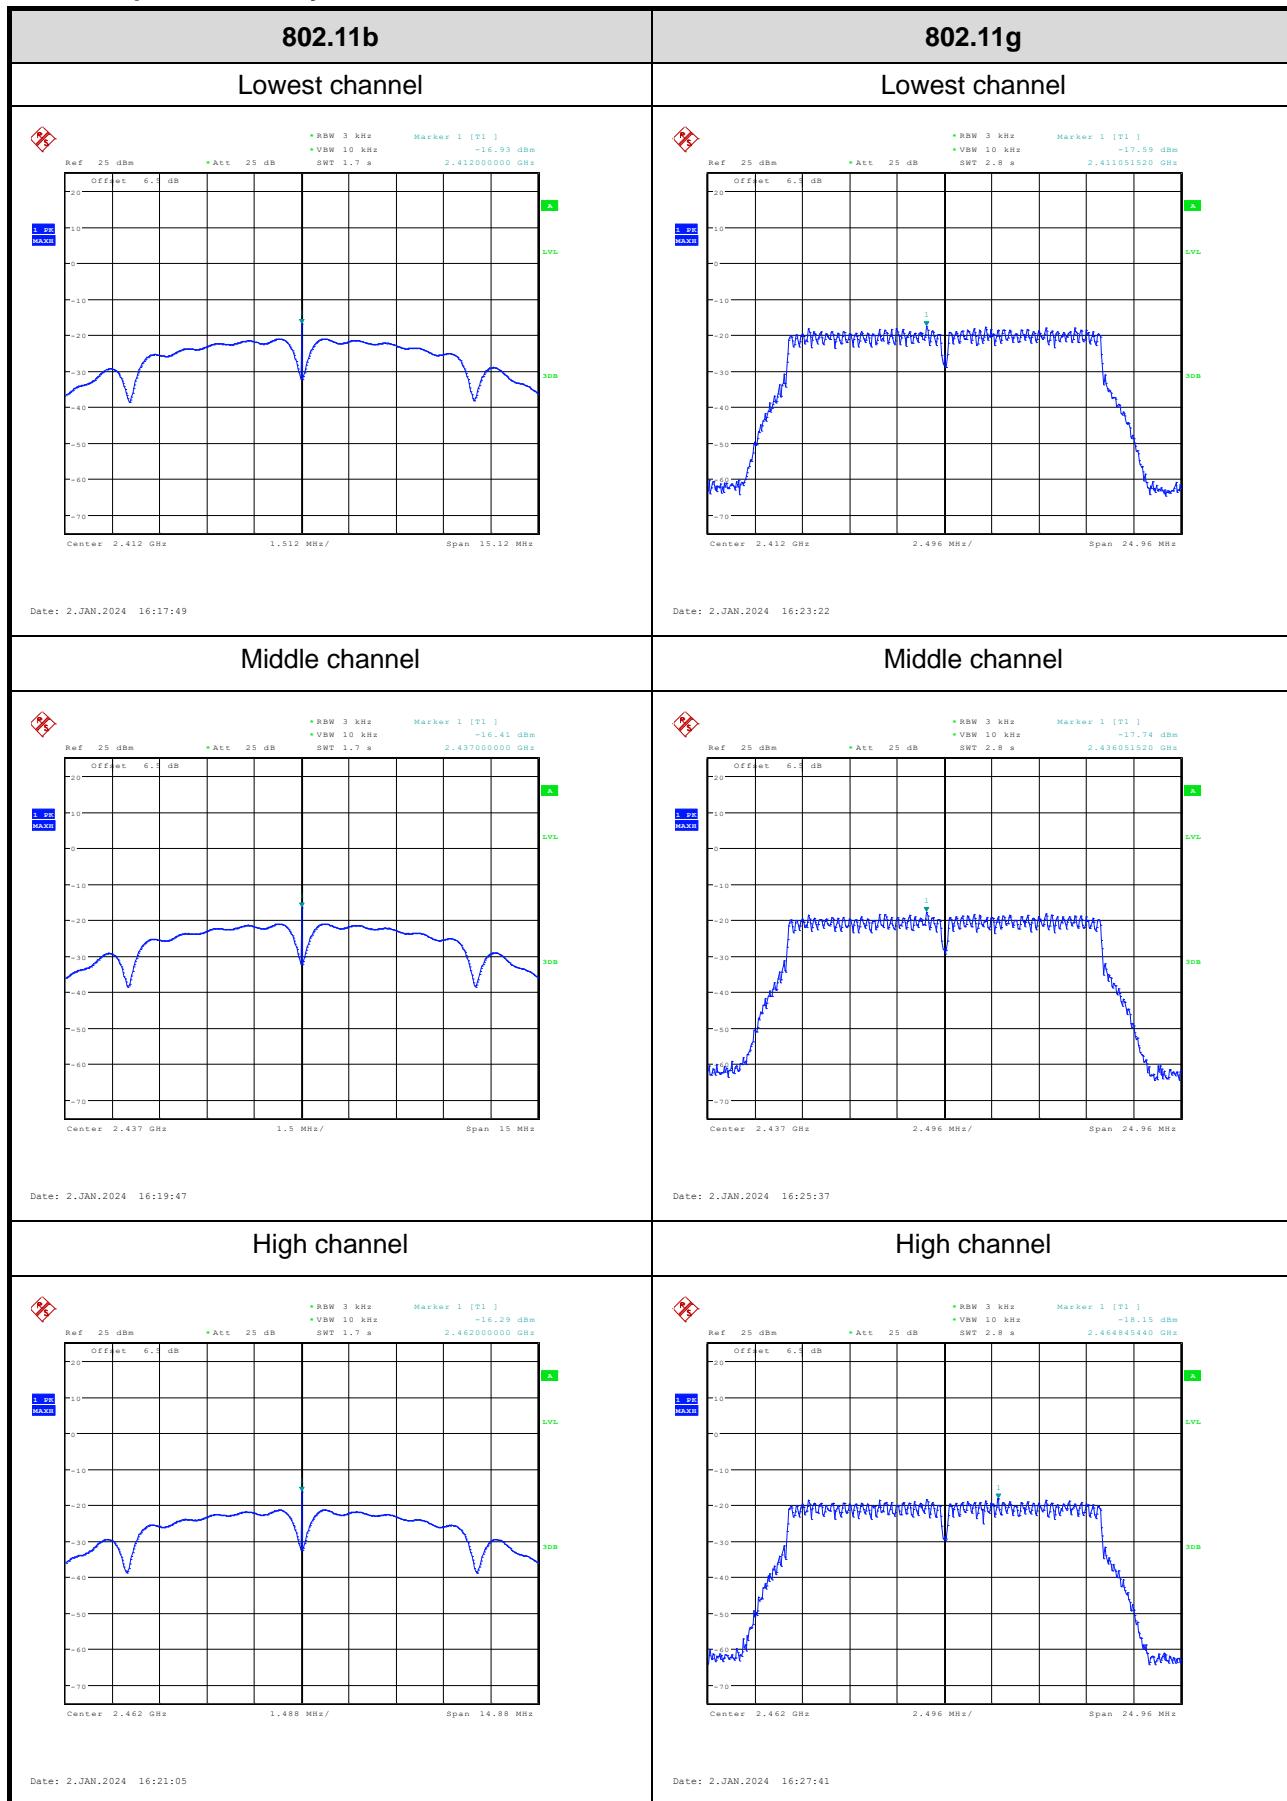
Power Spectral Density:

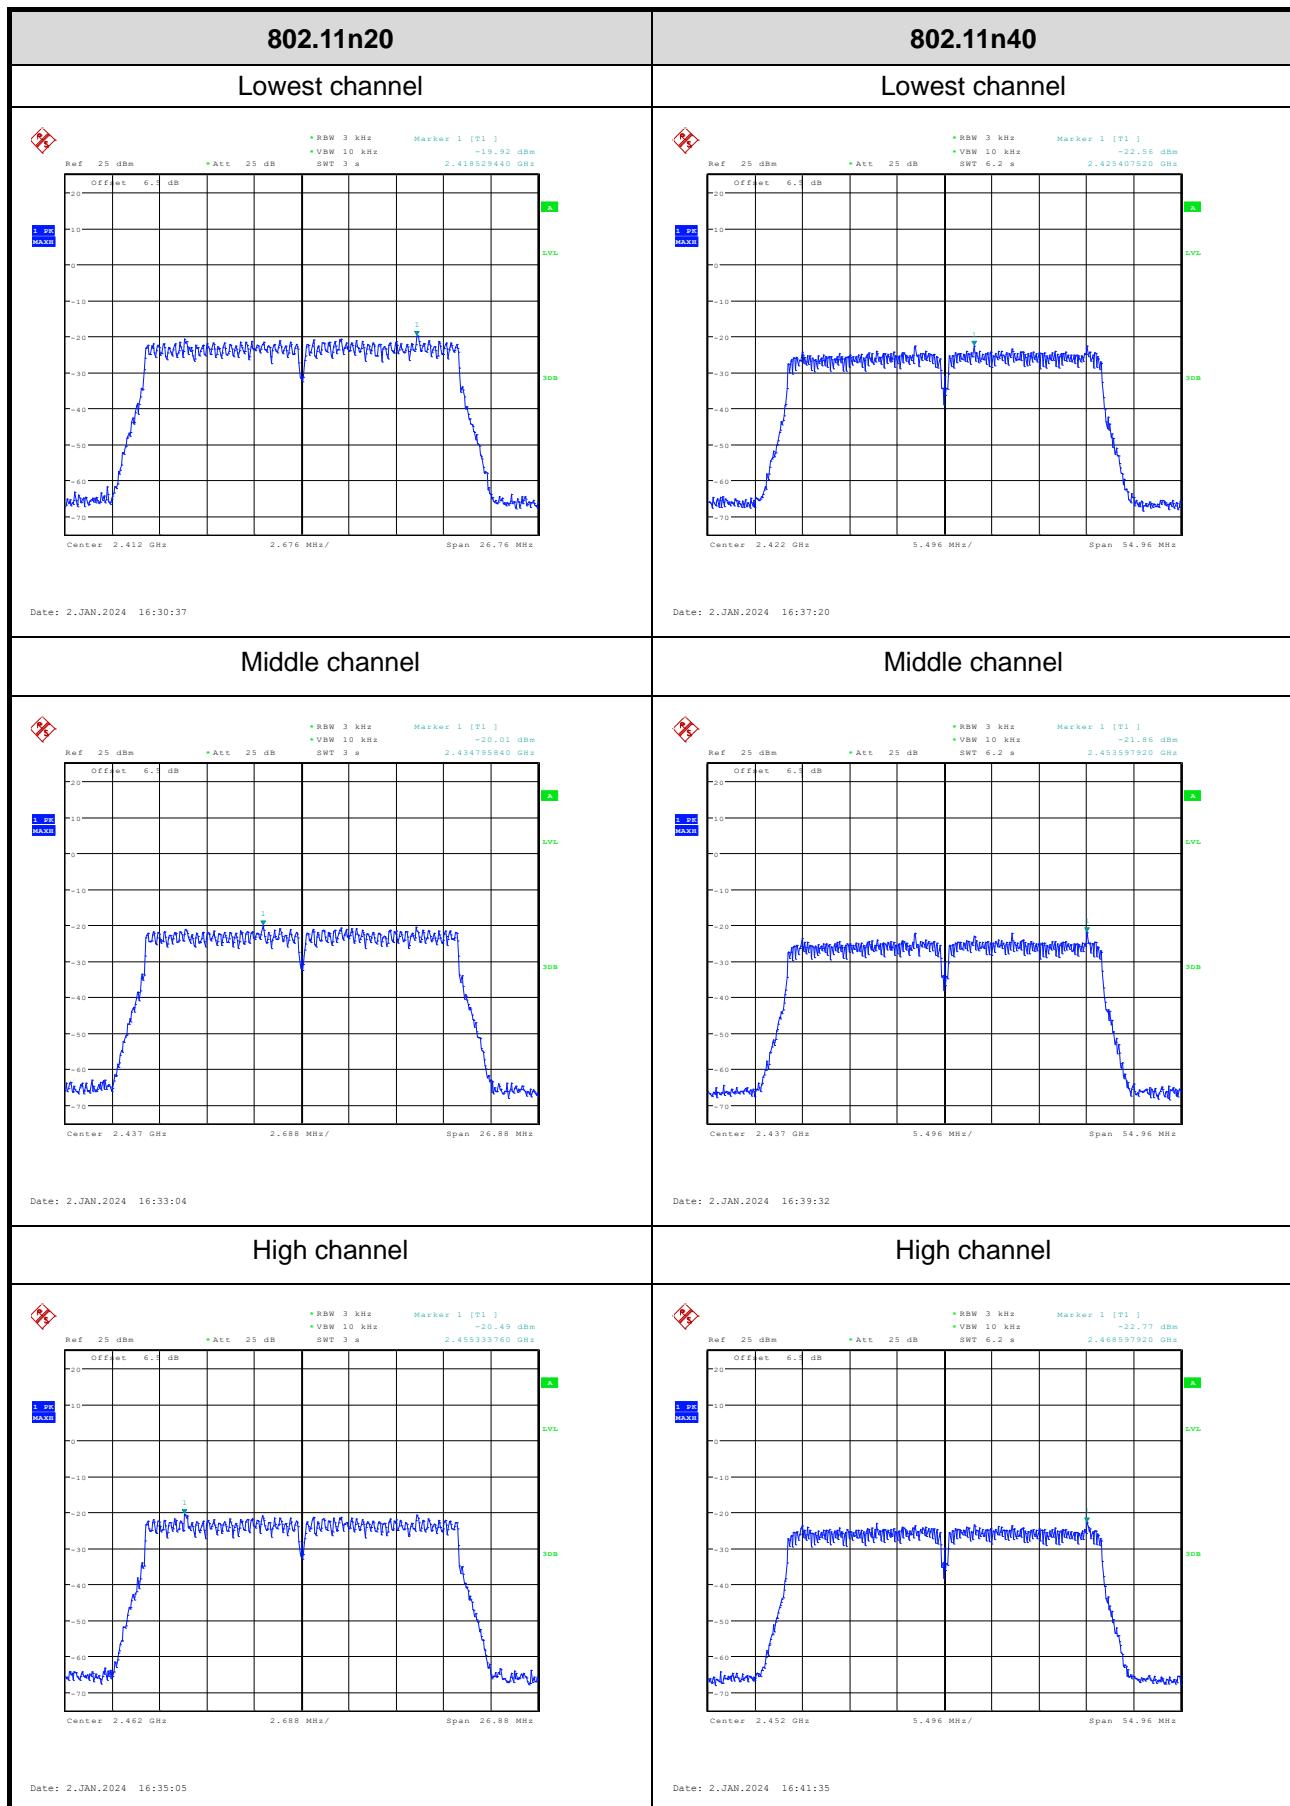


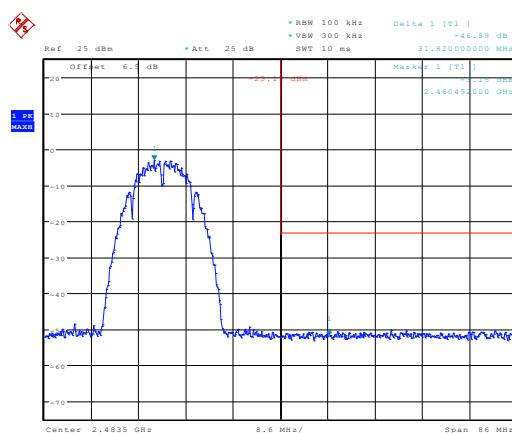
100kHz Bandwidth of Frequency Band Edge:

802.11b

Lowest channel

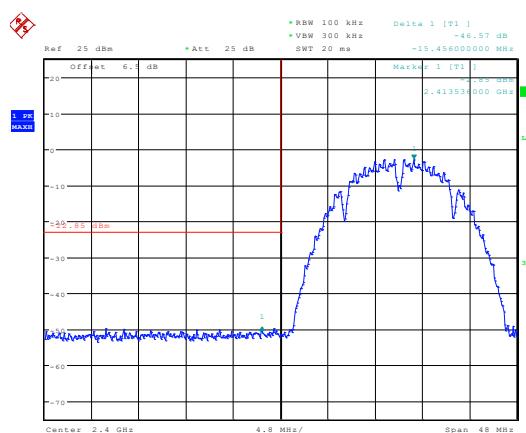

High channel




Date: 2.JAN.2024 16:18:00


Date: 2.JAN.2024 16:21:16

802.11g

Lowest channel

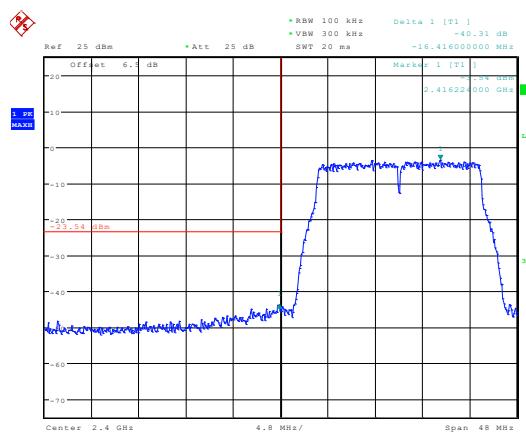

High channel

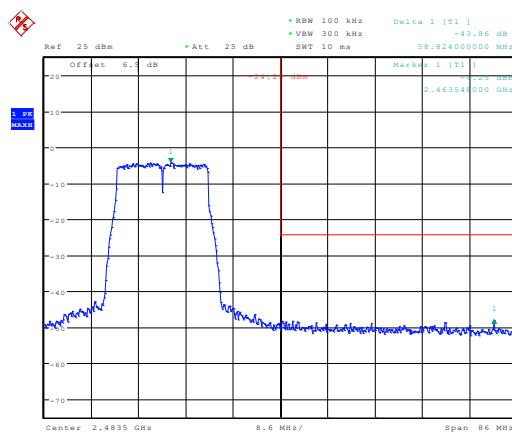


Date: 2.JAN.2024 16:23:33


Date: 2.JAN.2024 16:27:52

802.11n20

Lowest channel

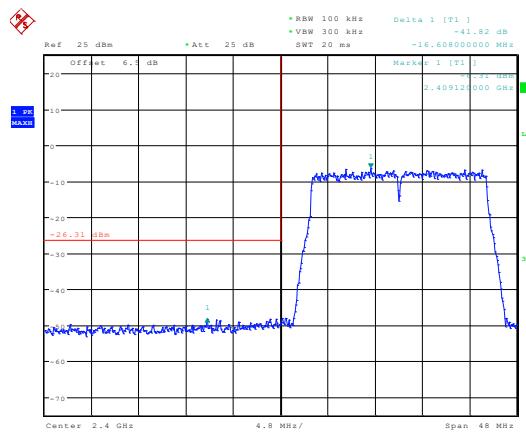


High channel

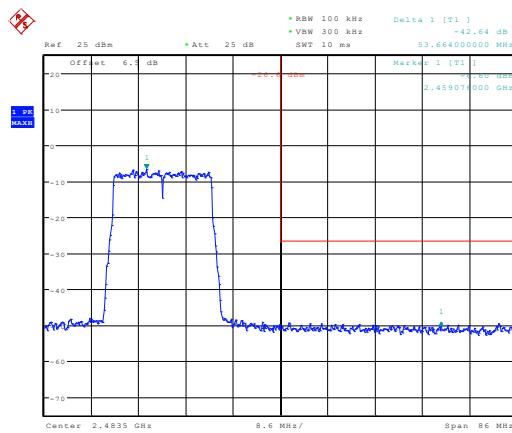

Date: 2.JAN.2024 16:30:48

Date: 2.JAN.2024 16:35:16

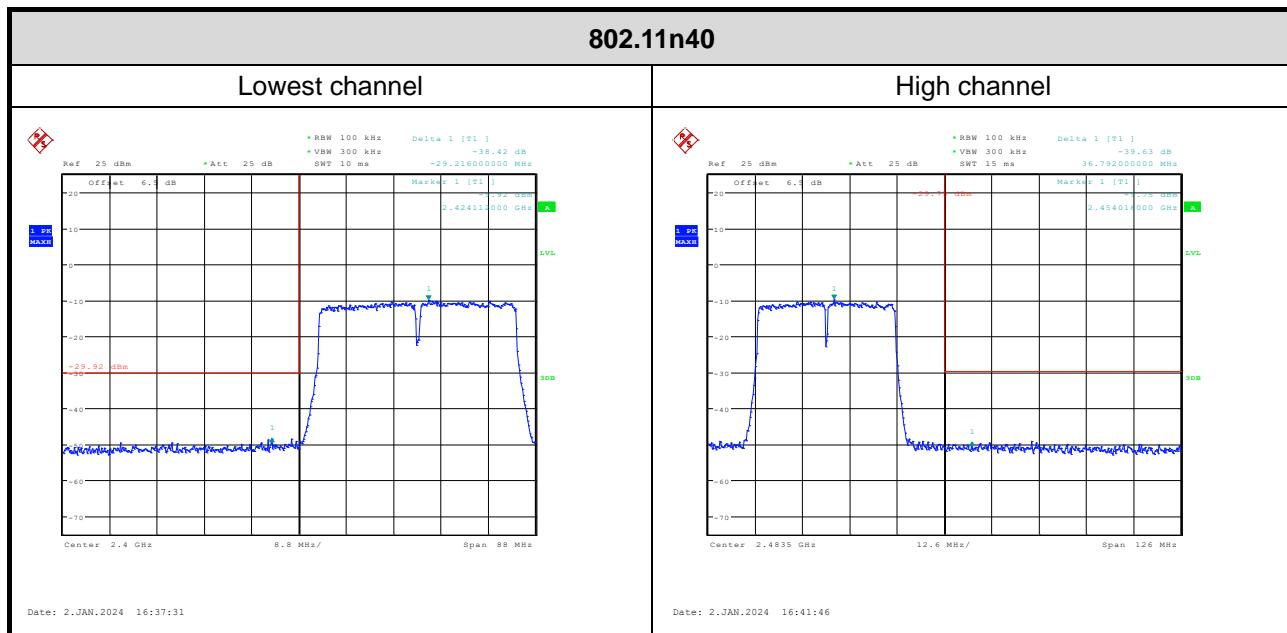

Duty Cycle:



4 Test Setup Photo

Please refer to the attachment RWAZ202300087 Test Setup photo.

5 E.U.T Photo

Please refer to the attachment

- (1) RWAZ202300087 XT892C External photo;
- (2) RWAZ202300087 XT892C Internal photo;
- (3) RWAZ202300087 XT812C External photo;
- (4) RWAZ202300087 XT812C Internal photo;
- (5) RWAZ202300087 XTGMC72C External photo;
- (6) RWAZ202300087 XTGMC72C Internal photo

---End of Report---