



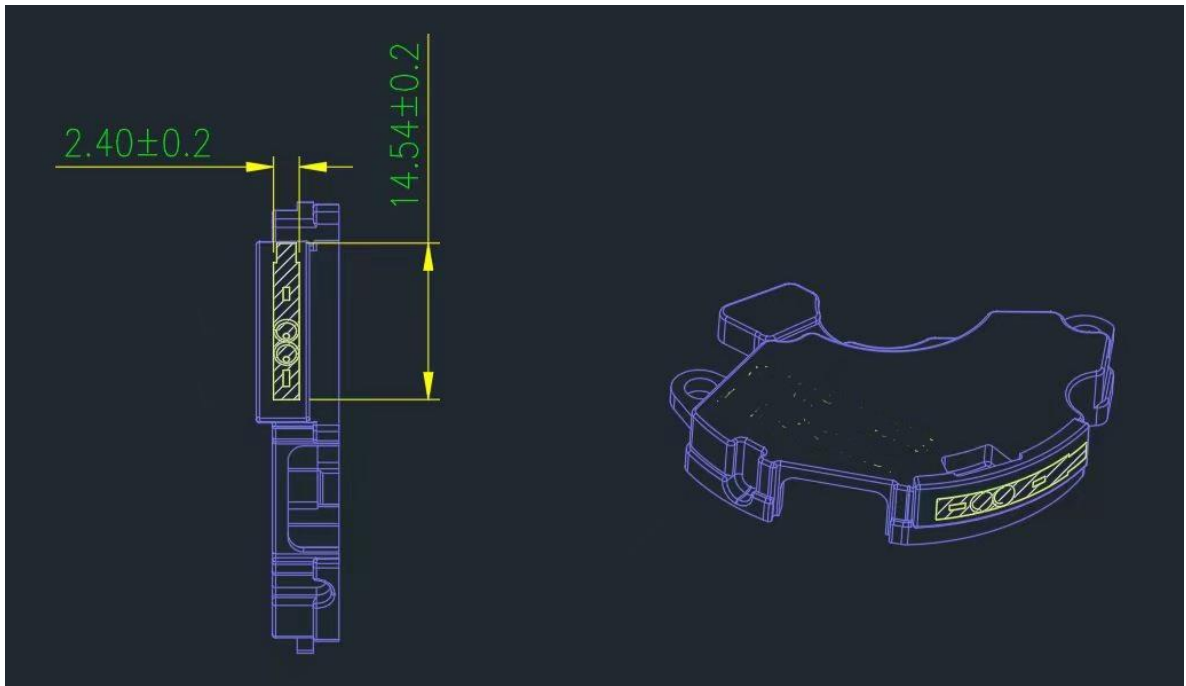


Passive Test For 2.4G								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHIS (%)	DHIS (%)	Max (dB)	Min (dB)
2400	23.64	-7.54	-1.94	-4.09	10.876	6.763	-1.94	-13.94
2410	24.82	-7.25	-1.94	-4.09	11.376	7.447	-1.94	-13.33
2420	25.55	-6.67	-1.73	-3.88	12.755	8.794	-1.73	-12.49
2430	25.02	-6.77	-2.35	-4.5	12.182	8.841	-2.35	-12.47
2440	26.57	-6.28	-2.25	-4.4	13.468	10.105	-2.25	-11.88
2450	27.09	-6.18	-2.49	-4.64	13.585	10.509	-2.49	-12
2460	29.4	-5.78	-2.21	-4.36	14.838	11.559	-2.21	-11.91
2470	30.08	-5.84	-2.19	-4.34	14.613	11.471	-2.19	-12.27
2480	28	-5.69	-2.16	-4.31	15.042	11.962	-2.16	-12.44
2490	25.3	-5.97	-2.54	-4.69	13.953	11.348	-2.54	-12.95
2500	25.07	-6.01	-2.69	-4.84	13.714	11.353	-2.69	-13.03


2400.000MHz

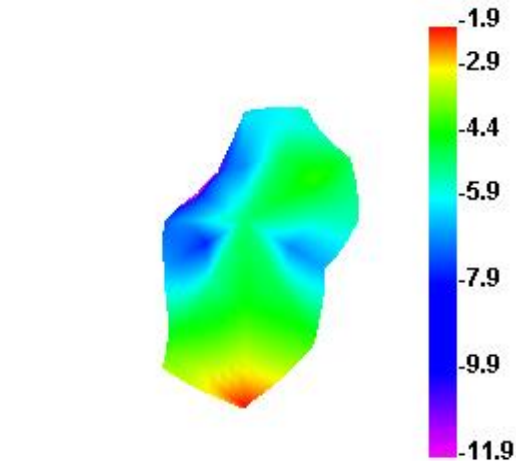


2400.000MHz H

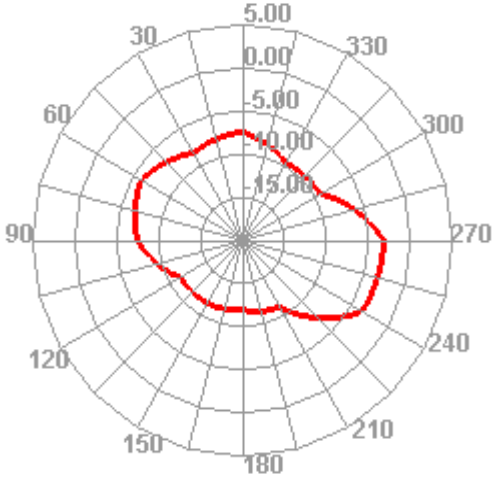

2400.000MHz E1

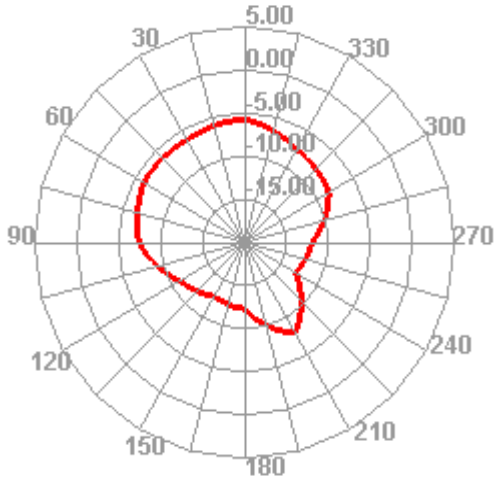

2400.000MHz E2


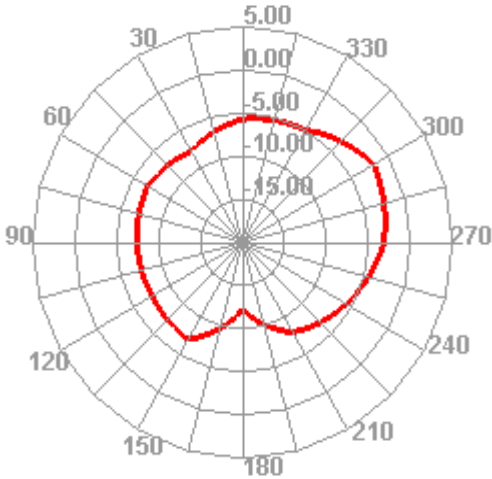


2410.000MHz




2410.000MHz H




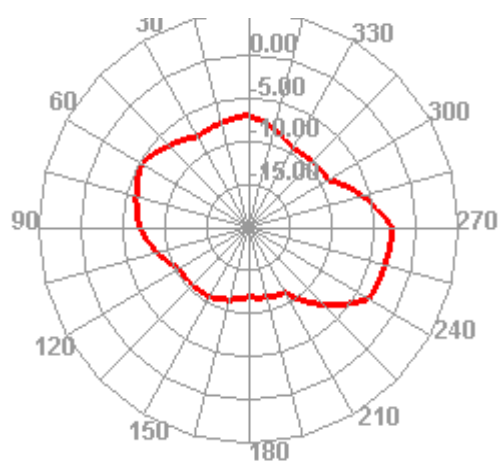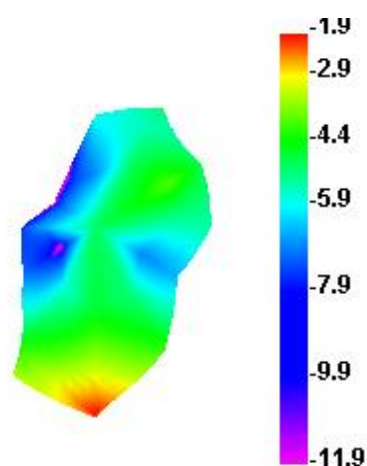

2410.000MHz E1

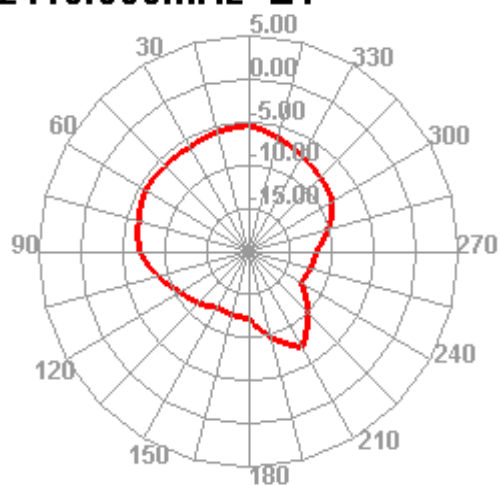

2410.000MHz E2

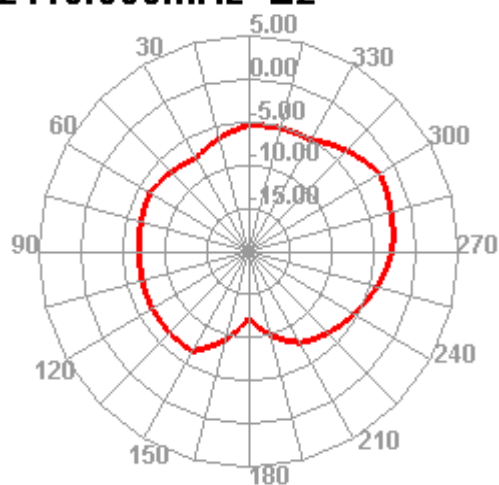

Directivity (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
5.6	150	46.16	46.16
5.31	120	46.28	46.28
4.93	120	46.7	46.7
4.42	120	46.8	46.8
4.03	120	47.04	47.04
3.69	120	47.16	47.16
3.58	120	47.19	47.19
3.64	120	47.08	47.08
3.53	120	47.36	47.36
3.43	120	47.28	47.28
3.32	120	47.24	47.24

Application Information	
Version	5.258.361
TotalTime	4m 6s 609ms
AdditionalInfor	NULL