

## TEST REPORT

<b>Applicant:</b>	Aurodi Corporation
<b>Address of Applicant:</b>	Suite 1100, 7887 E Belleview Ave, Denver, CO 80111, United States.
<b>Manufacturer:</b>	Aurodi Corporation
<b>Address of Manufacturer:</b>	Suite 1100, 7887 E Belleview Ave, Denver, CO 80111, United States.
<b>Product name:</b>	Smart Presence Sensing dimmer + mmWave & Lux
<b>Model(s):</b>	VZM32-SN
<b>Rating(s):</b>	AC120V, 60Hz
<b>Trademark:</b>	Inovelli
<b>Standards:</b>	47 CFR Part 15 Subpart C section 15.247
<b>FCC ID:</b>	2BBTA-VZM32SN
<b>Data of Receipt:</b>	2025-06-10
<b>Date of Test:</b>	2025-06-10~2025-06-20
<b>Date of Issue:</b>	2025-06-20
<b>Test Result</b>	<b>Pass*</b>

\* In the configuration tested, the test item complied with the standards specified above.

**Authorized for issue by:****Test by:**

Jun. 20, 2025 Chivas Tsang  
Project Engineer

**Reviewed by:**

Jun. 20, 2025 Victor Meng  
Project Manager



Date Name/Position Signature Date Name/Position Signature

**Testing Laboratory information:**

Testing Laboratory Name .....: ITL Co., Ltd  
Address : No. 8, Jinqianling Street 5, Huangjiang Town, Dongguan,  
Guangdong, China  
Testing location : Same as above  
Tel : 0086-769-39001678  
Fax : 0086-20-62824387  
E-mail : itl@i-testlab.com

**Possible test case verdicts:**

- test case does not apply to the test object .: N/A
- test object does meet the requirement .....: P (Pass)
- test object does not meet the requirement .: F (Fail)

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number.  
It is the responsibility of the manufacturer to ensure that all production models meet the intent of  
the requirements detailed within this report.**

This report would be invalid test report without all the signatures of testing technician and approver.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**General product information: /**

## 1 Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
Occupied Bandwidth	FCC PART 15 C section 15.247 (a)(2)	ANSI C63.10:2013	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(3)	ANSI C63.10: 2013	PASS
Peak Power Spectral Density	FCC PART 15 C section 15.247(e)	ANSI C63.10:2013	PASS
Conducted Spurious Emission (30MHz to 25GHz)	FCC PART 15 C section 15.209&15.247(d)	ANSI C63.10:2013	PASS
Radiated Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.209&15.247(d)	ANSI C63.10:2013	PASS
Radiated Emissions which fall in the restricted bands	FCC PART 15 C section 15.209	ANSI C63.10:2013	PASS
Band Edges Measurement	FCC PART 15 C section 15.209&15.247(d)	ANSI C63.10:2013	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10:2013	PASS

## 2 Contents

	Page
<b>TEST REPORT.....</b>	<b>1</b>
<b>1 TEST SUMMARY .....</b>	<b>3</b>
<b>2 CONTENTS.....</b>	<b>4</b>
<b>3 GENERAL INFORMATION .....</b>	<b>5</b>
3.1 CLIENT INFORMATION .....	5
3.2 GENERAL DESCRIPTION OF E.U.T.....	5
3.3 DETAILS OF E.U.T.....	5
3.4 DESCRIPTION OF SUPPORT UNITS .....	5
3.5 TEST LOCATION.....	5
3.6 DEVIATION FROM STANDARDS.....	5
3.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
3.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
3.9 TEST FACILITY .....	6
3.10 MEASUREMENT UNCERTAINTY.....	6
<b>4 INSTRUMENTS USED DURING TEST.....</b>	<b>7</b>
<b>5 TEST RESULTS .....</b>	<b>8</b>
5.1 E.U.T. TEST CONDITIONS .....	8
5.2 ANTENNA REQUIREMENT .....	10
5.3 OCCUPIED BANDWIDTH .....	11
5.4 MAXIMUM PEAK OUTPUT POWER .....	16
5.5 PEAK POWER SPECTRAL DENSITY.....	19
5.6 CONDUCTED SPURIOUS EMISSIONS.....	23
5.7 RADIATED SPURIOUS EMISSIONS .....	26
5.7.1 <i>Harmonic and other spurious emissions.....</i>	29
5.8 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS .....	38
5.9 BAND EDGES REQUIREMENT .....	41
5.10 CONDUCTED EMISSIONS AT MAINS TERMINALS 150 KHZ TO 30MHz.....	43
5.10.1 <i>Measurement Data.....</i>	45

### 3 General Information

#### 3.1 Client Information

Applicant: Aurodi Corporation.  
Address of Applicant: Suite 1100, 7887 E Belleview Ave, Denver, CO 80111, United States.

#### 3.2 General Description of E.U.T.

Name: Smart Presence Sensing dimmer + mmWave & Lux

Model No.: VZM32-SN

Operating Frequency: 2405 MHz to 2480 MHz

16 channels with 5MHz step

Channels:

channel	Frequency	channel	Frequency	channel	Frequency	channel	Frequency
1	2405	5	2425	9	2445	13	2465
2	2410	6	2430	10	2450	14	2470
3	2415	7	2435	11	2455	15	2475
4	2420	8	2440	12	2460	16	2480

Type of Modulation: O-QPSK

Antenna Type: SMD Antenna with 4.33 dBi peak Gain

Serial number: D44867FFFE8B991

Hardware Version: V1.1

Software Version: 1.0.0

#### 3.3 Details of E.U.T.

EUT Power Supply: AC120V, 60Hz

Test mode: The program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel lowest (2405MHz), middle (2440MHz) and highest (2480MHz) are chosen for full testing.

#### 3.4 Description of Support Units

#### 3.5 Test Location

All the tests were performed in ITL Co., Ltd. Which is located at No. 8, Jinqianling Street 5, Huangjiang Town, Dongguan, Guangdong, China.

Tel: 0086-769-39001678, Fax: 0086-20-62824387

No tests were sub-contracted.

#### 3.6 Deviation from Standards

None.

#### 3.7 Abnormalities from Standard Conditions

None.

### 3.8 Other Information Requested by the Customer

None.

### 3.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS Lab code:L9342**
- **FCC Designation No.:CN5035**
- **IC Registration NO.: 12593A**
- **NVLAP LAB CODE: 600199-0**

### 3.10 Measurement Uncertainty

The below measurement uncertainties given below are based on a 95% confidence level (base on a coverage factor (k=2).)

Parameter	Uncertainty
Radio frequency	2.25%
total RF power, conducted	±1.34 dB
RF power density , conducted	±1.49 dB
All emissions, radiated	±2.72 dB
Temperature	±5.02 dB
Humidity	±0.8°C
DC and low frequency voltages	±1.5 %

## 4 Instruments Used during Test

No.	Test Equipment	Manufacturer	Model	Serial No.	Cal Data	Due Date
DGITL-301	Semi-Anechoic chamber	ETS•Lindgren	9*6*6	CT000874-1181	2023.08.02	2026.08.02
DGITL-307	EMI test receiver	SCHWARZBECK	ESVS10	833616 /003	2025.03.13	2026.03.12
DGITL-376	Wideband Radio Communication Tester	SCHWARZBECK	CMW500	LR114195	2025.03.13	2026.03.12
DGITL-349a	Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	259268	2025.03.13	2026.03.12
DGITL-306	Spectrum Analyzer	Agilent Technologies	N9010A	MY54200334	2025.03.13	2026.03.12
DGITL-352	Pre Amplifier	Mlnl-Circuits	ZFC-1000HX	SN292801110	2025.03.13	2026.03.12
DGITL-375	Spectrum Analyzer	SCHWARZBECK	FSV40-N	6625-01-588-5515	2025.03.13	2026.03.12
DGITL-309	Horn Antenna	ETS Lindgren	3117	SN00152265	2025.05.14	2027.05.14
DGITL-308	Bilog Antenna	ETS• Lindgren	3142E	156975	2025.05.14	2027.05.14
DGITL-350	Wideband Amplifier Super Ultra	Mlnl-Circuits	ZVA-183X-S+	SN986401426	2025.03.13	2026.03.12
DGITL-371	Pre Amplifier	teramicrowave	TALA-0040G35	18081001	2025.03.13	2026.03.12
DGITL-363	Active Loop Antenna	SCHWARZBECK	FMZB1519B	00062	2024.05.15	2026.05.11
DGITL-303a	EMI Test receiver	R&S	ESCI	100910	2025.03.13	2026.03.12
DGITL-304	L.I.S.N.#1	R&S	ESH3-Z5	100272	2025.03.13	2026.03.12
DGITL-302	Shielded Room	ETS•Lindgren	8*4*3	CT09010	2023.08.02	2026.08.02
DGITL-184	Coaxial cables	COM-MW	DCA8-NM8000NM4.2-2425	/	2025/02/28	2027/02/27

## 5 Test Results

### 5.1 E.U.T. test conditions

**Test Voltage:** AC120V, 60Hz

**Temperature:** 23.2 -25.0 °C

**Humidity:** 38-50 % RH

**Atmospheric Pressure:** 1000 -1010 mbar

**Requirements:** **15.31(e):** For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

**15.32:** Power supplies and CPU boards used with personal computers and for which separate authorizations are required to be obtained shall be tested as follows: Testing shall be in accordance with the procedures specified in Section 15.31 of this part.

**Test frequencies and frequency range:** According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

**Number of fundamental frequencies to be tested in EUT transmit band**

Frequency range in which	Number of	Location in frequency range
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

**Frequency range of radiated emission measurements**

<b>Lowest frequency generated</b>	<b>Upper frequency range of measurement</b>
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz,
At or above 10 GHz to below	5th harmonic of highest fundamental frequency or to 100 GHz,
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz,

EUT channels and frequencies list:

channel	Frequency	channel	Frequency	channel	Frequency	channel	Frequency
1	2405	5	2425	9	2445	13	2465
2	2410	6	2430	10	2450	14	2470
3	2415	7	2435	11	2455	15	2475
4	2420	8	2440	12	2460	16	2480

Test frequencies are the lowest channel: 1 channel (2405MHz), middle channel: 8 channel (2440 MHz) and highest channel: 16 channel (2480 MHz)

Test the EUT in continuous transmission mode, duty cycle>98%.

## 5.2 Antenna requirement

### Standard requirement

15.203 requirement:

For intentional device. According to 15.203. An intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna

The antenna is a SMD Antenna and no consideration of replacement. The best-case gain of the antenna is 4.33 dBi.

**Test result: The unit does meet the FCC requirements.**

### 5.3 Occupied Bandwidth


Test Requirement: FCC Part 15 C section 15.247

(a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

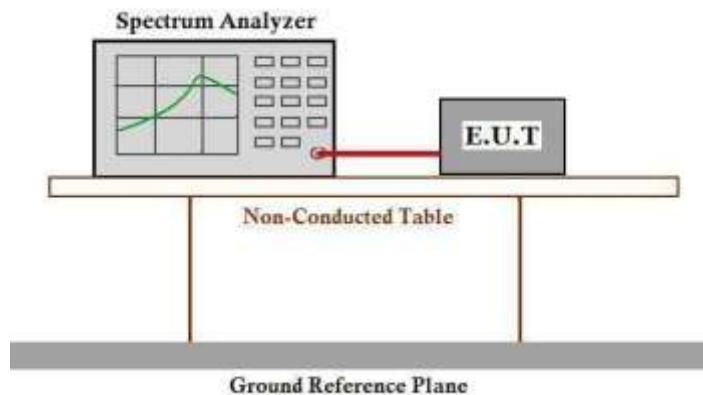

Test Procedure:

6 dB bandwidth

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW=100 kHz. VBW = 300 kHz, Sweep = auto; Detector Function = Peak. Trace = Max Hold, Set span to encompass the entire emission bandwidth of the signal.
3. Mark the peak power frequency and -6dB (upper and lower) power frequency.
4. Repeat until all the test status is investigated.
5. Report the worst case.

**99% bandwidth**

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW= 1-5% of the OBW. VBW = 3 x RBW, Sweep = auto; Detector Function = Peak. Trace = Max Hold, Set span to encompass the entire emission bandwidth of the signal.
3. Mark the peak power frequency and OBW 99% power frequency.
4. Repeat until all the test status is investigated.
5. Report the worst case.

**Test result (6 dB bandwidth)**

Channel No.	Frequency (MHz)	Measured 6dB bandwidth (MHz)	Limit	Result
1	2405	1.631	≥500KHz	Pass
8	2440	1.633		Pass
16	2480	1.624		Pass



**Test result (99% bandwidth)**


Channel No.	Frequency (MHz)	Measured 99% bandwidth (MHz)	Result
1	2405	2.224	Pass
8	2440	2.224	Pass
16	2480	2.223	Pass

**The unit does meet the FCC requirements.**

6dB bandwidth:


Result plot as follows:

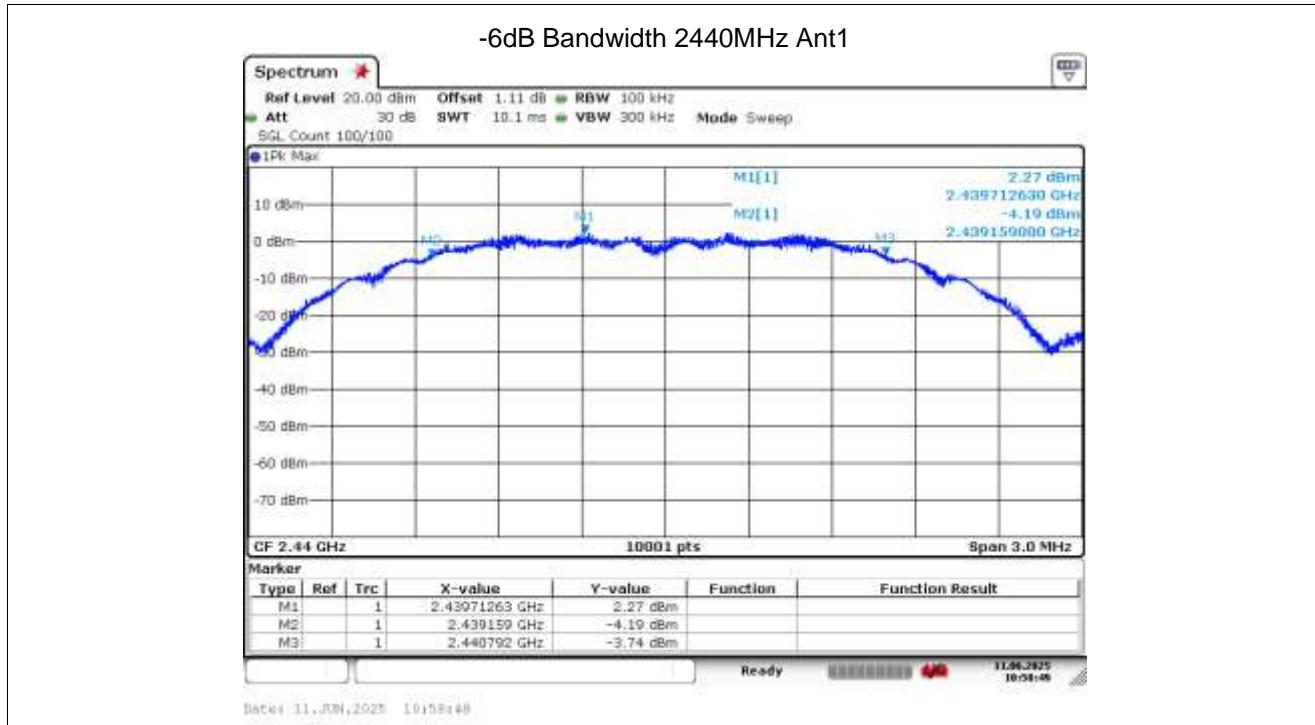
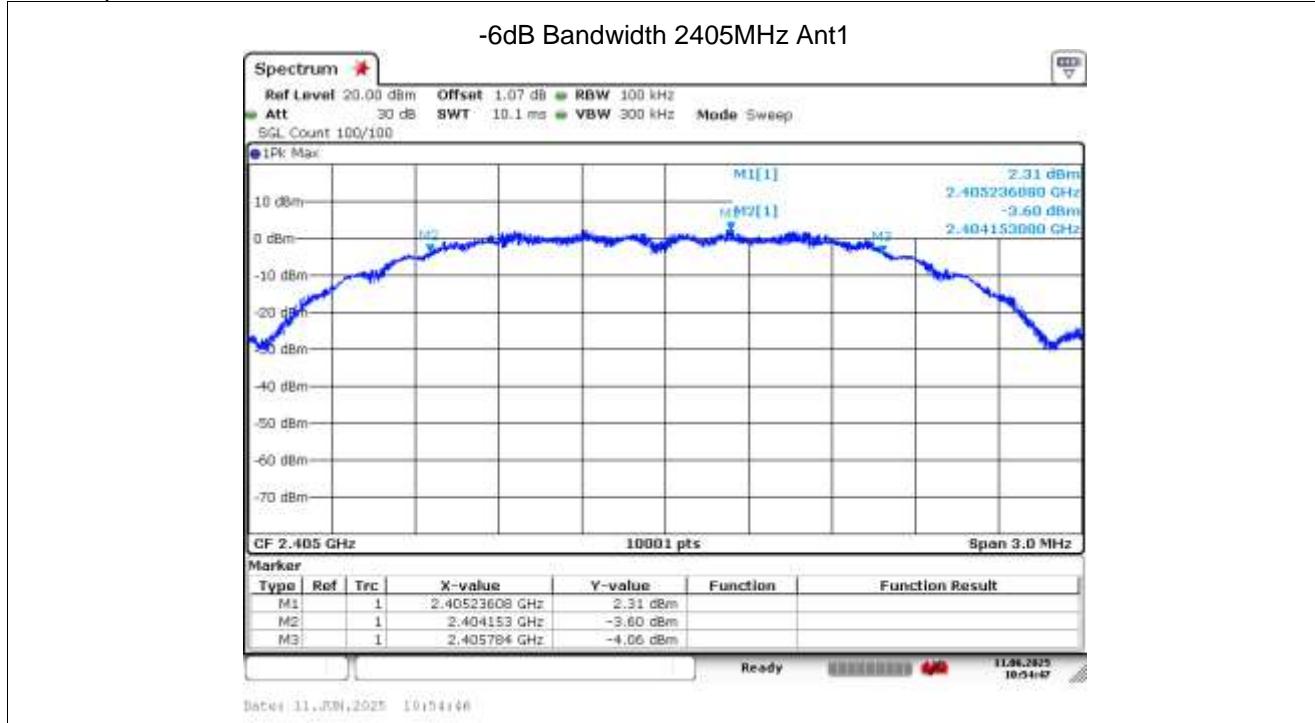


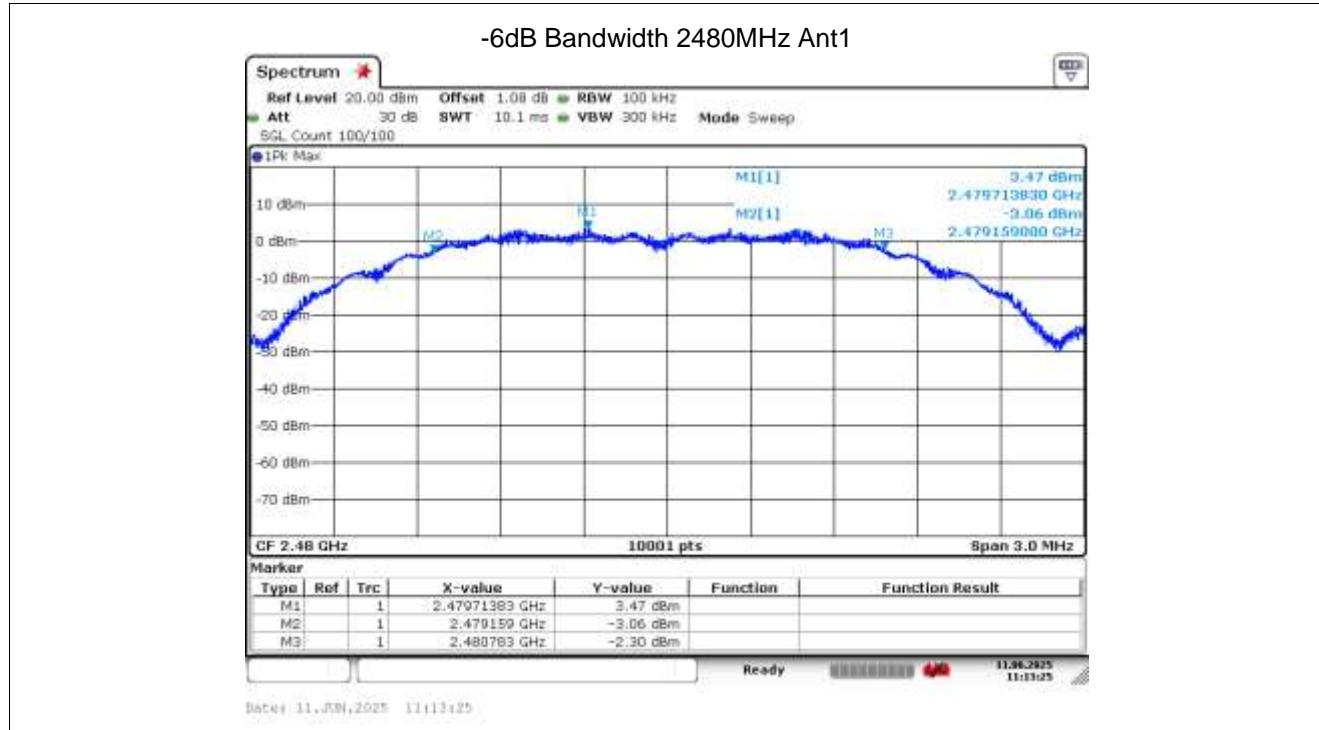

99% bandwidth:

Result plot as follows:

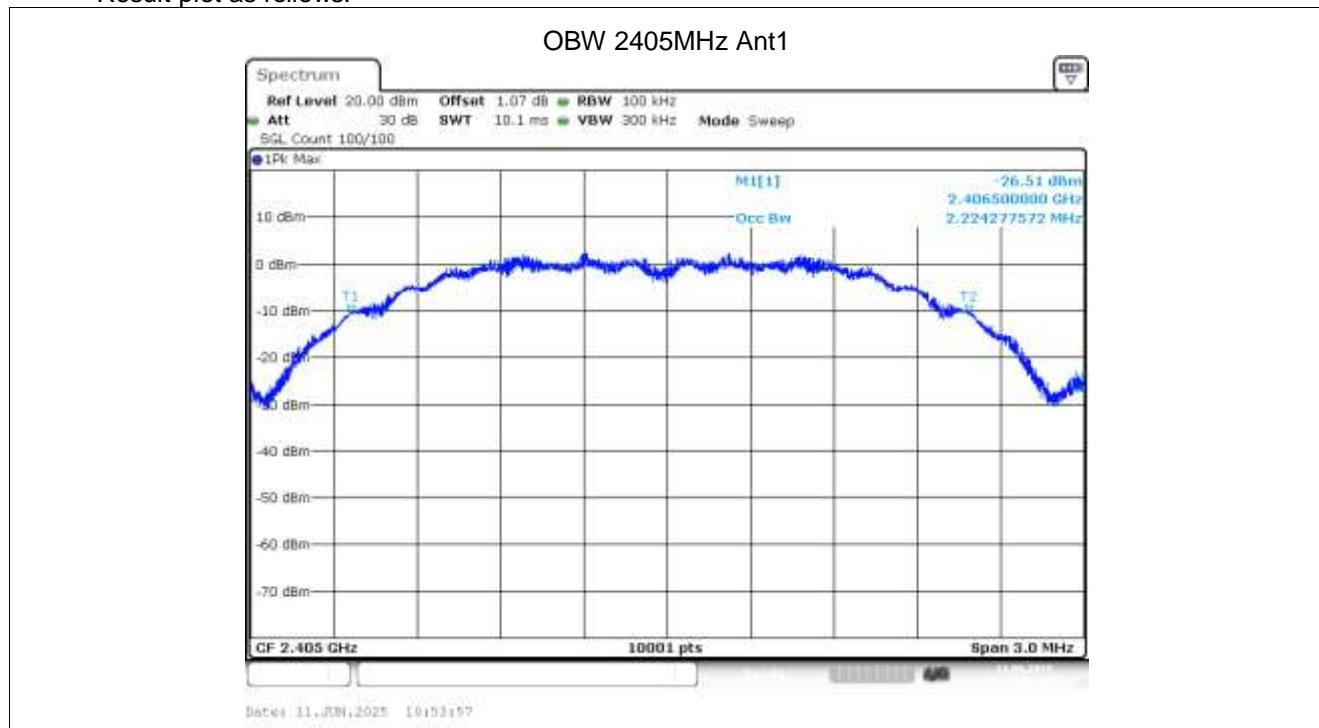

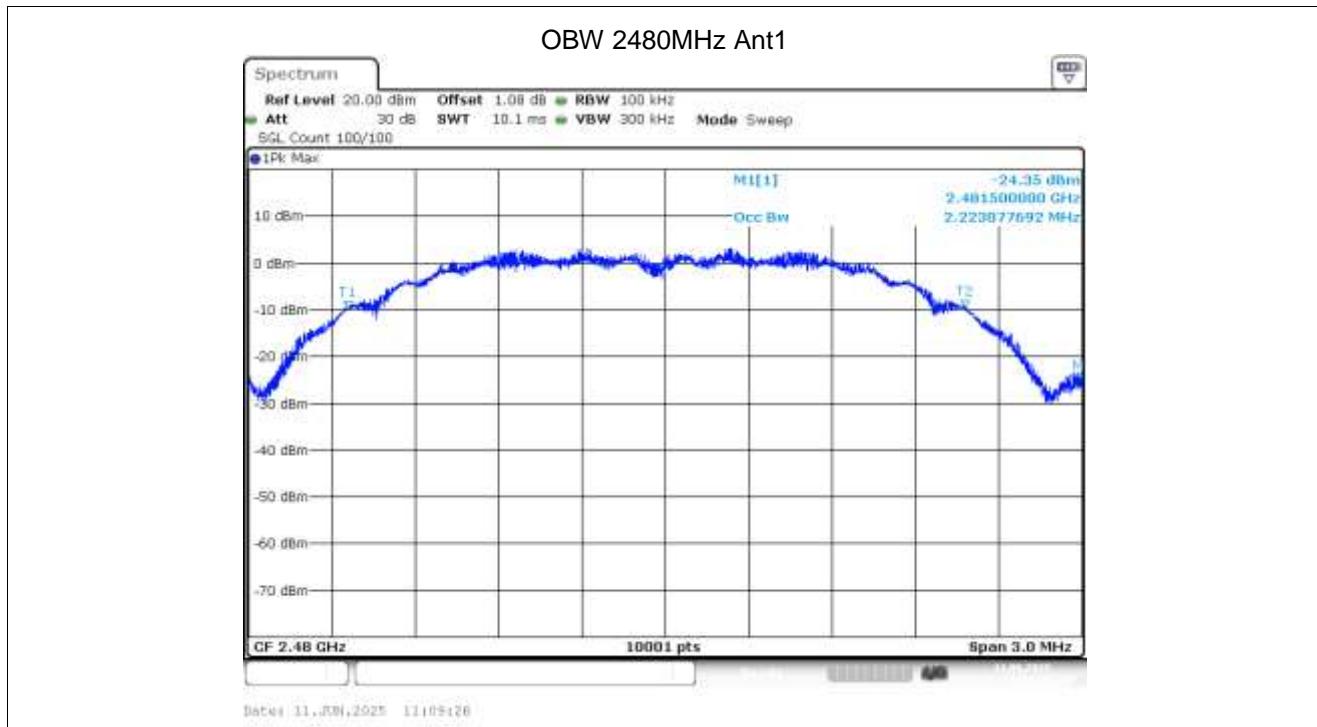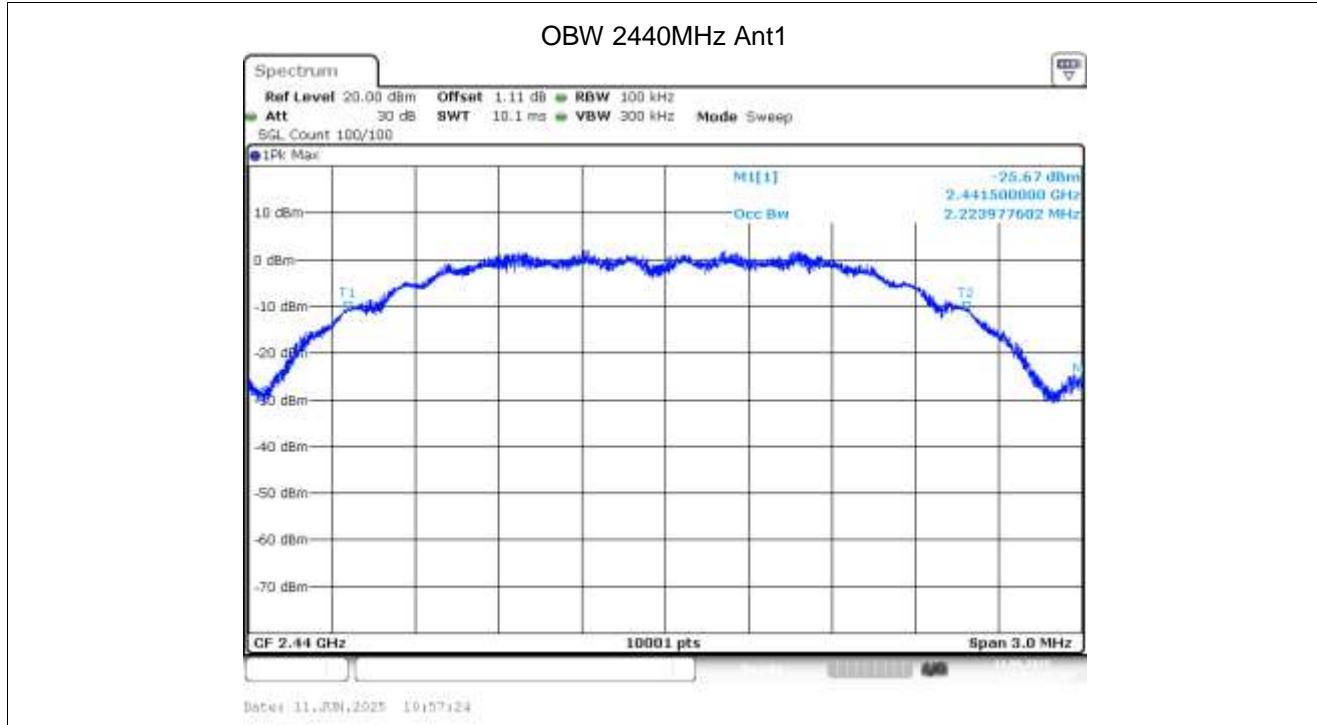


## 5.4 Maximum Peak Output Power

Test Requirement: FCC Part 15 C section 15.247  
(b)(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.  
Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b) (1), (b) (2), and (b) (3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

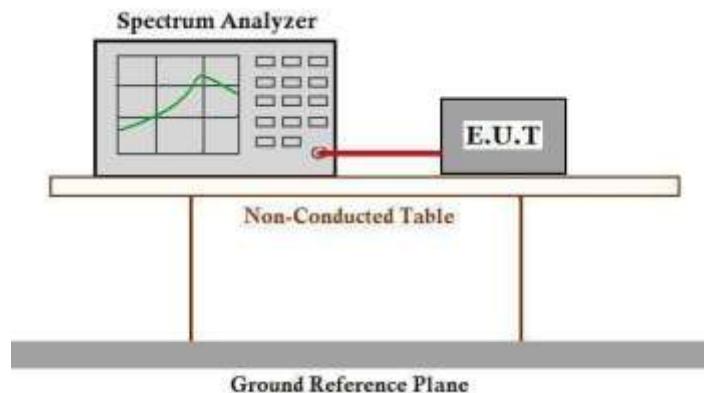

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable from the antenna port to the spectrum.
2. Set the  $RBW \geq DTS$  bandwidth
3. Set  $VBW \geq 3 \times RBW$
4. Set span  $\geq 3 \times RBW$ .
5. Sweep time = auto.
6. Detector = peak.
7. Trace mode = max hold.
8. Allow trace to fully stabilize
9. Use peak marker function to determine the peak amplitude level


**Test Data:**

Channel No.	Frequency (MHz)	Measured Power (dBm)	Limit (dBm)	Result
1	2405	6.099	30	Pass
8	2440	6.751		Pass
16	2480	6.883		Pass

**The unit does meet the FCC requirements.**


Result plot as follows:

Channel 1:2.405GHz:

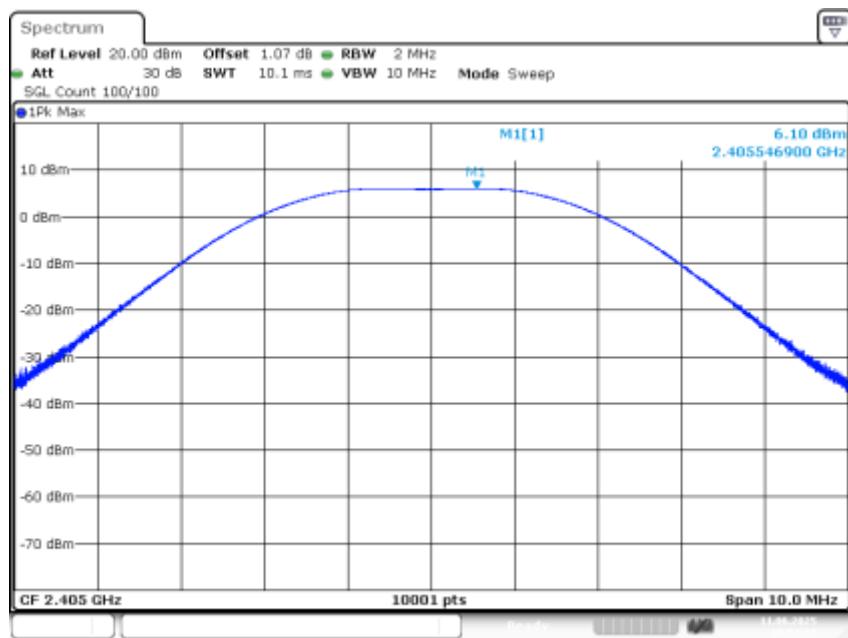


Date: 11.JUN.2025 10:53:34

Channel 8: 2.440GHz:

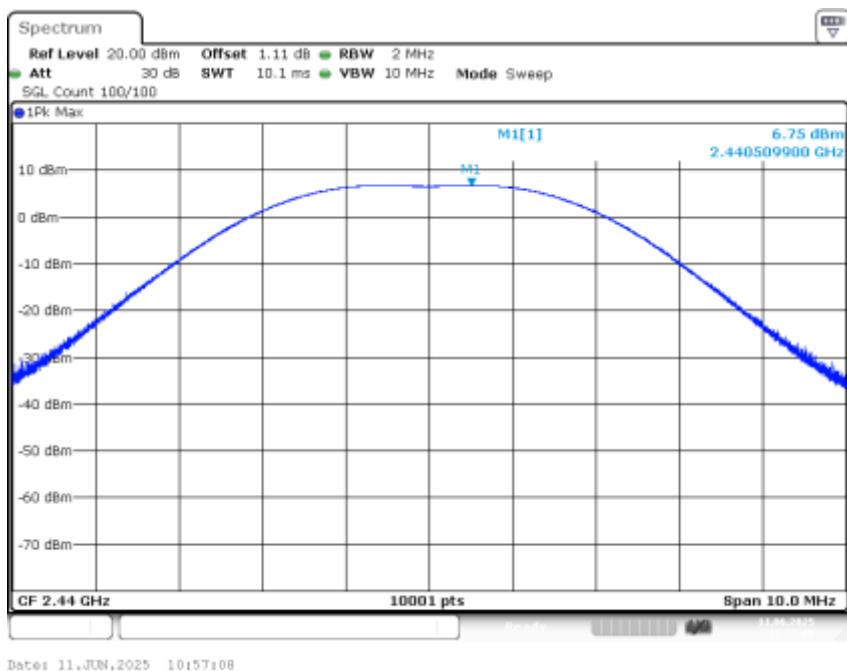

Channel 16: 2.480GHz:

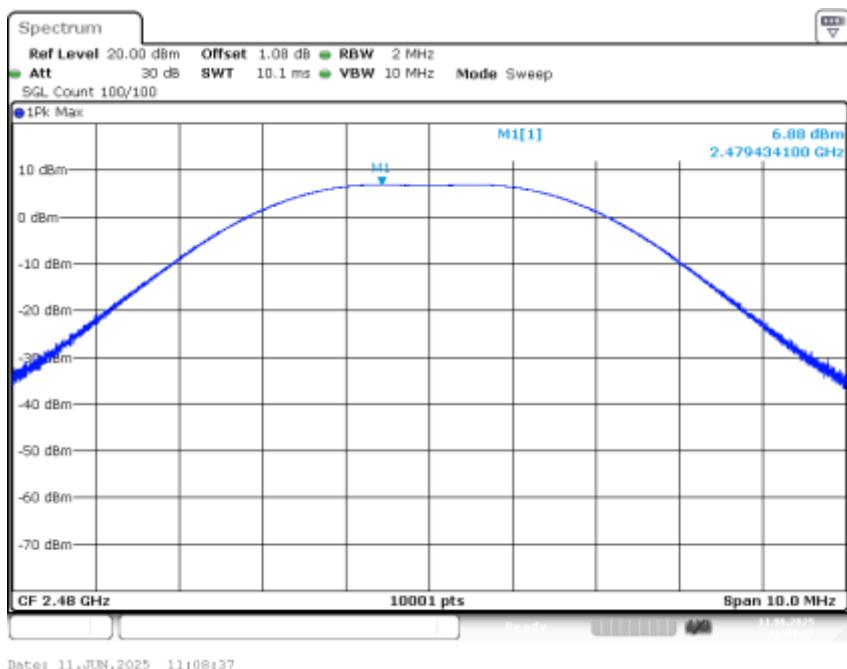


## 5.5 Peak Power Spectral Density

Test Requirement: FCC Part 15 C section 15.247  
(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channel and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

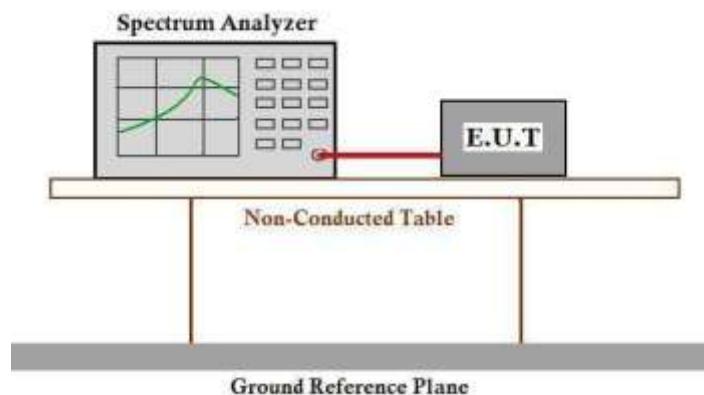

## Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer:
  - a) Set instrument center frequency to DTS channel center frequency.
  - b) Set the span to 1.5 times the DTS bandwidth.
  - c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
  - d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
  - e) Detector = peak.
  - f) Sweep time = auto couple.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum amplitude level within RBW.
  - j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
3. Repeat until all the test status is investigated.
4. Report the worst case.


## Test result:

Channel No.	Frequency (MHz)	Measured Peak Power Spectral Density (dBm/3kHz)	Limit	Result
1	2405	1.869	8dBm/3kHz	Pass
8	2440	2.341		Pass
16	2480	2.866		Pass


**The unit does meet the FCC requirements.**

Result plot as follows:


Channel 1: 2.405 GHz:

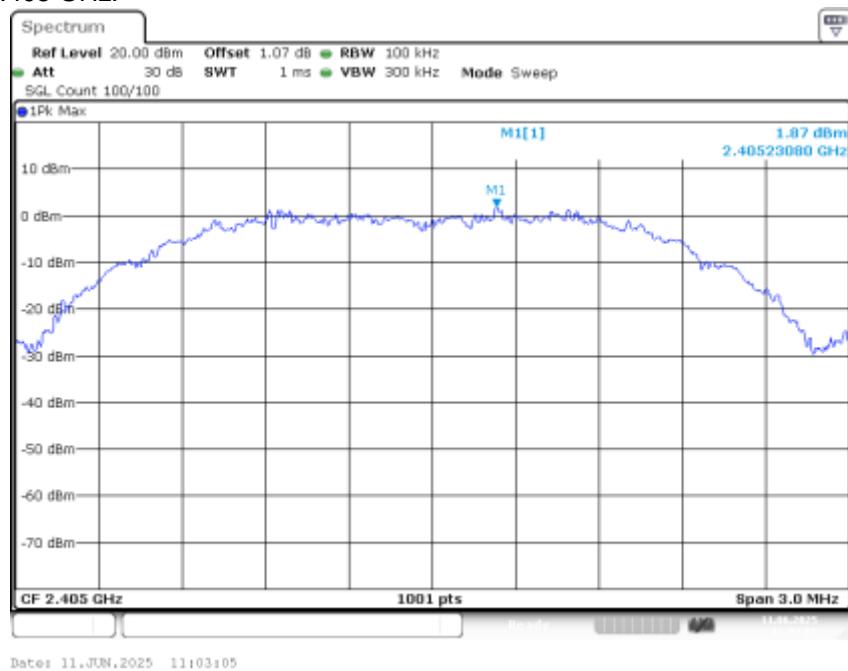

Channel 8: 2.440GHz:

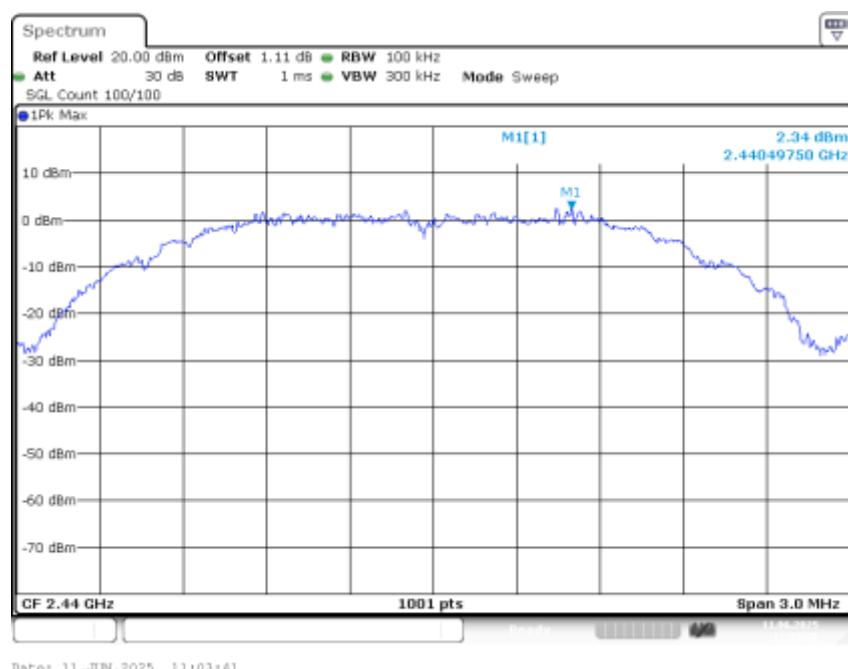

Channel 16: 2.480 GHz:

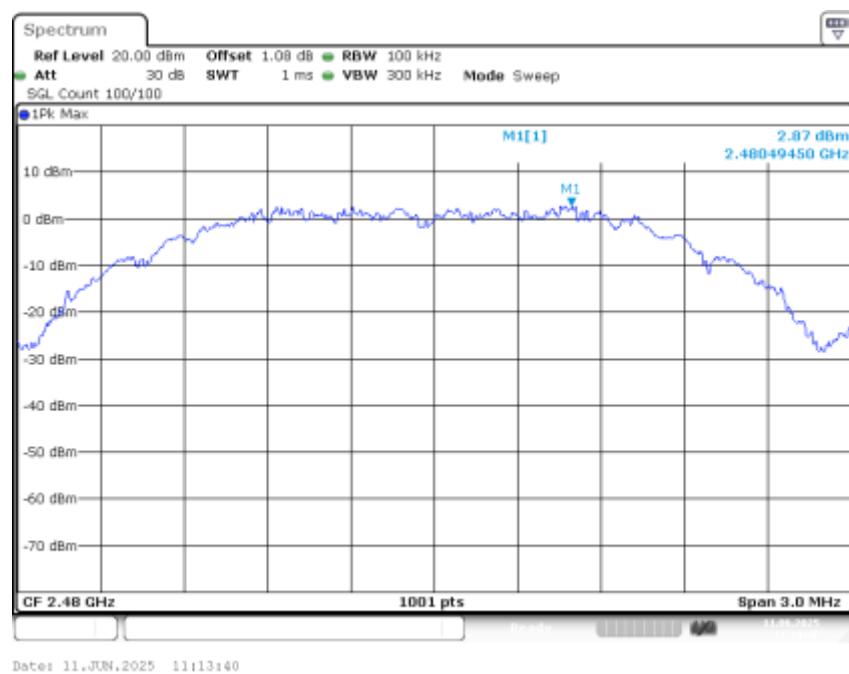

## 5.6 Conducted Spurious Emissions


Test Requirement: FCC Part 15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channel and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

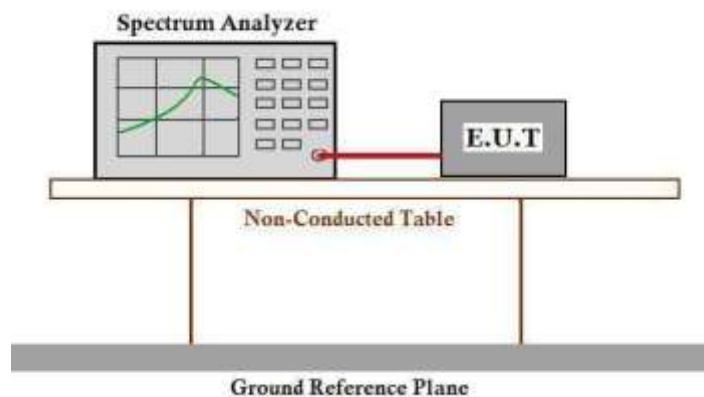


Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer: RBW=100 KHz, VBW = 300KHz. Sweep = auto; Detector Function = Peak. Trace = Max Hold, Scan up through 10th harmonic.
3. Measure the Conducted Spurious Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worst case.


Result plot as follows:

Channel 1: 2.405 GHz

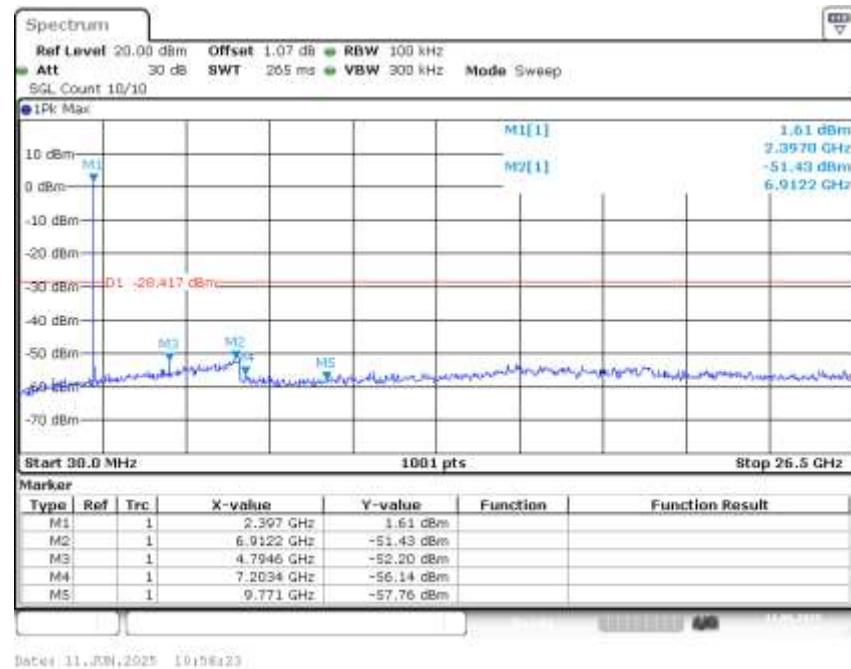


**Note:** This line in the plots is a reference line for the 20dB down limit, not the limit.

Channel 8: 2.440 GHz

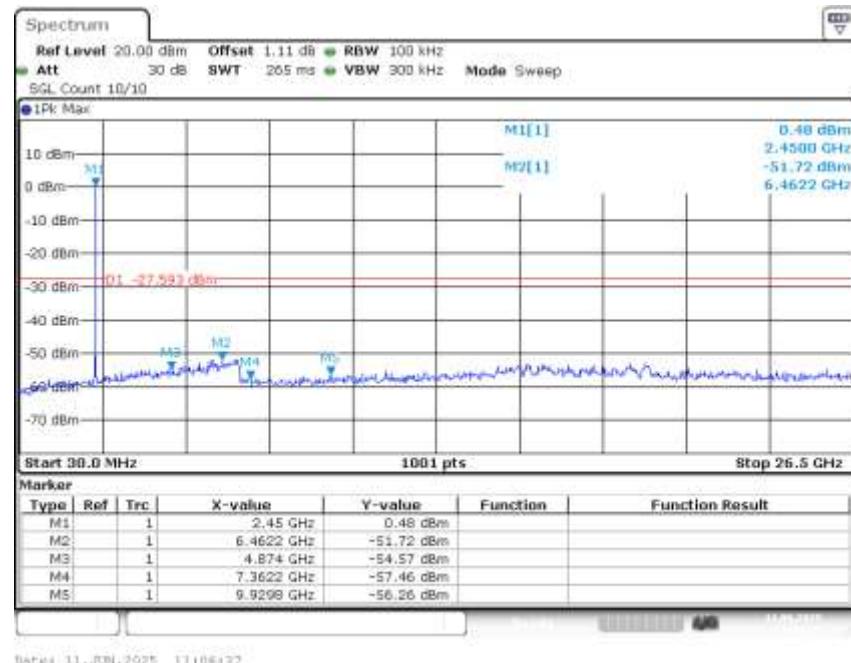

**Note:** This line in the plots is a reference line for the 20dB down limit, not the limit.

Channel 16: 2.480 GHz

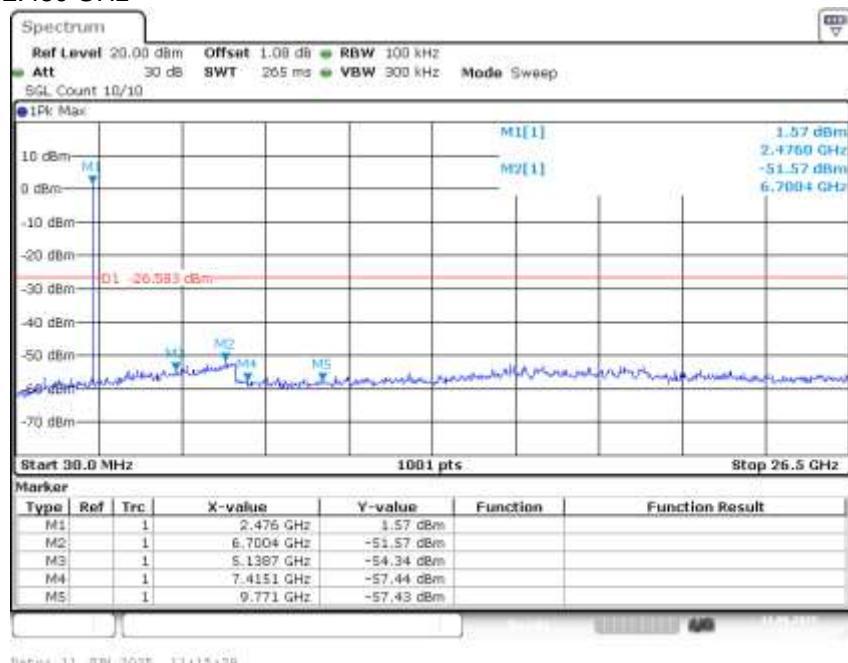

**Note: This line in the plots is a reference line for the 20dB down limit, not the limit.**


**The results do meet the FCC requirements.**

## 5.7 Radiated Spurious Emissions


Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.
Test Method:	ANSI C63.10:2013
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Detector: For PK value:	<p>RBW = 1 MHz for <math>f \geq 1</math> GHz, 100 kHz for <math>f &lt; 1</math> GHz</p> <p>VBW <math>\geq</math> RBW</p> <p>Sweep = auto</p> <p>Detector function = peak</p> <p>Trace = max hold</p>
For AV value:	<p>RBW = 1 MHz for <math>f \geq 1</math> GHz, 100 kHz for <math>f &lt; 1</math> GHz, 9kHz for <math>&lt; 30</math> MHz</p> <p>VBW = 10Hz</p> <p>Sweep = auto</p> <p>Detector function = peak</p> <p>Trace = max hold</p>
15.209 Limit:	40.0 dB $\mu$ V/m between 30MHz & 88MHz 43.5 dB $\mu$ V/m between 88MHz & 216MHz 46.0 dB $\mu$ V/m between 216MHz & 960MHz 54.0 dB $\mu$ V/m above 960MHz

**Test Configuration:**


1) 9kHz to 30MHz emissions:

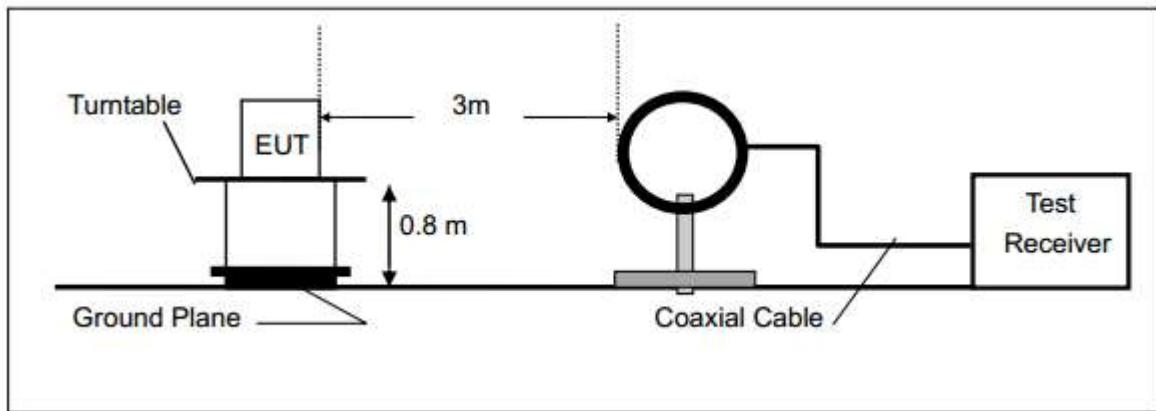

2) 30 MHz to 1 GHz emissions:

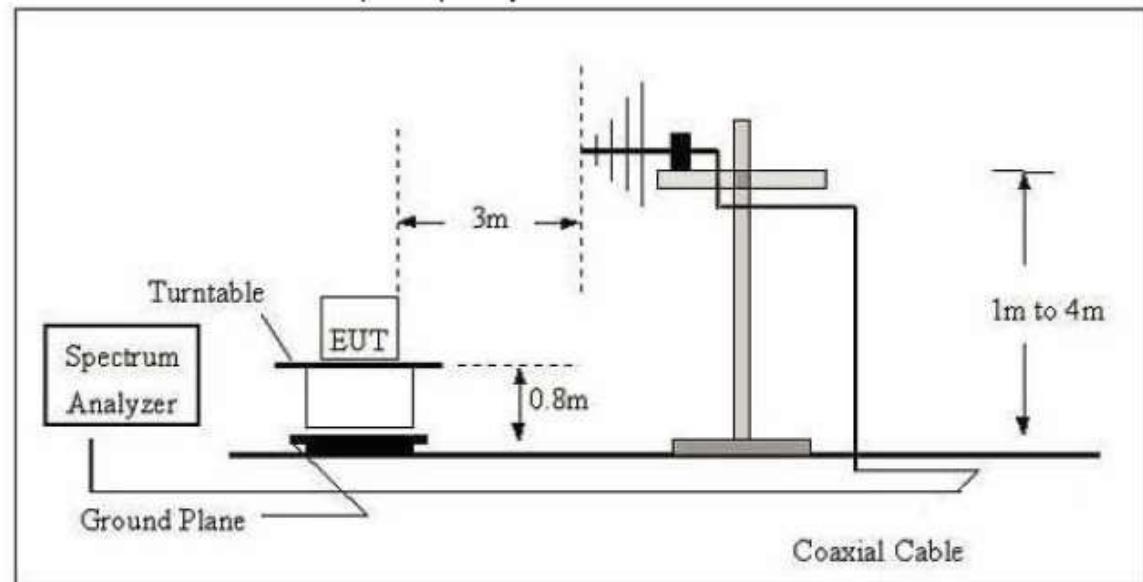

3) 1 GHz to 40 GHz emissions:

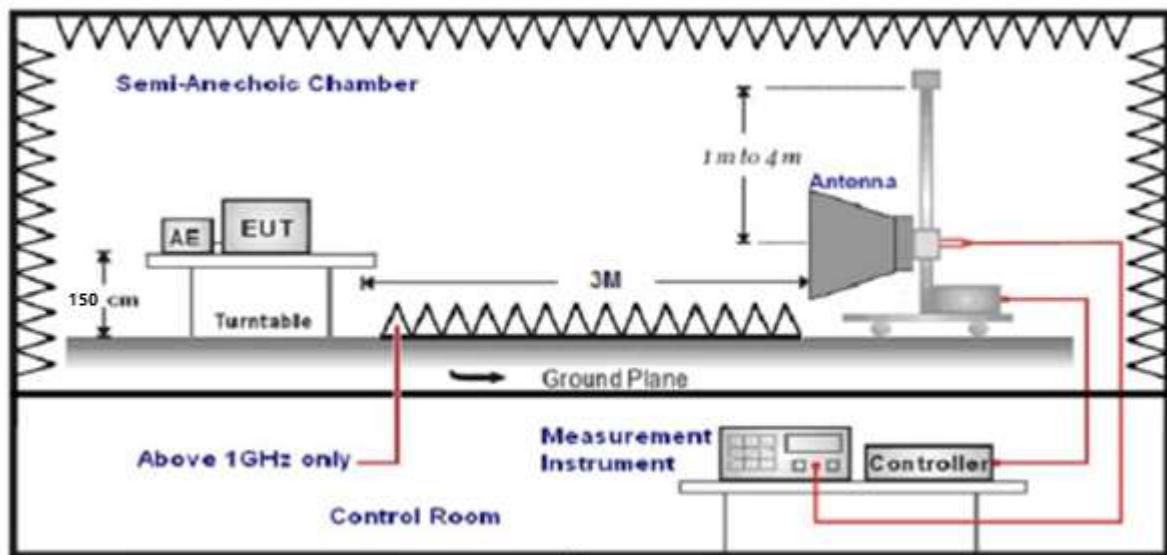**Test Procedure:****1) 9 kHz to 30 MHz emissions:**

For testing performed with the loop antenna. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the special distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

**2) 30 MHz to 1 GHz emissions:**

For testing performed with the bi-log type antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

**3) 1 GHz to 25 GHz emissions:**

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2010 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

**4) The receiver was scanned from 9 kHz to 25 GHz.** When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

The measurements with active loop antenna were greater than 20dB below the limit, so the

test data were not recorded in the test report.

### 5.7.1 Harmonic and other spurious emissions

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions. Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB $\mu$ V/m)

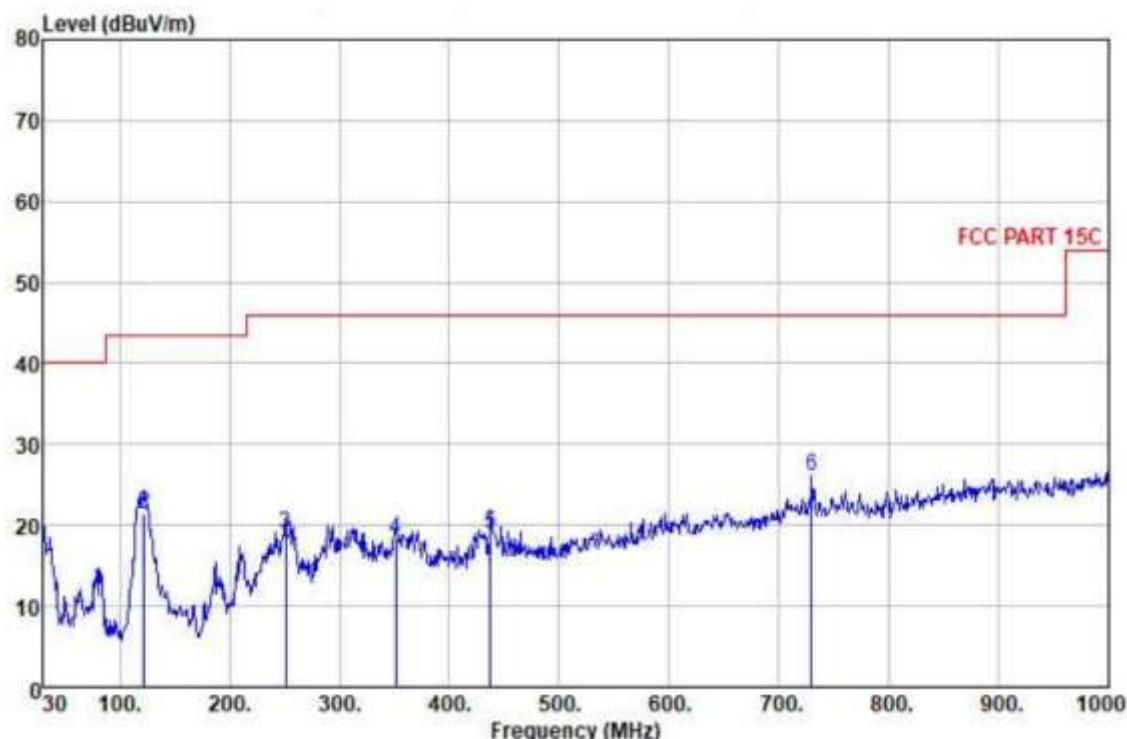


Quasi-peak measurement

No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	30.000	21.32	23.60	0.63	28.50	17.05	10.00	-22.95	HORIZONTAL	QP
2	122.150	38.28	10.27	1.31	28.48	21.38	13.50	-22.12	HORIZONTAL	QP
3	251.160	31.18	13.18	1.93	27.34	18.95	16.00	-27.05	HORIZONTAL	QP
4	351.070	28.19	14.78	2.28	27.35	18.20	16.00	-27.80	HORIZONTAL	QP
5	437.100	28.88	15.80	2.56	28.35	18.91	16.00	-27.09	HORIZONTAL	QP
6	729.370	29.81	20.30	3.40	27.58	25.96	16.00	-20.04	HORIZONTAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

**Vertical:**

Peak scan

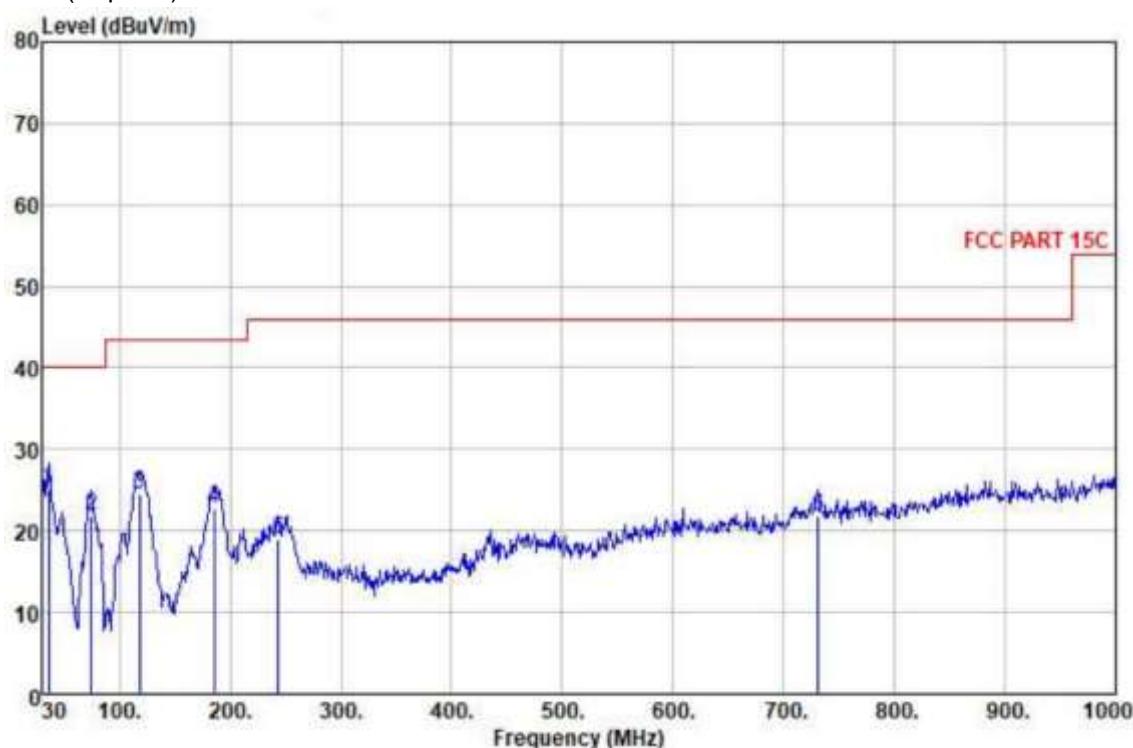Level (dB $\mu$ V/m)


Quasi-peak measurement

No.	Freq MHz	Read Level dB $\mu$ V	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	35.820	33.46	19.63	0.68	28.51	25.26	40.00	-14.74	VERTICAL	QP
2	71.620	41.11	7.92	1.01	28.20	21.87	40.00	-18.13	VERTICAL	QP
3	118.270	41.57	10.13	1.29	28.62	24.47	43.50	-19.03	VERTICAL	QP
4	185.200	38.41	10.36	1.61	27.69	22.72	43.50	-20.78	VERTICAL	QP
5	243.100	31.77	12.50	1.90	27.23	18.94	46.00	-27.06	VERTICAL	QP
6	731.310	25.73	20.33	3.10	27.57	21.89	46.00	-24.11	VERTICAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

**Spurious emissions above 1GHz****Test at low Channel in transmitting status****Horizontal:**

Peak scan

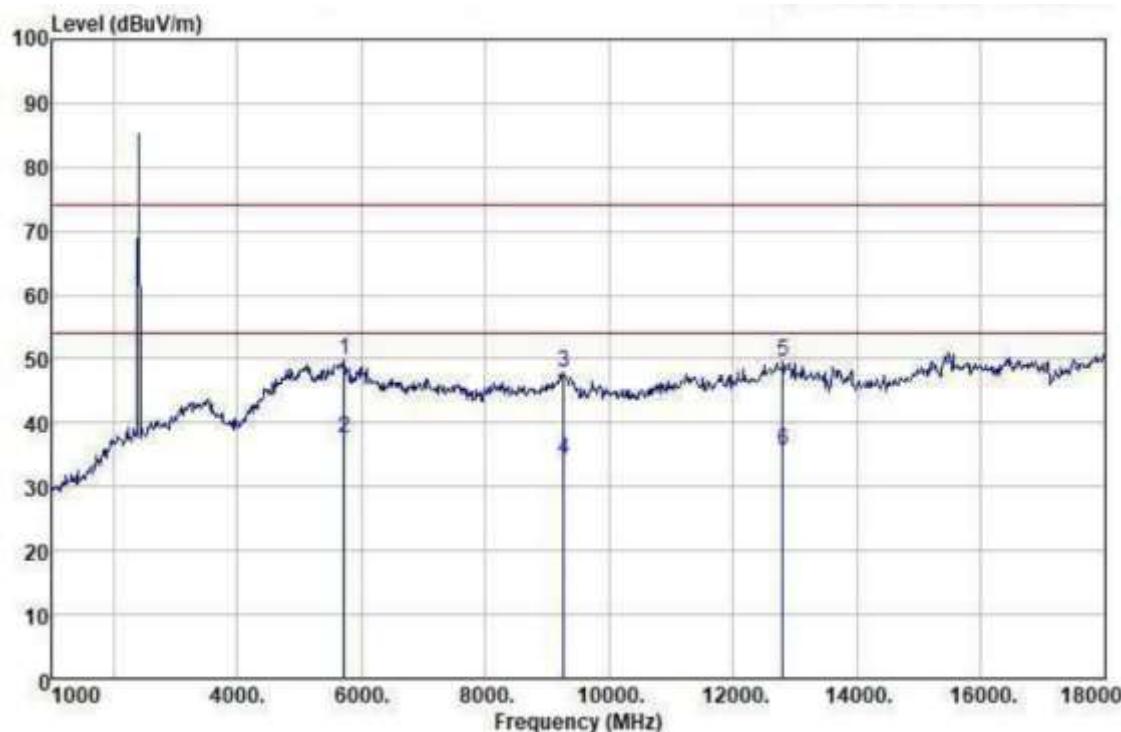Level (dB $\mu$ V/m)


Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
5726.000	31.98	34.85	10.60	27.16	49.97	74.00	-24.03	HORIZONTAL	Peak
5726.000	19.57	34.85	10.60	27.16	37.56	54.00	-16.44	HORIZONTAL	Average
9262.000	22.11	38.80	14.13	27.18	47.86	74.00	-26.14	HORIZONTAL	Peak
9262.000	8.19	38.80	14.13	27.18	34.24	54.00	-19.76	HORIZONTAL	Average
12798.000	19.03	10.22	17.02	26.56	49.71	74.00	-24.29	HORIZONTAL	Peak
12798.000	5.09	10.22	17.02	26.56	36.77	54.00	-18.23	HORIZONTAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

**Note: The emission above limit is fundamental emission, which is not subject to the limit.**

**Vertical:**

Peak scan

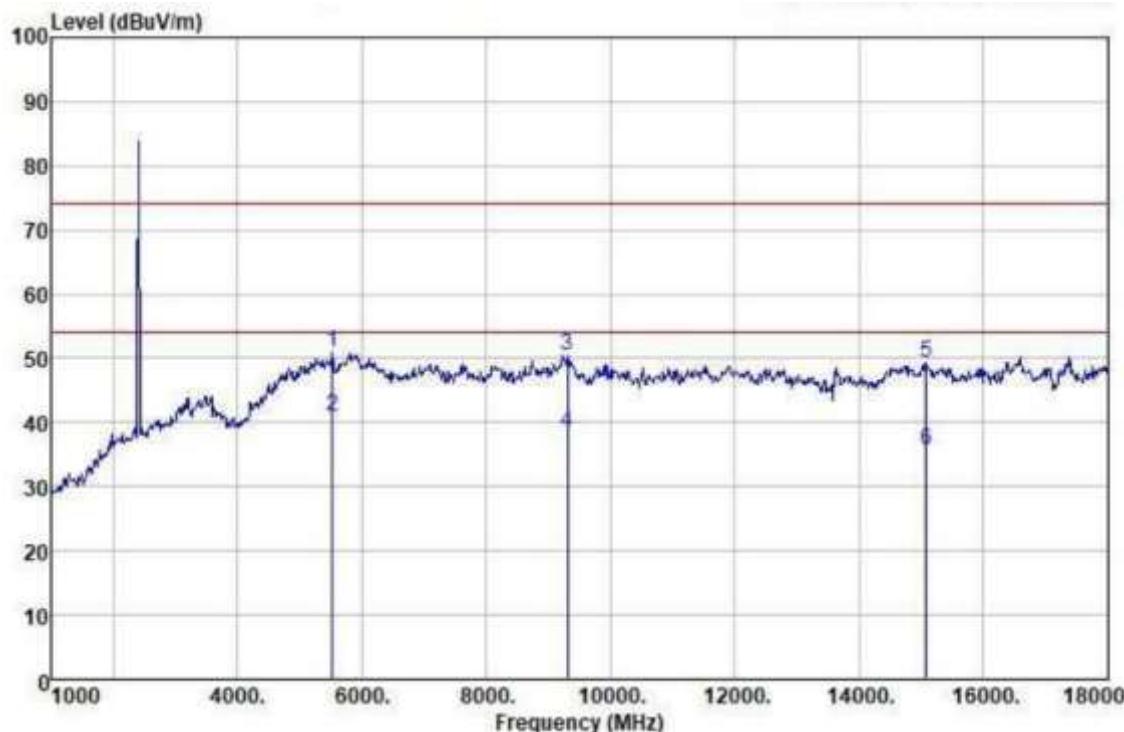Level (dB $\mu$ V/m)


Freq MHz	Read Level dB $\mu$ V	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dB $\mu$ V/m	Limit Line dB $\mu$ V/m	Over Limit dB	Pol/Phase	Remark
5522.000	34.02	33.99	10.38	27.49	50.90	74.00	-23.10	VERTICAL	Peak
5522.000	24.15	33.99	10.38	27.49	41.03	54.00	-12.97	VERTICAL	Average
9313.000	24.69	38.80	14.17	27.17	50.49	74.00	-23.51	VERTICAL	Peak
9313.000	12.67	38.80	14.17	27.17	38.47	54.00	-15.53	VERTICAL	Average
15076.000	16.50	39.99	18.79	26.06	49.22	74.00	-24.78	VERTICAL	Peak
15076.000	3.01	39.99	18.79	26.06	35.76	54.00	-18.24	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

**Note:** The emission above limit is fundamental emission, which is not subject to the limit.

**Test at Middle Channel in transmitting status Horizontal:**

Peak scan

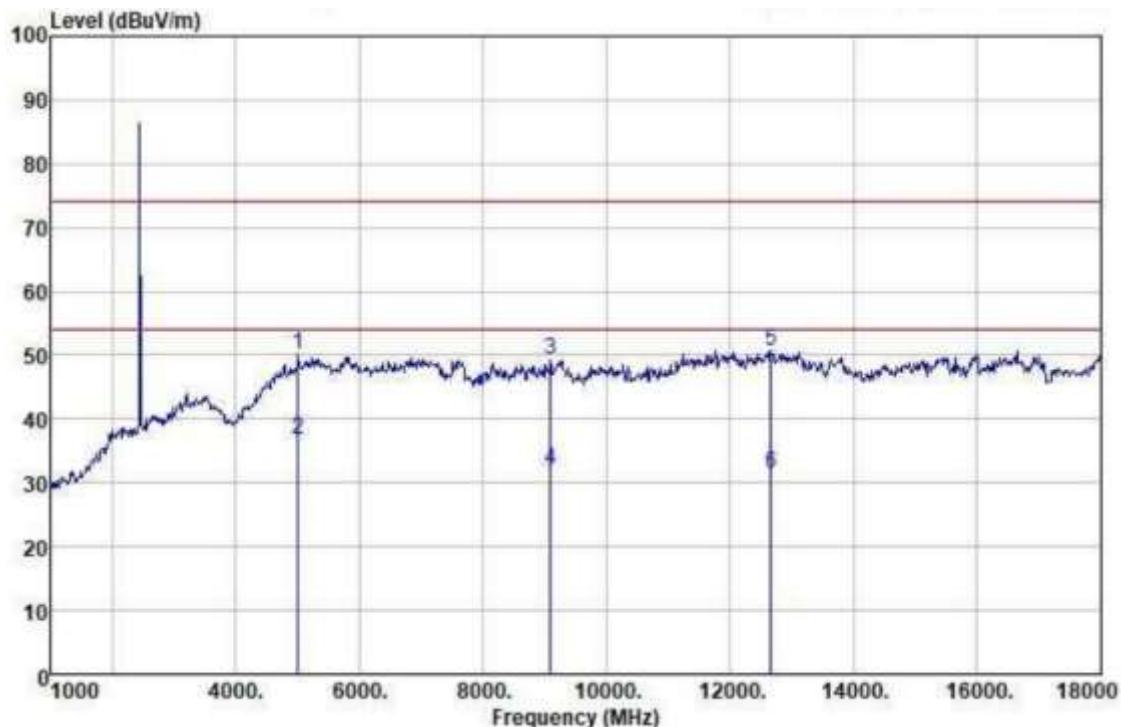Level (dB $\mu$ V/m)


Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
5012.000	34.37	33.61	9.81	27.59	50.10	74.00	-23.90	HORIZONTAL	Peak
5012.000	21.18	33.51	9.81	27.59	36.89	54.00	-17.11	HORIZONTAL	Average
9092.000	23.82	38.80	13.97	27.20	49.39	74.00	-24.61	HORIZONTAL	Peak
9092.000	6.35	38.80	13.97	27.20	31.92	51.00	-22.08	HORIZONTAL	Average
12662.000	20.61	39.89	16.91	26.62	50.82	74.00	-23.18	HORIZONTAL	Peak
12662.000	1.39	39.89	16.91	26.62	31.57	51.00	-22.43	HORIZONTAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

**Note: The emission above limit is fundamental emission, which is not subject to the limit.**

**Vertical:**

Peak scan

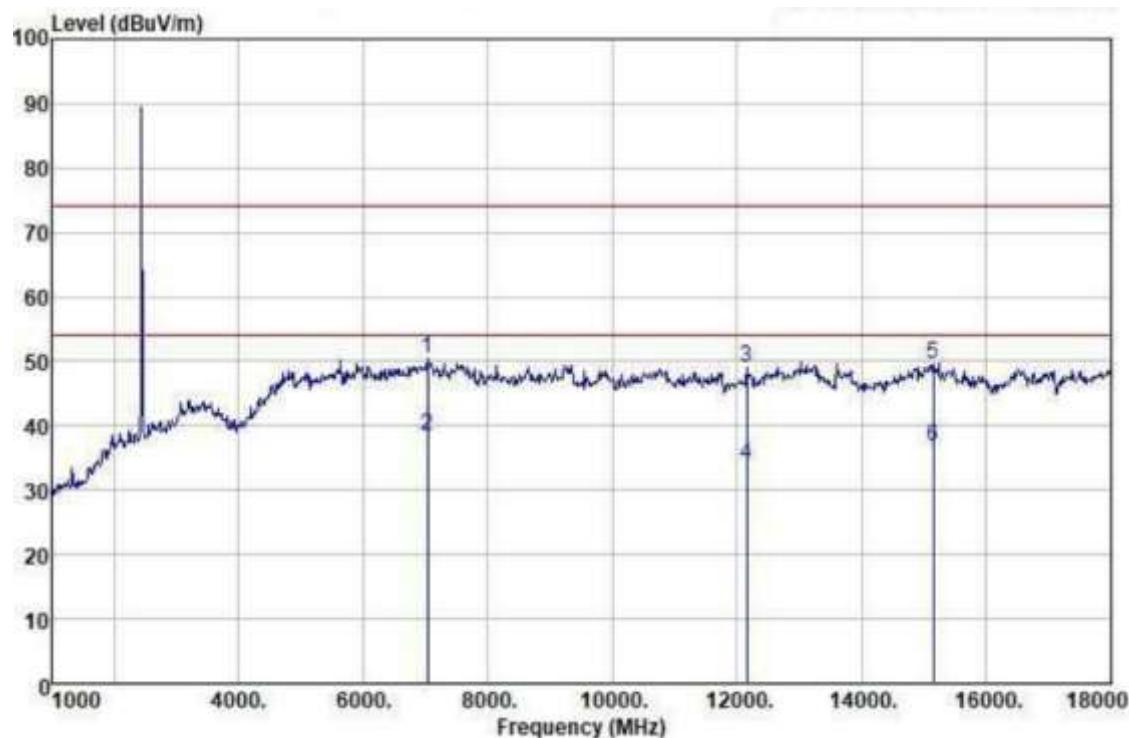Level (dB $\mu$ V/m)


Freq MHz	Read Level dB $\mu$ V	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dB $\mu$ V/m	Limit Line dB $\mu$ V/m	Over Limit dB	Pol/Phase	Remark
7035.000	29.25	36.46	11.96	27.31	60.33	74.00	-23.67	VERTICAL	Peak
7035.000	17.10	36.46	11.96	27.31	38.48	54.00	-15.52	VERTICAL	Average
12152.000	19.67	39.57	16.19	26.79	48.94	74.00	-25.06	VERTICAL	Peak
12152.000	4.59	39.57	16.19	26.79	33.86	54.00	-20.14	VERTICAL	Average
15144.000	17.00	39.90	18.85	26.05	49.70	74.00	-24.30	VERTICAL	Peak
15144.000	4.12	39.90	18.85	26.05	36.82	54.00	-17.18	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

**Note: The emission above limit is fundamental emission, which is not subject to the limit.**

**Test at high Channel in transmitting status****Horizontal:**

Peak scan

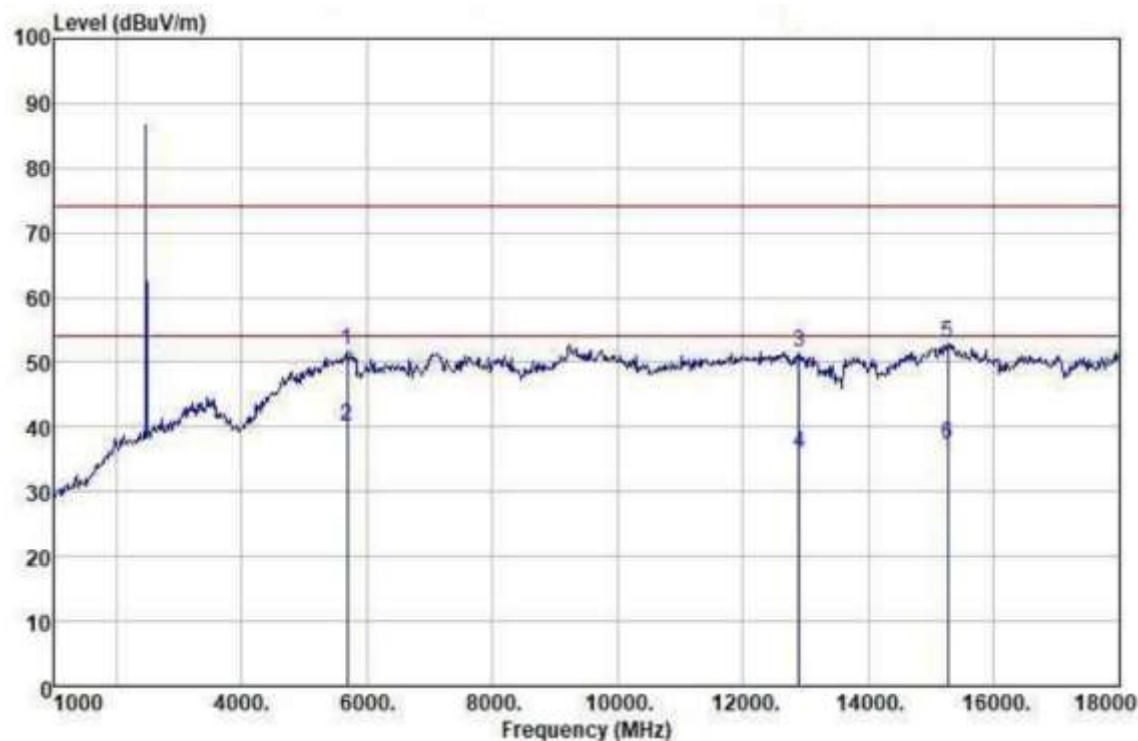Level (dB $\mu$ V/m)


Freq MHz	Read Level dB $\mu$ V	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dB $\mu$ V/m	Limit Line dB $\mu$ V/m	Over Limit dB	Pol/Phase	Remark
5675.000	31.08	31.61	10.55	27.47	51.80	71.00	-22.20	HORIZONTAL	Peak
5675.000	22.16	31.61	10.55	27.47	40.18	51.00	-13.82	HORIZONTAL	Average
12883.000	20.61	10.12	17.09	26.53	51.59	71.00	-22.41	HORIZONTAL	Peak
12883.000	4.90	10.12	17.09	26.53	35.88	51.00	-18.12	HORIZONTAL	Average
15263.000	20.37	39.73	18.95	26.03	53.02	74.00	-20.98	HORIZONTAL	Peak
15263.000	4.75	39.73	18.95	26.03	37.10	51.00	-16.60	HORIZONTAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

**Note: The emission above limit is fundamental emission, which is not subject to the limit.**

**Vertical:**

Peak scan

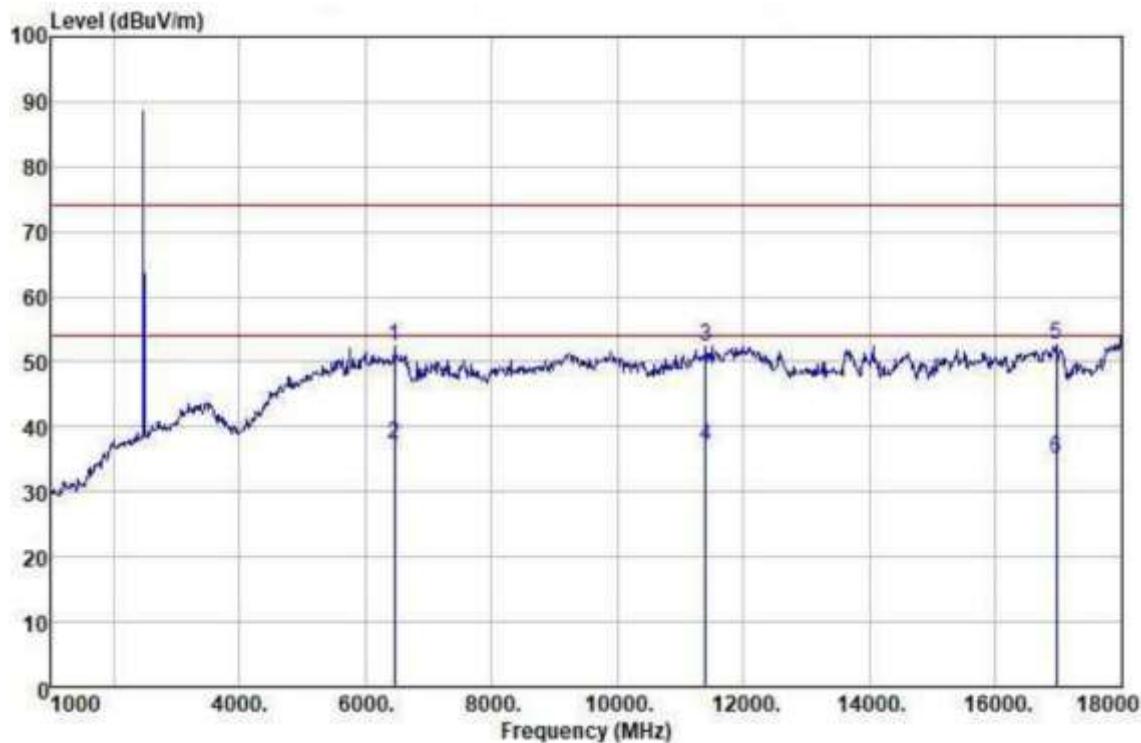Level (dB $\mu$ V/m)

Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
6157.000	32.69	35.54	11.38	27.37	52.24	74.00	-21.76	VERTICAL	Peak
6157.000	17.75	35.54	11.38	27.37	37.30	54.00	-16.70	VERTICAL	Average
11387.000	23.99	39.51	15.87	26.98	52.39	74.00	-21.61	VERTICAL	Peak
11387.000	8.72	39.51	15.87	26.98	37.12	54.00	-16.88	VERTICAL	Average
16963.000	16.19	41.60	20.29	25.44	52.61	74.00	-21.36	VERTICAL	Peak
16963.000	-1.40	41.60	20.29	25.44	35.05	54.00	-18.95	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

**Note: The emission above limit is fundamental emission, which is not subject to the limit.**

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

Remark:

- 1) For this intentional radiator operates below 25 GHz. The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 3<sup>rd</sup> harmonic.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

**Test result: The unit does meet the FCC requirements.**

## 5.8 Radiated Emissions which fall in the restricted bands

Test Requirement:	FCC Part 15 C section 15.247
	(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10:2013
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Limit:	40.0 dB $\mu$ V/m between 30MHz & 88MHz; 43.5 dB $\mu$ V/m between 88MHz & 216MHz; 46.0 dB $\mu$ V/m between 216MHz & 960MHz; 54.0 dB $\mu$ V/m above 960MHz.
Detector:	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW $\geq$ RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW = 10Hz Sweep = auto Detector function = peak Trace = max hold

## Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section. Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	
13.36 - 13.41	322 - 335.4		

Test Result:

Frequency (MHz)	Reading Level (dB $\mu$ V/m)	Correct (dB/m)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization	Detector
<b>Low Channel</b>							
2310.000	33.16	6.54	39.70	74.00	-34.30	H	PK
2310.000	25.82	6.54	32.36	54.00	-21.64	H	AV
2390.000	34.38	6.61	40.99	74.00	-33.01	V	PK
2390.000	23.50	6.61	30.11	54.00	-23.89	V	AV
<b>High Channel</b>							
2483.500	32.90	6.70	39.60	74.00	-34.40	H	PK
2483.500	27.24	6.70	33.94	54.00	-20.06	H	AV
2500.000	35.91	6.72	42.63	74.00	-31.37	V	PK
2500.000	25.34	6.72	32.06	54.00	-21.94	V	AV

Remark: No any other emission which falls in restricted bands can be detected and be reported.

**Test result: The unit does meet the FCC requirements.**

## 5.9 Band Edges Requirement

Test Requirement:

FCC Part 15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Frequency Band:

2400 MHz to 2483.5 MHz


Test Method:

ANSI C63.10:2013

Test Status:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

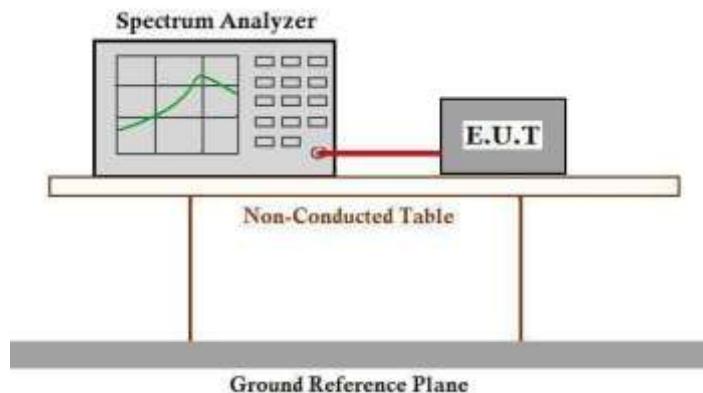

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set RBW=100 kHz, VBW=300 KHz, suitable frequency span including 1000 kHz bandwidth from band edge.
3. Measure the Conducted Spurious Emissions and Radiated Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worse.

### Test result with plots as follows:


The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB.


The Upper Edges attenuated more than 20dB.

Result plot as follows:

## Channel 1: 2.405 GHz

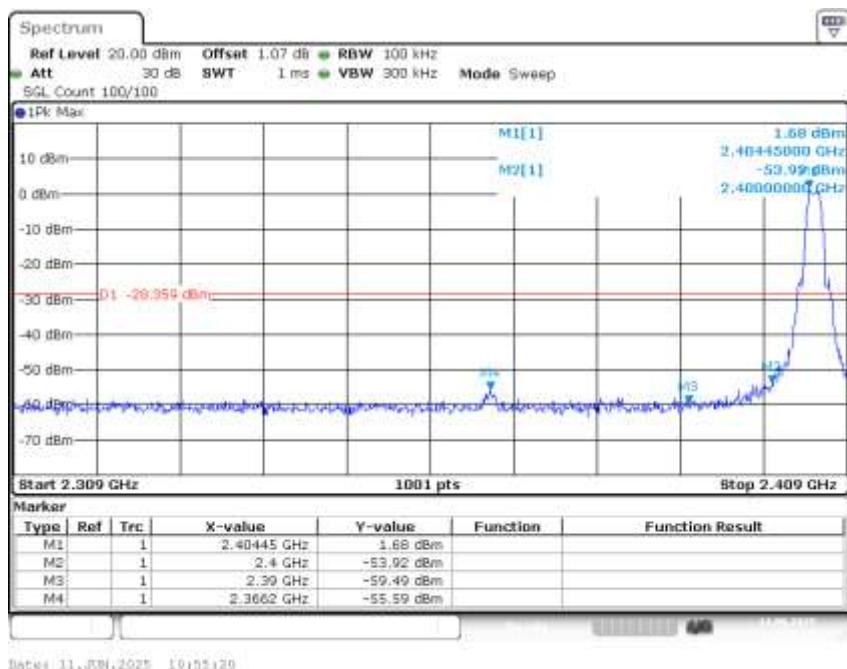

## Channel 16: 2.480 GHz

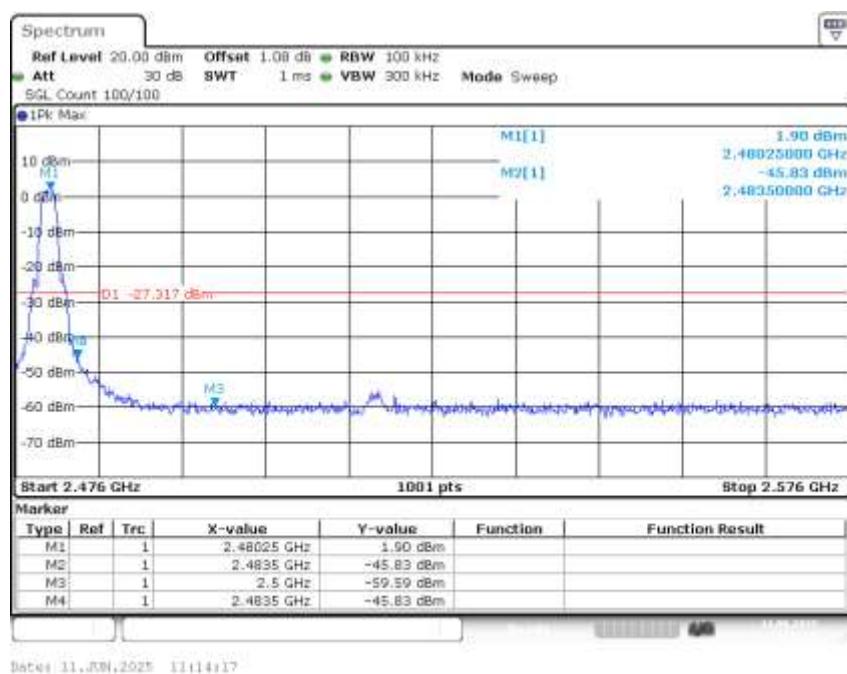

**Note:** This line in the plots is a reference line for the 20dB down limit, not the limit.

**Test result:** The unit does meet the FCC requirements.

## 5.10 Conducted Emissions at Mains Terminals 150 kHz to 30MHz

**Test Requirement:** FCC Part 15 C section 15.207  
**Test Voltage:** 120V~ 60Hz  
**Test Method:** ANSI C63.10:2013 Clause 6.2  
**Frequency Range:** 150 kHz to 30 MHz  
**Detector:** Peak for pre-scan (9 kHz Resolution Bandwidth)


### Test Limit

**Limits for conducted disturbance at the mains ports of class B**

Frequency Range	Class B Limit dB(µV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

**EUT Operation:** Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.  
Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture).

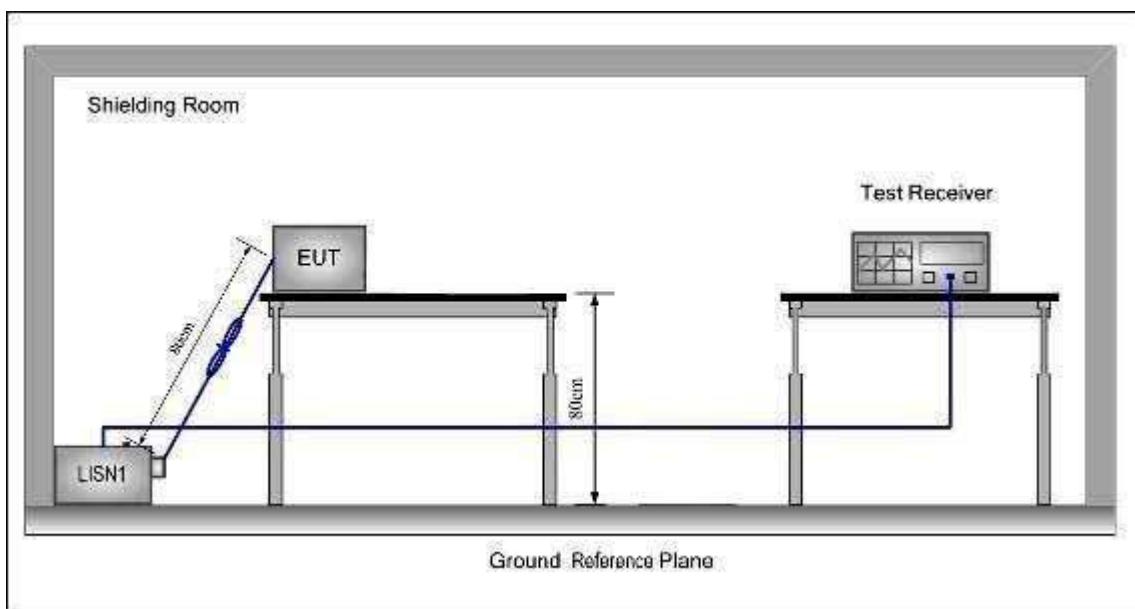**Test Configuration:****Test procedure:**

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

### 5.10.1 Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.

**The following Quasi-Peak and Average measurements were performed on the EUT**  
**Live Line**

Peak Scan:

Level (dB $\mu$ V)

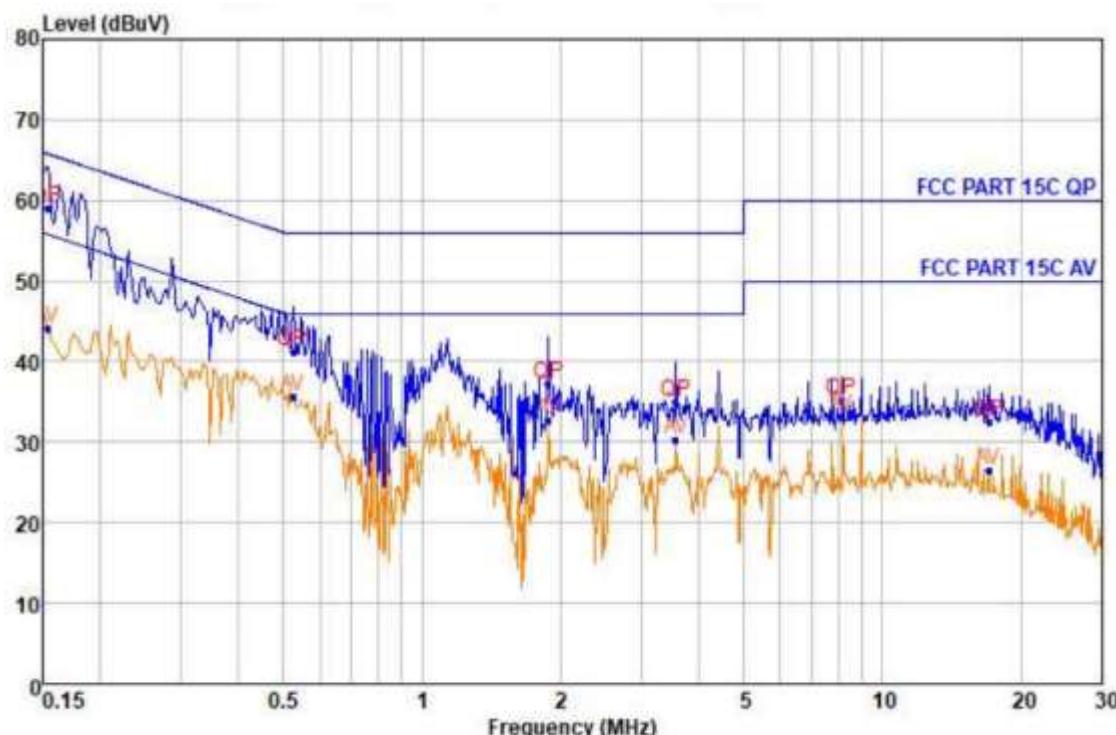


Quasi-peak and Average measurement

NO.	Freq MHz	Level dB $\mu$ V	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBuV	Margin dB
1	0.154	58.97	QP	9.70	0.20	65.80	-6.83
2	0.154	44.12	Average	9.70	0.20	55.78	-11.66
3	0.525	41.19	QP	9.66	0.27	56.00	-14.81
4	0.525	35.58	Average	9.66	0.27	46.00	-10.42
5	1.884	37.26	QP	9.65	0.34	56.00	-18.74
6	1.884	32.76	Average	9.65	0.34	46.00	-13.24
7	3.559	34.91	QP	9.62	0.38	56.00	-21.09
8	3.559	30.21	Average	9.62	0.38	46.00	-15.79
9	8.170	35.14	QP	9.68	0.43	60.00	-24.86
10	8.170	33.19	Average	9.68	0.43	50.00	-16.81
11	16.981	32.53	QP	9.70	0.47	60.00	-27.47
12	16.981	26.48	Average	9.70	0.47	50.00	-23.52

Level=Read Level + LISN Factor + Cable Loss

**Neutral Line:**

Peak Scan:

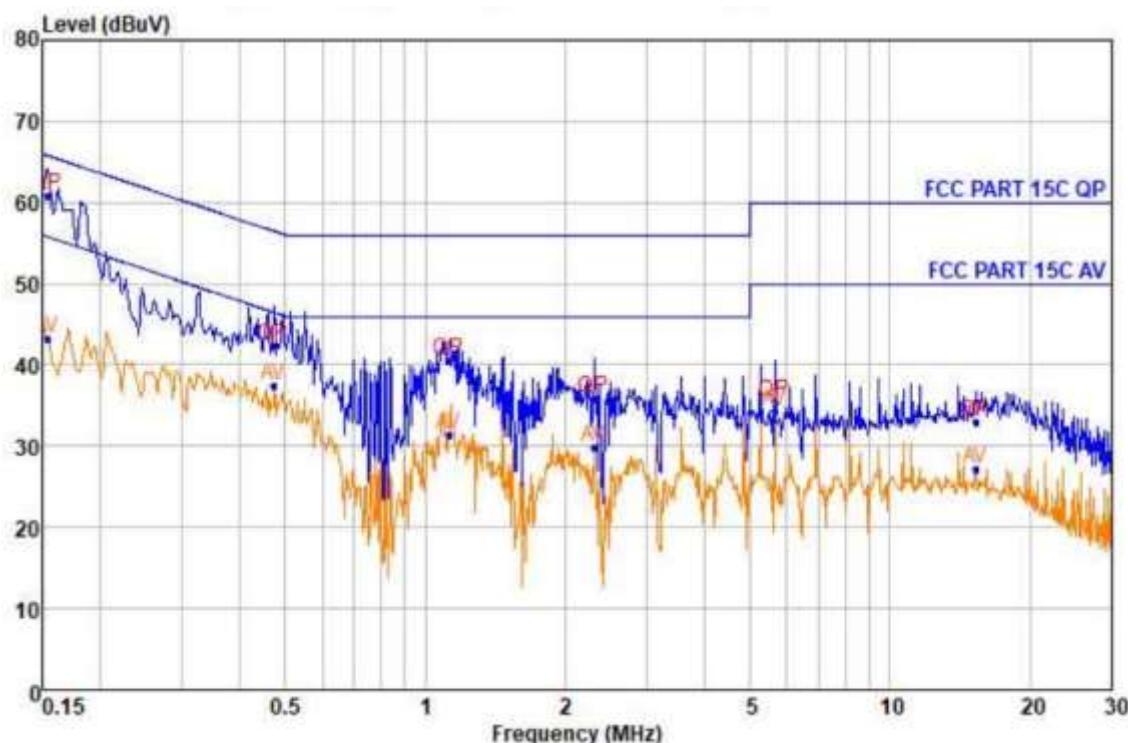Level (dB  $\mu$  V)

Quasi-peak and Average measurement

NO.	Freq MHz	Level dBuV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBuV	Margin dB
1	0.154	60.77	QP	9.70	0.20	65.80	-5.03
2	0.154	43.31	Average	9.70	0.20	55.78	-12.47
3	0.472	42.45	QP	9.67	0.26	56.47	-14.02
4	0.472	37.46	Average	9.67	0.26	46.47	-9.01
5	1.127	40.48	QP	9.63	0.31	56.00	-15.52
6	1.127	31.49	Average	9.63	0.31	46.00	-14.51
7	2.303	35.84	QP	9.62	0.35	56.00	-20.16
8	2.303	29.79	Average	9.62	0.35	46.00	-16.21
9	5.642	35.44	QP	9.62	0.41	60.00	-24.56
10	5.642	34.25	Average	9.62	0.41	50.00	-15.75
11	15.273	33.02	QP	9.63	0.46	60.00	-26.98
12	15.273	27.11	Average	9.63	0.46	50.00	-22.89

Level=Read Level + LISN Factor + Cable Loss

**-- End of test report --**