



RF Test Report

For

Applicant Name: SHENCHUANG INDUSTRIAL (HK) LIMITED
Address: FLAT/RM P 4/F LLADRO CENTRE,72 HOI YUEN ROAD,KWUN TONG,KOWLOON HONG KONG
EUT Name: Tablet PC
Brand Name: Acer
Model Number: Acer One 8 T9-422L, T87
Series Model Number: Refer to section 2

Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Report Number: BTF231010R00701
Test Standards: 47 CFR Part 15.247


Test Conclusion: Pass
FCC ID: 2BC27-T87
Test Date: 2023-08-23 to 2023-09-18
Date of Issue: 2023-10-10

Prepared By:

Date:

Approved By:

Date:

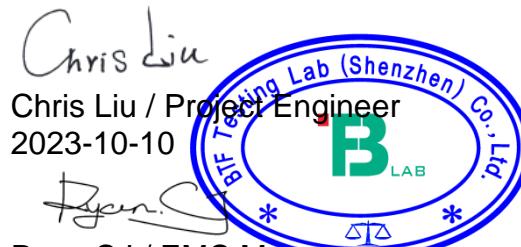

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.



Revision History		
Version	Issue Date	Revisions Content
R_V0	2023-10-10	Original

Note: Once the revision has been made, then previous versions reports are invalid.

Table of Contents

1	INTRODUCTION	5
1.1	Identification of Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Announcement	5
2	PRODUCT INFORMATION.....	6
2.1	Application Information	6
2.2	Manufacturer Information.....	6
2.3	General Description of Equipment under Test (EUT)	6
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	7
3.1	Test Standards.....	7
3.2	Uncertainty of Test	7
3.3	Summary of Test Result	7
4	TEST CONFIGURATION	8
4.1	Test Equipment List	8
4.2	Test Auxiliary Equipment	12
4.3	Test Modes.....	12
5	EVALUATION RESULTS (EVALUATION).....	13
5.1	Antenna requirement	13
5.1.1	Conclusion:.....	13
6	RADIO SPECTRUM MATTER TEST RESULTS (RF).....	14
6.1	Conducted Emission at AC power line	14
6.1.1	E.U.T. Operation:	14
6.1.2	Test Setup Diagram:.....	14
6.1.3	Test Data:	15
6.2	Occupied Bandwidth.....	17
6.2.1	E.U.T. Operation:	17
6.2.2	Test Setup Diagram:.....	17
6.2.3	Test Data:	17
6.3	Maximum Conducted Output Power	18
6.3.1	E.U.T. Operation:	18
6.3.2	Test Setup Diagram:.....	19
6.3.3	Test Data:	19
6.4	Power Spectral Density	20
6.4.1	E.U.T. Operation:	20
6.4.2	Test Setup Diagram:.....	20
6.4.3	Test Data:	20
6.5	Emissions in non-restricted frequency bands	21
6.5.1	E.U.T. Operation:	21
6.5.2	Test Setup Diagram:.....	22
6.5.3	Test Data:	22
6.6	Band edge emissions (Radiated).....	23
6.6.1	E.U.T. Operation:	23
6.6.2	Test Data:	24
6.7	Emissions in restricted frequency bands (below 1GHz).....	25
6.7.1	E.U.T. Operation:	25

6.7.2	Test Data:	26
6.8	Emissions in restricted frequency bands (above 1GHz).....	28
6.8.1	E.U.T. Operation:	28
6.8.2	Test Data:	29
APPENDIX	30

1 Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130
FCC Registration Number:	518915
Designation Number:	CN1330

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 Product Information

2.1 Application Information

Company Name:	SHENCHUANG INDUSTRIAL (HK) LIMITED
Address:	FLAT/RM P 4/F LLADRO CENTRE,72 HOI YUEN ROAD,KWUN TONG,KOWLOON HONG KONG

2.2 Manufacturer Information

Company Name:	Shenzhen Yuko Technology Co., Ltd
Address:	6th floor A9 Bldg,&4th floor,A4 Bldg,Tianrui Industrial Park, Fuyuan 1st Rd, Fuyong, Baoan District, Shenzhen

2.3 General Description of Equipment under Test (EUT)

EUT Name:	Tablet PC
Test Model Number:	Acer One 8 T9-422L
Series Model Number:	T87

2.4 Technical Information

Power Supply:	Model: GFL 1100100 1ICP4/100/100 Nominal Voltage: 3.8V Rated capacity: 5100mAh/19.38Wh Limited Charge Voltage: 4.35V
Power Adaptor:	Model: BSY01J3050200UU Input: 100-240V~50/60Hz 0.3A Output: 5.0V=2.0A 10.0W
Operation Frequency:	2402MHz to 2480MHz
Number of Channels:	40
Modulation Type:	GFSK
Antenna Type:	Integral Antenna
Antenna Gain [#] :	1.96 dBi

Note:

#: The antenna gain provided by the applicant, and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.

3 Summary of Test Results

3.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

3.2 Uncertainty of Test

Item	Measurement Uncertainty
Conducted Emission (150 kHz-30 MHz)	±2.64dB

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.3 Summary of Test Result

Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15.247	Part 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
Occupied Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Emissions in restricted frequency bands (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Emissions in restricted frequency bands (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass

4 Test Configuration

4.1 Test Equipment List

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00953	2022-11-24	2023-11-23
Coaxial Switcher	SCHWARZBECK	CX210	CX210	2022-11-24	2023-11-23
V-LISN	SCHWARZBECK	NSLK 8127	01073	2022-11-24	2023-11-23
LISN	AFJ	LS16/110VAC	16010020076	2023-02-23	2024-02-22
EMI Receiver	ROHDE&SCHWABERZ	ESCI3	101422	2022-11-24	2023-11-23

Occupied Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Maximum Conducted Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Power Spectral Density



Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Emissions in non-restricted frequency bands

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Band edge emissions (Radiated)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1 0m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1 m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST	ROHDE&SCHWA	ESCI7	101032	2022-11-24	2023-11-23

RECEIVER	RZ				
SIGNAL ANALYZER	ROHDE&SCHWABE RZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ_EMU	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

Emissions in restricted frequency bands (below 1GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1 0m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1 m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWABE RZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWABE RZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ_EMU	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

Emissions in restricted frequency bands (above 1GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1 0m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1	21101568	2022-11-24	2023-11-23



		m			
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARTZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARTZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ_EMU	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

4.2 Test Auxiliary Equipment

The EUT was tested as an independent device.

4.3 Test Modes

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 90.56%) with Fully-charged battery.
The sample was placed (0.1m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	--

5.1.1 Conclusion:



6 Radio Spectrum Matter Test Results (RF)


6.1 Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).															
Test Method:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices															
Test Limit:	<table border="1"> <thead> <tr> <th data-bbox="433 720 879 765">Frequency of emission (MHz)</th><th data-bbox="879 720 1287 765">Conducted limit (dBμV)</th><th data-bbox="1287 720 1387 765"></th></tr> <tr> <th data-bbox="433 765 879 788">Quasi-peak</th><th data-bbox="879 765 1287 788">Average</th><th data-bbox="1287 765 1387 788"></th></tr> </thead> <tbody> <tr> <td data-bbox="433 788 879 808">0.15-0.5</td><td data-bbox="879 788 1287 808">66 to 56*</td><td data-bbox="1287 788 1387 808">56 to 46*</td></tr> <tr> <td data-bbox="433 808 879 831">0.5-5</td><td data-bbox="879 808 1287 831">56</td><td data-bbox="1287 808 1387 831">46</td></tr> <tr> <td data-bbox="433 831 879 853">5-30</td><td data-bbox="879 831 1287 853">60</td><td data-bbox="1287 831 1387 853">50</td></tr> </tbody> </table>	Frequency of emission (MHz)	Conducted limit (dB μ V)		Quasi-peak	Average		0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency of emission (MHz)	Conducted limit (dB μ V)															
Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*														
0.5-5	56	46														
5-30	60	50														

6.1.1 E.U.T. Operation:


Operating Environment:	
Temperature:	25.2 °C
Humidity:	50.5 %
Atmospheric Pressure:	1010 mbar

6.1.2 Test Setup Diagram:

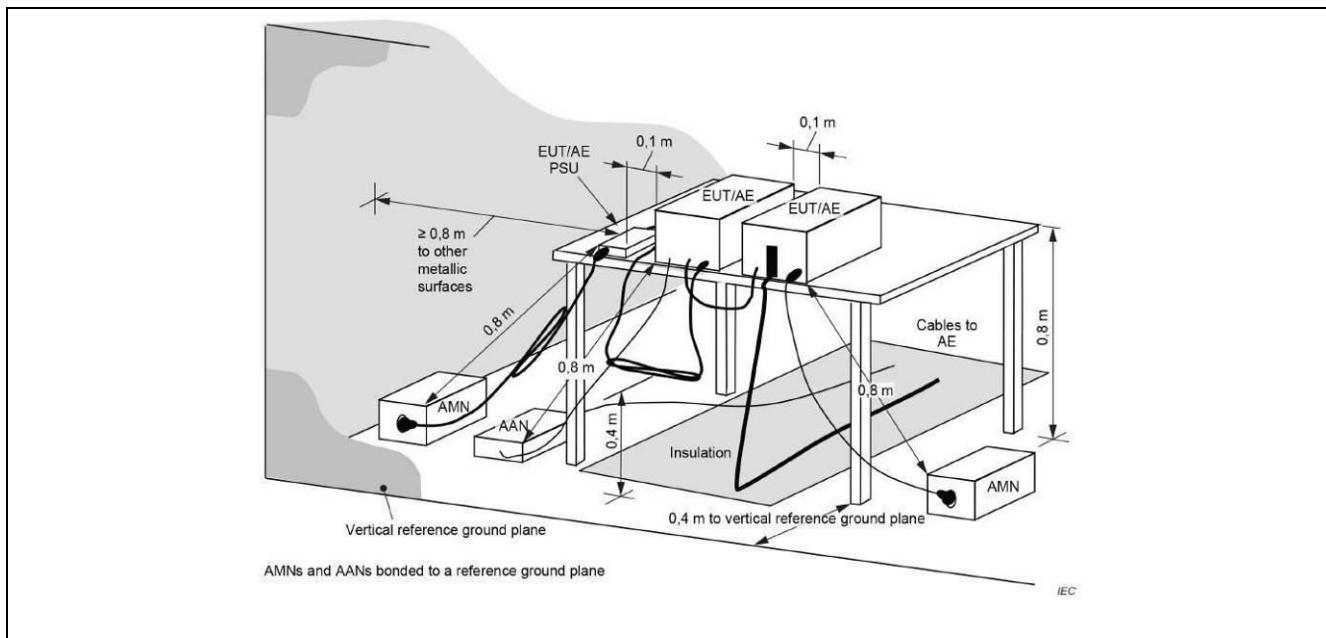


6.1.3 Test Data:

Line: Line / Band: 2.4G / BW: 1 / CH: M

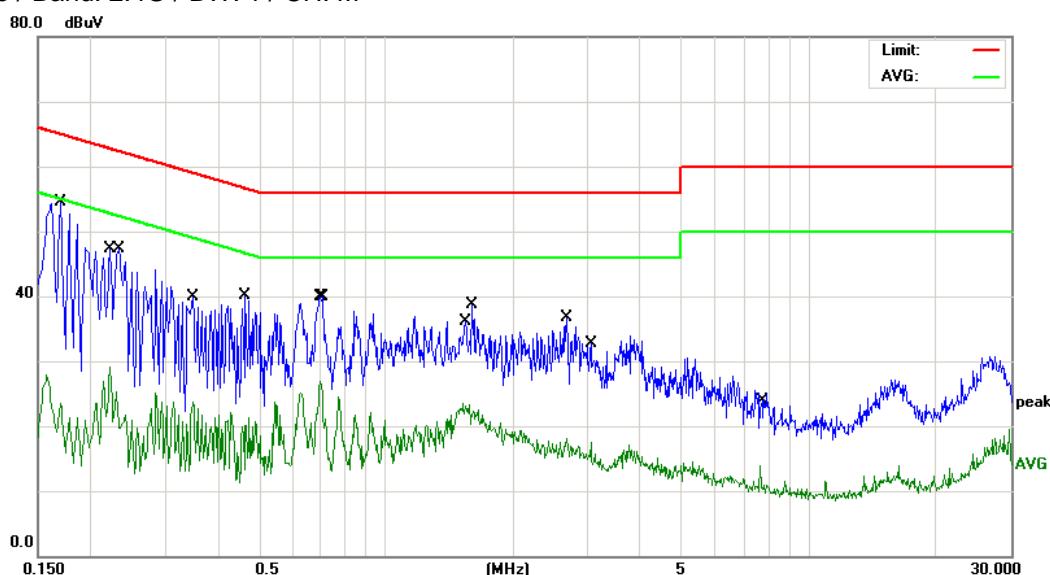

No.	Mk.	Freq.	Reading	Correct Factor	Measure- ment	Limit	Over	
			Level				dB	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.1700	44.07	10.45	54.52	64.96	-10.44	QP
2		0.2220	18.59	10.46	29.05	52.74	-23.69	AVG
3		0.2340	36.93	10.46	47.39	62.30	-14.91	QP
4		0.3500	13.16	10.48	23.64	48.96	-25.32	AVG
5		0.4660	29.58	10.51	40.09	56.58	-16.49	QP
6		0.6980	16.27	10.53	26.80	46.00	-19.20	AVG
7		0.7100	29.44	10.53	39.97	56.00	-16.03	QP
8		1.5260	12.92	10.63	23.55	46.00	-22.45	AVG
9		1.5980	28.01	10.65	38.66	56.00	-17.34	QP
10		2.6780	25.92	10.72	36.64	56.00	-19.36	QP
11		3.0540	6.83	10.72	17.55	46.00	-28.45	AVG
12		7.6780	3.07	10.79	13.86	50.00	-36.14	AVG

Line: Neutral / Band: 2.4G / BW: 1 / CH: M

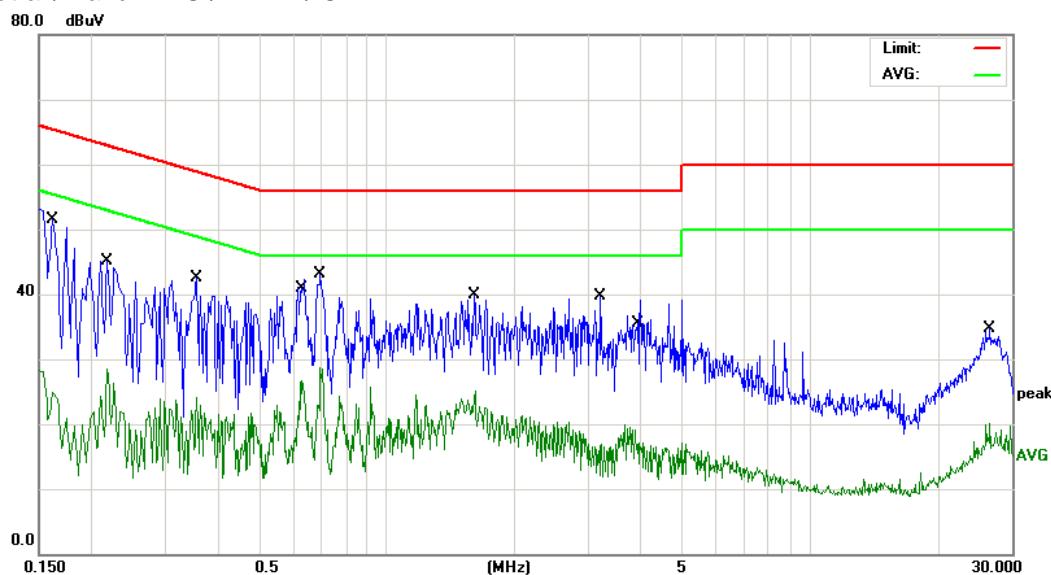

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV	dBuV	dB
1		0.1620	40.99	10.45	51.44	65.36	-13.92
2		0.2180	34.68	10.45	45.13	62.89	-17.76
3		0.2180	18.01	10.45	28.46	52.89	-24.43
4		0.3540	32.07	10.49	42.56	58.87	-16.31
5		0.6300	16.17	10.53	26.70	46.00	-19.30
6	*	0.6940	32.67	10.53	43.20	56.00	-12.80
7		0.6940	18.18	10.53	28.71	46.00	-17.29
8		1.6060	29.17	10.65	39.82	56.00	-16.18
9		1.6140	14.40	10.65	25.05	46.00	-20.95
10		3.2020	28.92	10.72	39.64	56.00	-16.36
11		3.8620	7.12	10.73	17.85	46.00	-28.15
12		26.5900	8.94	11.15	20.09	50.00	-29.91


6.2 Occupied Bandwidth

Test Requirement:	Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	DTS bandwidth
Test Limit:	Section (a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Procedure:	<ul style="list-style-type: none"> a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.2.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.8 °C
Humidity:	49.9 %
Atmospheric Pressure:	1010 mbar

6.2.2 Test Setup Diagram:

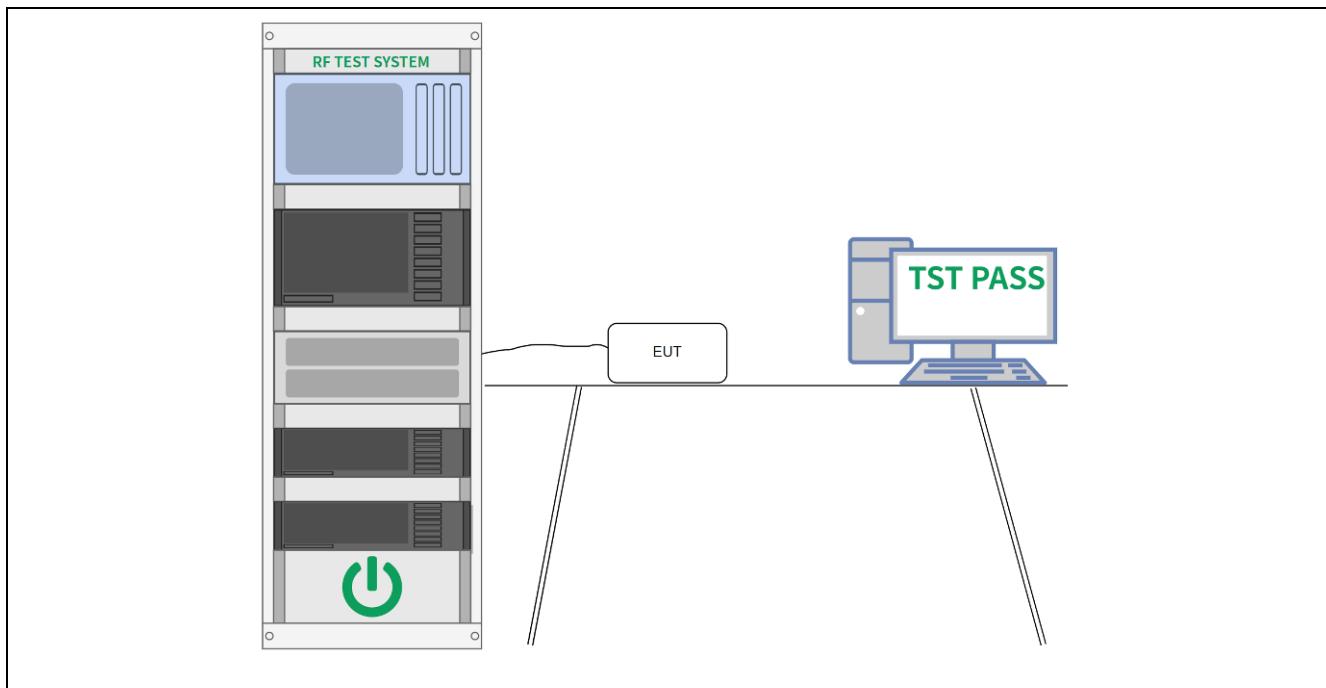

6.2.3 Test Data:


Please Refer to Appendix for Details.

6.3 Maximum Conducted Output Power

Test Requirement:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	Maximum peak conducted output power
Test Limit:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power

6.3.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.8 °C
Humidity:	49.9 %
Atmospheric Pressure:	1010 mbar

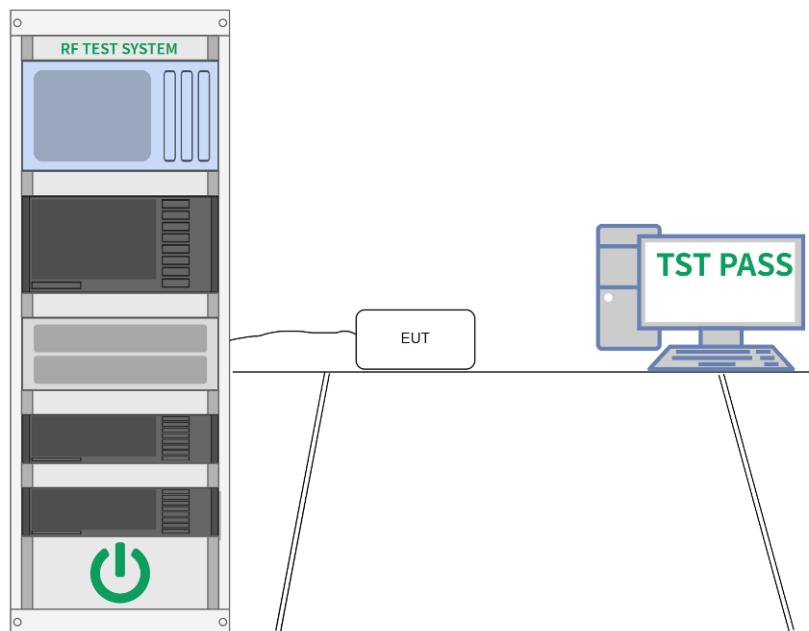6.3.2 Test Setup Diagram:**6.3.3 Test Data:**

Please Refer to Appendix for Details.


6.4 Power Spectral Density

Test Requirement:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	Maximum power spectral density level in the fundamental emission
Test Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

6.4.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.8 °C
Humidity:	49.9 %
Atmospheric Pressure:	1010 mbar

6.4.2 Test Setup Diagram:

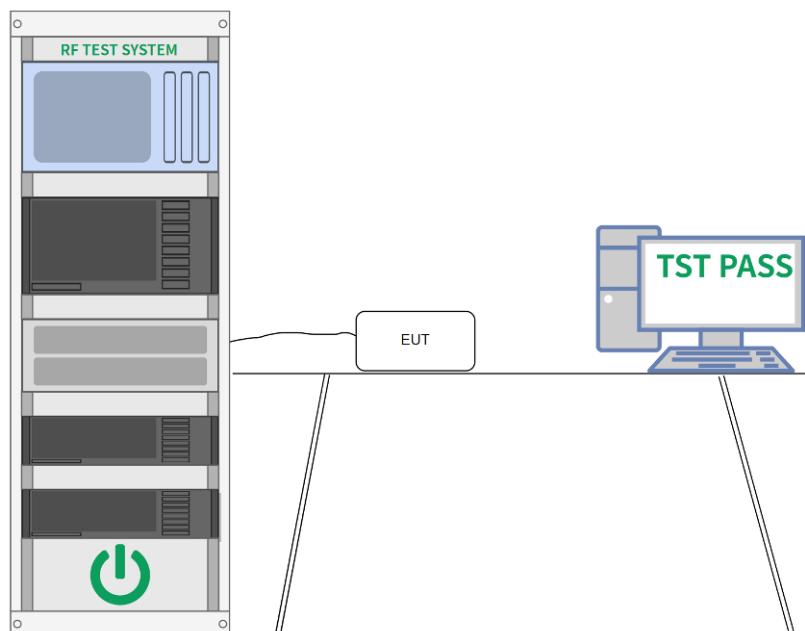

6.4.3 Test Data:


Please Refer to Appendix for Details.

6.5 Emissions in non-restricted frequency bands

Test Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	Emissions in nonrestricted frequency bands
Test Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.5.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.8 °C
Humidity:	49.9 %
Atmospheric Pressure:	1010 mbar

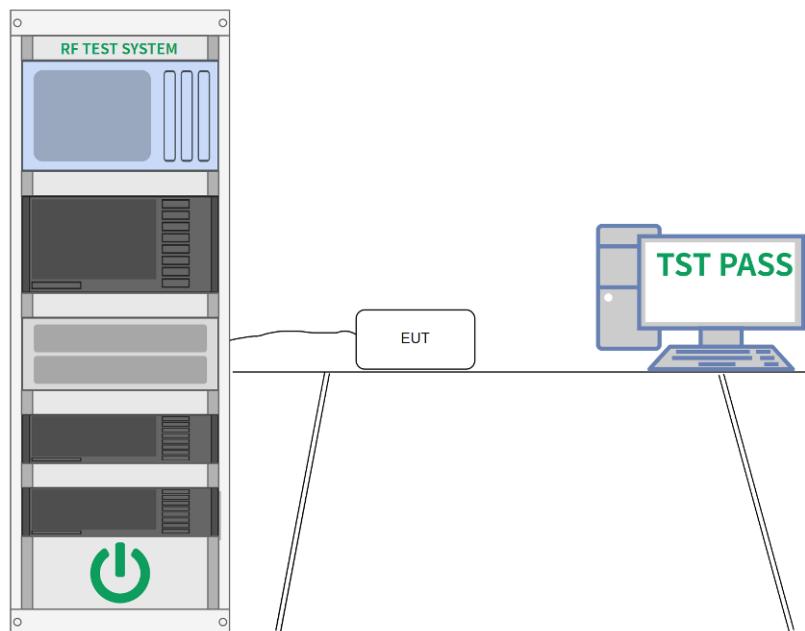6.5.2 Test Setup Diagram:**6.5.3 Test Data:**

Please Refer to Appendix for Details.

6.6 Band edge emissions (Radiated)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2013 section 6.6.4		

6.6.1 E.U.T. Operation:

Operating Environment:	
Temperature:	22.1 °C
Humidity:	46.3 %
Atmospheric Pressure:	1010 mbar

6.6.2 Test Data:

Test result for GFSK Mode (the worst case)

Frequency (MHz)	Reading (dBuV/m)	Correct Factor	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar	Detector
Low Channel							
2390	63.77	-8.76	55.01	74	18.99	H	PK
2390	53.88	-8.76	45.12	54	8.88	H	AV
2390	63.46	-8.73	54.73	74	19.27	V	PK
2390	55.58	-8.73	46.85	54	7.15	V	AV
High Channel							
2483.5	63.50	-8.76	54.74	74	19.26	H	PK
2483.5	54.53	-8.76	45.77	54	8.23	H	AV
2483.5	60.43	-8.73	51.70	74	22.30	V	PK
2483.5	56.00	-8.73	47.27	54	6.73	V	AV

6.7 Emissions in restricted frequency bands (below 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2013 section 6.6.4		


6.7.1 E.U.T. Operation:

Operating Environment:	
Temperature:	22.1 °C
Humidity:	46.3 %
Atmospheric Pressure:	1010 mbar

6.7.2 Test Data:

Note: All the mode have been tested, and only the worst case of 1M mode are in the report

Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: H

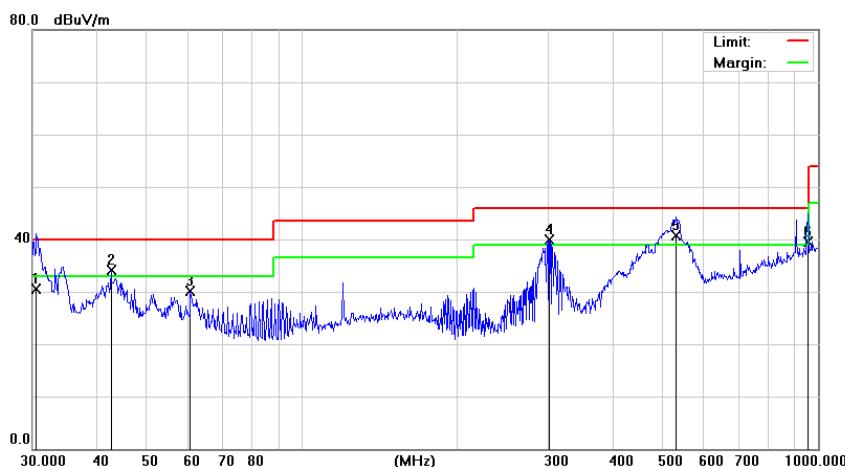

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m			
1		30.5306	28.38	2.20	30.58	40.00	-9.42	QP
2	!	42.6000	30.93	3.13	34.06	40.00	-5.94	QP
3		60.7044	28.22	1.79	30.01	40.00	-9.99	QP
4	!	301.4224	37.55	2.29	39.84	46.00	-6.16	QP
5	*	528.7214	33.87	6.76	40.63	46.00	-5.37	QP
6	!	952.8581	24.49	15.04	39.53	46.00	-6.47	QP

Polarization: Vertical / Band: 2.4G / BW: 1 / CH: H



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		30.1054	48.81	-16.61	32.20	40.00	-7.80	QP
2		42.4508	49.16	-16.52	32.64	40.00	-7.36	QP
3		60.9176	47.52	-16.69	30.83	40.00	-9.17	QP
4		119.8556	48.90	-16.83	32.07	43.50	-11.43	QP
5		550.9480	55.17	-16.97	38.20	46.00	-7.80	QP
6	*	952.6181	53.92	-14.36	39.56	46.00	-6.44	QP

6.8 Emissions in restricted frequency bands (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2013 section 6.6.4		

6.8.1 E.U.T. Operation:

Operating Environment:	
Temperature:	22.1 °C
Humidity:	46.3 %
Atmospheric Pressure:	1010 mbar

6.8.2 Test Data:

Freq. (MHz)	Low channel: 2402MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		H/V	PK	AV	PK	AV	PK
4804	V	60.27	40.64	74	54	-13.73	-13.36
7206	V	59.19	39.38	74	54	-14.81	-14.62
4804	H	58.35	40.89	74	54	-15.65	-13.11
7206	H	58.35	39.35	74	54	-15.65	-14.65

Freq. (MHz)	Middle channel: 2440MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		H/V	PK	AV	PK	AV	PK
4880	V	59.28	41.57	74	54	-14.72	-12.43
7320	V	58.39	39.99	74	54	-15.61	-14.01
4880	H	58.25	39.89	74	54	-15.75	-14.11
7320	H	58.82	39.82	74	54	-15.18	-14.18

Freq. (MHz)	High channel: 2480 MHz						
	Ant.Pol	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		H/V	PK	AV	PK	AV	PK
4960	V	59.88	39.46	74	54	-14.12	-14.54
7440	V	59.96	39.25	74	54	-14.04	-14.75
4960	H	58.12	40.97	74	54	-15.88	-13.03
7440	H	59.72	40.72	74	54	-14.28	-13.28

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.

2. Emission Level= Reading Level+Probe Factor +Cable Loss.

Data of measurement within this frequency range shown “--” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Appendix

1. Bandwidth

1.1 BW

1.1.1 Test Result


BLE 1M

Test channel	6dB Emission Bandwidth (kHz)		
	BT LE mode	Limit	Result
Lowest	646.0	>500k	PASS
Middle	678.9	>500k	
Highest	675.7	>500k	

BLE 2M

Test channel	6dB Emission Bandwidth (MHz)		
	BT LE mode	Limit	Result
Lowest	1.139	>500k	PASS
Middle	1.148	>500k	
Highest	1.211	>500k	

1.1.2 Test Graph

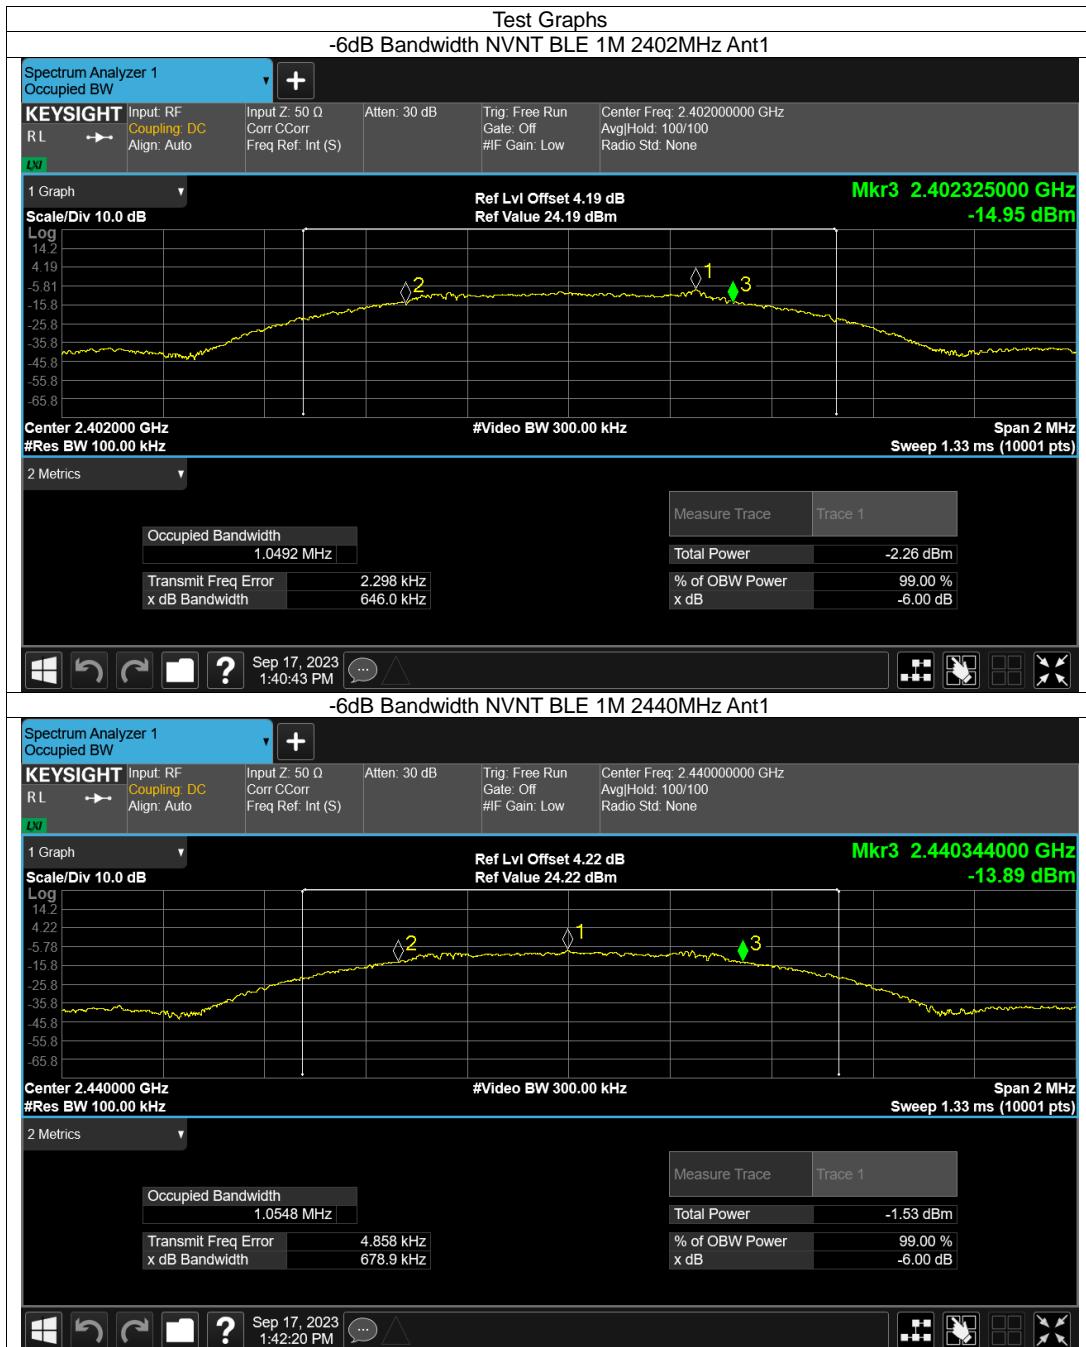





2. Maximum Conducted Output Power

2.1 Power


2.1.1 Test Result


BLE 1M			
Test channel	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
Lowest	-11.51	30.00	PASS
Middle	-10.66	30.00	PASS
Highest	-12.14	30.00	PASS

BLE 2M			
Test channel	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
Lowest	-8.63	30.00	PASS
Middle	-7.76	30.00	PASS
Highest	-9.27	30.00	PASS

2.1.2 Test Graph



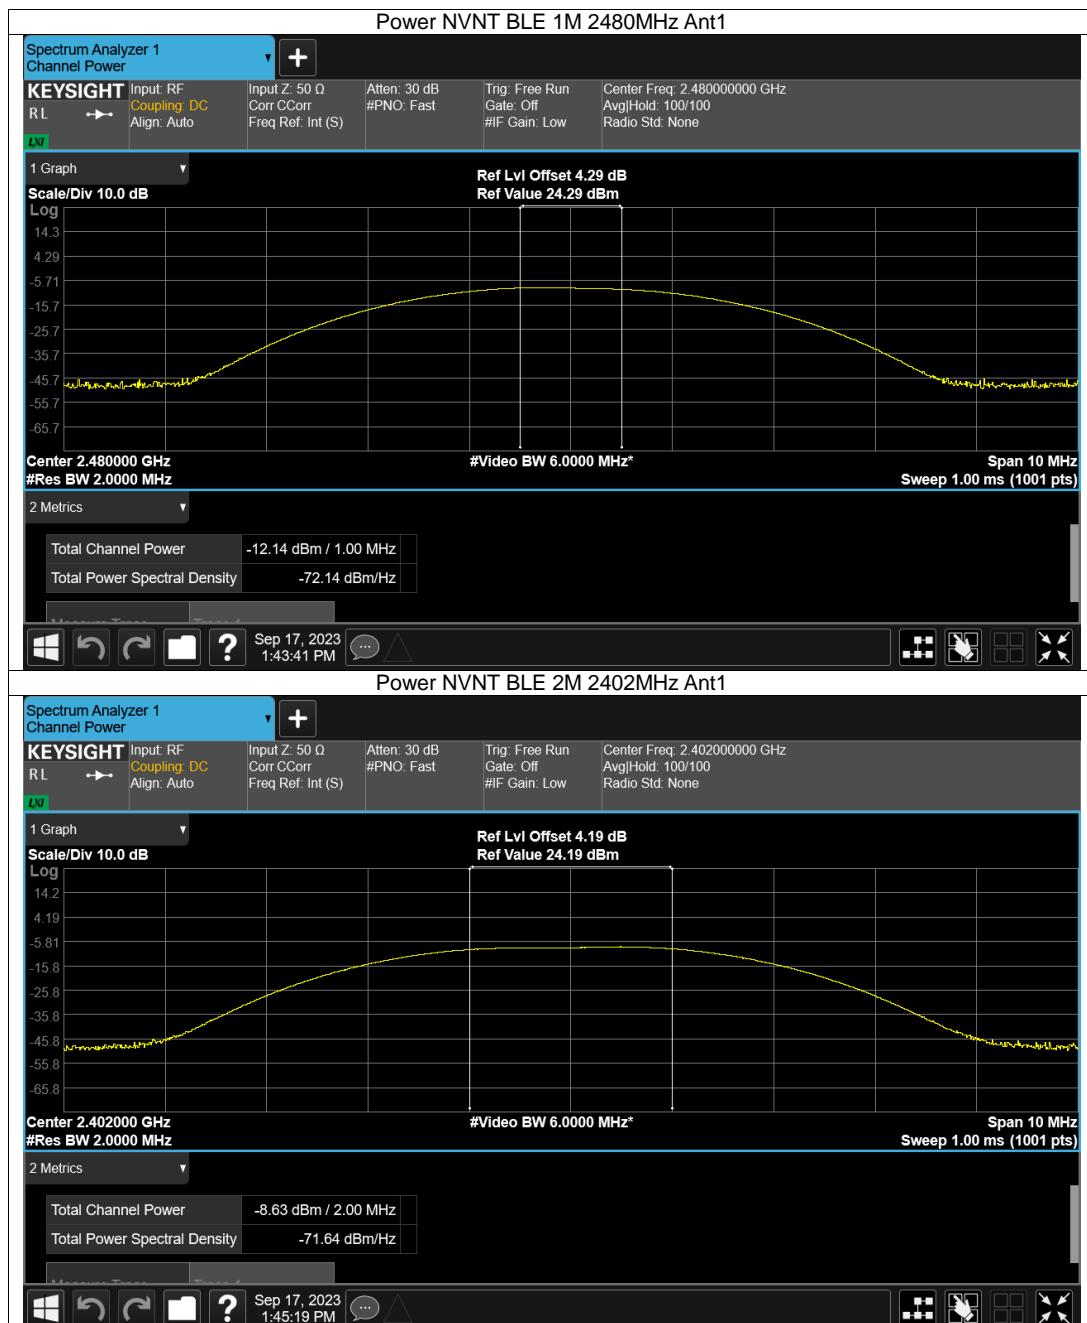

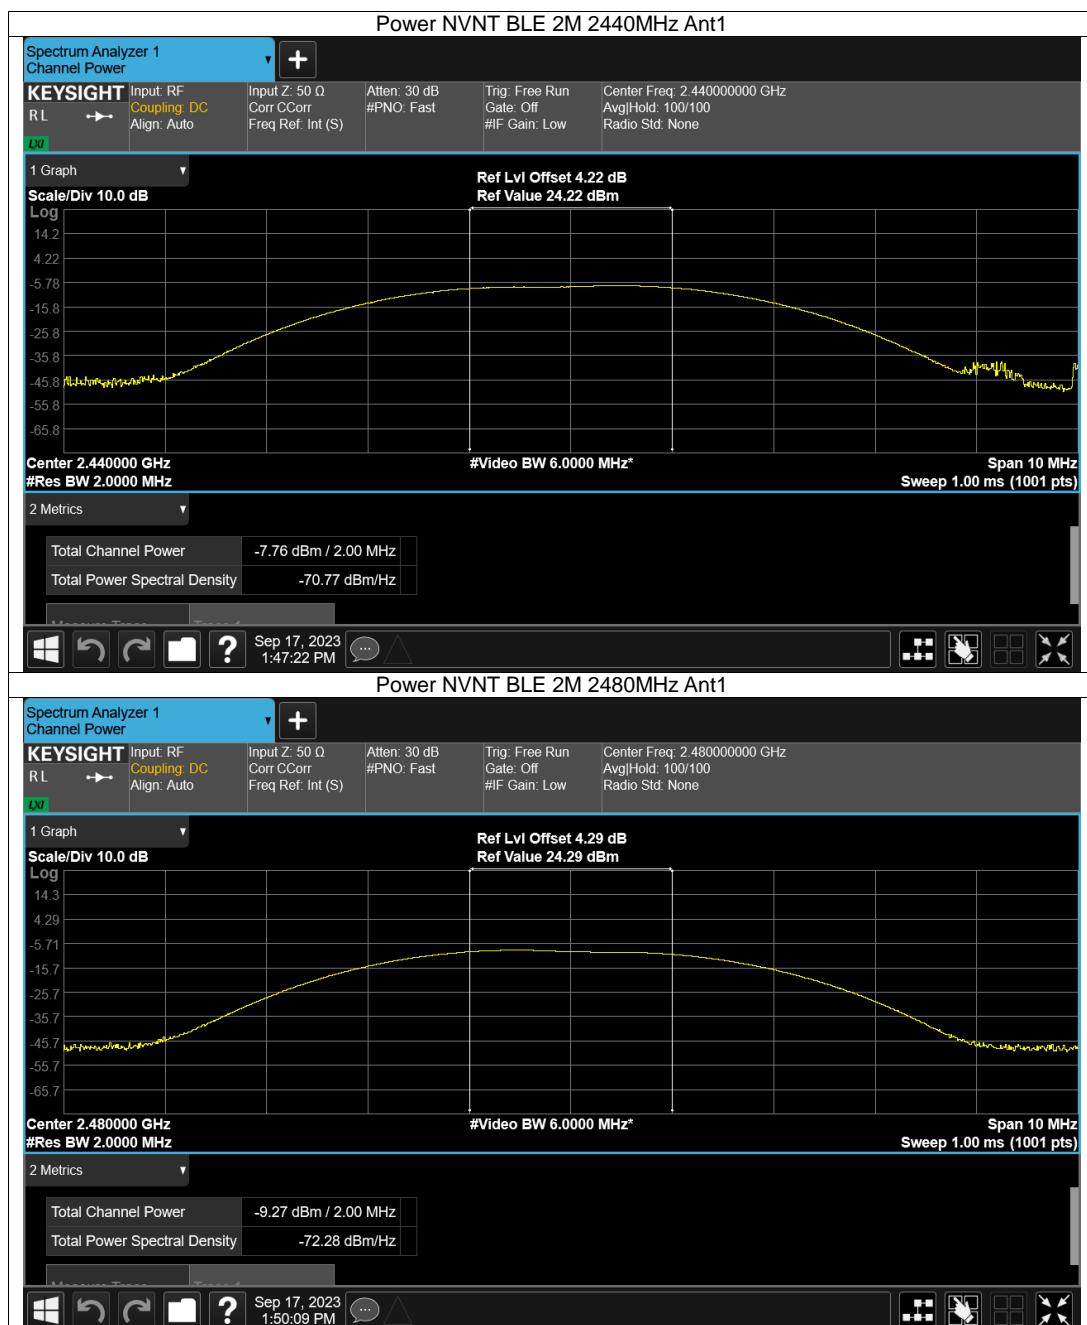



3. Maximum Power Spectral Density


3.1 PSD

3.1.1 Test Result

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-24.29	0	-24.29	8	Pass
NVNT	BLE 1M	2440	Ant1	-23.5	0	-23.50	8	Pass
NVNT	BLE 1M	2480	Ant1	-25.06	0	-25.06	8	Pass
NVNT	BLE 2M	2402	Ant1	-26.71	0	-26.71	8	Pass
NVNT	BLE 2M	2440	Ant1	-25.94	0	-25.94	8	Pass
NVNT	BLE 2M	2480	Ant1	-27.44	0	-27.44	8	Pass

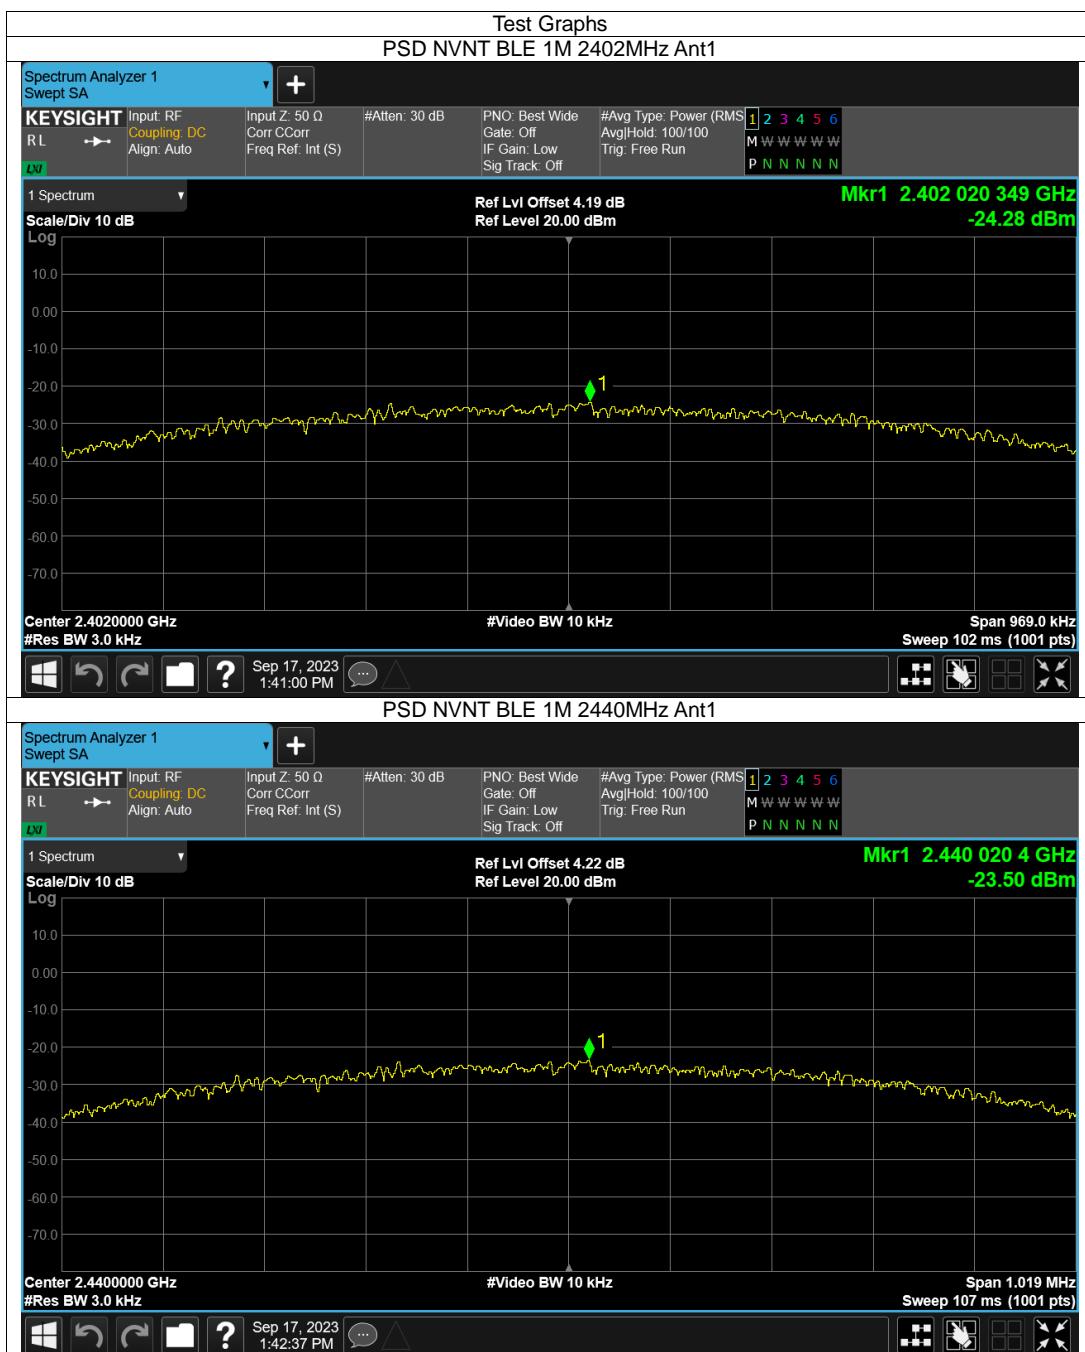

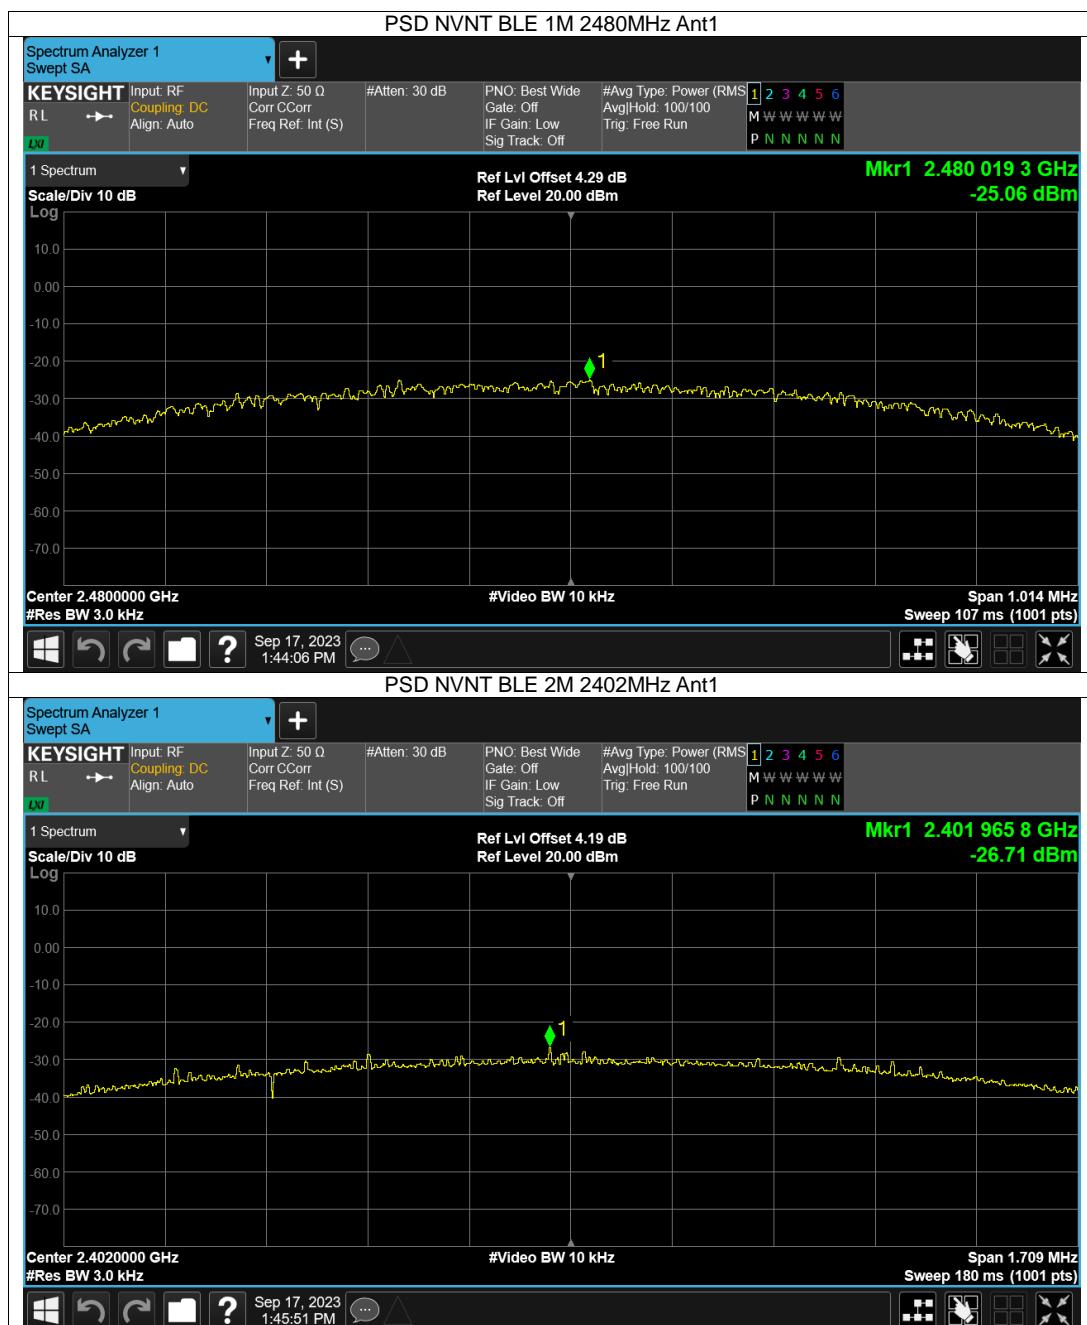

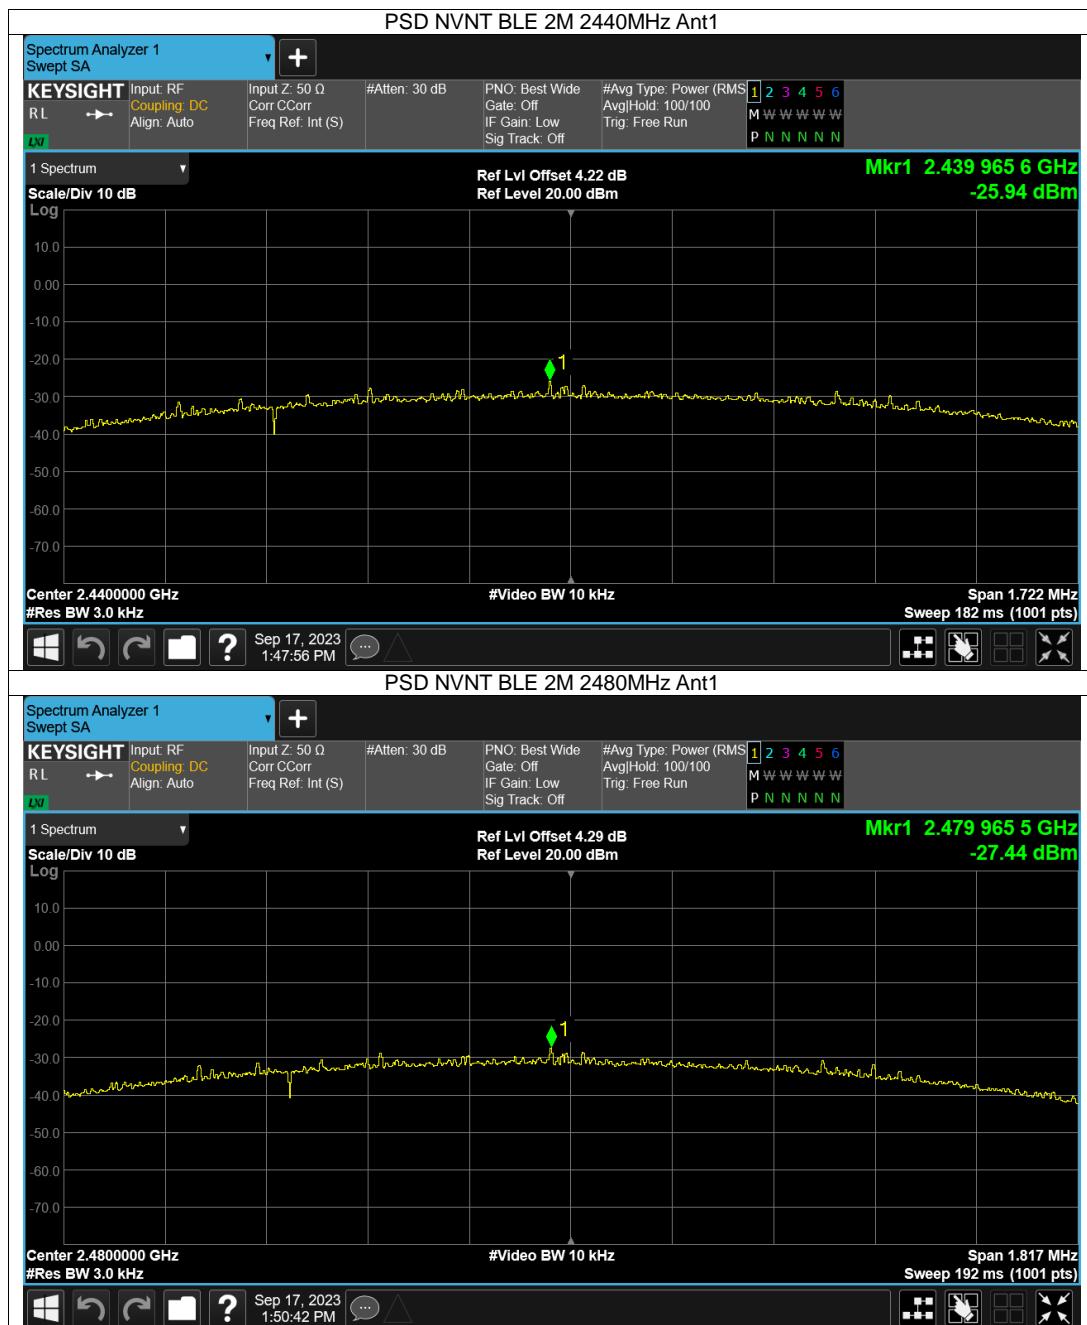

4. Unwanted Emissions In Non-restricted Frequency Bands


4.1.1 Test Result(PASS)

4.1.2 Test Graph








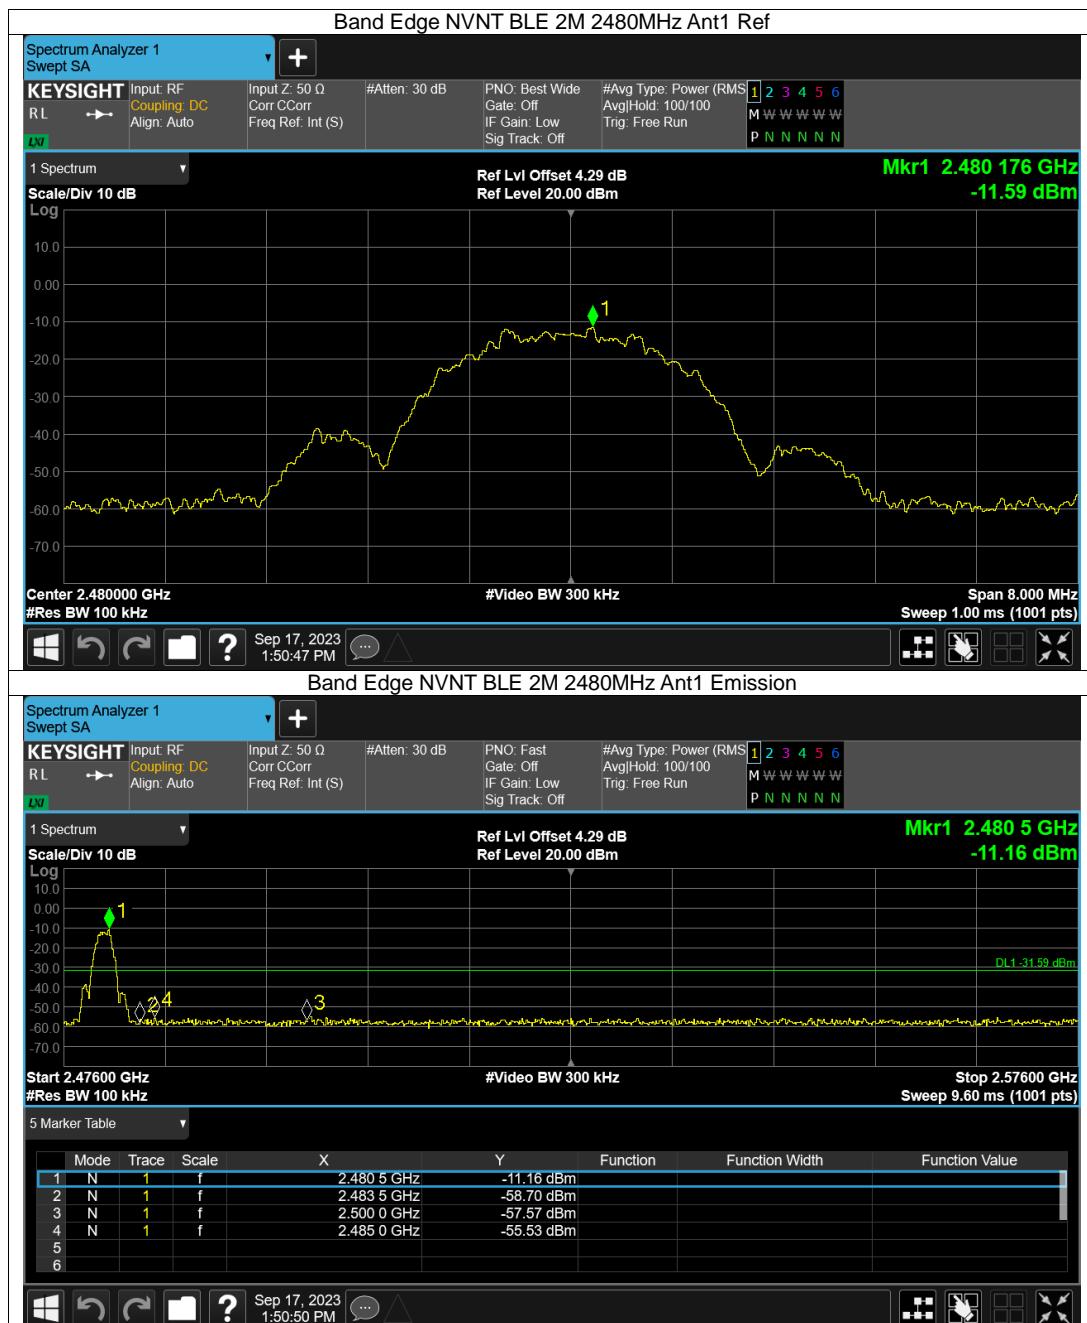

Conducted RF Spurious Emission



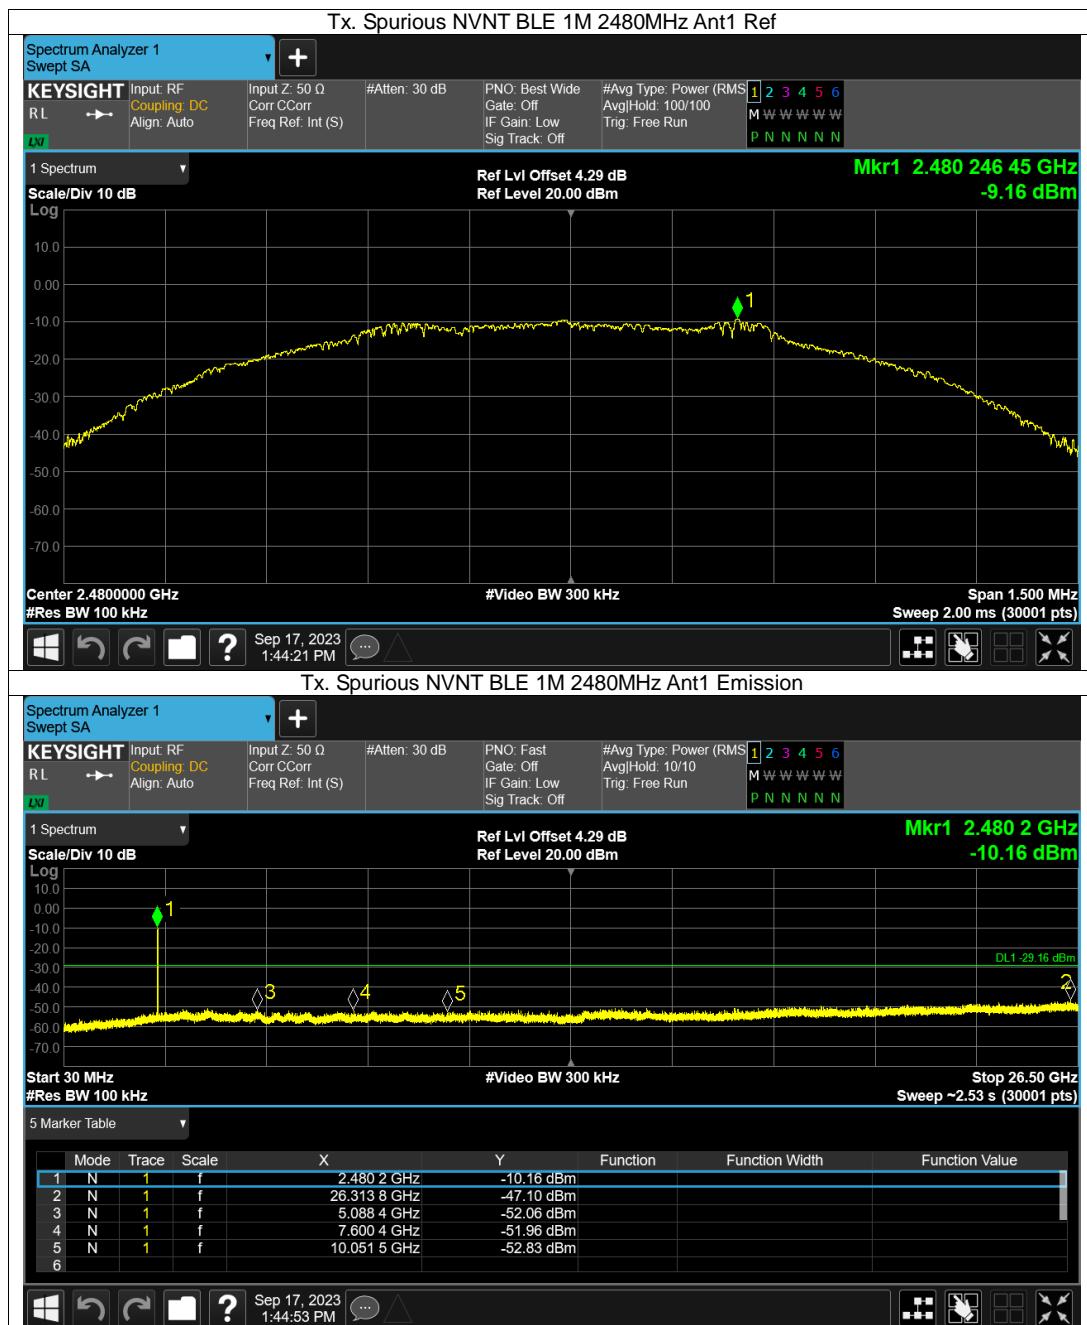







Test Report Number: BTF231010R00701



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

-- END OF REPORT --