


SPECIFICATION

DESC :	ZLGD0-15*38.5-60-FR	Rev:A	Customer:	ZLGD
			Description:	Coil + diskette
			Date:	20221109

1. DIMENSION: (mm)

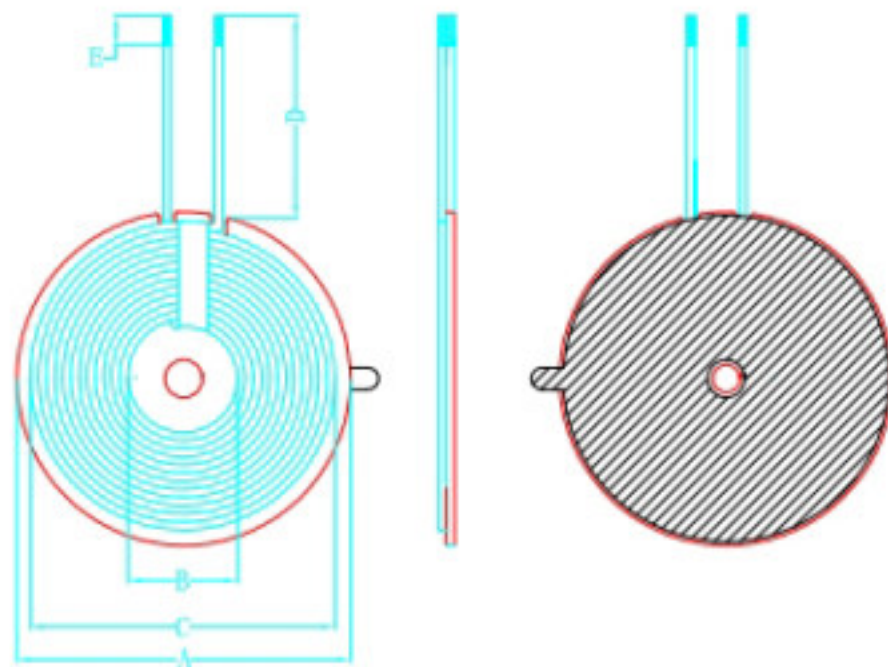

A	44.0 ± 1.0
B	15.0 ± 1.0
C	38.5 ± 2.0
D	60.0 ± 3.0
E	3.5 ± 1.5
F	
G	
H	
I	
J	
K	
L	

1. The coil is hard magnetic, the magnetic disc has holes with double slots and the thickness of the magnetic disc is between 0.7-0.90, and the coil position is
2. White double-sided tape with ears on the back of the magnetic disc
3. Wrap 8mm high-temperature tape around the coil outlet position be loosened
4. The coil must not be loosened

2. schematic diagram:

3. Winding Specification:

NO.	TERMINAL	WIRE	Turns	Winding Direction
1		0.08X105P silk-covered wire	12TS	Anticlockwise

4. ELECTRICAL CHARACTERISTICS:

TEMPERATURE: $25 \pm 10^{\circ} \text{C}$, RELATIVE HUMIDITY: $65 \pm 20\%$

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND.		6.8UH(must be within 6.5-7.1)	100KHZ/1.0V	SHDA 1062
2	IND.				
3	Q				
4	DCR				