

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013**

Product Name : Smart Phone

Brand Name : LYOTECH LABS

Model Name : LFi ONE

Family Model : LFi TWO, LFi THREE, LFi FOUR, LFi FIVE,
LFi SIX, LFi SEVEN

Report No. : S23071205807001

FCC ID : 2BCIX-LFIONE

Prepared for

Lyotech Labs LLC

8 The Green, Suite R in the City of Dover, Zip code - 19901
Delaware U.S.A.

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name** Lyotech Labs LLC

Address 8 The Green, Suite R in the City of Dover, Zip code - 19901 Delaware U.S.A.

Manufacturer's Name . Lyotech Labs LLC

Address 8 The Green, Suite R in the City of Dover, Zip code - 19901 Delaware U.S.A.

Product description

Product name Smart Phone

Brand Name LYOTECH LABS

Model and/or type
reference LFi ONE

Family Model LFi TWO, LFi THREE, LFi FOUR, LFi FIVE, LFi SIX, LFi SEVEN

FCC 47 CFR Part 2(2.1093)

ANSI/IEEE C95.1-1992

Standards IEEE Std 1528-2013

Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.


This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Test Sample Number S230712058007

Date of Test

Date (s) of performance of tests.. Jul. 22, 2023 ~ Aug. 13, 2023

Date of Issue..... Aug. 26, 2023

Test Result..... **Pass**Prepared By
(Test Engineer) :

(Jack Li)

Approved By
(Lab Manager) :

(Alex Li)

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Aug. 26, 2023	Jack Li

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits	6
1.2. Statement of Compliance	7
1.3. EUT Description	7
1.4. Test specification(s)	9
1.5. Ambient Condition	9
2. SAR Measurement System	10
2.1. SATIMO SAR Measurement Set-up Diagram	10
2.2. Robot	11
2.3. E-Field Probe	12
2.3.1. E-Field Probe Calibration	12
2.4. SAM phantoms	13
2.4.1. Technical Data	14
2.5. Device Holder	15
2.6. Test Equipment List	16
3. SAR Measurement Procedures	19
3.1. Power Reference	19
3.2. Area scan & Zoom scan	19
3.3. Description of interpolation/extrapolation scheme	21
3.4. Volumetric Scan	21
3.5. Power Drift	21
4. System Verification Procedure	22
4.1. Tissue Verification	22
4.1.1. Tissue Dielectric Parameter Check Results	23
4.2. System Verification Procedure	24
4.2.1. System Verification Results	25
5. SAR Measurement variability and uncertainty	26
5.1. SAR measurement variability	26
5.2. SAR measurement uncertainty	26
6. RF Exposure Positions	27
6.1. Ear and handset reference point	27
6.2. Definition of the cheek position	27
6.3. Definition of the tilt position	29
6.4. Body Worn Accessory	29
6.5. Wireless Router Devices	30
7. RF Output Power	31
7.1. GSM Conducted Power	31
7.2. WCDMA Conducted Power	31
7.3. LTE Conducted Power	33

7.4. NR SA Power	49
7.5. WLAN & Bluetooth Output Power	55
8. Antenna Location	60
9. Stand-alone SAR test exclusion	60
10. SAR Results	61
10.1. SAR measurement Result	61
10.1.1. SAR measurement Result of GSM850	61
10.1.2. SAR measurement Result of GSM1900	62
10.1.3. SAR measurement Result of WCDMA Band 2	63
10.1.4. SAR measurement Result of WCDMA Band 4	64
10.1.5. SAR measurement Result of WCDMA Band 5	65
10.1.6. SAR measurement Result of LTE Band 2	66
10.1.7. SAR measurement Result of LTE Band 4	68
10.1.8. SAR measurement Result of LTE Band 5	70
10.1.9. SAR measurement Result of LTE Band 7	72
10.1.10. SAR measurement Result of LTE Band 12	74
10.1.11. SAR measurement Result of LTE Band 17	76
10.1.12. SAR measurement Result of LTE Band 41	77
10.1.13. SAR measurement Result of LTE Band 66	79
10.1.14. SAR measurement Result of NR n78	81
10.1.15. SAR measurement Result of WLAN2.4G	82
10.1.16. SAR measurement Result of WLAN5.2G	83
10.1.17. SAR measurement Result of WLAN5.3G	84
10.1.18. SAR measurement Result of WLAN5.6G	85
10.1.19. SAR measurement Result of WLAN5.8G	86
10.2. Simultaneous Transmission Analysis	87
1. Appendix A. Photo documentation	89
2. Appendix B. System Check Plots	90
1. Appendix C. Plots of High SAR Measurement	113
2. Appendix D. Calibration Certificate	191

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
HEAD AND TRUNK LIMIT
1.6 W/kg
APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for LFi ONE are as follows.

RF Exposure Conditions		Equipment Class -Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
1-g Head		0.427	0.144	0.024	0.328
1-g Body-Worn (Separation distance of 10mm)		0.526	0.078	0.019	0.164
1-g Hotspot (Separation distance of 10mm)		0.526	0.078	0.019	0.164
Max Simultaneous Tx	Head	0.755	0.571	0.451	0.755
	Body-Worn	0.690	0.604	0.545	0.690
	Hotspot	0.690	0.604	0.545	0.690

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information	
Product Name	Smart Phone
Brand Name	LYOTECH LABS
Model Name	LFi ONE
Family Model	LFi TWO, LFi THREE, LFi FOUR, LFi FIVE, LFi SIX, LFi SEVEN
Model Difference	All models are the same circuit and RF module, except the model name.
FCC ID	2BCIX-LFIONE
Device Phase	Identical Prototype
Exposure Category	General population / Uncontrolled environment
Antenna Type	LDS Antenna
Battery Information	DC 3.87V, 6100mAh, 23.607Wh
HW Version	M108-MUB-V2
SW Version	R08
Device Operating Configurations	
Supporting Mode(s)	GSM850/1900,WCDMABand2/4/5,LTEBand2/4/5/7/12/17/41/66, NR SA n78, WLAN 2.4G/5G, Bluetooth, NFC
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM),

	NR(DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM CP-OFDM: QPSK/16-QAM/64QAM/256QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK), NFC(ASK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 4	1710-1755	2110-2155
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 12	699-716	729-746
	LTE Band 17	704-716	734-746
	LTE Band 41	2535-2655	
	LTE Band 66	1710-1780	2110-2200
	NR n78	3450-3550	
	WLAN 2.4G	2412-2462	
	WLAN 5.2G	5180-5240	
	WLAN 5.3G	5250-5350	
	WLAN 5.6G	5470-5725	
	WLAN 5.8G	5745-5825	
	NFC	13.56	
	Bluetooth	2402-2480	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control "all 1"(WCDMA Band 2)		
	3, tested with power control "all 1"(WCDMA Band 4)		
	3, tested with power control "all 1"(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		

	3, tested with power control all Max.(LTE Band 5)
	3, tested with power control all Max.(LTE Band 7)
	3, tested with power control all Max.(LTE Band 12)
	3, tested with power control all Max.(LTE Band 17)
	3, tested with power control all Max.(LTE Band 41)
	3, tested with power control all Max.(LTE Band 66)
	3, tested with power control all Max.(NR n78)

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 941225 D06 Hotspot SAR
KDB 648474 D04 Handset SAR

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

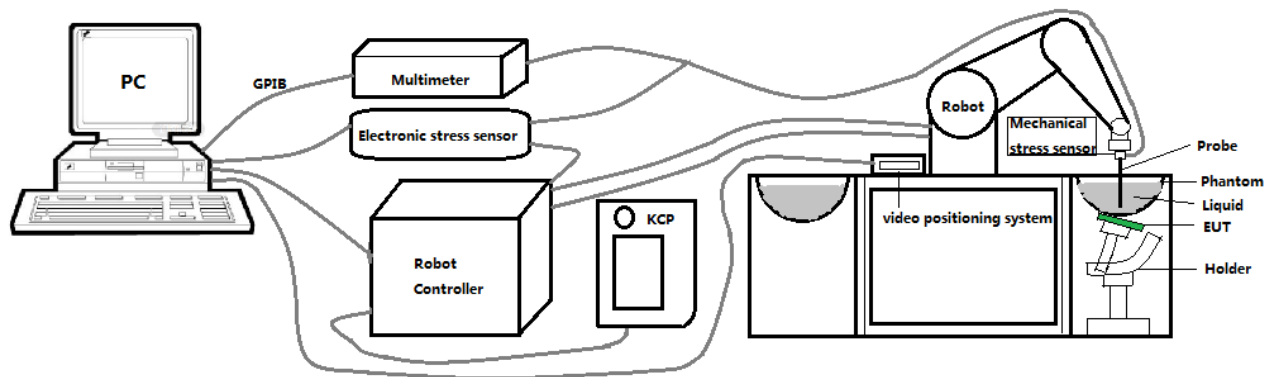

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter : 2.5 mm
 - Distance between probe tip and sensor center: 1 mm
 - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.08 dB
 - Axial isotropy: ± 0.01 dB
 - Hemispherical Isotropy: ± 0.01 dB
 - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
 - Lower detection limit: 8mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms

Photo of SAM phantom SN 16/15 SAM119




The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by Smart Phones.

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μm .

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

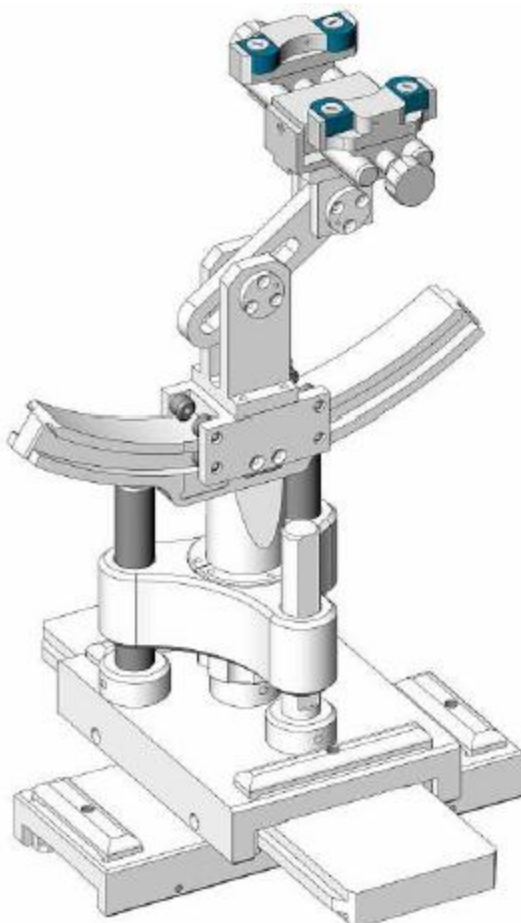

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Jan. 10, 2023	Jan. 09, 2024
☒	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	2300 MHz Dipole	SID2300	SN 03/16 DIP 2G300-358	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	3500 MHz Dipole	SID3500	SN 09/12 DIP 3G500-360	Oct. 15, 2022	Oct. 14, 2025
☒	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
☒	R&S	Universal radio communication tester	CMU200	117858	May 29, 2023	May 28, 2024
☒	R&S	Wideband radio communication	CMW500	103917	May 29, 2023	May 28, 2024

		tester				
☒	HP	Network Analyzer	8753D	3410J01136	May 29, 2023	May 28, 2024
☒	Agilent	MXG Vector Signal Generator	N5182A	MY47070317	May 29, 2023	May 28, 2024
☒	Agilent	Power meter	E4419B	MY45102538	May 29, 2023	May 28, 2024
☒	Agilent	Power sensor	E9301A	MY41495644	May 29, 2023	May 28, 2024
☒	Agilent	Power sensor	E9301A	US39212148	May 29, 2023	May 28, 2024
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Jul. 04, 2023	Jul. 03, 2024
☒	N/A	Thermometer	N/A	LES-085	Mar. 27, 2023	Mar. 26, 2026
☒	MVG	SAM Phantom	SSM2	SN 16/15 SAM119	NCR	NCR
☒	MVG	Device Holder	SMPPD	SN 16/15 MSH100	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 750	Head 750	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 835	Head 835	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 1800	Head 1800	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 1900	Head 1900	NCR	NCR
☒	Shenzhen Tianxu Communication	Human Simulating Liquid	Head 2450	Head 2450	NCR	NCR

	Technology Co., Ltd.					
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 2600	Head 2600	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 3500	Head 3500	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 5200	Head 5200	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 5400	Head 5400	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 5600	Head 5600	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 5800	Head 5800	NCR	NCR

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For Wi-Fi/BT power measurement, use engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure Wi-Fi/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan

above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful form multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scan to calculate the SAR value of the combined measurement as it is define in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.

4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

Photo of Liquid depth for Head Position	Photo of Liquid depth for Body Position
	

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r ($\pm 5\%$)	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 750	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	40.18	0.89	21.6 °C	Jul. 28, 2023
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	40.35	0.91	21.1 °C	Aug. 05, 2023
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.06	1.43	21.4 °C	Aug. 08, 2023
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.38	1.42	21.3 °C	Aug. 09, 2023
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	37.73	1.79	21.2 °C	Jul. 26, 2023
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	38.14	1.97	21.4 °C	Jul. 27, 2023
Head 3500	3500	37.93 (36.04~39.82)	2.91 (2.77~3.05)	38.08	2.77	21.9 °C	Aug. 13, 2023
Head 5200	5200	36.00 (34.20~37.80)	4.66 (4.43~4.89)	34.90	4.61	21.5 °C	Aug. 10, 2023
Head 5400	5400	35.80 (34.01~37.59)	4.86 (4.62~5.10)	35.37	4.81	21.1 °C	Jul. 22, 2023
Head 5600	5600	35.50 (33.73~37.28)	5.07 (4.82~5.32)	34.24	4.94	21.6 °C	Jul. 23, 2023
Head 5800	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	34.52	5.25	21.5 °C	Jul. 24, 2023

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

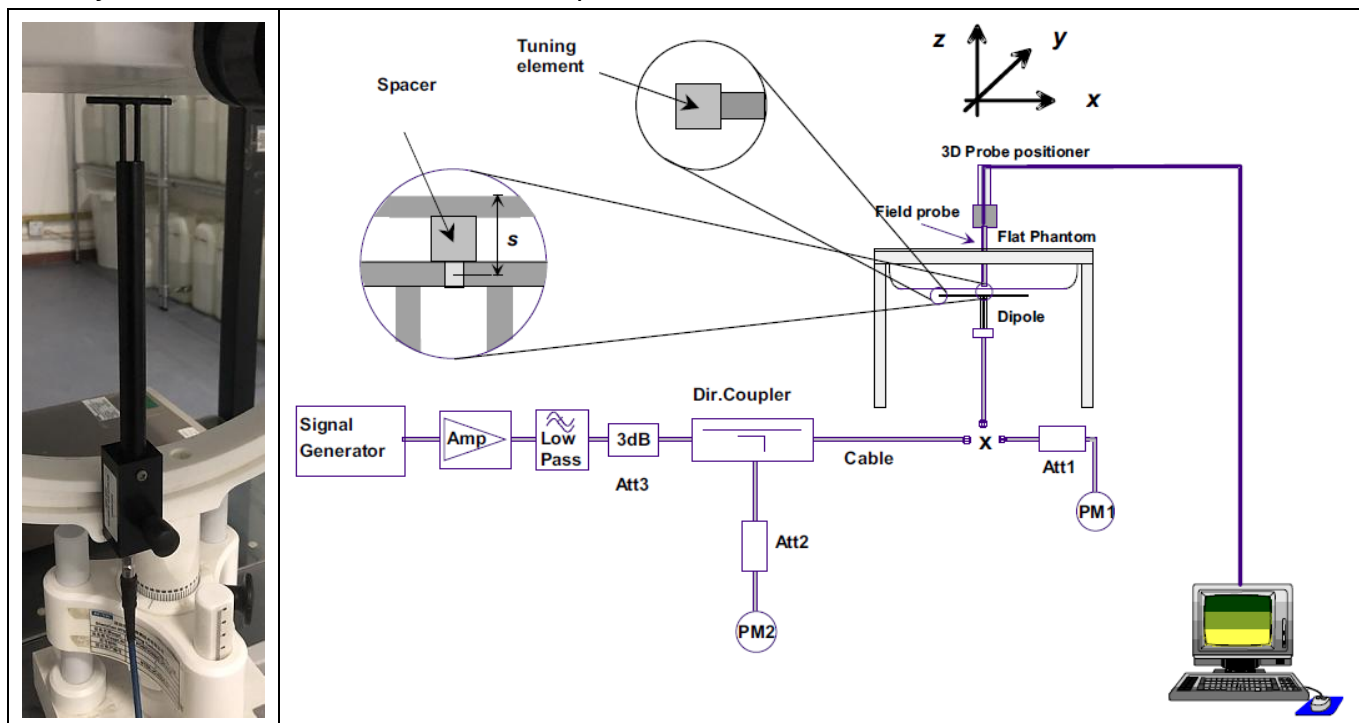

System Verification	Target SAR (1W)		Measured SAR		Liquid Temp.	Delta (%)		Test Date
	(±10%)		(Normalized to 1W)					
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		1-g (±10%)	10-g (±10%)	
750MHz	8.53	5.56	9.01	5.26	21.6 °C	5.63%	-5.40%	Jul. 28 2023
	(7.68~9.38)	(5.01~6.11)						
835MHz	9.84	6.22	9.80	6.76	21.1 °C	-0.41%	8.68%	Aug. 05, 2023
	(8.86~10.82)	(5.60~6.84)						
1800MHz	37.96	19.81	38.65	18.25	21.4 °C	1.82%	-7.87%	Aug. 08, 2023
	(34.17~41.75)	(17.83~21.79)						
1900MHz	40.37	20.48	38.46	20.72	21.3 °C	-4.73%	1.17%	Aug. 09, 2023
	(36.34~44.40)	(18.44~22.52)						
2450MHz	53.69	23.94	54.57	22.20	21.2 °C	1.64%	-5.73%	Jul. 26, 2023
	(48.33~59.05)	(21.55~26.33)						
2600MHz	55.83	24.19	50.55	22.91	21.4 °C	-9.46%	-5.29%	Jul. 27, 2023
	(50.25~61.41)	(21.78~26.60)						
3500MHz	67.18 (60.47~73.89)	24.50 (22.05~26.95)	68.29	25.35	21.9 °C	1.65%	3.47%	Aug. 13, 2023
5200MHz	162.34	55.42	161.62	53.70	21.5 °C	-0.44%	-3.10%	Aug. 10, 2023
	(146.11~178.57)	(49.88~60.96)						
5400MHz	168.48 (151.64~185.32)	57.03 (51.33~62.73)	159.83	52.19	21.1 °C	-5.13%	-8.49%	Jul. 22, 2023
5600MHz	174.92 (157.43~192.41)	58.63 (52.77~64.49)	169.28	56.47	21.6 °C	-3.22%	-3.68%	Jul. 23, 2023
5800MHz	178.89	59.32	181.30	58.68	21.5 °C	1.35%	-1.08%	Jul. 24, 2023
	(161.01~196.77)	(53.39~65.25)						

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.

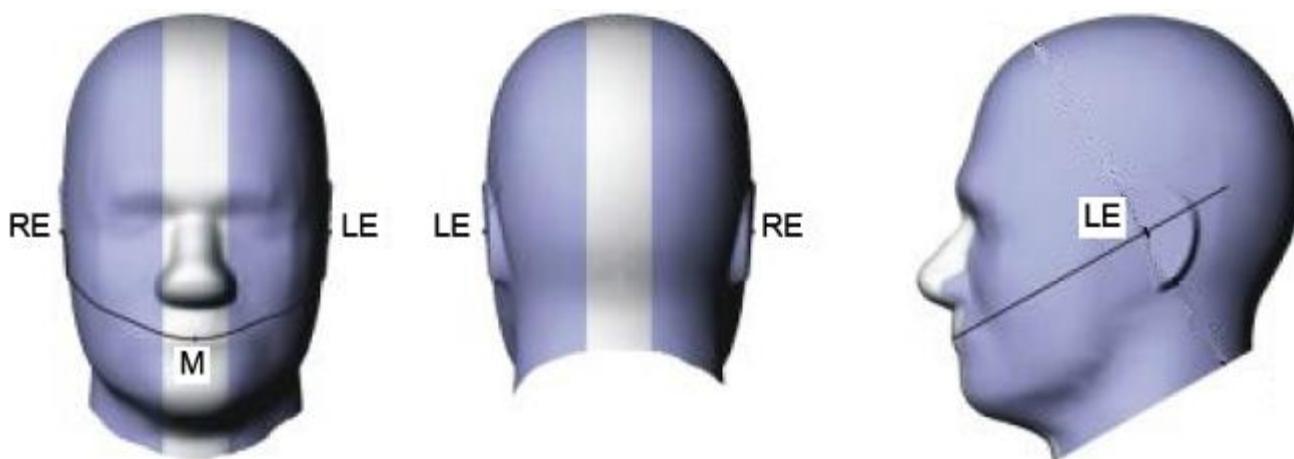


Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

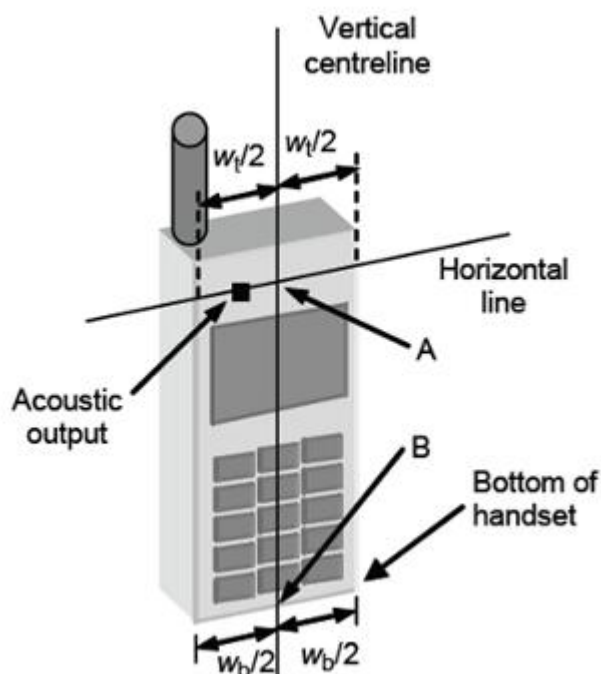


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

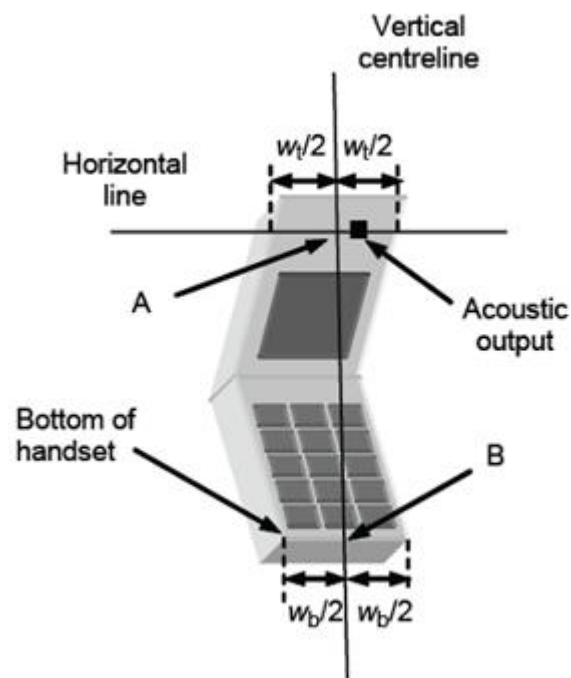


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

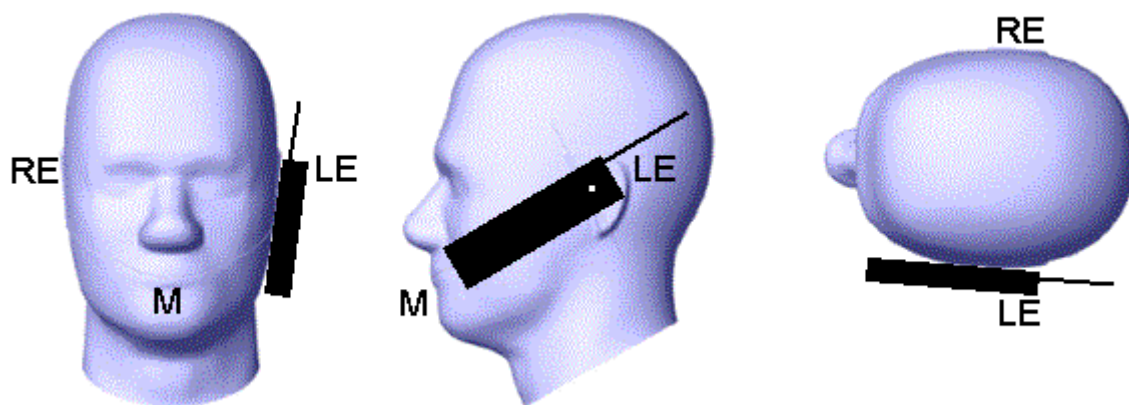


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

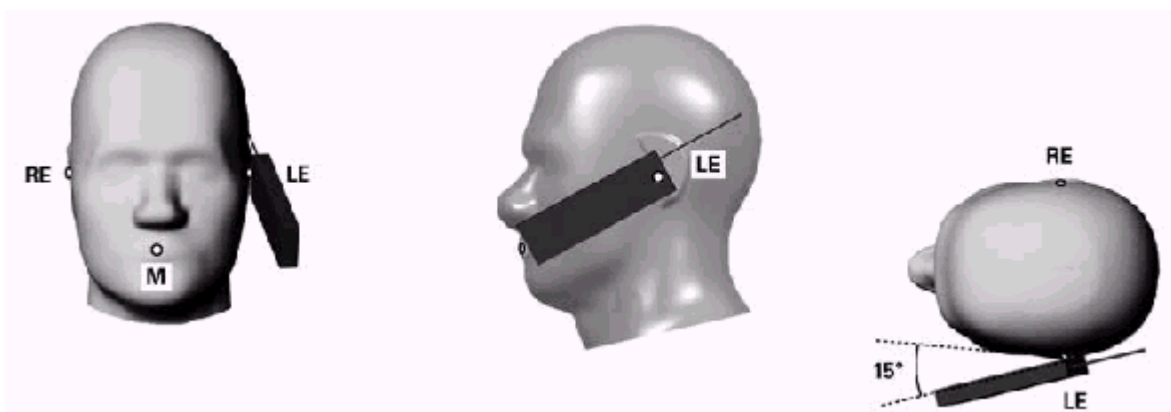


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

6.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest

spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

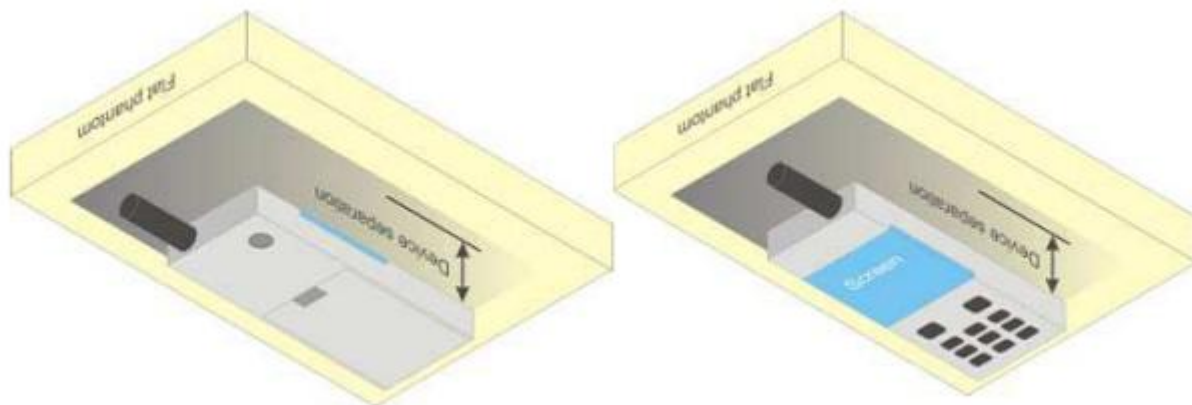


Figure 6.4.1 – Test positions for body-worn devices

6.5. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

7. RF Output Power

7.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	34.00	33.69	33.59	33.57	24.97	24.66	24.56	24.54
GPRS(GMSK,1 Tx slot)	34.00	33.71	33.58	33.58	24.97	24.68	24.55	24.55
GPRS(GMSK,2 Tx slot)	33.50	33.18	33.05	33.03	27.48	27.16	27.03	27.01
GPRS(GMSK,3 Tx slot)	31.50	31.32	31.20	31.19	27.24	27.06	26.94	26.93
GPRS(GMSK,4 Tx slot)	30.50	30.22	30.16	30.16	27.49	27.21	27.15	27.15
EGPRS(8PSK,1 Tx slot)	29.00	27.74	27.77	28.62	19.97	18.71	18.74	19.59
EGPRS(8PSK,2 Tx slot)	27.50	26.91	26.68	27.29	21.48	20.89	20.66	21.27
EGPRS(8PSK,3 Tx slot)	25.00	24.31	24.22	24.53	20.74	20.05	19.96	20.27
EGPRS(8PSK,4 Tx slot)	23.50	22.93	22.94	23.01	20.49	19.92	19.93	20.00
Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880	1909.8	(dBm)	1850.2	1880	1909.8
GSM (GMSK)	32.00	31.39	31.64	31.73	22.97	22.36	22.61	22.70
GPRS(GMSK,1 Tx slot)	32.00	31.36	31.64	31.70	22.97	22.33	22.61	22.67
GPRS(GMSK,2 Tx slot)	31.50	30.91	30.92	31.02	25.48	24.89	24.90	25.00
GPRS(GMSK,3 Tx slot)	29.50	28.79	29.18	29.31	25.24	24.53	24.92	25.05
GPRS(GMSK,4 Tx slot)	28.50	27.71	28.10	28.25	25.49	24.70	25.09	25.24
EGPRS(8PSK,1 Tx slot)	27.50	27.06	27.41	27.17	18.47	18.03	18.38	18.14
EGPRS(8PSK,2 Tx slot)	26.50	25.96	26.20	26.17	20.48	19.94	20.18	20.15
EGPRS(8PSK,3 Tx slot)	24.00	23.63	23.74	23.59	19.74	19.37	19.48	19.33
EGPRS(8PSK,4 Tx slot)	23.00	22.58	22.41	22.44	19.99	19.57	19.40	19.43

7.2. WCDMA Conducted Power

WCDMA Band 2	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
RMC12.2K	25.50	25.13	25.37	25.42
HSDPA Sub 1	24.50	24.04	24.31	24.34
HSDPA Sub 2	24.50	23.62	23.84	24.08

HSDPA Sub 3	23.00	22.62	22.78	22.60
HSDPA Sub 4	23.00	22.24	22.99	22.92
HSUPA Sub 1	24.50	22.67	24.00	24.17
HSUPA Sub 2	24.50	23.85	24.22	24.15
HSUPA Sub 3	23.50	22.49	23.05	23.24
HSUPA Sub 4	24.50	24.01	24.26	24.36
HSUPA Sub 5	24.00	22.48	23.66	23.59
WCDMA Band 4	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	1312	1413	1513
Frequency (MHz)		1712.4	1732.6	1752.6
RMC12.2K	25.50	25.25	25.06	24.92
HSDPA Sub 1	24.50	24.25	24.06	23.94
HSDPA Sub 2	24.00	23.64	23.53	23.50
HSDPA Sub 3	23.00	22.74	22.54	22.45
HSDPA Sub 4	23.00	22.46	22.20	22.50
HSUPA Sub 1	24.00	23.31	23.96	23.72
HSUPA Sub 2	24.50	24.31	24.04	23.98
HSUPA Sub 3	23.00	22.63	22.86	22.68
HSUPA Sub 4	24.50	24.35	24.16	24.01
HSUPA Sub 5	24.00	22.87	23.70	23.51
WCDMA Band 5	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC12.2K	25.00	24.54	24.34	24.24
HSDPA Sub 1	23.50	23.43	23.21	23.11
HSDPA Sub 2	23.50	23.09	22.89	22.81
HSDPA Sub 3	22.50	22.04	21.12	21.32
HSDPA Sub 4	22.00	21.98	21.79	21.71
HSUPA Sub 1	23.50	22.93	23.02	22.93
HSUPA Sub 2	23.50	23.24	22.97	23.08
HSUPA Sub 3	22.00	21.28	21.97	21.67
HSUPA Sub 4	23.50	23.38	23.19	23.07
HSUPA Sub 5	22.50	21.89	22.10	22.44

7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	25.50	23.87	25.04	25.21
			1	2	25.50	23.86	25.08	25.25
			1	5	25.50	24.83	25.05	25.20
			3	0	25.50	24.82	25.06	25.19
			3	1	25.50	24.83	25.04	25.19
			3	2	25.50	24.79	25.03	25.17
		16QAM	6	0	24.50	23.84	24.03	24.16
			1	0	24.50	24.08	23.93	24.36
			1	2	24.50	24.10	23.95	24.36
			1	5	24.50	24.08	23.95	24.36
			3	0	24.50	24.10	24.16	24.37
			3	1	24.50	24.08	24.15	24.37
			3	2	24.50	24.09	24.16	24.34
			6	0	23.50	23.01	23.14	23.37
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	25.50	24.84	24.95	25.13
			1	7	25.50	24.81	25.03	25.23
			1	14	25.50	24.80	24.97	25.20
			8	0	24.50	23.85	23.96	24.15
			8	4	24.50	23.82	23.98	24.15
			8	7	24.50	23.80	23.99	24.17
			15	0	24.50	23.82	23.99	24.16
		16QAM	1	0	24.50	24.32	24.18	24.02
			1	7	24.50	24.30	24.26	24.12
			1	14	24.50	24.31	24.23	24.09
			8	0	23.50	22.87	22.99	23.16
			8	4	23.50	22.88	23.00	23.14
			8	7	23.50	22.86	22.97	23.15
			15	0	23.50	22.86	22.92	23.23
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		

			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	25.50	24.87	25.04	25.12
			1	12	25.50	24.89	25.13	25.17
			1	24	25.50	24.84	25.08	25.18
			12	0	24.50	23.83	24.03	24.14
			12	6	24.50	23.85	24.02	24.16
			12	11	24.50	23.85	23.98	24.13
			25	0	24.50	23.86	24.02	24.19
		16QAM	1	0	25.00	24.24	24.52	24.55
			1	12	25.00	24.23	24.58	24.57
			1	24	25.00	24.22	24.60	24.64
			12	0	23.50	22.87	23.03	23.06
			12	6	23.50	22.87	23.01	23.05
			12	11	23.50	22.86	22.96	23.03
			25	0	23.50	22.83	23.00	23.19
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	25.50	24.88	25.02	25.02
			1	24	25.50	24.94	25.13	25.13
			1	49	25.50	24.93	25.04	25.13
			25	0	24.50	23.84	24.03	24.17
			25	12	24.50	23.87	24.04	24.12
			25	24	24.50	23.90	24.05	24.15
			50	0	24.50	23.93	24.07	24.17
		16QAM	1	0	25.00	23.76	24.40	24.09
			1	24	25.00	23.80	24.53	24.28
			1	49	25.00	23.76	24.43	24.30
			25	0	23.50	22.81	23.04	23.18
			25	12	23.50	22.88	23.06	23.12
			25	24	23.50	22.91	23.06	23.13
			50	0	23.50	22.85	23.04	23.17
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band	15MHz	QPSK	1	0	25.00	24.66	24.78	24.39
			1	37	25.00	24.76	24.94	24.68

2			1	74	25.00	24.67	24.88	24.71
			36	0	24.50	23.76	23.98	24.06
			36	18	24.50	23.81	24.03	24.09
			36	37	24.50	23.82	23.99	24.09
			75	0	24.50	23.89	24.03	24.09
		16QAM	1	0	24.50	24.27	23.87	23.56
			1	37	24.50	24.33	23.87	23.64
			1	74	24.50	24.26	23.94	23.72
			36	0	23.50	22.79	23.06	23.02
			36	18	23.50	22.85	23.05	23.04
			36	37	23.50	22.93	23.08	23.08
			75	0	23.50	22.85	23.02	23.08
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	20MHz	QPSK	1	0	25.00	24.60	24.29	24.41
			1	49	25.00	24.68	24.60	24.57
			1	99	25.00	24.64	24.44	24.61
			50	0	24.50	23.79	24.02	24.03
			50	24	24.50	23.85	24.04	24.06
			50	49	24.50	23.89	24.06	23.97
			100	0	24.00	23.86	23.99	23.99
		16QAM	1	0	24.00	23.68	23.54	23.72
			1	49	24.00	23.87	23.83	23.84
			1	99	24.00	23.85	23.70	23.82
			50	0	23.50	22.82	22.97	23.02
			50	24	23.50	22.88	23.01	23.06
			50	49	23.50	22.95	23.03	23.00
			100	0	23.00	22.85	22.99	22.95

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band 4	1.4MHz	QPSK	1	0	26.00	25.45	25.18	24.96
			1	2	26.00	25.51	25.16	24.96
			1	5	26.00	25.47	25.17	24.97
			3	0	25.50	25.21	25.25	25.03
			3	1	25.50	25.22	25.27	25.00

			16QAM	3	2	25.50	25.22	25.20	24.99
				6	0	24.50	24.24	24.19	23.97
				1	0	25.00	24.50	24.46	23.87
				1	2	25.00	24.52	24.42	23.90
				1	5	25.00	24.51	24.43	23.91
				3	0	24.50	24.47	24.40	24.11
				3	1	24.50	24.48	24.38	24.11
				3	2	24.50	24.48	24.34	24.13
				6	0	23.50	23.47	23.35	23.08
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5	
LTE Band 4	3MHz	QPSK	1	0	25.50	25.25	25.19	24.98	
			1	7	25.50	25.27	25.19	24.99	
			1	14	25.50	25.25	25.15	24.97	
			8	0	24.50	24.28	24.17	23.90	
			8	4	24.50	24.27	24.16	23.91	
			8	7	24.50	24.29	24.14	23.91	
			15	0	24.50	24.28	24.17	23.92	
		16QAM	1	0	25.00	24.69	24.44	23.92	
			1	7	25.00	24.70	24.46	23.86	
			1	14	25.00	24.71	24.40	23.84	
			8	0	23.50	23.31	23.20	22.92	
			8	4	23.50	23.33	23.18	22.91	
			8	7	23.50	23.31	23.14	22.93	
			15	0	23.50	23.34	23.09	22.99	
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5	
LTE Band 4	5MHz	QPSK	1	0	25.50	25.39	25.28	25.07	
			1	12	25.50	25.42	25.25	25.05	
			1	24	25.50	25.46	25.20	25.02	
			12	0	24.50	24.35	24.25	23.95	
			12	6	24.50	24.27	24.21	23.93	
			12	11	24.50	24.25	24.12	23.87	
			25	0	24.50	24.27	24.20	23.94	
		16QAM	1	0	25.00	24.77	24.57	24.51	
			1	12	25.00	24.81	24.54	24.49	

			1	24	25.00	24.79	24.52	24.48
			12	0	23.50	23.24	23.24	22.98
			12	6	23.50	23.21	23.22	22.93
			12	11	23.50	23.21	23.16	22.90
			25	0	23.50	23.32	23.18	22.92
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	25.50	25.26	25.22	24.92
			1	24	25.50	25.33	25.21	24.97
			1	49	25.50	25.33	25.10	24.93
			25	0	24.50	24.26	24.21	23.93
			25	12	24.50	24.33	24.18	23.94
			25	24	24.50	24.33	24.15	23.88
			50	0	24.50	24.32	24.21	23.99
		16QAM	1	0	25.00	24.68	24.42	23.81
			1	24	25.00	24.76	24.40	23.87
			1	49	25.00	24.73	24.29	23.83
			25	0	23.50	23.28	23.25	22.94
			25	12	23.50	23.33	23.17	22.95
			25	24	23.50	23.35	23.16	22.91
			50	0	23.50	23.31	23.21	22.89
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	15MHz	QPSK	1	0	25.50	25.05	25.18	24.91
			1	37	25.50	25.19	25.19	24.88
			1	74	25.50	25.11	25.02	24.78
			36	0	24.50	24.27	24.18	23.93
			36	18	24.50	24.26	24.13	23.90
			36	37	24.50	24.32	24.05	23.86
			75	0	24.50	24.31	24.12	23.93
		16QAM	1	0	25.00	24.67	24.38	24.12
			1	37	25.00	24.75	24.39	24.10
			1	74	25.00	24.70	24.25	23.98
			36	0	23.50	23.30	23.23	22.89
			36	18	23.50	23.34	23.18	22.87
			36	37	23.50	23.36	23.13	22.86

			75	0	23.50	23.28	23.11	22.95
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	QPSK	1	0	25.50	25.18	25.12	24.97
			1	49	25.50	25.36	25.18	24.93
			1	99	25.50	25.24	25.01	24.82
			50	0	24.50	24.25	24.16	23.99
			50	24	24.50	24.32	24.16	23.99
			50	49	24.50	24.27	24.08	23.93
			100	0	24.50	24.23	24.11	23.96
		16QAM	1	0	25.00	24.39	24.57	24.20
			1	49	25.00	24.57	24.62	24.19
			1	99	25.00	24.46	24.42	24.10
			50	0	23.50	23.26	23.25	22.97
			50	24	23.50	23.33	23.17	22.95
			50	49	23.50	23.29	23.12	22.93
			100	0	23.50	23.25	23.13	22.94

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	24.50	24.43	24.09	23.99
			1	2	24.50	24.44	24.08	23.99
			1	5	24.50	24.30	24.08	24.02
			3	0	24.50	24.20	24.12	24.05
			3	1	24.50	24.15	24.15	24.02
			3	2	24.50	24.21	24.17	24.05
			6	0	23.50	23.22	23.08	23.02
		16QAM	1	0	23.50	23.43	23.35	22.87
			1	2	23.50	23.41	23.36	22.90
			1	5	23.50	23.41	23.39	22.90
			3	0	23.50	23.41	23.30	23.16
			3	1	23.50	23.42	23.31	23.14
			3	2	23.50	23.42	23.30	23.16
			6	0	22.50	22.40	22.24	22.17
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		

			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	24.50	24.17	24.12	24.12
			1	7	24.50	24.22	24.20	24.04
			1	14	24.50	24.25	24.11	23.99
			8	0	23.50	23.23	23.11	22.93
			8	4	23.50	23.19	23.07	22.92
			8	7	23.50	23.21	23.05	22.92
			15	0	23.50	23.23	23.09	22.95
		16QAM	1	0	23.50	23.45	23.07	23.42
			1	7	23.50	23.45	23.11	23.40
			1	14	23.50	23.43	22.98	23.42
			8	0	22.50	22.23	22.10	21.99
			8	4	22.50	22.20	22.07	21.98
			8	7	22.50	22.21	22.01	22.01
			15	0	22.50	22.17	22.13	22.01
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	24.50	24.31	24.10	24.08
			1	12	24.50	24.31	24.16	24.06
			1	24	24.50	24.30	24.11	24.08
			12	0	23.50	23.26	23.15	23.03
			12	6	23.50	23.26	23.13	22.99
			12	11	23.50	23.25	23.01	22.94
			25	0	23.50	23.28	23.10	23.03
		16QAM	1	0	24.00	23.73	23.60	23.39
			1	12	24.00	23.69	23.60	23.36
			1	24	24.00	23.71	23.57	23.37
			12	0	22.50	22.24	22.08	22.07
			12	6	22.50	22.22	22.02	22.03
			12	11	22.50	22.25	21.94	21.98
			25	0	22.50	22.21	22.11	22.00
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE Band	10MHz	QPSK	1	0	24.50	24.25	24.22	24.16
			1	24	24.50	24.24	24.23	23.95

5			1	49	24.50	24.21	24.18	23.96
			25	0	23.50	23.20	23.15	23.05
			25	12	23.50	23.21	23.11	23.00
			25	24	23.50	23.18	23.12	23.03
			50	0	23.50	23.19	23.14	23.06
		16QAM	1	0	24.00	23.12	23.60	23.28
			1	24	24.00	23.12	23.62	23.20
			1	49	24.00	23.06	23.52	23.10
			25	0	22.50	22.18	22.16	22.07
			25	12	22.50	22.18	22.12	22.02
			25	24	22.50	22.14	22.08	22.03
			50	0	22.50	22.15	22.12	22.07

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	26.00	25.67	25.67	25.84
			1	12	26.00	25.68	25.69	25.81
			1	24	26.00	25.70	25.67	25.77
			12	0	25.00	24.63	24.66	24.76
			12	6	25.00	24.59	24.69	24.74
			12	11	25.00	24.61	24.63	24.73
			25	0	25.00	24.61	24.65	24.78
		16QAM	1	0	25.50	25.03	25.16	25.10
			1	12	25.50	25.04	25.17	25.06
			1	24	25.50	25.06	25.19	25.03
			12	0	24.00	23.57	23.58	23.82
			12	6	24.00	23.55	23.61	23.81
			12	11	24.00	23.56	23.54	23.77
			25	0	24.00	23.56	23.71	23.76
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band 7	10MHz	QPSK	1	0	26.00	25.57	25.66	25.82
			1	24	26.00	25.67	25.74	25.88
			1	49	26.00	25.70	25.72	25.72
			25	0	25.00	24.60	24.69	24.81
			25	12	25.00	24.62	24.73	24.81

			25	24	25.00	24.59	24.74	24.87
			50	0	25.00	24.61	24.76	24.84
		16QAM	1	0	25.00	24.70	24.58	24.97
			1	24	25.00	24.79	24.65	24.99
			1	49	25.00	24.82	24.65	24.75
			25	0	24.00	23.60	23.66	23.81
			25	12	24.00	23.63	23.67	23.84
			25	24	24.00	23.61	23.73	23.88
			50	0	24.00	23.65	23.69	23.85
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
LTE Band 7	15MHz	QPSK	1	0	26.00	25.35	25.17	25.12
			1	37	26.00	25.51	25.21	25.21
			1	74	26.00	25.44	25.17	25.01
			36	0	25.00	24.56	24.66	24.77
			36	18	25.00	24.59	24.66	24.81
			36	37	25.00	24.61	24.66	24.84
			75	0	25.00	24.64	24.69	24.84
		16QAM	1	0	25.00	24.65	24.34	24.40
			1	37	25.00	24.64	24.43	24.53
			1	74	25.00	24.65	24.40	24.42
			36	0	24.00	23.63	23.73	23.73
			36	18	24.00	23.63	23.79	23.83
			36	37	24.00	23.64	23.73	23.80
			75	0	24.00	23.64	23.65	23.89
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band 7	20MHz	QPSK	1	0	25.50	24.96	25.12	25.16
			1	49	25.50	25.18	25.29	25.35
			1	99	25.50	25.09	25.27	25.22
			50	0	25.00	24.71	24.71	24.86
			50	24	25.00	24.65	24.74	24.91
			50	49	25.00	24.65	24.74	24.94
			100	0	25.00	24.60	24.68	24.86
		16QAM	1	0	25.00	24.18	24.35	24.63
			1	49	25.00	24.41	24.53	24.81

			1	99	25.00	24.36	24.51	24.73
			50	0	24.00	23.66	23.69	23.88
			50	24	24.00	23.66	23.78	23.91
			50	49	24.00	23.61	23.72	23.99
			100	0	24.00	23.62	23.70	23.90

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23017/699.7	23095/707.5	23173/715.3
LTE Band 12	1.4MHz	QPSK	1	0	24.00	23.71	23.39	23.21
			1	2	24.00	23.73	23.36	23.18
			1	5	24.00	23.70	23.32	23.19
			3	0	24.50	24.04	23.94	23.78
			3	1	24.50	24.03	23.92	23.76
			3	2	24.50	24.05	23.93	23.76
		16QAM	6	0	23.50	23.05	22.91	22.72
			1	0	23.00	22.78	22.65	22.08
			1	2	23.00	22.75	22.60	22.11
			1	5	23.00	22.78	22.61	22.10
			3	0	23.50	23.26	23.07	22.84
			3	1	23.50	23.26	23.09	22.86
			3	2	23.50	23.27	23.06	22.87
			6	0	22.50	22.24	22.02	21.83

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23025/700.5	23095/707.5	23165/714.5
LTE Band 12	3MHz	QPSK	1	0	24.00	23.57	23.44	23.20
			1	7	24.00	23.59	23.41	23.19
			1	14	24.00	23.55	23.29	23.25
			8	0	23.50	23.09	22.83	22.70
			8	4	23.50	22.99	22.80	22.63
			8	7	23.50	23.06	22.79	22.66
			15	0	23.50	23.05	22.81	22.65
		16QAM	1	0	23.00	22.50	22.84	22.43
			1	7	23.00	22.52	22.83	22.44
			1	14	23.00	22.43	22.73	22.31
			8	0	22.50	22.06	21.89	21.74
			8	4	22.50	22.01	21.86	21.69

			8	7	22.50	22.01	21.84	21.68
			15	0	22.50	22.11	21.86	21.64
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23035/701.5	23095/707.5	23155/713.5
LTE Band 12	5MHz	QPSK	1	0	24.00	23.66	23.44	23.28
			1	12	24.00	23.64	23.42	23.22
			1	24	24.00	23.60	23.29	23.24
			12	0	23.50	23.08	22.90	22.75
			12	6	23.50	23.05	22.85	22.68
			12	11	23.50	23.00	22.88	22.64
			25	0	23.50	23.01	22.84	22.72
		16QAM	1	0	23.50	23.08	22.85	22.58
			1	12	23.50	23.04	22.78	22.53
			1	24	23.50	23.00	22.75	22.54
			12	0	22.50	22.04	21.81	21.77
			12	6	22.50	22.00	21.77	21.71
			12	11	22.50	21.98	21.78	21.63
			25	0	22.00	22.00	21.86	21.67
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23060/704	23095/707.5	23130/711
LTE Band 12	10MHz	QPSK	1	0	24.00	23.57	23.50	23.42
			1	24	24.00	23.48	23.44	23.34
			1	49	24.00	23.39	23.29	23.27
			25	0	23.50	23.07	22.88	22.78
			25	12	23.50	22.99	22.85	22.78
			25	24	23.50	22.99	22.83	22.66
			50	0	23.50	23.06	22.88	22.78
		16QAM	1	0	23.00	22.75	22.34	22.80
			1	24	23.00	22.65	22.32	22.70
			1	49	23.00	22.55	22.17	22.63
			25	0	22.50	22.05	21.89	21.79
			25	12	22.50	22.00	21.85	21.79
			25	24	22.50	21.99	21.81	21.67
			50	0	22.50	22.05	21.82	21.74

Band	Band	Modulation	RB	Tune-up	Channel/Frequency(MHz)
------	------	------------	----	---------	------------------------

	Width		Configuration		(dBm)			
			RB Size	RB Offset		23755/706.5	23790/710	23825/713.5
LTE Band 17	5MHz	QPSK	1	0	24.00	23.58	23.41	23.30
			1	12	24.00	23.51	23.36	23.28
			1	24	24.00	23.49	23.27	23.28
			12	0	23.00	22.92	22.84	22.80
			12	6	23.00	22.92	22.84	22.74
			12	11	23.00	22.87	22.72	22.63
			25	0	23.00	22.90	22.80	22.73
		16QAM	1	0	23.50	23.01	22.84	22.60
			1	12	23.50	22.92	22.76	22.59
			1	24	23.50	22.93	22.70	22.58
			12	0	22.00	21.92	21.74	21.78
			12	6	22.00	21.90	21.77	21.77
			12	11	22.00	21.89	21.67	21.63
			25	0	22.00	21.86	21.82	21.69
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23780/709	23790/710	23800/711
LTE Band 17	10MHz	QPSK	1	0	23.50	23.43	23.40	23.39
			1	24	23.50	23.36	23.34	23.32
			1	49	23.50	23.22	23.18	23.23
			25	0	23.00	22.82	22.81	22.81
			25	12	23.00	22.88	22.79	22.82
			25	24	23.00	22.76	22.72	22.68
			50	0	23.00	22.84	22.79	22.78
		16QAM	1	0	23.00	22.88	22.64	22.32
			1	24	23.00	22.79	22.55	22.19
			1	49	23.00	22.69	22.40	22.15
			25	0	22.00	21.86	21.82	21.83
			25	12	22.00	21.86	21.83	21.80
			25	24	22.00	21.78	21.74	21.68
			50	0	22.00	21.80	21.81	21.72

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		40065/2537.5	40640/2595	41215/2652.5

LTE Band 41	5MHz	QPSK	1	0	26.00	25.47	25.40	25.55
			1	12	26.00	25.52	25.44	25.57
			1	24	26.00	25.58	25.41	25.55
			12	0	25.00	24.31	24.38	24.52
			12	6	25.00	24.29	24.36	24.52
			12	11	25.00	24.31	24.39	24.48
			25	0	25.00	24.31	24.39	24.53
		16QAM	1	0	25.00	24.88	24.69	24.78
			1	12	25.00	24.92	24.70	24.84
			1	24	25.00	24.94	24.72	24.80
			12	0	24.00	23.34	23.32	23.56
			12	6	24.00	23.31	23.28	23.53
			12	11	24.00	23.28	23.30	23.49
			25	0	24.00	23.28	23.41	23.50
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		40090/2540	40640/2595	41190/2650
LTE Band 41	10MHz	QPSK	1	0	25.50	25.16	25.34	25.47
			1	24	25.50	25.27	25.40	25.49
			1	49	25.50	25.33	25.35	25.46
			25	0	25.00	24.25	24.32	24.53
			25	12	25.00	24.27	24.35	24.49
			25	24	25.00	24.33	24.38	24.50
			50	0	25.00	24.29	24.40	24.54
		16QAM	1	0	25.00	24.72	24.49	24.53
			1	24	25.00	24.85	24.51	24.53
			1	49	25.00	24.84	24.52	24.50
			25	0	24.00	23.29	23.33	23.55
			25	12	24.00	23.29	23.37	23.51
			25	24	24.00	23.33	23.36	23.47
			50	0	24.00	23.28	23.40	23.53
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		40115/2542.5	40640/2595	41165/2647.5
LTE Band 41	15MHz	QPSK	1	0	25.50	25.29	25.27	25.33
			1	37	25.50	25.45	25.37	25.41
			1	74	25.50	25.39	25.28	25.35
			36	0	24.50	24.24	24.35	24.36

				36	18	24.50	24.29	24.39	24.38
				36	37	24.50	24.32	24.41	24.35
				75	0	24.50	24.31	24.41	24.40
			16QAM	1	0	25.00	24.36	24.56	24.83
				1	37	25.00	24.52	24.65	24.92
				1	74	25.00	24.45	24.59	24.86
				36	0	23.50	23.34	23.35	23.41
				36	18	23.50	23.35	23.37	23.42
				36	37	23.50	23.44	23.41	23.39
				75	0	23.50	23.29	23.43	23.38
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		40140/2545	40640/2595	41140/2645	
LTE Band 41	20MHz	QPSK	1	0	25.50	25.08	25.19	25.25	
			1	49	25.50	25.35	25.41	25.44	
			1	99	25.50	25.27	25.33	25.32	
			50	0	24.50	24.28	24.36	24.40	
			50	24	24.50	24.32	24.43	24.44	
			50	49	24.50	24.37	24.38	24.41	
			100	0	24.50	24.31	24.35	24.42	
		16QAM	1	0	25.00	24.38	24.33	24.54	
			1	49	25.00	24.63	24.54	24.71	
			1	99	25.00	24.59	24.48	24.59	
			50	0	23.50	23.30	23.29	23.43	
			50	24	23.50	23.36	23.38	23.47	
			50	49	23.50	23.37	23.34	23.44	
			100	0	23.50	23.29	23.32	23.41	

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131979/1710.7	132322/1745	132665/1779.3
LTE Band 66	1.4MHz	QPSK	1	0	25.50	24.10	24.84	24.53
			1	2	25.50	25.18	24.86	24.52
			1	5	25.50	25.10	24.82	24.52
			3	0	25.50	25.15	24.80	24.61
			3	1	25.50	25.15	24.79	24.63
			3	2	25.50	25.11	24.78	24.64
			6	0	24.50	24.09	23.78	23.57

		16QAM	1	0	24.50	24.01	24.00	23.79
			1	2	24.50	24.03	24.00	23.80
			1	5	24.50	24.01	23.98	23.80
			3	0	24.50	24.26	24.00	23.78
			3	1	24.50	24.26	24.00	23.75
			3	2	24.50	24.26	23.95	23.77
			6	0	23.50	23.25	22.97	22.73
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131987/1711.5	132322/1745	132657/1778.5
LTE Band 66	3MHz	QPSK	1	0	25.50	25.07	24.76	24.61
			1	7	25.50	25.05	24.77	24.64
			1	14	25.50	25.09	24.78	24.61
			8	0	24.50	24.07	23.76	23.57
			8	4	24.50	24.06	23.79	23.57
			8	7	24.50	24.10	23.71	23.56
			15	0	24.50	24.10	23.73	23.59
		16QAM	1	0	25.00	24.52	24.01	23.54
			1	7	25.00	24.53	24.00	23.54
			1	14	25.00	24.54	24.00	23.49
			8	0	23.50	23.13	22.79	22.61
			8	4	23.50	23.11	22.78	22.56
			8	7	23.50	23.14	22.75	22.54
			15	0	23.50	23.15	22.69	22.65
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131997/1712.5	132322/1745	132647/1777.5
LTE Band 66	5MHz	QPSK	1	0	25.50	25.11	24.93	24.69
			1	12	25.50	25.15	24.90	24.63
			1	24	25.50	25.15	24.87	24.58
			12	0	24.50	24.13	23.79	23.67
			12	6	24.50	24.15	23.81	23.61
			12	11	24.50	24.12	23.71	23.55
			25	0	24.50	24.14	23.75	23.61
		16QAM	1	0	25.00	24.46	24.35	24.13
			1	12	25.00	24.47	24.31	24.07
			1	24	25.00	24.54	24.33	24.08
			12	0	23.50	23.15	22.79	22.59

			12	6	23.50	23.20	22.79	22.53
			12	11	23.50	23.13	22.73	22.48
			25	0	23.50	23.13	22.76	22.62
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132022/1715	132322/1745	132622/1775
LTE Band 66	10MHz	QPSK	1	0	25.50	25.06	24.78	24.73
			1	24	25.50	25.15	24.83	24.72
			1	49	25.50	25.19	24.78	24.60
			25	0	24.50	24.11	23.78	23.73
			25	12	24.50	24.17	23.81	23.71
			25	24	24.50	24.19	23.82	23.61
			50	0	24.50	24.14	23.83	23.72
		16QAM	1	0	25.00	24.50	23.98	23.64
			1	24	25.00	24.60	24.03	23.61
			1	49	25.00	24.57	24.00	23.47
			25	0	23.50	23.18	22.79	22.71
			25	12	23.50	23.19	22.81	22.68
			25	24	23.50	23.21	22.84	22.59
			50	0	23.50	23.12	22.83	22.66
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132047/1717.5	132322/1745	132597/1772.5
LTE Band 66	15MHz	QPSK	1	0	25.50	25.13	24.68	24.77
			1	37	25.50	25.23	24.72	24.73
			1	74	25.50	25.12	24.70	24.56
			36	0	24.50	24.05	23.81	23.69
			36	18	24.50	24.15	23.79	23.65
			36	37	24.50	24.10	23.78	23.59
			75	0	24.50	24.17	23.80	23.69
		16QAM	1	0	24.50	24.24	23.92	24.19
			1	37	24.50	24.35	23.94	24.18
			1	74	24.50	24.30	23.89	24.00
			36	0	23.50	23.15	22.77	22.72
			36	18	23.50	23.18	22.77	22.69
			36	37	23.50	23.18	22.76	22.63
			75	0	23.50	23.12	22.79	22.64
Band	Band	Modulation	RB		Tune-u	Channel/Frequency(MHz)		

	Width		Configuration		p (dBm)			
			RB Size	RB Offset		132072/1720	132322/1745	132572/1770
LTE Band 66	20MHz	QPSK	1	0	25.50	25.01	24.78	24.73
			1	49	25.50	25.22	24.80	24.78
			1	99	25.50	25.10	24.74	24.55
			50	0	24.50	24.17	23.83	23.88
			50	24	24.50	24.17	23.86	23.81
			50	49	24.50	24.12	23.83	23.61
			100	0	24.50	24.17	23.79	23.75
		16QAM	1	0	24.50	24.25	24.17	23.96
			1	49	24.50	24.44	24.24	24.04
			1	99	24.50	24.33	24.19	23.79
			50	0	23.50	23.13	22.84	22.82
			50	24	23.50	23.20	22.88	22.78
			50	49	23.50	23.16	22.84	22.59
			100	0	23.50	23.11	22.80	22.67

7.4. NR SA Power

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Tune-up	Power (dBm)
n78	30	10	630334	1@1	DFT_BPSK	20.50	19.93
n78	30	10	630334	24@0	DFT_QPSK	20.50	19.52
n78	30	10	630334	12@6	DFT_QPSK	20.50	20.48
n78	30	10	630334	1@1	DFT_QPSK	20.50	19.85
n78	30	10	630334	1@22	DFT_QPSK	20.50	19.89
n78	30	10	630334	1@1	DFT_QAM16	20.00	19.23
n78	30	10	630334	1@1	DFT_QAM64	18.00	17.77
n78	30	10	630334	1@1	DFT_QAM256	17.00	16.41
n78	30	10	630334	1@1	CP_QPSK	19.00	18.53
n78	30	10	633333	1@1	DFT_BPSK	21.50	20.32
n78	30	10	633333	24@0	DFT_QPSK	21.50	19.45
n78	30	10	633333	12@6	DFT_QPSK	21.50	20.32
n78	30	10	633333	1@1	DFT_QPSK	21.50	20.28
n78	30	10	633333	1@22	DFT_QPSK	21.50	20.25
n78	30	10	633333	1@1	DFT_QAM16	21.50	19.54
n78	30	10	633333	1@1	DFT_QAM64	19.00	18.11
n78	30	10	633333	1@1	DFT_QAM256	17.00	16.30

n78	30	10	633333	1@1	CP_QPSK	19.00	18.91
n78	30	10	636333	1@1	DFT_BPSK	21.50	20.69
n78	30	10	636333	24@0	DFT_QPSK	20.00	19.84
n78	30	10	636333	12@6	DFT_QPSK	21.50	20.81
n78	30	10	636333	1@1	DFT_QPSK	21.50	20.64
n78	30	10	636333	1@22	DFT_QPSK	21.50	20.79
n78	30	10	636333	1@1	DFT_QAM16	20.00	19.92
n78	30	10	636333	1@1	DFT_QAM64	19.00	18.32
n78	30	10	636333	1@1	DFT_QAM256	17.00	16.73
n78	30	10	636333	1@1	CP_QPSK	20.00	19.19
n78	30	15	630500	1@1	DFT_BPSK	21.50	20.32
n78	30	15	630500	36@0	DFT_QPSK	21.50	19.46
n78	30	15	630500	18@9	DFT_QPSK	21.50	20.42
n78	30	15	630500	1@1	DFT_QPSK	21.50	20.26
n78	30	15	630500	1@36	DFT_QPSK	21.50	20.30
n78	30	15	630500	1@1	DFT_QAM16	20.00	19.64
n78	30	15	630500	1@1	DFT_QAM64	19.00	17.98
n78	30	15	630500	1@1	DFT_QAM256	17.00	16.39
n78	30	15	630500	1@1	CP_QPSK	20.00	18.86
n78	30	15	633333	1@1	DFT_BPSK	21.50	20.32
n78	30	15	633333	36@0	DFT_QPSK	20.00	19.39
n78	30	15	633333	18@9	DFT_QPSK	21.50	20.34
n78	30	15	633333	1@1	DFT_QPSK	21.50	20.27
n78	30	15	633333	1@36	DFT_QPSK	21.50	20.19
n78	30	15	633333	1@1	DFT_QAM16	20.00	19.64
n78	30	15	633333	1@1	DFT_QAM64	19.00	17.97
n78	30	15	633333	1@1	DFT_QAM256	18.00	16.34
n78	30	15	633333	1@1	CP_QPSK	20.00	18.88
n78	30	15	636166	1@1	DFT_BPSK	21.00	20.55
n78	30	15	636166	36@0	DFT_QPSK	20.00	19.73
n78	30	15	636166	18@9	DFT_QPSK	21.50	20.75
n78	30	15	636166	1@1	DFT_QPSK	21.50	20.52
n78	30	15	636166	1@36	DFT_QPSK	21.50	20.72
n78	30	15	636166	1@1	DFT_QAM16	20.00	19.80
n78	30	15	636166	1@1	DFT_QAM64	19.00	18.25
n78	30	15	636166	1@1	DFT_QAM256	17.00	16.55
n78	30	15	636166	1@1	CP_QPSK	20.00	19.12
n78	30	20	630667	1@1	DFT_BPSK	21.50	20.27
n78	30	20	630667	50@0	DFT_QPSK	21.50	19.39

n78	30	20	630667	25@12	DFT_QPSK	21.50	20.39
n78	30	20	630667	1@1	DFT_QPSK	21.50	20.22
n78	30	20	630667	1@49	DFT_QPSK	21.50	20.17
n78	30	20	630667	1@1	DFT_QAM16	21.50	19.43
n78	30	20	630667	1@1	DFT_QAM64	18.50	18.03
n78	30	20	630667	1@1	DFT_QAM256	17.00	16.18
n78	30	20	630667	1@1	CP_QPSK	19.00	18.92
n78	30	20	633333	1@1	DFT_BPSK	21.50	20.27
n78	30	20	633333	50@0	DFT_QPSK	21.50	19.38
n78	30	20	633333	25@12	DFT_QPSK	21.50	20.37
n78	30	20	633333	1@1	DFT_QPSK	21.50	20.25
n78	30	20	633333	1@49	DFT_QPSK	21.50	20.11
n78	30	20	633333	1@1	DFT_QAM16	21.50	19.60
n78	30	20	633333	1@1	DFT_QAM64	19.00	17.85
n78	30	20	633333	1@1	DFT_QAM256	17.00	16.26
n78	30	20	633333	1@1	CP_QPSK	19.00	18.80
n78	30	20	636000	1@1	DFT_BPSK	20.50	20.46
n78	30	20	636000	50@0	DFT_QPSK	20.00	19.69
n78	30	20	636000	25@12	DFT_QPSK	21.50	20.69
n78	30	20	636000	1@1	DFT_QPSK	21.50	20.47
n78	30	20	636000	1@49	DFT_QPSK	21.50	20.68
n78	30	20	636000	1@1	DFT_QAM16	21.50	19.77
n78	30	20	636000	1@1	DFT_QAM64	20.00	18.09
n78	30	20	636000	1@1	DFT_QAM256	17.00	16.50
n78	30	20	636000	1@1	CP_QPSK	20.50	19.03
n78	30	40	631334	1@1	DFT_BPSK	20.50	19.92
n78	30	40	631334	100@0	DFT_QPSK	20.50	19.26
n78	30	40	631334	50@25	DFT_QPSK	20.50	20.32
n78	30	40	631334	1@1	DFT_QPSK	20.50	19.89
n78	30	40	631334	1@104	DFT_QPSK	20.50	19.71
n78	30	40	631334	1@1	DFT_QAM16	20.50	19.25
n78	30	40	631334	1@1	DFT_QAM64	18.00	17.55
n78	30	40	631334	1@1	DFT_QAM256	17.00	15.99
n78	30	40	631334	1@1	CP_QPSK	19.00	18.47
n78	30	40	633333	1@1	DFT_BPSK	20.50	19.82
n78	30	40	633333	100@0	DFT_QPSK	20.50	19.22
n78	30	40	633333	50@25	DFT_QPSK	20.50	20.30
n78	30	40	633333	1@1	DFT_QPSK	20.50	19.73
n78	30	40	633333	1@104	DFT_QPSK	20.50	19.82

n78	30	40	633333	1@1	DFT_QAM16	20.00	19.18
n78	30	40	633333	1@1	DFT_QAM64	18.00	17.53
n78	30	40	633333	1@1	DFT_QAM256	16.00	15.84
n78	30	40	633333	1@1	CP_QPSK	20.50	18.38
n78	30	40	635333	1@1	DFT_BPSK	20.50	19.94
n78	30	40	635333	100@0	DFT_QPSK	20.50	19.54
n78	30	40	635333	50@25	DFT_QPSK	21.50	20.59
n78	30	40	635333	1@1	DFT_QPSK	20.50	19.89
n78	30	40	635333	1@104	DFT_QPSK	20.50	20.27
n78	30	40	635333	1@1	DFT_QAM16	20.50	19.26
n78	30	40	635333	1@1	DFT_QAM64	18.00	17.64
n78	30	40	635333	1@1	DFT_QAM256	16.00	15.94
n78	30	40	635333	1@1	CP_QPSK	19.00	18.55
n78	30	50	631667	1@1	DFT_BPSK	21.50	20.14
n78	30	50	631667	128@0	DFT_QPSK	20.00	19.30
n78	30	50	631667	64@32	DFT_QPSK	21.50	20.32
n78	30	50	631667	1@1	DFT_QPSK	21.50	20.13
n78	30	50	631667	1@131	DFT_QPSK	20.50	19.98
n78	30	50	631667	1@1	DFT_QAM16	20.00	19.45
n78	30	50	631667	1@1	DFT_QAM64	18.00	17.94
n78	30	50	631667	1@1	DFT_QAM256	17.00	16.18
n78	30	50	631667	1@1	CP_QPSK	19.00	18.79
n78	30	50	633333	1@1	DFT_BPSK	21.50	20.07
n78	30	50	633333	128@0	DFT_QPSK	20.50	19.32
n78	30	50	633333	64@32	DFT_QPSK	21.50	20.37
n78	30	50	633333	1@1	DFT_QPSK	21.50	20.04
n78	30	50	633333	1@131	DFT_QPSK	21.50	20.14
n78	30	50	633333	1@1	DFT_QAM16	20.00	19.37
n78	30	50	633333	1@1	DFT_QAM64	18.00	17.68
n78	30	50	633333	1@1	DFT_QAM256	17.00	16.11
n78	30	50	633333	1@1	CP_QPSK	19.00	18.66
n78	30	50	635000	1@1	DFT_BPSK	21.50	20.20
n78	30	50	635000	128@0	DFT_QPSK	20.00	19.54
n78	30	50	635000	64@32	DFT_QPSK	21.50	20.55
n78	30	50	635000	1@1	DFT_QPSK	21.50	20.14
n78	30	50	635000	1@131	DFT_QPSK	21.50	20.56
n78	30	50	635000	1@1	DFT_QAM16	20.50	19.39
n78	30	50	635000	1@1	DFT_QAM64	18.00	17.82
n78	30	50	635000	1@1	DFT_QAM256	17.00	16.29

n78	30	50	635000	1@1	CP_QPSK	19.00	18.78
n78	30	60	632000	1@1	DFT_BPSK	20.50	20.05
n78	30	60	632000	162@0	DFT_QPSK	20.00	19.28
n78	30	60	632000	81@40	DFT_QPSK	21.50	20.30
n78	30	60	632000	1@1	DFT_QPSK	20.50	19.98
n78	30	60	632000	1@160	DFT_QPSK	20.00	19.82
n78	30	60	632000	1@1	DFT_QAM16	20.00	19.39
n78	30	60	632000	1@1	DFT_QAM64	18.00	17.71
n78	30	60	632000	1@1	DFT_QAM256	17.00	16.25
n78	30	60	632000	1@1	CP_QPSK	19.00	18.63
n78	30	60	633333	1@1	DFT_BPSK	20.50	20.00
n78	30	60	633333	162@0	DFT_QPSK	20.50	19.30
n78	30	60	633333	81@40	DFT_QPSK	20.50	20.32
n78	30	60	633333	1@1	DFT_QPSK	20.50	19.94
n78	30	60	633333	1@160	DFT_QPSK	20.50	20.05
n78	30	60	633333	1@1	DFT_QAM16	20.00	19.30
n78	30	60	633333	1@1	DFT_QAM64	18.00	17.73
n78	30	60	633333	1@1	DFT_QAM256	17.00	16.05
n78	30	60	633333	1@1	CP_QPSK	19.00	18.57
n78	30	60	634666	1@1	DFT_BPSK	20.50	20.14
n78	30	60	634666	162@0	DFT_QPSK	20.00	19.46
n78	30	60	634666	81@40	DFT_QPSK	21.50	20.41
n78	30	60	634666	1@1	DFT_QPSK	21.50	20.09
n78	30	60	634666	1@160	DFT_QPSK	21.50	20.38
n78	30	60	634666	1@1	DFT_QAM16	20.00	19.43
n78	30	60	634666	1@1	DFT_QAM64	18.00	17.89
n78	30	60	634666	1@1	DFT_QAM256	17.00	16.16
n78	30	60	634666	1@1	CP_QPSK	19.00	18.77
n78	30	80	632667	1@1	DFT_BPSK	20.50	19.78
n78	30	80	632667	216@0	DFT_QPSK	20.50	19.26
n78	30	80	632667	108@54	DFT_QPSK	21.50	20.32
n78	30	80	632667	1@1	DFT_QPSK	20.50	19.69
n78	30	80	632667	1@215	DFT_QPSK	21.50	19.79
n78	30	80	632667	1@1	DFT_QAM16	21.50	19.04
n78	30	80	632667	1@1	DFT_QAM64	18.00	17.48
n78	30	80	632667	1@1	DFT_QAM256	16.50	15.94
n78	30	80	632667	1@1	CP_QPSK	19.50	18.35
n78	30	80	633333	1@1	DFT_BPSK	20.50	19.80
n78	30	80	633333	216@0	DFT_QPSK	20.50	19.29

n78	30	80	633333	108@54	DFT_QPSK	20.50	20.36
n78	30	80	633333	1@1	DFT_QPSK	20.50	19.76
n78	30	80	633333	1@215	DFT_QPSK	20.50	19.92
n78	30	80	633333	1@1	DFT_QAM16	20.00	19.14
n78	30	80	633333	1@1	DFT_QAM64	18.00	17.45
n78	30	80	633333	1@1	DFT_QAM256	16.00	15.96
n78	30	80	633333	1@1	CP_QPSK	19.00	18.32
n78	30	80	634000	1@1	DFT_BPSK	20.50	19.72
n78	30	80	634000	216@0	DFT_QPSK	20.50	19.35
n78	30	80	634000	108@54	DFT_QPSK	20.50	20.41
n78	30	80	634000	1@1	DFT_QPSK	20.50	19.69
n78	30	80	634000	1@215	DFT_QPSK	21.50	20.09
n78	30	80	634000	1@1	DFT_QAM16	20.00	19.05
n78	30	80	634000	1@1	DFT_QAM64	18.00	17.38
n78	30	80	634000	1@1	DFT_QAM256	16.00	15.90
n78	30	80	634000	1@1	CP_QPSK	19.00	18.35
n78	30	90	633000	1@1	DFT_BPSK	20.00	19.55
n78	30	90	633000	240@0	DFT_QPSK	20.00	19.23
n78	30	90	633000	120@60	DFT_QPSK	21.50	20.29
n78	30	90	633000	1@1	DFT_QPSK	20.00	19.53
n78	30	90	633000	1@243	DFT_QPSK	20.00	19.69
n78	30	90	633000	1@1	DFT_QAM16	19.00	18.79
n78	30	90	633000	1@1	DFT_QAM64	18.00	17.25
n78	30	90	633000	1@1	DFT_QAM256	16.00	15.76
n78	30	90	633000	1@1	CP_QPSK	19.00	18.23
n78	30	90	633333	1@1	DFT_BPSK	20.50	19.62
n78	30	90	633333	240@0	DFT_QPSK	20.50	19.26
n78	30	90	633333	120@60	DFT_QPSK	21.50	20.30
n78	30	90	633333	1@1	DFT_QPSK	20.50	19.55
n78	30	90	633333	1@243	DFT_QPSK	20.50	19.73
n78	30	90	633333	1@1	DFT_QAM16	19.50	18.82
n78	30	90	633333	1@1	DFT_QAM64	18.00	17.18
n78	30	90	633333	1@1	DFT_QAM256	16.00	15.80
n78	30	90	633333	1@1	CP_QPSK	19.00	18.14
n78	30	90	633666	1@1	DFT_BPSK	20.50	19.69
n78	30	90	633666	240@0	DFT_QPSK	20.50	19.35
n78	30	90	633666	120@60	DFT_QPSK	20.50	20.41
n78	30	90	633666	1@1	DFT_QPSK	20.50	19.64
n78	30	90	633666	1@243	DFT_QPSK	20.50	19.93

n78	30	90	633666	1@1	DFT_QAM16	20.50	19.03
n78	30	90	633666	1@1	DFT_QAM64	18.00	17.28
n78	30	90	633666	1@1	DFT_QAM256	16.00	15.88
n78	30	90	633666	1@1	CP_QPSK	19.00	18.22
n78	30	100	633333	1@1	DFT_BPSK	20.50	19.45
n78	30	100	633333	270@0	DFT_QPSK	20.50	19.18
n78	30	100	633333	135@67	DFT_QPSK	20.50	20.27
n78	30	100	633333	1@1	DFT_QPSK	20.50	19.43
n78	30	100	633333	1@271	DFT_QPSK	20.50	19.73
n78	30	100	633333	1@1	DFT_QAM16	19.00	18.73
n78	30	100	633333	1@1	DFT_QAM64	18.00	17.13
n78	30	100	633333	1@1	DFT_QAM256	16.00	15.67
n78	30	100	633333	1@1	CP_QPSK	19.00	18.04

7.5. WLAN & Bluetooth Output Power

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
802.11b	1	2412	16.50	16.22
	6	2437	16.50	15.27
	11	2462	16.50	15.98
802.11g	1	2412	14.50	14.04
	6	2437	14.50	13.11
	11	2462	14.50	13.90
802.11n HT20	1	2412	13.00	12.94
	6	2437	13.00	11.36
	11	2462	13.00	12.30
802.11n HT40	3	2422	12.50	12.16
	6	2437	12.50	11.79
	9	2452	12.50	12.39
ax20	1	2412	13.00	12.62
	6	2437	13.00	12.42
	11	2462	13.00	12.07
ax40	3	2422	13.00	12.94
	6	2437	13.00	12.85
	9	2452	13.00	12.30

NOTE: Power measurement results of WLAN 2.4G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
802.11a	36	5180	11.50	11.01
	40	5200	11.50	11.01
	48	5240	11.50	11.15
802.11n HT20	36	5180	11.00	10.26
	40	5200	11.00	10.79
	48	5240	11.00	10.97
802.11n HT40	38	5190	11.50	10.90
	46	5230	11.50	11.07
802.11ac VHT20	36	5180	11.00	10.20
	40	5200	11.00	10.82
	48	5240	11.00	10.99
802.11ac VHT40	38	5190	11.50	10.97
	46	5230	11.50	11.07
802.11ac VHT80	42	5210	10.50	10.17
ax20	36	5180	12.50	11.77
	40	5200	12.50	12.03
	48	5240	12.50	12.17
ax40	38	5190	12.50	12.09
	46	5230	12.50	12.42
ax80	42	5210	12.50	12.08

NOTE: Power measurement results of WLAN 5.2G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
802.11a	52	5260	12.00	11.67
	56	5280	12.00	11.59
	64	5320	12.00	10.67
802.11n HT20	52	5260	11.50	11.46
	56	5280	11.50	11.39
	64	5320	11.50	10.63
802.11n HT40	54	5270	12.00	11.67
	62	5310	12.00	11.16
802.11ac VHT20	52	5260	12.00	11.42

	56	5280	12.00	11.51
	64	5320	12.00	10.32
802.11ac VHT40	54	5270	12.00	11.64
	62	5310	12.00	11.14
802.11ac VHT80	58	5290	10.50	10.25
ax20	52	5260	12.00	11.51
	56	5280	12.00	11.40
	64	5320	12.00	11.41
ax40	54	5270	12.00	11.59
	62	5310	12.00	11.36
ax80	58	5290	12.00	11.32

NOTE: Power measurement results of WLAN 5.3G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
802.11a	100	5500	10.50	10.44
	120	5600	10.50	10.26
	140	5700	10.50	9.91
802.11n	100	5500	10.50	10.34
	120	5600	10.50	10.34
	140	5700	10.50	9.90
802.11n	102	5510	9.50	9.04
	118	5590	9.50	8.74
	134	5670	9.50	9.32
802.11ac (VHT20)	100	5500	10.00	9.60
	120	5600	10.00	9.33
	140	5700	10.00	9.96
802.11ac (VHT40)	102	5510	9.50	9.04
	118	5590	9.50	8.72
	134	5670	9.50	9.28
802.11ac (VHT80)	106	5530	7.50	6.76
	122	5610	7.50	7.10
ax20	100	5500	11.00	10.65
	120	5600	11.00	10.07
	140	5700	11.00	10.55

ax40	102	5510	11.00	10.96
	118	5590	11.00	10.33
	134	5670	11.00	10.77
ax80	106	5530	11.00	10.81
	122	5610	11.00	10.22

NOTE: Power measurement results of WLAN 5.6G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
802.11a	149	5745	12.00	10.89
	157	5785	12.00	11.59
	165	5825	12.00	11.40
802.11n HT20	149	5745	11.50	10.79
	157	5785	11.50	11.48
	165	5825	11.50	11.22
802.11n HT40	151	5755	12.00	11.41
	159	5795	12.00	11.98
802.11ac VHT20	149	5745	12.00	10.89
	157	5785	12.00	11.54
	165	5825	12.00	11.24
802.11ac VHT40	151	5755	12.50	11.53
	159	5795	12.50	12.01
802.11ac VHT80	155	5775	11.50	11.47
ax20	149	5745	10.50	10.37
	157	5785	10.50	10.49
	165	5825	10.50	10.33
ax40	151	5755	11.00	10.58
	159	5795	11.00	10.66
ax80	155	5775	11.00	10.56

NOTE: Power measurement results of WLAN 5.8G.


BR+EDR	Output Power (dBm)				
	Channel	Tune-up (dBm)	Data Rates		
			1M	2M	3M
	0CH	8.00	7.67	7.11	7.53

	39CH	9.00	8.52	8.20	8.25
	78CH	8.00	6.95	7.18	7.19

BLE	Channel	Tune-up (dBm)	Output Power (dBm)	
			1M	2M
	0CH	-2.00	-2.29	-2.21
	19CH	-1.00	-1.17	-1.08
	39CH	-1.00	-1.80	-1.72

NOTE: Power measurement results of Bluetooth.

8. Antenna Location

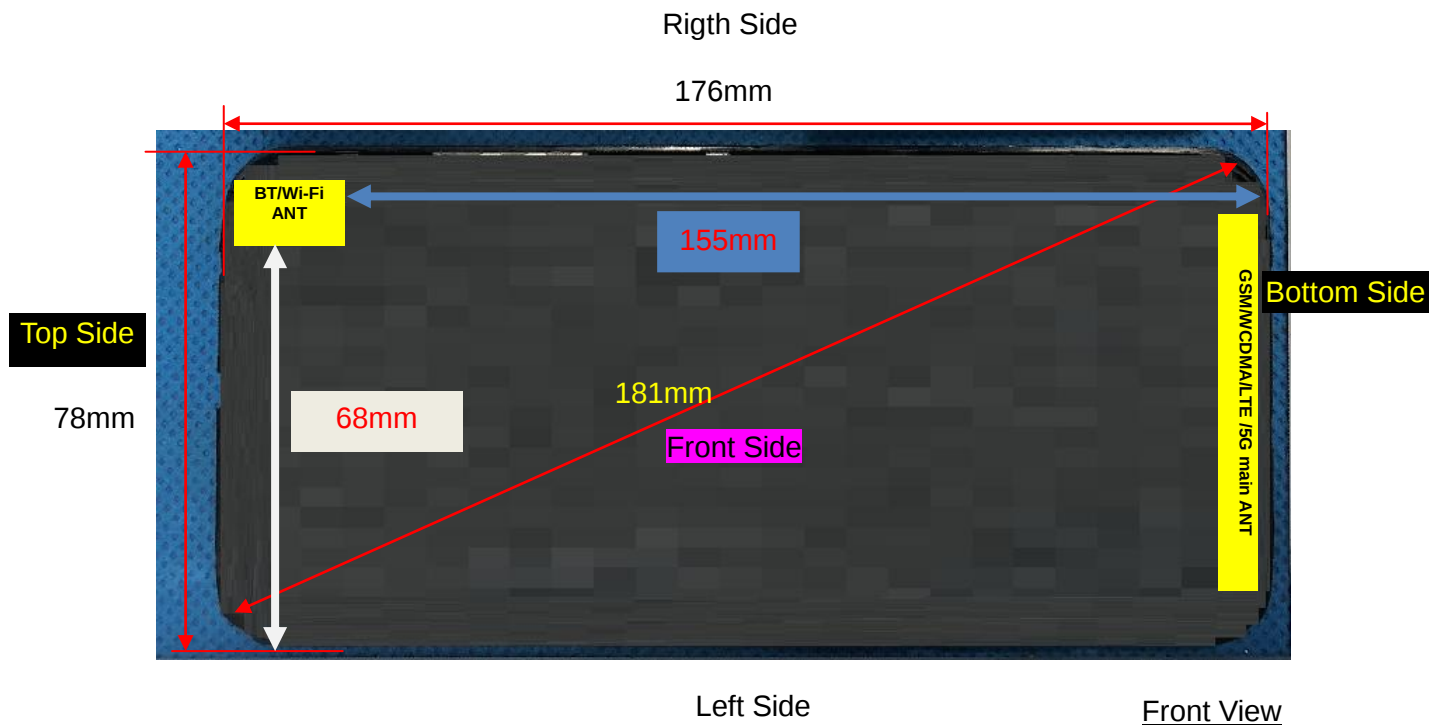

Note: Since the confidentiality request of EUT, the antenna location example diagram see as above.

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main ANT	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm
WLAN & Bluetooth	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	>25mm
Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main ANT	Yes	Yes	Yes	Yes	NO	Yes
WLAN & Bluetooth	Yes	Yes	NO	Yes	Yes	NO

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}]$
 ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P_{max}	P_{max}	Distance	f	Calculation	SAR Exclusion	SAR test
------	------------------	------------------	----------	---	-------------	---------------	----------

	(dBm)	(mW)	(mm)	(GHz)	Result	threshold	exclusion
Bluetooth	9.00	7.94	5	2.480	2.97	3	Yes

NOTE: Standalone SAR test exclusion for Bluetooth.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] * [\sqrt{f_{(\text{GHz})}}/x] \text{ W/kg}$ for test separation distances $\leq 50\text{mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is $< 5 \text{ mm}$, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	9.00	7.94	5	2.48	7.5	0.328
Bluetooth	Body	9.00	7.94	10	2.48	7.5	0.164
Bluetooth	Hotspot	9.00	7.94	10	2.48	7.5	0.164

NOTE: Estimated SAR calculation for Bluetooth

10. SAR Results

10.1. SAR measurement Result

10.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	189/836.4	GPRS(GMSK 4TS)	0.395	0.222	0.70	30.16	30.50	0.427	2023/8/05	1#
Left Tilt 15 Degree	189/836.4	GPRS(GMSK 4TS)	0.203	0.111	0.40	30.16	30.50	0.220	2023/8/05	
Right Cheek	189/836.4	GPRS(GMSK 4TS)	0.370	0.208	3.09	30.16	30.50	0.400	2023/8/05	
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 4TS)	0.196	0.110	2.95	30.16	30.50	0.212	2023/8/05	

NOTE: Head SAR test results of GSM850.

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	189/836.4	GPRS(GMSK 4TS)	0.174	0.099	-2.52	30.16	30.50	0.188	2023/8/05	
Back Side	189/836.4	GPRS(GMSK 4TS)	0.266	0.152	-0.25	30.16	30.50	0.288	2023/8/05	2#

NOTE: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	189/836.4	GPRS(GMSK 4TS)	0.174	0.099	-2.52	30.16	30.50	0.188	2023/8/05	
Back Side	189/836.4	GPRS(GMSK 4TS)	0.266	0.152	-0.25	30.16	30.50	0.288	2023/8/05	2#
Left Side	189/836.4	GPRS(GMSK 4TS)	0.081	0.046	2.19	30.16	30.50	0.088	2023/8/05	
Right Side	189/836.4	GPRS(GMSK 4TS)	0.087	0.048	1.66	30.16	30.50	0.094	2023/8/05	
Bottom Side	189/836.4	GPRS(GMSK 4TS)	0.140	0.077	-0.60	30.16	30.50	0.151	2023/8/05	

NOTE: Hotspot SAR test results of GSM850

10.1.2. SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	661/1880	GPRS(GMSK 4TS)	0.014	0.008	-0.29	28.10	28.50	0.015	2023/8/09	3#
Left Tilt 15 Degree	661/1880	GPRS(GMSK 4TS)	0.007	0.005	1.68	28.10	28.50	0.008	2023/8/09	
Right Cheek	661/1880	GPRS(GMSK 4TS)	0.013	0.011	3.87	28.10	28.50	0.014	2023/8/09	
Right Tilt 15 Degree	661/1880	GPRS(GMSK 4TS)	0.007	0.005	-1.87	28.10	28.50	0.008	2023/8/09	

NOTE: Head SAR test results of GSM1900

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	661/1880	GPRS(GMSK 4TS)	0.108	0.050	2.85	28.10	28.50	0.118	2023/8/09	
Back Side	661/1880	GPRS(GMSK 4TS)	0.147	0.070	-2.70	28.10	28.50	0.161	2023/8/09	4#

NOTE: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	661/1880	GPRS(GMSK 4TS)	0.108	0.050	2.85	28.10	28.50	0.118	2023/8/09	
Back Side	661/1880	GPRS(GMSK 4TS)	0.147	0.070	-2.70	28.10	28.50	0.161	2023/8/09	4#
Left Side	661/1880	GPRS(GMSK 4TS)	0.051	0.024	-1.32	28.10	28.50	0.056	2023/8/09	
Right Side	661/1880	GPRS(GMSK 4TS)	0.045	0.020	-1.92	28.10	28.50	0.049	2023/8/09	
Bottom Side	661/1880	GPRS(GMSK 4TS)	0.095	0.045	-0.91	28.10	28.50	0.104	2023/8/09	

NOTE: Hotspot SAR test results of GSM1900

10.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Head	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	9400/1880	RMC12.2K	0.006	0.003	-0.31	25.37	25.50	0.006	2023/8/09	5#
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.003	0.001	-3.33	25.37	25.50	0.003	2023/8/09	
Right Cheek	9400/1880	RMC12.2K	0.005	0.003	-1.55	25.37	25.50	0.005	2023/8/09	
Right Tilt 15	9400/1880	RMC12.2K	0.002	0.001	-0.40	25.37	25.50	0.002	2023/8/09	

Degree										
--------	--	--	--	--	--	--	--	--	--	--

NOTE: Head SAR test results of WCDMA Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	9400/1880	RMC12.2K	0.120	0.054	2.47	25.37	25.50	0.124	2023/8/09	
Back Side	9400/1880	RMC12.2K	0.156	0.074	2.69	25.37	25.50	0.161	2023/8/09	6#

NOTE: Body-Worn SAR test results of WCDMA Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducte d Power (dBm)	Tune-u p Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	9400/1880	RMC12.2K	0.120	0.054	2.47	25.37	25.50	0.124	2023/8/09	
Back Side	9400/1880	RMC12.2K	0.156	0.074	2.69	25.37	25.50	0.161	2023/8/09	6#
Left Side	9400/1880	RMC12.2K	0.051	0.023	-3.38	25.37	25.50	0.053	2023/8/09	
Right Side	9400/1880	RMC12.2K	0.057	0.027	3.48	25.37	25.50	0.059	2023/8/09	
Bottom Side	9400/1880	RMC12.2K	0.090	0.043	-1.75	25.37	25.50	0.093	2023/8/09	

NOTE: Hotspot SAR test results of WCDMA Band 2

10.1.4. SAR measurement Result of WCDMA Band 4

Test Position of Head	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	1413/1732.6	RMC12.2K	0.013	0.008	2.53	25.06	25.50	0.014	2023/8/08	7#
Left Tilt 15 Degree	1413/1732.6	RMC12.2K	0.008	0.006	-3.02	25.06	25.50	0.009	2023/8/08	

Right Cheek	1413/1732.6	RMC12.2K	0.011	0.009	2.03	25.06	25.50	0.012	2023/8/08	
Right Tilt 15 Degree	1413/1732.6	RMC12.2K	0.005	0.003	-0.59	25.06	25.50	0.006	2023/8/08	

NOTE: Head SAR test results of WCDMA Band 4

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	1413/1732.6	RMC12.2K	0.051	0.026	-3.42	25.06	25.50	0.056	2023/8/08	
Back Side	1413/1732.6	RMC12.2K	0.055	0.027	4.47	25.06	25.50	0.061	2023/8/08	8#

NOTE: Body-Worn SAR test results of WCDMA Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	1413/1732.6	RMC12.2K	0.051	0.026	-3.42	25.06	25.50	0.056	2023/8/08	
Back Side	1413/1732.6	RMC12.2K	0.055	0.027	4.47	25.06	25.50	0.061	2023/8/08	8#
Left Side	1413/1732.6	RMC12.2K	0.030	0.015	0.25	25.06	25.50	0.033	2023/8/08	
Right Side	1413/1732.6	RMC12.2K	0.024	0.011	2.01	25.06	25.50	0.027	2023/8/08	
Bottom Side	1413/1732.6	RMC12.2K	0.050	0.025	2.15	25.06	25.50	0.055	2023/8/08	

NOTE: Hotspot SAR test results of WCDMA Band 4

10.1.5. SAR measurement Result of WCDMA Band 5

Test Position of Head	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g	Date	Plot
			1-g	10-g						

								(W/Kg)		
1RB										
Left Cheek	18900/1880	20M QPSK(1,49)	0.006	0.004	-4.90	24.60	25.00	0.007	2023/8/09	21#
Left Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.003	0.001	-2.26	24.60	25.00	0.003	2023/8/09	
Right Cheek	18900/1880	20M QPSK(1,49)	0.005	0.003	2.39	24.60	25.00	0.005	2023/8/09	
Right Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.003	0.001	1.85	24.60	25.00	0.003	2023/8/09	
50%RB										
Left Cheek	18900/1880	20M QPSK(50,49)	0.003	0.002	-1.82	24.06	24.50	0.003	2023/8/09	
Left Tilt 15 Degree	18900/1880	20M QPSK(50,49)	0.002	0.001	0.31	24.06	24.50	0.002	2023/8/09	
Right Cheek	18900/1880	20M QPSK(50,49)	0.002	0.002	2.91	24.06	24.50	0.002	2023/8/09	
Right Tilt 15 Degree	18900/1880	20M QPSK(50,49)	0.001	0.001	4.60	24.06	24.50	0.001	2023/8/09	

NOTE: Head SAR test results of LTE Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
1RB										
Front Side	18900/1880	20M QPSK(1,49)	0.102	0.050	-2.89	24.60	25.00	0.112	2023/8/09	
Back Side	18900/1880	20M QPSK(1,49)	0.148	0.075	1.36	24.60	25.00	0.162	2023/8/09	22#
50%RB										
Front Side	18900/1880	20M QPSK(50,49)	0.060	0.026	3.66	24.06	24.50	0.066	2023/8/09	
Back Side	18900/1880	20M QPSK(50,49)	0.076	0.043	2.49	24.06	24.50	0.084	2023/8/09	

NOTE: Body-Worn SAR test results of LTE Band 2

Test Position of	Test channel	Mode	SAR Value (W/kg)	Power Drift(%)	Conducte d Power	Tune-u p	Scaled SAR	Date	Plot
------------------	--------------	------	------------------	----------------	------------------	----------	------------	------	------

Hotspot with 10mm	/Freq.		1-g	10-g		(dBm)	Power (dBm)	1-g (W/Kg)		
1RB										
Front Side	18900/1880	20M QPSK(1,49)	0.102	0.050	-2.89	24.60	25.00	0.112	2023/8/09	
Back Side	18900/1880	20M QPSK(1,49)	0.148	0.075	1.36	24.60	25.00	0.162	2023/8/09	22#
Left Side	18900/1880	20M QPSK(1,49)	0.051	0.025	1.35	24.60	25.00	0.056	2023/8/09	
Right Side	18900/1880	20M QPSK(1,49)	0.052	0.026	-2.52	24.60	25.00	0.057	2023/8/09	
Bottom Side	18900/1880	20M QPSK(1,49)	0.080	0.039	0.54	24.60	25.00	0.088	2023/8/09	
50%RB										
Front Side	18900/1880	20M QPSK(50,49)	0.060	0.026	3.66	24.06	24.50	0.066	2023/8/09	
Back Side	18900/1880	20M QPSK(50,49)	0.076	0.043	2.49	24.06	24.50	0.084	2023/8/09	
Left Side	18900/1880	20M QPSK(50,49)	0.028	0.013	-2.09	24.06	24.50	0.031	2023/8/09	
Right Side	18900/1880	20M QPSK(50,49)	0.029	0.014	1.04	24.06	24.50	0.032	2023/8/09	
Bottom Side	18900/1880	20M QPSK(50,49)	0.043	0.021	2.49	24.06	24.50	0.048	2023/8/09	

NOTE: Hotspot SAR test results of LTE Band 2

10.1.7. SAR measurement Result of LTE Band 4

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	20175/1732.5	20M QPSK(1,49)	0.006	0.004	-4.43	25.18	25.50	0.006	2023/8/08	23#
Left Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.004	0.002	3.60	25.18	25.50	0.004	2023/8/08	
Right Cheek	20175/1732.5	20M QPSK(1,49)	0.005	0.003	0.80	25.18	25.50	0.005	2023/8/08	
Right Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.003	0.001	-2.50	25.18	25.50	0.003	2023/8/08	
50%RB										
Left	20175/1732.5	20M QPSK(50,24)	0.003	0.002	0.64	24.16	24.50	0.003	2023/8/08	

Cheek										
Left Tilt 15 Degree	20175/1732.5	20M QPSK(50,24)	0.002	0.001	2.35	24.16	24.50	0.002	2023/8/08	
Right Cheek	20175/1732.5	20M QPSK(50,24)	0.002	0.002	1.82	24.16	24.50	0.002	2023/8/08	
Right Tilt 15 Degree	20175/1732.5	20M QPSK(50,24)	0.001	0.001	-0.53	24.16	24.50	0.001	2023/8/08	

NOTE: Head SAR test results of LTE Band 4

Test Position of Body- Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
1RB										
Front Side	20175/1732.5	20M QPSK(1,49)	0.048	0.025	-2.98	25.18	25.50	0.052	2023/8/08	
Back Side	20175/1732.5	20M QPSK(1,49)	0.059	0.031	3.62	25.18	25.50	0.064	2023/8/08	24#
50%RB										
Front Side	20175/1732.5	20M QPSK(50,24)	0.026	0.013	0.18	24.16	24.50	0.028	2023/8/08	
Back Side	20175/1732.5	20M QPSK(50,24)	0.032	0.016	-2.82	24.16	24.50	0.035	2023/8/08	

NOTE: Body-Worn SAR test results of LTE Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
			1RB							
Front Side	20175/1732.5	20M QPSK(1,49)	0.048	0.025	-2.98	25.18	25.50	0.052	2023/8/08	
Back	20175/1732.5	20M QPSK(1,49)	0.059	0.031	3.62	25.18	25.50	0.064	2023/8/08	24#

Side										
Left Side	20175/1732.5	20M QPSK(1,49)	0.021	0.010	0.30	25.18	25.50	0.023	2023/8/08	
Right Side	20175/1732.5	20M QPSK(1,49)	0.024	0.012	-3.00	25.18	25.50	0.026	2023/8/08	
Bottom Side	20175/1732.5	20M QPSK(1,49)	0.045	0.023	2.86	25.18	25.50	0.048	2023/8/08	
50%RB										
Front Side	20175/1732.5	20M QPSK(50,24)	0.026	0.013	0.18	24.16	24.50	0.028	2023/8/08	
Back Side	20175/1732.5	20M QPSK(50,24)	0.032	0.016	-2.82	24.16	24.50	0.035	2023/8/08	
Left Side	20175/1732.5	20M QPSK(50,24)	0.011	0.006	1.19	24.16	24.50	0.012	2023/8/08	
Right Side	20175/1732.5	20M QPSK(50,24)	0.013	0.006	3.97	24.16	24.50	0.014	2023/8/08	
Bottom Side	20175/1732.5	20M QPSK(50,24)	0.025	0.013	0.29	24.16	24.50	0.027	2023/8/08	

NOTE: Hotspot SAR test results of LTE Band 4

10.1.8. SAR measurement Result of LTE Band 5

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	20525/836.5	10M QPSK(1,0)	0.033	0.025	0.33	24.22	24.50	0.035	2023/8/05	25#
Left Tilt 15 Degree	20525/836.5	10M QPSK(1,0)	0.020	0.018	1.88	24.22	24.50	0.021	2023/8/05	
Right Cheek	20525/836.5	10M QPSK(1,0)	0.031	0.023	0.87	24.22	24.50	0.033	2023/8/05	
Right Tilt 15 Degree	20525/836.5	10M QPSK(1,0)	0.016	0.014	1.24	24.22	24.50	0.017	2023/8/05	
50%RB										
Left	20525/836.5	10M OPSK(25,12)	0.019	0.014	4.54	23.11	23.50	0.021	2023/8/05	

Cheek										
Left Tilt 15 Degree	20525/836.5	10M QPSK(25,12)	0.012	0.011	0.86	23.11	23.50	0.013	2023/8/05	
Right Cheek	20525/836.5	10M QPSK(25,12)	0.018	0.013	2.33	23.11	23.50	0.020	2023/8/05	
Right Tilt 15 Degree	20525/836.5	10M QPSK(25,12)	0.009	0.008	3.01	23.11	23.50	0.010	2023/8/05	

NOTE: Head SAR test results of LTE Band 5

Test Position of Body-W orn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
1RB										
Front Side	20525/836.5	10M QPSK(1,0)	0.096	0.056	-2.42	24.22	24.50	0.102	2023/8/05	
Back Side	20525/836.5	10M QPSK(1,0)	0.110	0.066	0.02	24.22	24.50	0.117	2023/8/05	26#
50%RB										
Front Side	20525/836.5	10M QPSK(25,12)	0.054	0.034	2.65	23.11	23.50	0.059	2023/8/05	
Back Side	20525/836.5	10M QPSK(25,12)	0.059	0.038	-3.71	23.11	23.50	0.065	2023/8/05	

NOTE: Body-Worn SAR test results of LTE Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	20525/836.5	10M QPSK(1,0)	0.096	0.056	-2.42	24.22	24.50	0.102	2023/8/05	
Back	20525/836.5	10M QPSK(1,0)	0.110	0.066	0.02	24.22	24.50	0.117	2023/8/05	26#

Side										
Left Side	20525/836.5	10M QPSK(1,0)	0.033	0.019	-3.61	24.22	24.50	0.035	2023/8/05	
Right Side	20525/836.5	10M QPSK(1,0)	0.039	0.023	-1.59	24.22	24.50	0.042	2023/8/05	
Bottom Side	20525/836.5	10M QPSK(1,0)	0.075	0.043	-2.54	24.22	24.50	0.080	2023/8/05	
50%RB										
Front Side	20525/836.5	10M QPSK(25,12)	0.054	0.034	2.65	23.11	23.50	0.059	2023/8/05	
Back Side	20525/836.5	10M QPSK(25,12)	0.059	0.038	-3.71	23.11	23.50	0.065	2023/8/05	
Left Side	20525/836.5	10M QPSK(25,12)	0.020	0.010	3.39	23.11	23.50	0.022	2023/8/05	
Right Side	20525/836.5	10M QPSK(25,12)	0.021	0.014	-0.60	23.11	23.50	0.023	2023/8/05	
Bottom Side	20525/836.5	10M QPSK(25,12)	0.040	0.023	2.13	23.11	23.50	0.044	2023/8/05	

NOTE: Hotspot SAR test results of LTE Band 5

10.1.9. SAR measurement Result of LTE Band 7

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	21100/2535	20M QPSK(1,49)	0.387	0.170	-0.68	25.29	25.50	0.406	2023/7/27	27#
Left Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.218	0.093	1.77	25.29	25.50	0.229	2023/7/27	
Right Cheek	21100/2535	20M QPSK(1,49)	0.355	0.153	-3.83	25.29	25.50	0.373	2023/7/27	
Right Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.182	0.076	3.18	25.29	25.50	0.191	2023/7/27	
50%RB										
Left	21100/2535	20M QPSK(50,49)	0.220	0.098	-1.76	24.74	25.00	0.234	2023/7/27	

Cheek										
Left Tilt 15 Degree	21100/2535	20M QPSK(50,49)	0.125	0.055	3.04	24.74	25.00	0.133	2023/7/27	
Right Cheek	21100/2535	20M QPSK(50,49)	0.195	0.078	4.78	24.74	25.00	0.207	2023/7/27	
Right Tilt 15 Degree	21100/2535	20M QPSK(50,49)	0.107	0.041	4.47	24.74	25.00	0.114	2023/7/27	

NOTE: Head SAR test results of LTE Band 7

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	21100/2535	20M QPSK(1,49)	0.324	0.138	-3.82	25.29	25.50	0.340	2023/7/27	
Back Side	21100/2535	20M QPSK(1,49)	0.501	0.223	-4.03	25.29	25.50	0.526	2023/7/27	28#
50%RB										
Front Side	21100/2535	20M QPSK(50,49)	0.173	0.071	2.11	24.74	25.00	0.184	2023/7/27	
Back Side	21100/2535	20M QPSK(50,49)	0.298	0.134	2.97	24.74	25.00	0.316	2023/7/27	

NOTE: Body-Worn SAR test results of LTE Band 7

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	21100/2535	20M QPSK(1,49)	0.324	0.138	-3.82	25.29	25.50	0.340	2023/7/27	
Back Side	21100/2535	20M QPSK(1,49)	0.501	0.223	-4.03	25.29	25.50	0.526	2023/7/27	28#
Left Side	21100/2535	20M QPSK(1,49)	0.156	0.069	-1.84	25.29	25.50	0.164	2023/7/27	
Right Side	21100/2535	20M QPSK(1,49)	0.162	0.069	2.57	25.29	25.50	0.170	2023/7/27	
Bottom Side	21100/2535	20M QPSK(1,49)	0.270	0.118	-1.44	25.29	25.50	0.283	2023/7/27	

50%RB										
Front Side	21100/2535	20M QPSK(50,49)	0.173	0.071	2.11	24.74	25.00	0.184	2023/7/27	
Back Side	21100/2535	20M QPSK(50,49)	0.298	0.134	2.97	24.74	25.00	0.316	2023/7/27	
Left Side	21100/2535	20M QPSK(50,49)	0.088	0.038	-3.75	24.74	25.00	0.093	2023/7/27	
Right Side	21100/2535	20M QPSK(50,49)	0.090	0.040	1.89	24.74	25.00	0.096	2023/7/27	
Bottom Side	21100/2535	20M QPSK(50,49)	0.156	0.065	-3.92	24.74	25.00	0.166	2023/7/27	

NOTE: Hotspot SAR test results of LTE Band 7

10.1.10. SAR measurement Result of LTE Band 12

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	23095/707.5	10M QPSK(1,0)	0.222	0.133	-0.04	23.50	24.00	0.249	2023/7/28	29#
Left Tilt 15 Degree	23095/707.5	10M QPSK(1,0)	0.119	0.068	1.96	23.50	24.00	0.134	2023/7/28	
Right Cheek	23095/707.5	10M QPSK(1,0)	0.203	0.119	3.20	23.50	24.00	0.228	2023/7/28	
Right Tilt 15 Degree	23095/707.5	10M QPSK(1,0)	0.096	0.056	-3.68	23.50	24.00	0.108	2023/7/28	
50%RB										
Left Cheek	23095/707.5	10M QPSK(25,0)	0.131	0.078	-3.43	22.88	23.50	0.151	2023/7/28	
Left Tilt 15 Degree	23095/707.5	10M QPSK(25,0)	0.071	0.039	-4.07	22.88	23.50	0.082	2023/7/28	
Right Cheek	23095/707.5	10M QPSK(25,0)	0.109	0.061	-3.12	22.88	23.50	0.126	2023/7/28	
Right Tilt 15	23095/707.5	10M QPSK(25,0)	0.057	0.029	-2.31	22.88	23.50	0.066	2023/7/28	

Degree

NOTE: Head SAR test results of LTE Band 12

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	23095/707.5	10M QPSK(1,0)	0.048	0.037	0.18	23.50	24.00	0.054	2023/7/28	
Back Side	23095/707.5	10M QPSK(1,0)	0.068	0.052	0.18	23.50	24.00	0.076	2023/7/28	30#
50%RB										
Front Side	23095/707.5	10M QPSK(25,0)	0.027	0.020	4.98	22.88	23.50	0.031	2023/7/28	
Back Side	23095/707.5	10M QPSK(25,0)	0.040	0.026	1.33	22.88	23.50	0.046	2023/7/28	

NOTE: Body-Worn SAR test results of LTE Band 12

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	23095/707.5	10M QPSK(1,0)	0.048	0.037	0.18	23.50	24.00	0.054	2023/7/28	
Back Side	23095/707.5	10M QPSK(1,0)	0.068	0.052	0.18	23.50	24.00	0.076	2023/7/28	30#
Left Side	23095/707.5	10M QPSK(1,0)	0.021	0.015	-2.00	23.50	24.00	0.024	2023/7/28	
Right Side	23095/707.5	10M QPSK(1,0)	0.027	0.020	-2.47	23.50	24.00	0.030	2023/7/28	
Bottom Side	23095/707.5	10M QPSK(1,0)	0.055	0.041	1.09	23.50	24.00	0.062	2023/7/28	
50%RB										
Front Side	23095/707.5	10M QPSK(25,0)	0.027	0.020	4.98	22.88	23.50	0.031	2023/7/28	
Back Side	23095/707.5	10M QPSK(25,0)	0.040	0.026	1.33	22.88	23.50	0.046	2023/7/28	
Left Side	23095/707.5	10M QPSK(25,0)	0.012	0.008	-1.14	22.88	23.50	0.014	2023/7/28	
Right	23095/707.5	10M	0.016	0.010	-1.46	22.88	23.50	0.018	2023/7/28	

Side		QPSK(25,0)								
Bottom Side	23095/707.5	10M QPSK(25,0)	0.028	0.021	-0.12	22.88	23.50	0.032	2023/7/28	

NOTE: Hotspot SAR test results of LTE Band 12

10.1.11. SAR measurement Result of LTE Band 17

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	23790/710	10M QPSK(1,0)	0.146	0.103	1.01	23.40	23.50	0.149	2023/7/28	31#
Left Tilt 15 Degree	23790/710	10M QPSK(1,0)	0.079	0.053	-1.37	23.40	23.50	0.081	2023/7/28	
Right Cheek	23790/710	10M QPSK(1,0)	0.134	0.093	3.35	23.40	23.50	0.137	2023/7/28	
Right Tilt 15 Degree	23790/710	10M QPSK(1,0)	0.063	0.043	2.58	23.40	23.50	0.064	2023/7/28	
50%RB										
Left Cheek	23790/710	10M QPSK(25,12)	0.074	0.062	-1.30	22.79	23.00	0.078	2023/7/28	
Left Tilt 15 Degree	23790/710	10M QPSK(25,12)	0.046	0.031	0.50	22.79	23.00	0.048	2023/7/28	
Right Cheek	23790/710	10M QPSK(25,12)	0.070	0.055	4.13	22.79	23.00	0.073	2023/7/28	
Right Tilt 15 Degree	23790/710	10M QPSK(25,12)	0.036	0.022	-3.91	22.79	23.00	0.038	2023/7/28	

NOTE: Head SAR test results of LTE Band 17

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										

Front Side	23790/710	10M QPSK(1,0)	0.048	0.035	0.57	23.40	23.50	0.049	2023/7/28	
Back Side	23790/710	10M QPSK(1,0)	0.062	0.047	-3.14	23.40	23.50	0.063	2023/7/28	32#
50%RB										
Front Side	23790/710	10M QPSK(25,12)	0.028	0.018	4.31	22.79	23.00	0.029	2023/7/28	
Back Side	23790/710	10M QPSK(25,12)	0.031	0.026	4.42	22.79	23.00	0.033	2023/7/28	

NOTE: Body-Worn SAR test results of LTE Band 17

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	23790/710	10M QPSK(1,0)	0.048	0.035	0.57	23.40	23.50	0.049	2023/7/28	
Back Side	23790/710	10M QPSK(1,0)	0.062	0.047	-3.14	23.40	23.50	0.063	2023/7/28	32#
Left Side	23790/710	10M QPSK(1,0)	0.033	0.025	3.88	23.40	23.50	0.034	2023/7/28	
Right Side	23790/710	10M QPSK(1,0)	0.021	0.016	0.26	23.40	23.50	0.021	2023/7/28	
Bottom Side	23790/710	10M QPSK(1,0)	0.045	0.034	-2.17	23.40	23.50	0.046	2023/7/28	
50%RB										
Front Side	23790/710	10M QPSK(25,12)	0.028	0.018	4.31	22.79	23.00	0.029	2023/7/28	
Back Side	23790/710	10M QPSK(25,12)	0.031	0.026	4.42	22.79	23.00	0.033	2023/7/28	
Left Side	23790/710	10M QPSK(25,12)	0.018	0.014	-3.28	22.79	23.00	0.019	2023/7/28	
Right Side	23790/710	10M QPSK(25,12)	0.012	0.009	2.59	22.79	23.00	0.013	2023/7/28	
Bottom Side	23790/710	10M QPSK(25,12)	0.024	0.020	2.01	22.79	23.00	0.025	2023/7/28	

NOTE: Hotspot SAR test results of LTE Band 17

10.1.12. SAR measurement Result of LTE Band 41

Test	Test	Mode	SAR Value	Power	Conducted	Tune-up	Scaled	Date	Plot
------	------	------	-----------	-------	-----------	---------	--------	------	------

Position of Head	channel /Freq.		(W/kg)		Drift(%)	Power (dBm)	Power (dBm)	SAR 1-g (W/Kg)		
			1-g	10-g						
1RB										
Left Cheek	40640/2595	20M QPSK(1,49)	0.137	0.057	3.99	25.41	25.50	0.140	2023/7/27	33#
Left Tilt 15 Degree	40640/2595	20M QPSK(1,49)	0.078	0.032	2.81	25.41	25.50	0.080	2023/7/27	
Right Cheek	40640/2595	20M QPSK(1,49)	0.129	0.052	-1.92	25.41	25.50	0.132	2023/7/27	
Right Tilt 15 Degree	40640/2595	20M QPSK(1,49)	0.059	0.024	0.43	25.41	25.50	0.060	2023/7/27	
50%RB										
Left Cheek	40640/2595	20M QPSK(50,24)	0.077	0.033	0.28	24.43	24.50	0.078	2023/7/27	
Left Tilt 15 Degree	40640/2595	20M QPSK(50,24)	0.044	0.019	-0.75	24.43	24.50	0.045	2023/7/27	
Right Cheek	40640/2595	20M QPSK(50,24)	0.076	0.029	-2.35	24.43	24.50	0.077	2023/7/27	
Right Tilt 15 Degree	40640/2595	20M QPSK(50,24)	0.034	0.014	-4.99	24.43	24.50	0.035	2023/7/27	

NOTE: Head SAR test results of LTE Band 41

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	40640/2595	20M QPSK(1,49)	0.102	0.043	-1.22	25.41	25.50	0.104	2023/7/27	
Back Side	40640/2595	20M QPSK(1,49)	0.148	0.065	1.19	25.41	25.50	0.151	2023/7/27	34#
50%RB										
Front Side	40640/2595	20M QPSK(50,24)	0.052	0.022	2.23	24.43	24.50	0.053	2023/7/27	
Back Side	40640/2595	20M QPSK(50,24)	0.088	0.038	3.59	24.43	24.50	0.089	2023/7/27	

NOTE: Body-Worn SAR test results of LTE Band 41

Test	Test	Mode	SAR Value	Power	Conducted	Tune-up	Scaled	Date	Plot
------	------	------	-----------	-------	-----------	---------	--------	------	------

Position of Hotspot with 10mm	channel /Freq.		(W/kg)		Drift(%)	Power (dBm)	Power (dBm)	SAR 1-g (W/Kg)		
			1-g	10-g						
1RB										
Front Side	40640/2595	20M QPSK(1,49)	0.102	0.043	-1.22	25.41	25.50	0.104	2023/7/27	
Back Side	40640/2595	20M QPSK(1,49)	0.148	0.065	1.19	25.41	25.50	0.151	2023/7/27	34#
Left Side	40640/2595	20M QPSK(1,49)	0.048	0.020	1.20	25.41	25.50	0.049	2023/7/27	
Right Side	40640/2595	20M QPSK(1,49)	0.050	0.021	-1.91	25.41	25.50	0.051	2023/7/27	
Bottom Side	40640/2595	20M QPSK(1,49)	0.080	0.035	2.13	25.41	25.50	0.082	2023/7/27	
50%RB										
Front Side	40640/2595	20M QPSK(50,24)	0.052	0.022	2.23	24.43	24.50	0.053	2023/7/27	
Back Side	40640/2595	20M QPSK(50,24)	0.088	0.038	3.59	24.43	24.50	0.089	2023/7/27	
Left Side	40640/2595	20M QPSK(50,24)	0.029	0.011	0.67	24.43	24.50	0.029	2023/7/27	
Right Side	40640/2595	20M QPSK(50,24)	0.030	0.012	-2.92	24.43	24.50	0.030	2023/7/27	
Bottom Side	40640/2595	20M QPSK(50,24)	0.045	0.019	3.13	24.43	24.50	0.046	2023/7/27	

NOTE: Hotspot SAR test results of LTE Band 41

10.1.13. SAR measurement Result of LTE Band 66

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	132322/1745	20M QPSK(1,49)	0.006	0.003	-0.11	24.80	25.50	0.007	2023/8/08	35#
Left Tilt	132322/1745	20M QPSK(1,49)	0.004	0.003	0.12	24.80	25.50	0.005	2023/8/08	

15 Degree										
Right Cheek	132322/1745	20M QPSK(1,49)	0.005	0.002	0.65	24.80	25.50	0.006	2023/8/08	
Right Tilt 15 Degree	132322/1745	20M QPSK(1,49)	0.002	0.001	3.10	24.80	25.50	0.002	2023/8/08	
50%RB										
Left Cheek	132322/1745	20M QPSK(50,0)	0.004	0.003	0.21	23.83	24.50	0.005	2023/8/08	
Left Tilt 15 Degree	132322/1745	20M QPSK(50,0)	0.002	0.001	1.36	23.83	24.50	0.002	2023/8/08	
Right Cheek	132322/1745	20M QPSK(50,0)	0.003	0.002	1.47	23.83	24.50	0.004	2023/8/08	
Right Tilt 15 Degree	132322/1745	20M QPSK(50,0)	0.001	0.001	1.52	23.83	24.50	0.001	2023/8/08	

NOTE: Head SAR test results of LTE Band 66

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	132322/1745	20M QPSK(1,49)	0.042	0.021	2.21	24.80	25.50	0.049	2023/8/08	
Back Side	132322/1745	20M QPSK(1,49)	0.052	0.027	-4.87	24.80	25.50	0.061	2023/8/08	37#
50%RB										
Front Side	132322/1745	20M QPSK(50,0)	0.022	0.012	2.61	23.83	24.50	0.026	2023/8/08	
Back Side	132322/1745	20M QPSK(50,0)	0.031	0.014	1.77	23.83	24.50	0.036	2023/8/08	

NOTE: Body-Worn SAR test results of LTE Band 66

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front	132322/1745	20M QPSK(1,49)	0.042	0.021	2.21	24.80	25.50	0.049	2023/8/08	

Side										
Back Side	132322/1745	20M QPSK(1,49)	0.052	0.027	-4.87	24.80	25.50	0.061	2023/8/08	37#
Left Side	132322/1745	20M QPSK(1,49)	0.018	0.016	3.18	24.80	25.50	0.021	2023/8/08	
Right Side	132322/1745	20M QPSK(1,49)	0.024	0.012	-1.84	24.80	25.50	0.028	2023/8/08	
Bottom Side	132322/1745	20M QPSK(1,49)	0.045	0.023	-3.07	24.80	25.50	0.053	2023/8/08	
50%RB										
Front Side	132322/1745	20M QPSK(50,0)	0.022	0.012	2.61	23.83	24.50	0.026	2023/8/08	
Back Side	132322/1745	20M QPSK(50,0)	0.031	0.014	1.77	23.83	24.50	0.036	2023/8/08	
Left Side	132322/1745	20M QPSK(50,0)	0.010	0.009	-1.28	23.83	24.50	0.012	2023/8/08	
Right Side	132322/1745	20M QPSK(50,0)	0.013	0.007	4.56	23.83	24.50	0.015	2023/8/08	
Bottom Side	132322/1745	20M QPSK(50,0)	0.026	0.013	-3.11	23.83	24.50	0.030	2023/8/08	

NOTE: Hotspot SAR test results of LTE Band 66

10.1.14. SAR measurement Result of NR n78

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	633333/3499.99	100M QPSK(135,67)	0.070	0.026	-0.59	20.27	20.50	0.074	2023/8/13	36#
Left Tilt 15 Degree	633333/3499.99	100M QPSK(135,67)	0.038	0.014	-0.88	20.27	20.50	0.040	2023/8/13	
Right Cheek	633333/3499.99	100M QPSK(135,67)	0.066	0.024	0.60	20.27	20.50	0.070	2023/8/13	
Right Tilt 15 Degree	633333/3499.99	100M QPSK(135,67)	0.031	0.011	-0.11	20.27	20.50	0.033	2023/8/13	

NOTE: Head SAR test results of NR n78

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	633333/3499.99	100M QPSK(135,67)	0.114	0.047	-0.29	20.27	20.50	0.120	2023/8/13	
Back Side	633333/3499.99	100M QPSK(135,67)	0.181	0.079	0.15	20.27	20.50	0.191	2023/8/13	38#

NOTE: Body-Worn SAR test results of NR n78

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	633333/3499.99	100M QPSK(135,67)	0.114	0.047	-0.29	20.27	20.50	0.120	2023/8/13	
Back Side	633333/3499.99	100M QPSK(135,67)	0.181	0.079	0.15	20.27	20.50	0.191	2023/8/13	38#
Left Side	633333/3499.99	100M QPSK(135,67)	0.060	0.026	-2.23	20.27	20.50	0.063	2023/8/13	
Right Side	633333/3499.99	100M QPSK(135,67)	0.066	0.027	3.52	20.27	20.50	0.070	2023/8/13	
Bottom Side	633333/3499.99	100M QPSK(135,67)	0.100	0.043	-1.21	20.27	20.50	0.105	2023/8/13	

NOTE: Hotspot SAR test results of NR n78

10.1.15. SAR measurement Result of WLAN2.4G

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	1/2412	802.11b	0.135	0.060	1.24	16.22	16.50	0.144	2023/7/26	11#
Left Tilt 15 Degree	1/2412	802.11b	0.077	0.033	-2.80	16.22	16.50	0.082	2023/7/26	
Right Cheek	1/2412	802.11b	0.116	0.049	-0.18	16.22	16.50	0.124	2023/7/26	
Right Tilt	1/2412	802.11b	0.059	0.025	1.58	16.22	16.50	0.063	2023/7/26	

15 Degree										
--------------	--	--	--	--	--	--	--	--	--	--

NOTE: Head SAR test results of WLAN2.4G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	1/2412	802.11b	0.049	0.024	0.53	16.22	16.50	0.052	2023/7/26	
Back Side	1/2412	802.11b	0.073	0.034	2.14	16.22	16.50	0.078	2023/7/26	16#

NOTE: Body-worn SAR test results of WLAN2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	1/2412	802.11b	0.049	0.024	0.53	16.22	16.50	0.052	2023/7/26	
Back Side	1/2412	802.11b	0.073	0.034	2.14	16.22	16.50	0.078	2023/7/26	16#
Right Side	1/2412	802.11b	0.024	0.011	-3.19	16.22	16.50	0.026	2023/7/26	
Top Side	1/2412	802.11b	0.033	0.015	-2.46	16.22	16.50	0.035	2023/7/26	

NOTE: Hotspot SAR test results of WLAN2.4G

10.1.16. SAR measurement Result of WLAN5.2G

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	46/5230	802.11ax	0.024	0.007	-4.69	12.42	12.50	0.024	2023/8/10	12#
Left Tilt 15 Degree	46/5230	802.11ax	0.014	0.012	-0.20	12.42	12.50	0.014	2023/8/10	
Right Cheek	46/5230	802.11ax	0.022	0.006	-1.65	12.42	12.50	0.022	2023/8/10	

Right Tilt 15 Degree	46/5230	802.11ax	0.011	0.009	-1.75	12.42	12.50	0.011	2023/8/10	
----------------------------	---------	----------	-------	-------	-------	-------	-------	-------	-----------	--

NOTE: Head SAR test results of WLAN5.2G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	46/5230	802.11ax	0.001	0.001	0.25	12.42	12.50	0.001	2023/8/10	
Back Side	46/5230	802.11ax	0.002	0.001	-3.00	12.42	12.50	0.002	2023/8/10	17#

NOTE: Body-worn SAR test results of WLAN5.2G

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	46/5230	802.11ax	0.001	0.001	0.25	12.42	12.50	0.001	2023/8/10	
Back Side	46/5230	802.11ax	0.002	0.001	-3.00	12.42	12.50	0.002	2023/8/10	17#
Right Side	46/5230	802.11ax	0.001	0.001	0.12	12.42	12.50	0.001	2023/8/10	
Top Side	46/5230	802.11ax	0.001	0.001	3.21	12.42	12.50	0.001	2023/8/10	

NOTE: Hotspot SAR test results of WLAN5.2G

10.1.17. SAR measurement Result of WLAN5.3G

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	52/5260	802.11a	0.020	0.006	2.96	11.67	12.00	0.022	2023/7/22	13#
Left Tilt 15	52/5260	802.11a	0.015	0.003	0.58	11.67	12.00	0.016	2023/7/22	

Degree										
Right Cheek	52/5260	802.11a	0.018	0.004	3.24	11.67	12.00	0.019	2023/7/22	
Right Tilt 15 Degree	52/5260	802.11a	0.013	0.002	1.14	11.67	12.00	0.014	2023/7/22	

NOTE: Head SAR test results of WLAN5.3G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	52/5260	802.11a	0.001	0.001	0.25	11.67	12.00	0.001	2023/7/22	
Back Side	52/5260	802.11a	0.002	0.001	2.05	11.67	12.00	0.002	2023/7/22	18#

NOTE: Body-worn SAR test results of WLAN5.3G

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	52/5260	802.11a	0.001	0.001	0.25	11.67	12.00	0.001	2023/7/22	
Back Side	52/5260	802.11a	0.002	0.001	2.05	11.67	12.00	0.002	2023/7/22	18#
Right Side	52/5260	802.11a	0.001	0.001	2.01	11.67	12.00	0.001	2023/7/22	
Top Side	52/5260	802.11a	0.001	0.001	3.01	11.67	12.00	0.001	2023/7/22	

NOTE: Hotspot SAR test results of WLAN5.3G

10.1.18. SAR measurement Result of WLAN5.6G

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left	102/5510	802.11ax	0.010	0.003	-3.42	10.96	11.00	0.010	2023/7/23	14#

Cheek										
Left Tilt 15 Degree	102/5510	802.11ax	0.006	0.002	1.20	10.96	11.00	0.006	2023/7/23	
Right Cheek	102/5510	802.11ax	0.007	0.003	0.36	10.96	11.00	0.007	2023/7/23	
Right Tilt 15 Degree	102/5510	802.11ax	0.003	0.002	0.25	10.96	11.00	0.003	2023/7/23	

NOTE: Head SAR test results of WLAN5.6G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	102/5510	802.11ax	0.015	0.006	3.21	10.96	11.00	0.015	2023/7/23	
Back Side	102/5510	802.11ax	0.019	0.008	1.23	10.96	11.00	0.019	2023/7/23	19#

NOTE: Body-worn SAR test results of WLAN5.6G

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	102/5510	802.11ax	0.015	0.006	3.21	10.96	11.00	0.015	2023/7/23	
Back Side	102/5510	802.11ax	0.019	0.008	1.23	10.96	11.00	0.019	2023/7/23	19#
Right Side	102/5510	802.11ax	0.012	0.004	1.17	10.96	11.00	0.012	2023/7/23	
Top Side	102/5510	802.11ax	0.008	0.002	0.69	10.96	11.00	0.008	2023/7/23	

NOTE: Hotspot SAR test results of WLAN5.6G

10.1.19. SAR measurement Result of WLAN5.8G

Test Position	Test channel	Mode	SAR Value (W/kg)	Power Drift(%)	Conducted Power	Tune-up Power	Scaled SAR	Date	Plot
------------------	-----------------	------	---------------------	-------------------	--------------------	------------------	---------------	------	------

of Head	/Freq.		1-g	10-g		(dBm)	(dBm)	1-g (W/Kg)		
Left Cheek	159/5795	802.11ac VHT40	0.016	0.004	-3.33	12.01	12.50	0.018	2023/7/24	15#
Left Tilt 15 Degree	159/5795	802.11ac VHT40	0.009	0.007	-3.59	12.01	12.50	0.010	2023/7/24	
Right Cheek	159/5795	802.11ac VHT40	0.014	0.012	2.98	12.01	12.50	0.016	2023/7/24	
Right Tilt 15 Degree	159/5795	802.11ac VHT40	0.007	0.005	-1.71	12.01	12.50	0.008	2023/7/24	

NOTE: Head SAR test results of WLAN5.8G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	159/5795	802.11ac VHT40	0.002	0.001	0.36	12.01	12.50	0.002	2023/7/24	
Back Side	159/5795	802.11ac VHT40	0.003	0.001	-3.72	12.01	12.50	0.003	2023/7/24	20#

NOTE: Body-worn SAR test results of WLAN5.8G

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	159/5795	802.11ac VHT40	0.002	0.001	0.36	12.01	12.50	0.002	2023/7/24	
Back Side	159/5795	802.11ac VHT40	0.003	0.001	-3.72	12.01	12.50	0.003	2023/7/24	20#
Right Side	159/5795	802.11ac VHT40	0.002	0.001	1.25	12.01	12.50	0.002	2023/7/24	
Top Side	159/5795	802.11ac VHT40	0.001	0.001	1.03	12.01	12.50	0.001	2023/7/24	

NOTE: Hotspot SAR test results of WLAN5.8G

10.2. Simultaneous Transmission Analysis

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- 1) Scalar SAR summation $< 1.6\text{W/kg}$.
- 2) $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DTS			
Head	Left Cheek	0.427	0.144	0.571	N/A	N/A
	Left Tilt 15 Degree	0.220	0.082	0.302	N/A	N/A
	Right Cheek	0.400	0.124	0.524	N/A	N/A
	Right Tilt 15 Degree	0.212	0.063	0.275	N/A	N/A
Body-Worn	Front Side	0.340	0.052	0.392	N/A	N/A
	Back Side	0.526	0.078	0.604	N/A	N/A
Hotspot	Front Side	0.340	0.052	0.392	N/A	N/A
	Back Side	0.526	0.078	0.604	N/A	N/A
	Left Side	0.164	N/A	0.164	N/A	N/A
	Right Side	0.170	0.026	0.196	N/A	N/A
	Top Side	N/A	0.035	0.035	N/A	N/A
	Bottom Side	0.283	N/A	0.283	N/A	N/A

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	NII			
Head	Left Cheek	0.427	0.024	0.451	N/A	N/A
	Left Tilt 15 Degree	0.220	0.016	0.236	N/A	N/A
	Right Cheek	0.400	0.022	0.422	N/A	N/A
	Right Tilt 15 Degree	0.212	0.014	0.226	N/A	N/A
Body-Worn	Front Side	0.340	0.015	0.355	N/A	N/A
	Back Side	0.526	0.019	0.545	N/A	N/A
Hotspot	Front Side	0.340	0.015	0.355	N/A	N/A

	Back Side	0.526	0.019	0.545	N/A	N/A
	Left Side	0.164	N/A	0.164	N/A	N/A
	Right Side	0.170	0.012	0.182	N/A	N/A
	Top Side	N/A	0.008	0.008	N/A	N/A
	Bottom Side	0.283	N/A	0.283	N/A	N/A

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DSS			
Head	Left Cheek	0.427	0.328	0.755	N/A	N/A
	Left Tilt 15 Degree	0.220	0.328	0.548	N/A	N/A
	Right Cheek	0.400	0.328	0.728	N/A	N/A
	Right Tilt 15 Degree	0.212	0.328	0.540	N/A	N/A
Body-Worn	Front Side	0.340	0.164	0.504	N/A	N/A
	Back Side	0.526	0.164	0.690	N/A	N/A
Hotspot	Front Side	0.340	0.164	0.504	N/A	N/A
	Back Side	0.526	0.164	0.690	N/A	N/A
	Left Side	0.164	N/A	0.164	N/A	N/A
	Right Side	0.170	0.164	0.334	N/A	N/A
	Top Side	N/A	0.164	0.164	N/A	N/A
	Bottom Side	0.283	N/A	0.283	N/A	N/A

1. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

2. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 750MHz
MEASUREMENT 2 System Performance Check - 835MHz
MEASUREMENT 3 System Performance Check - 1800MHz
MEASUREMENT 4 System Performance Check - 1900MHz
MEASUREMENT 5 System Performance Check - 2450MHz
MEASUREMENT 6 System Performance Check - 2600MHz
MEASUREMENT 7 System Performance Check - 3500MHz
MEASUREMENT 8 System Performance Check - 5200MHz
MEASUREMENT 9 System Performance Check - 5400MHz
MEASUREMENT 10 System Performance Check - 5600MHz
MEASUREMENT 11 System Performance Check - 5800MHz

MEASUREMENT 1


Date of measurement: 28/7/2023



A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW750</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.49</u>

B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative permittivity (real part)	40.181774
Relative permittivity (imaginary part)	21.429812
Conductivity (S/m)	0.892909
Variation (%)	3.070000

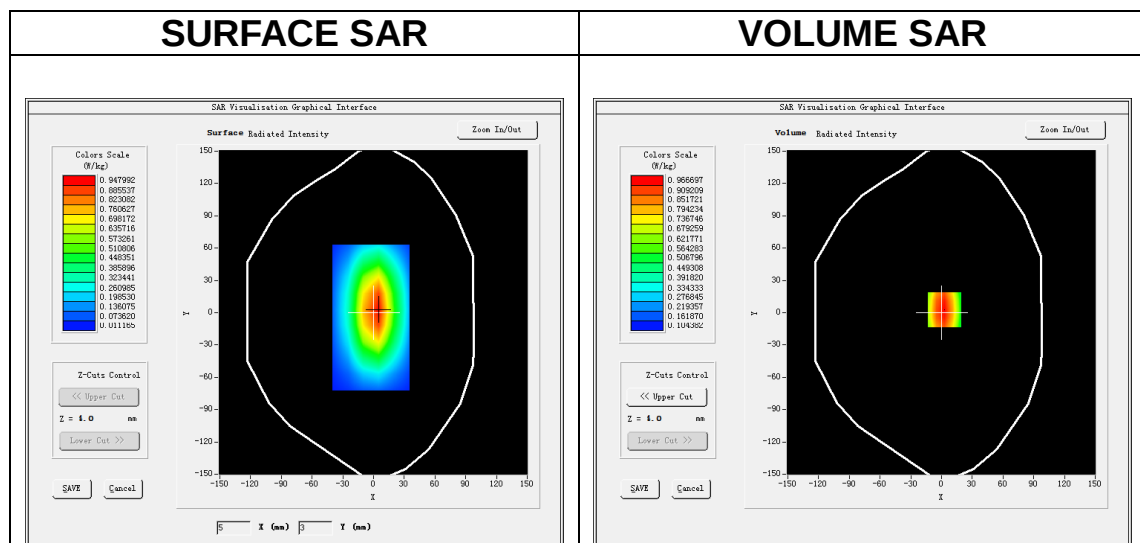

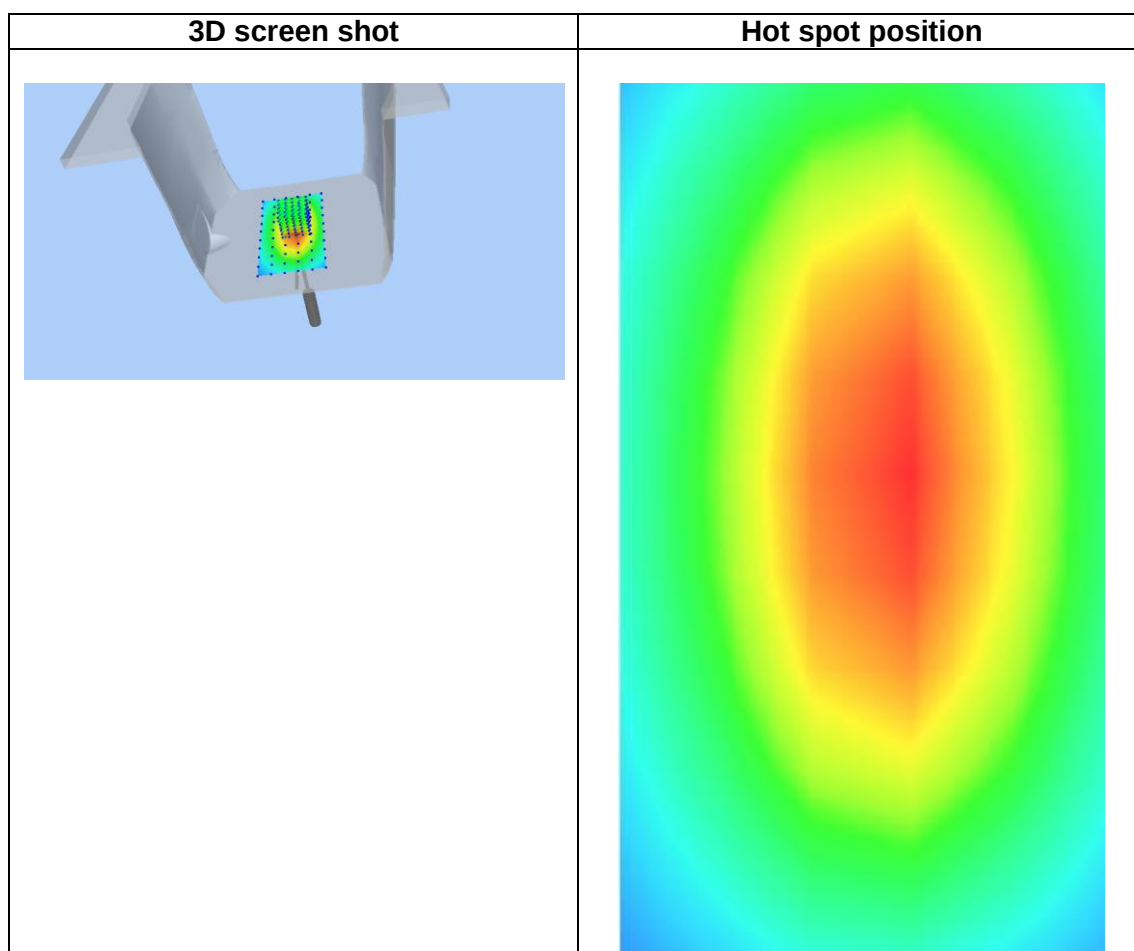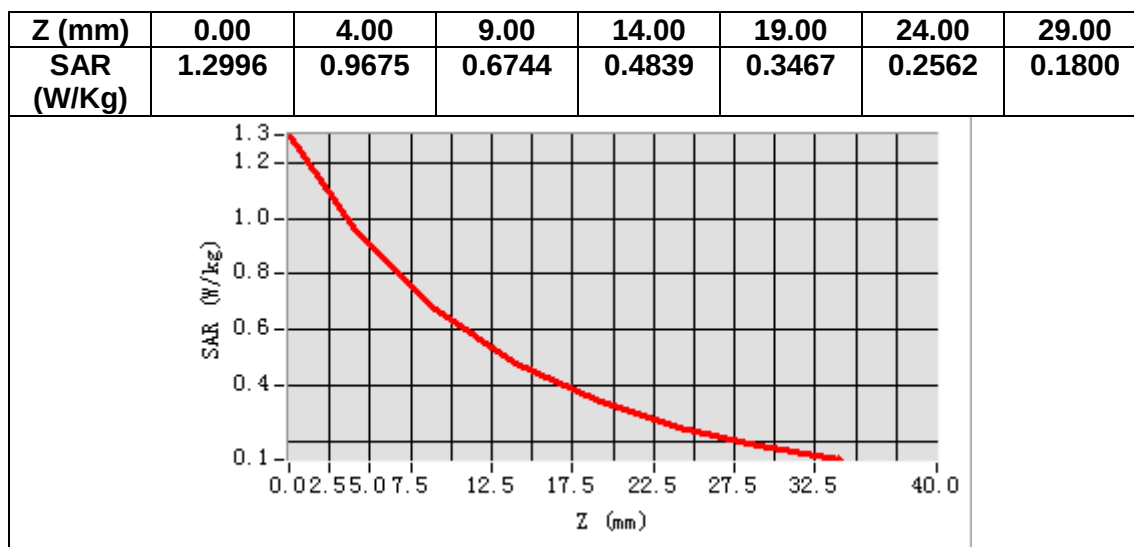

MEASUREMENT 2

Date of measurement: 5/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	40.353959
Relative permittivity (imaginary part)	19.614151
Conductivity (S/m)	0.909879
Variation (%)	-1.880000

SURFACE SAR

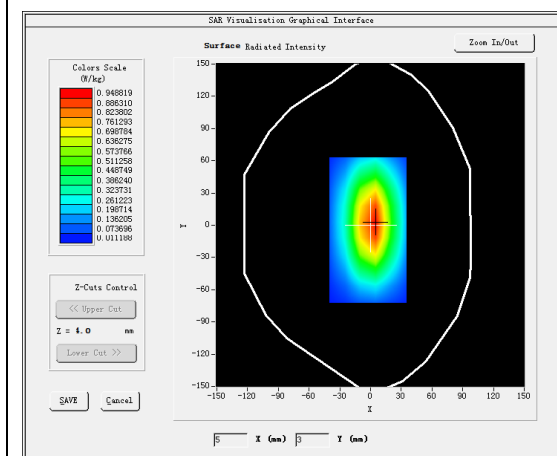



VOLUME SAR

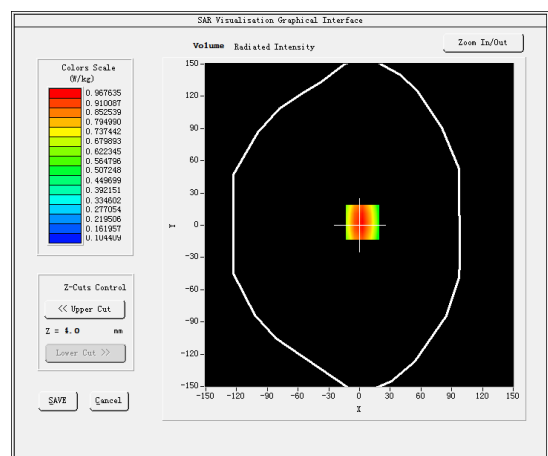

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.676307
SAR 1g (W/Kg)	0.980012

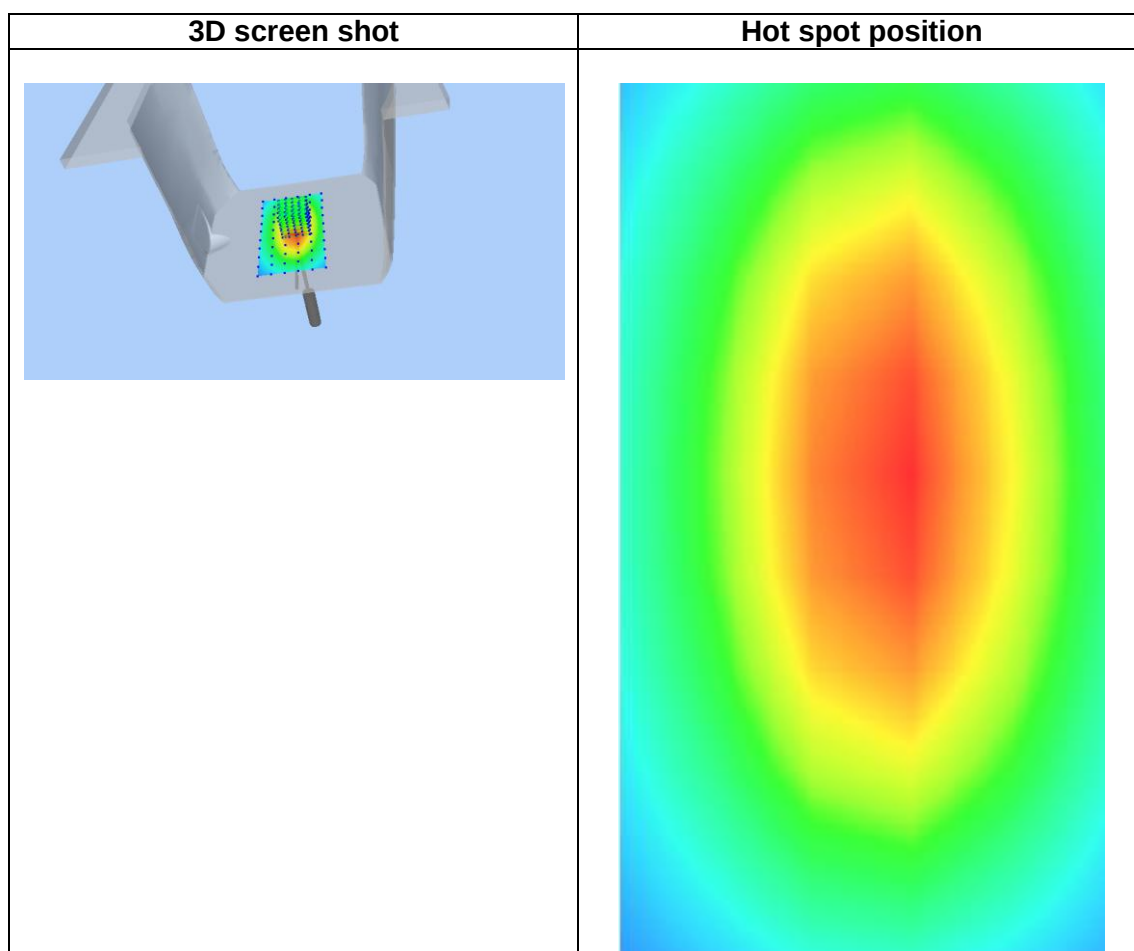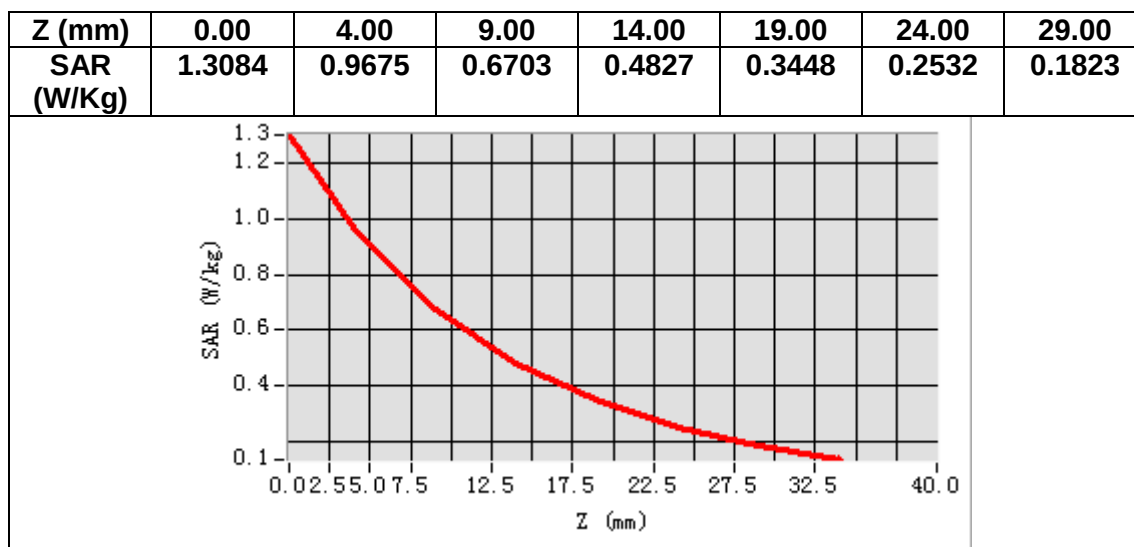

MEASUREMENT 3

Date of measurement: 8/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.73</u>


B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative permittivity (real part)	40.056022
Relative permittivity (imaginary part)	14.318645
Conductivity (S/m)	1.431865
Variation (%)	0.680000

SURFACE SAR

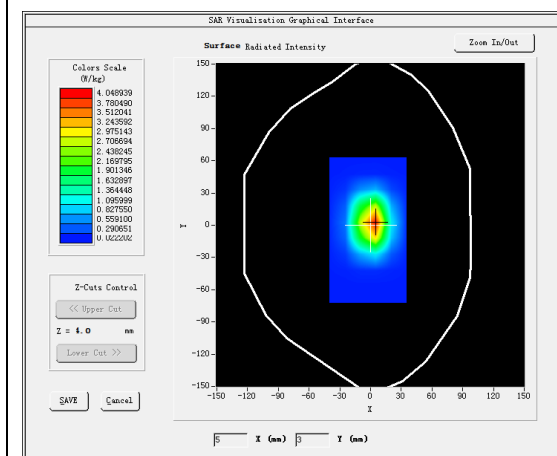



VOLUME SAR

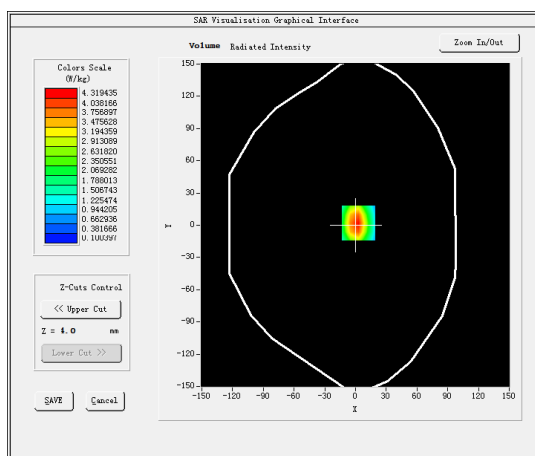

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	1.825124
SAR 1g (W/Kg)	3.865229

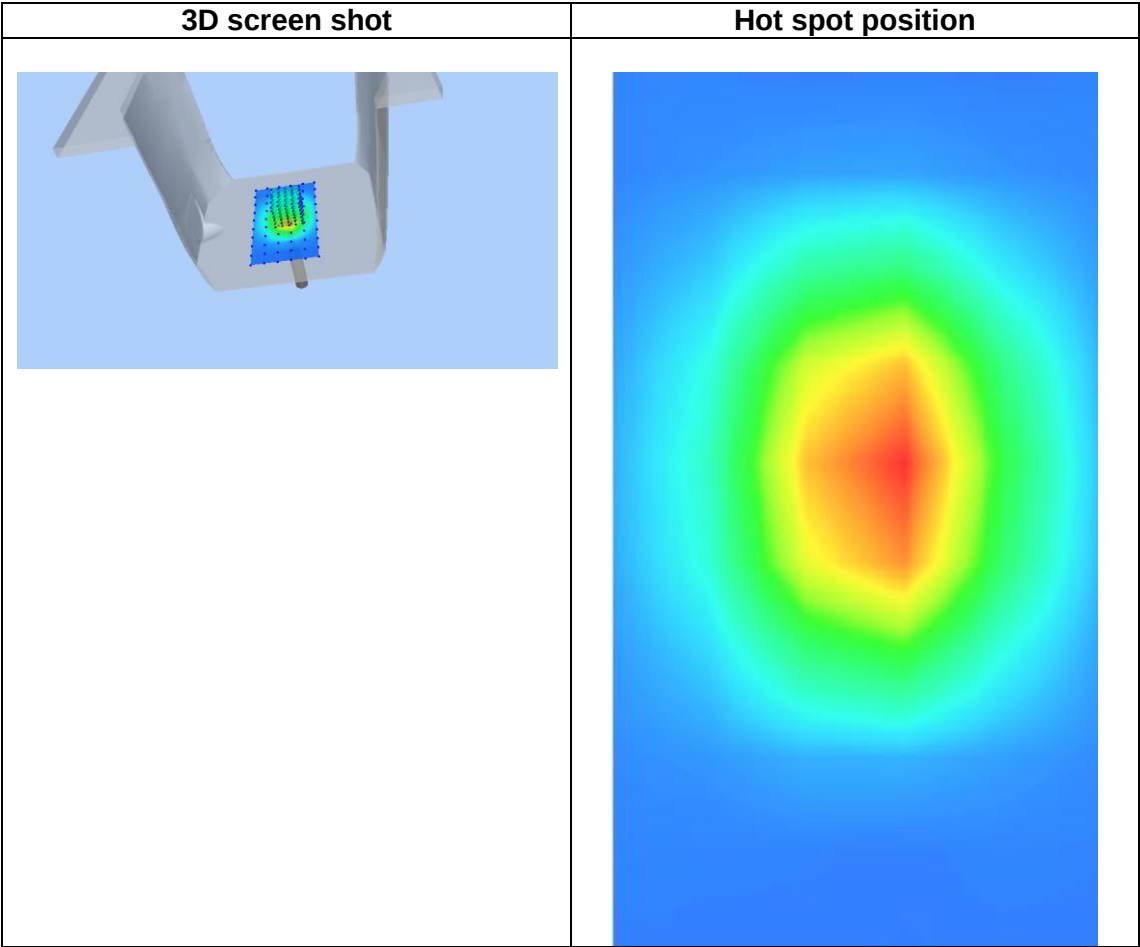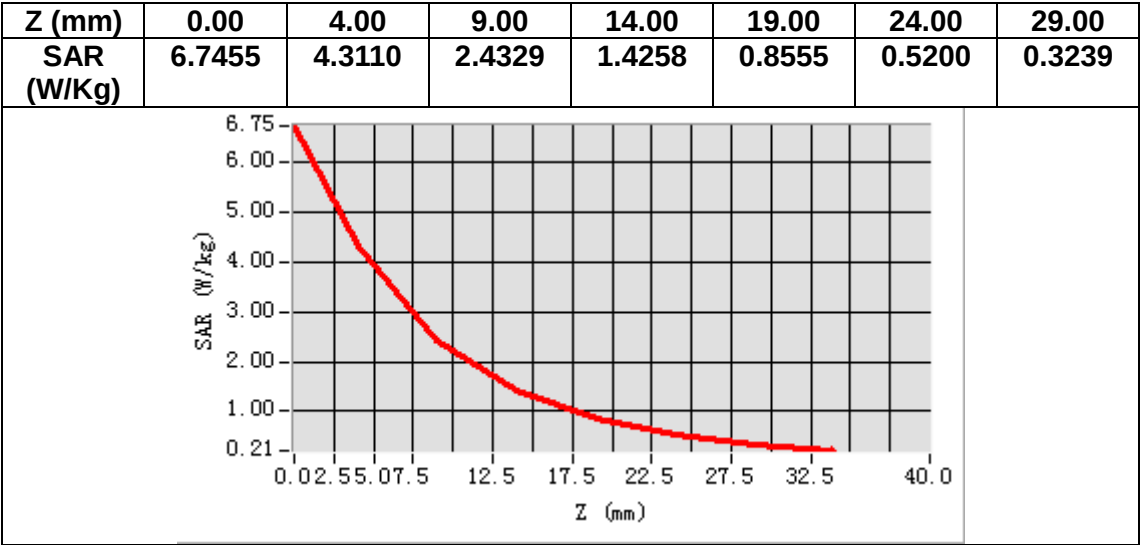

MEASUREMENT 4

Date of measurement: 9/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.375084
Relative permittivity (imaginary part)	13.423204
Conductivity (S/m)	1.416894
Variation (%)	-2.250000

SURFACE SAR

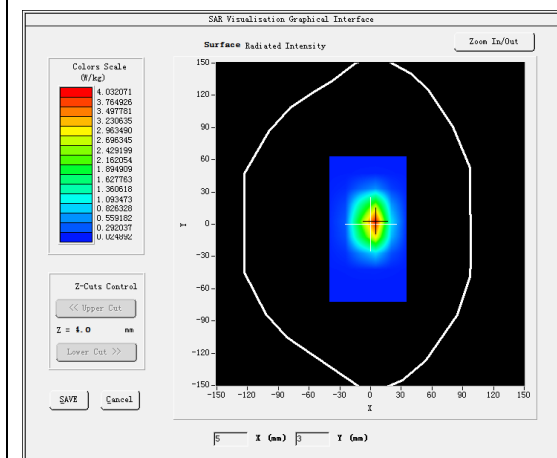



VOLUME SAR

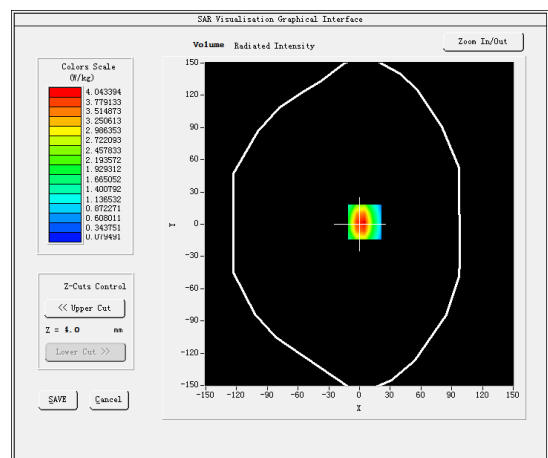

Maximum location: X=5.00, Y=2.00

SAR Peak: 6.70 W/kg

SAR 10g (W/Kg)	2.072094
SAR 1g (W/Kg)	3.846039

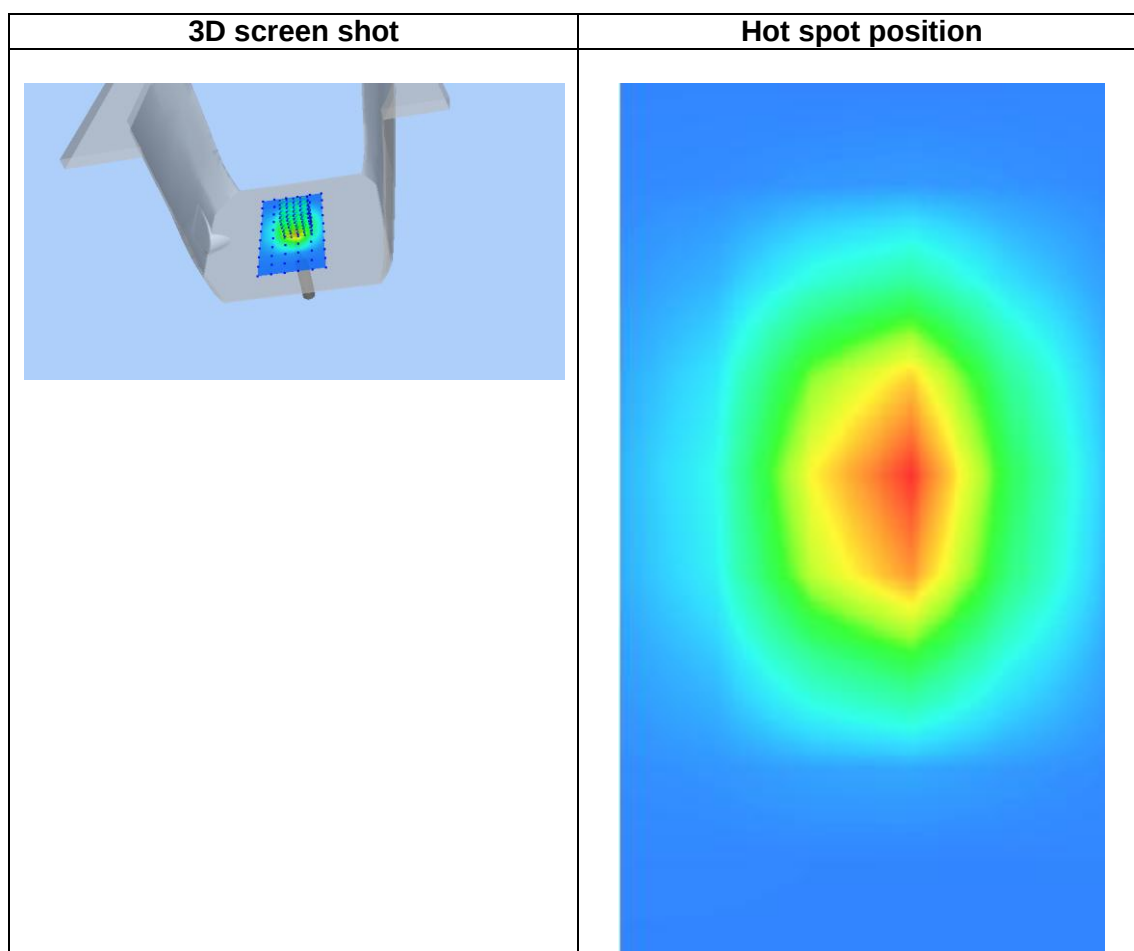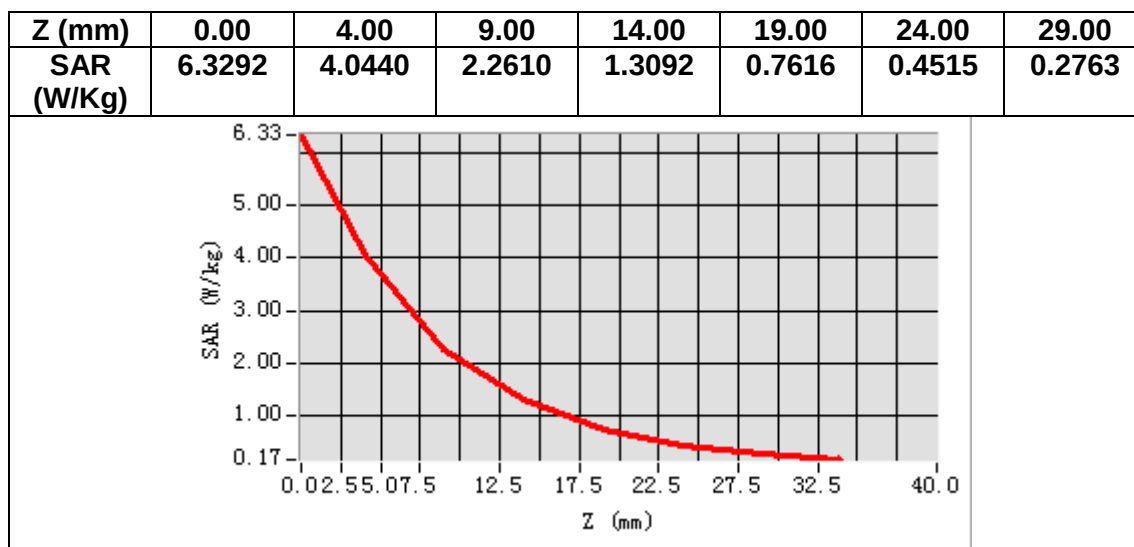

MEASUREMENT 5

Date of measurement: 26/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.98</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	37.725838
Relative permittivity (imaginary part)	13.153547
Conductivity (S/m)	1.790344
Variation (%)	-1.610000

SURFACE SAR

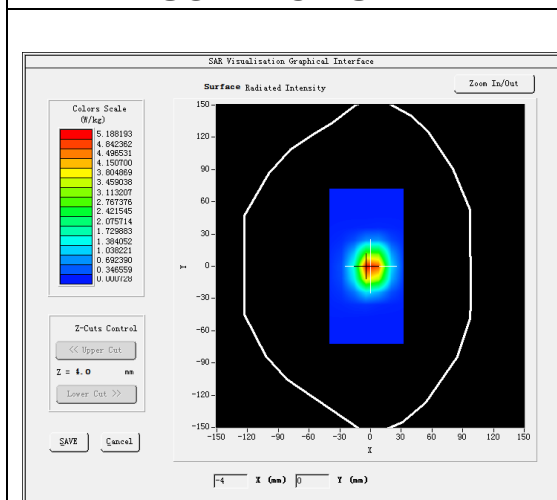



VOLUME SAR

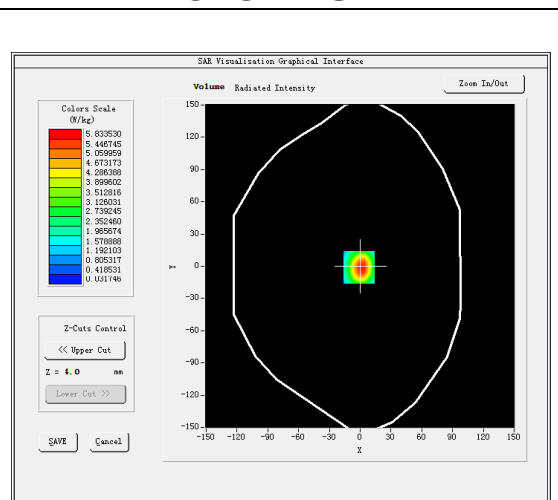

Maximum location: X=-1.00, Y=-1.00

SAR Peak: 9.83 W/kg

SAR 10g (W/Kg)	2.220206
SAR 1g (W/Kg)	5.457310

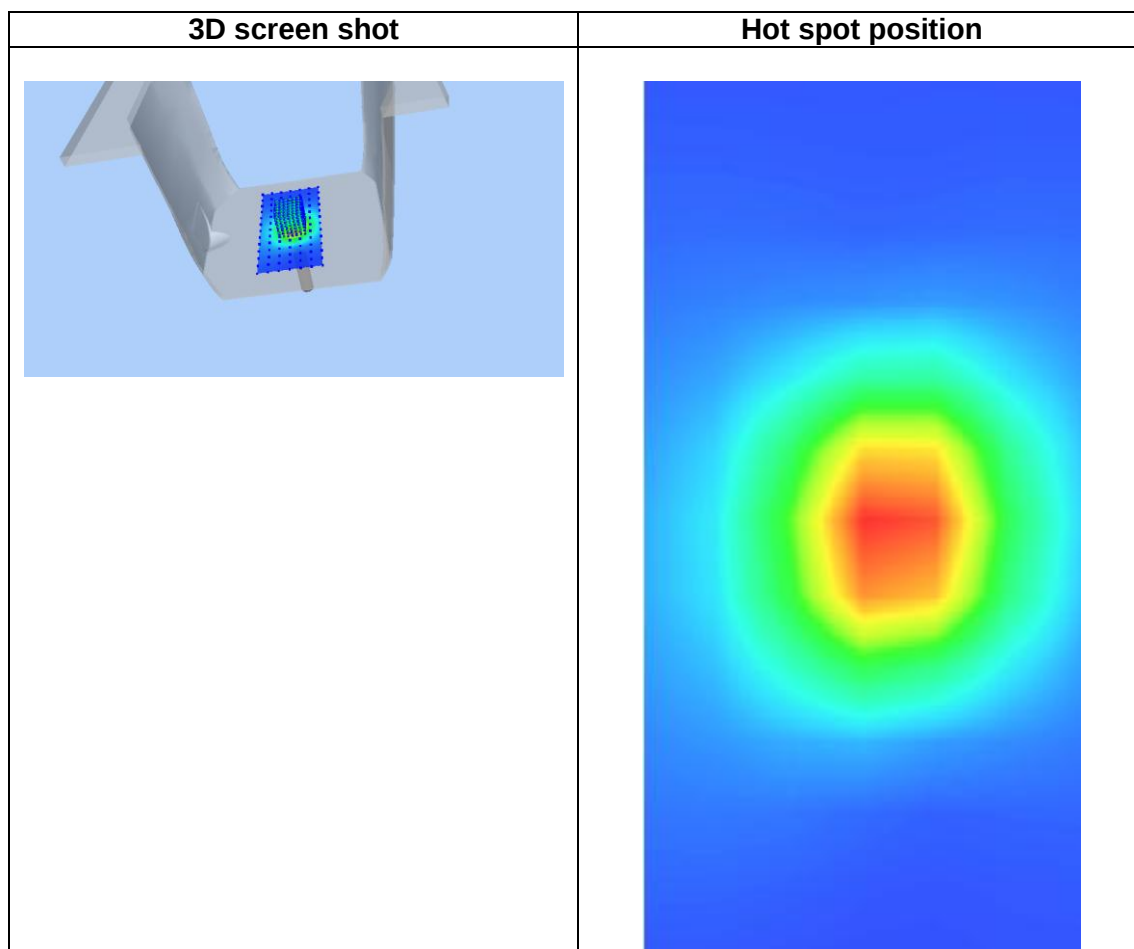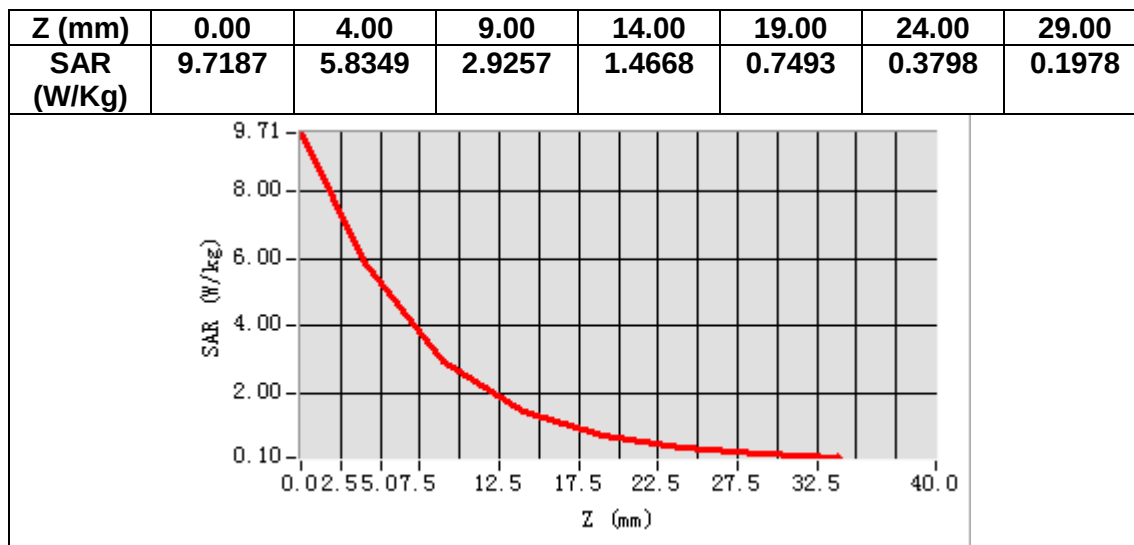

MEASUREMENT 6

Date of measurement: 27/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.87</u>


B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.141595
Relative permittivity (imaginary part)	13.635535
Conductivity (S/m)	1.969577
Variation (%)	-0.440000

SURFACE SAR

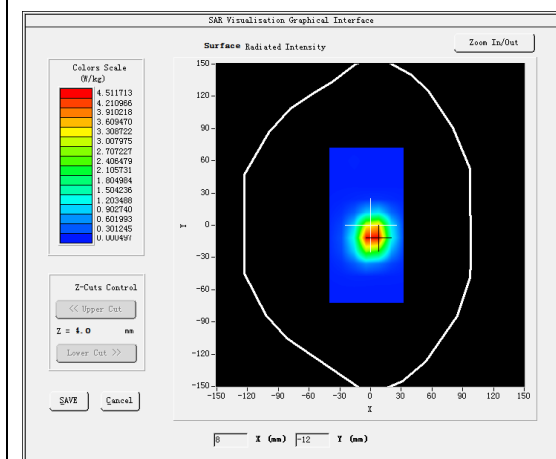



VOLUME SAR

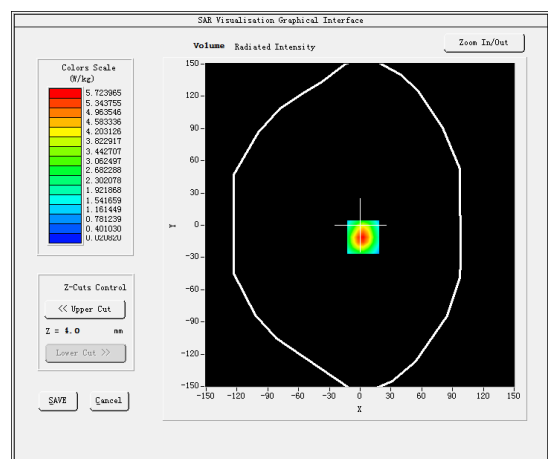

Maximum location: X=3.00, Y=-11.00

SAR Peak: 10.29 W/kg

SAR 10g (W/Kg)	2.291000
SAR 1g (W/Kg)	5.055286

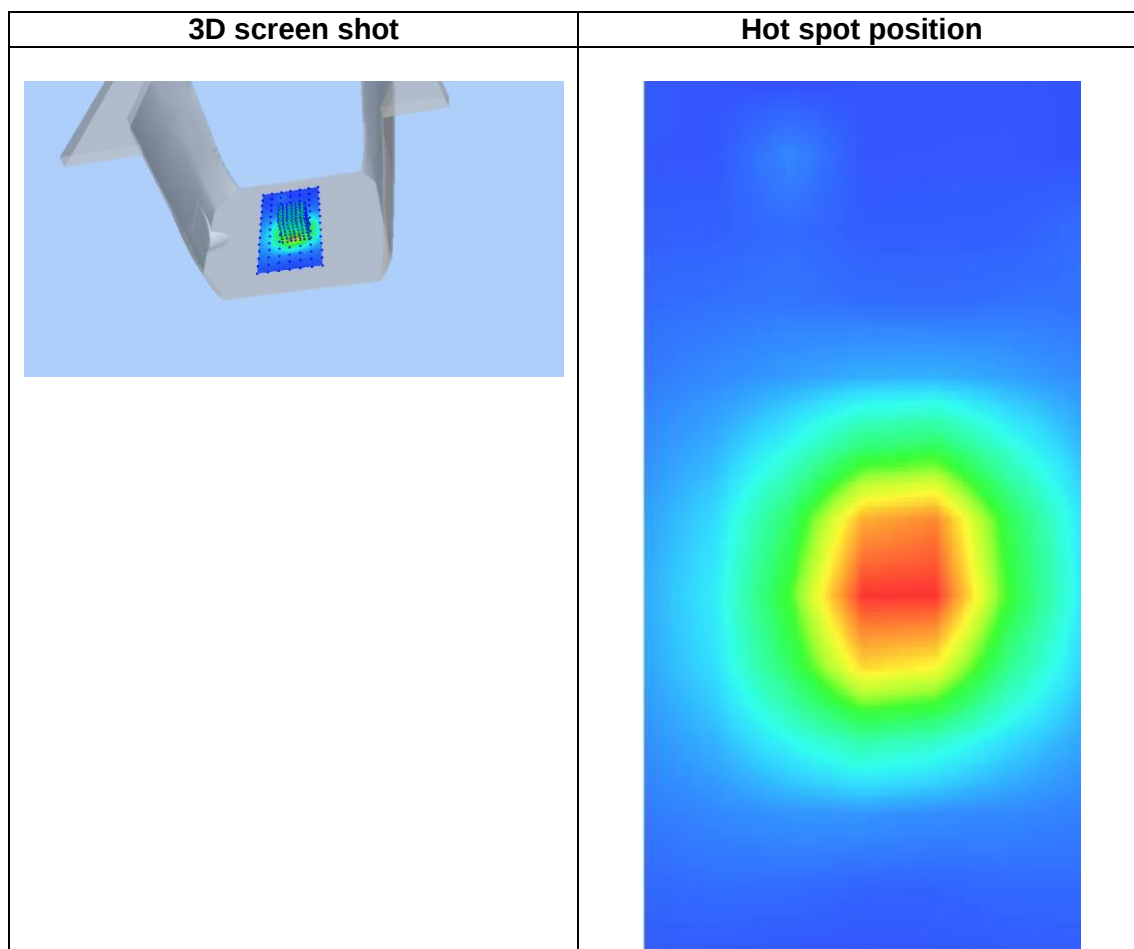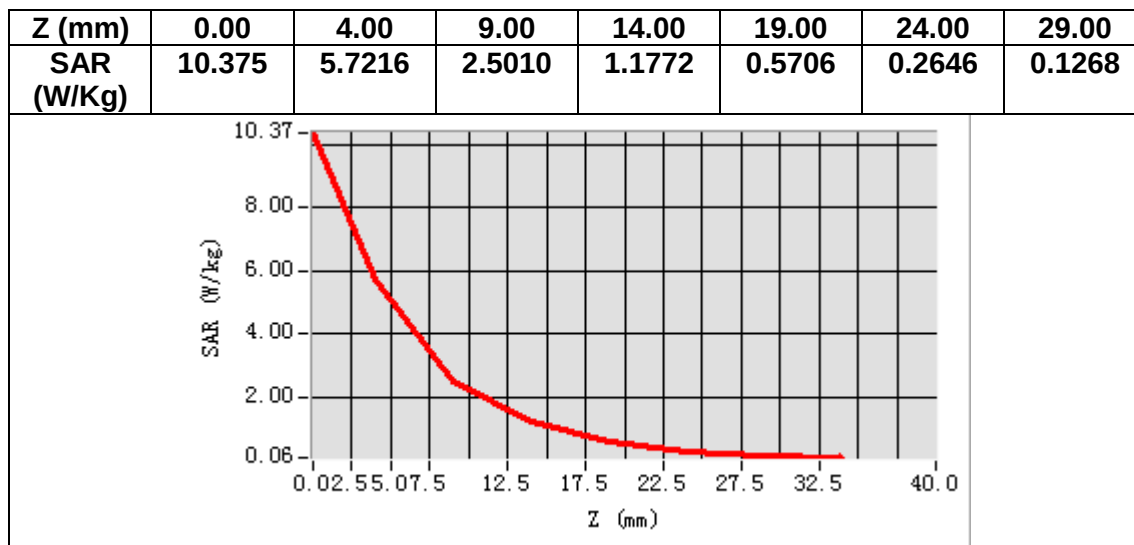

MEASUREMENT 7


Date of measurement: 13/8/2022

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW3500</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.85</u>

B. SAR Measurement Results


Frequency (MHz)	3500.000000
Relative permittivity (real part)	38.082704
Relative permittivity (imaginary part)	14.242830
Conductivity (S/m)	2.769439
Variation (%)	1.300000

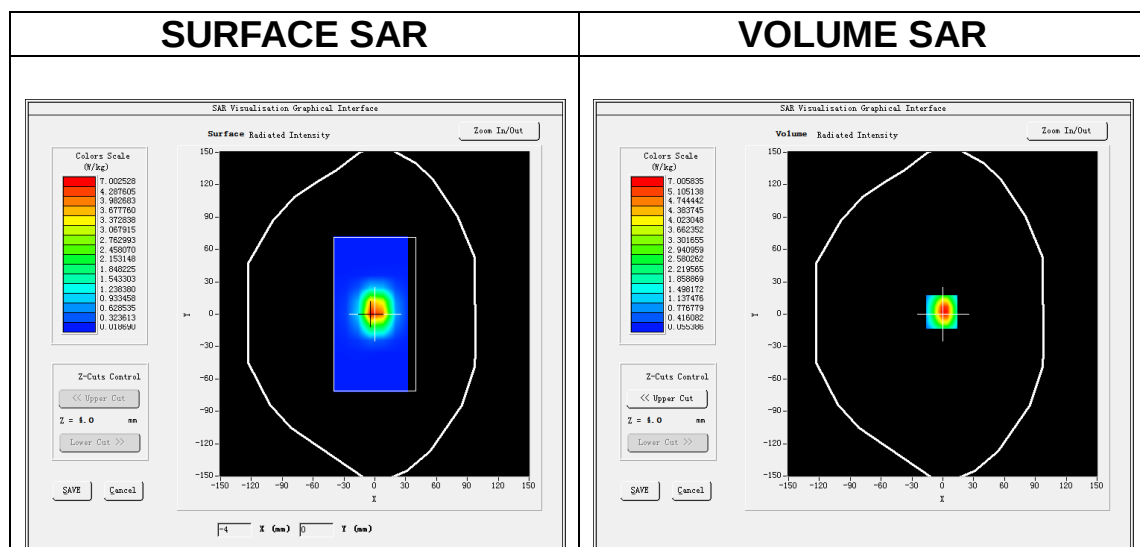


Maximum location: X=-1.00, Y=2.00

SAR Peak: 9.07 W/kg


SAR 10g (W/Kg)	2.535008
SAR 1g (W/Kg)	6.829065

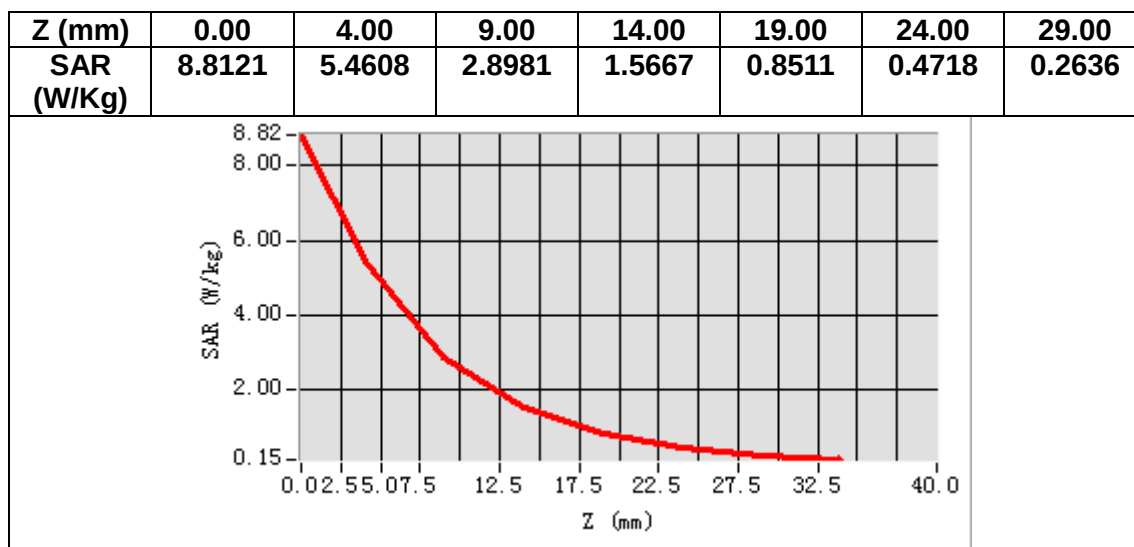

3D screen shot

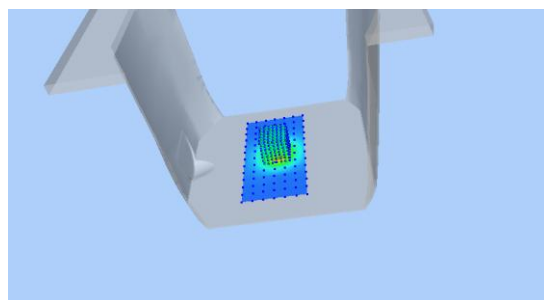

Hot spot position

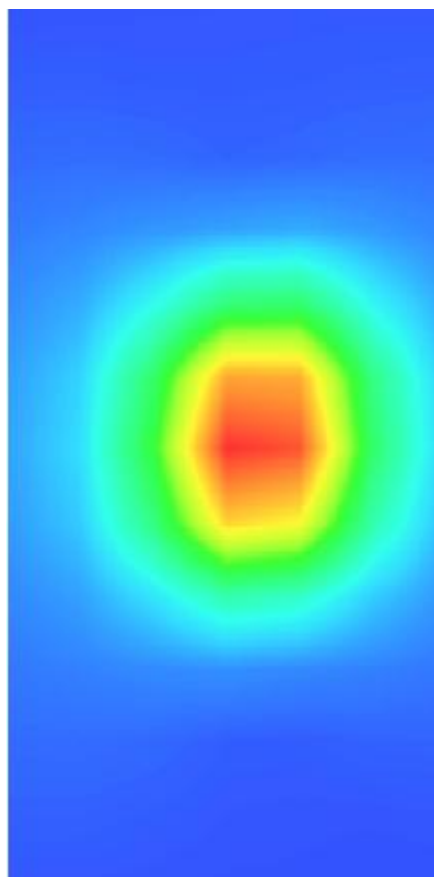

MEASUREMENT 8


Date of measurement: 10/8/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.80</u>

B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	34.895066
Relative permittivity (imaginary part)	15.973492
Conductivity (S/m)	4.614564
Variation (%)	-0.900000

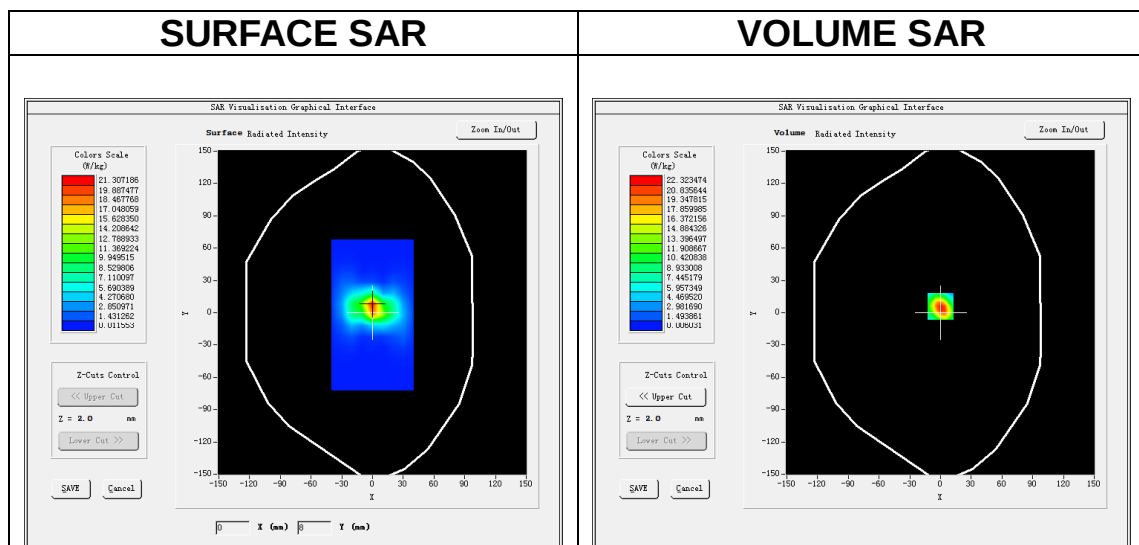


Maximum location: X=0.00, Y=6.00


SAR Peak: 40.06 W/kg

SAR 10g (W/Kg)	5.370376
SAR 1g (W/Kg)	16.162267


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	37.8 64	22.3 79	11.3 41	5.66 52	2.82 25	1.40 73	0.71 08	0.36 65	0.18 12	0.10 14	0.05 43	0.03 85

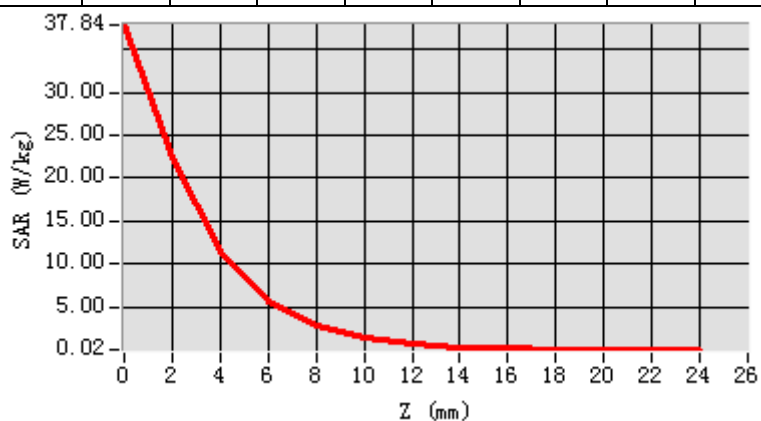

3D screen shot

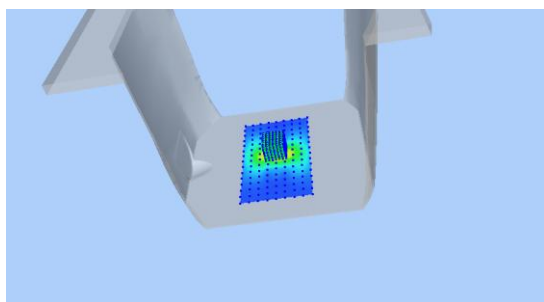

Hot spot position

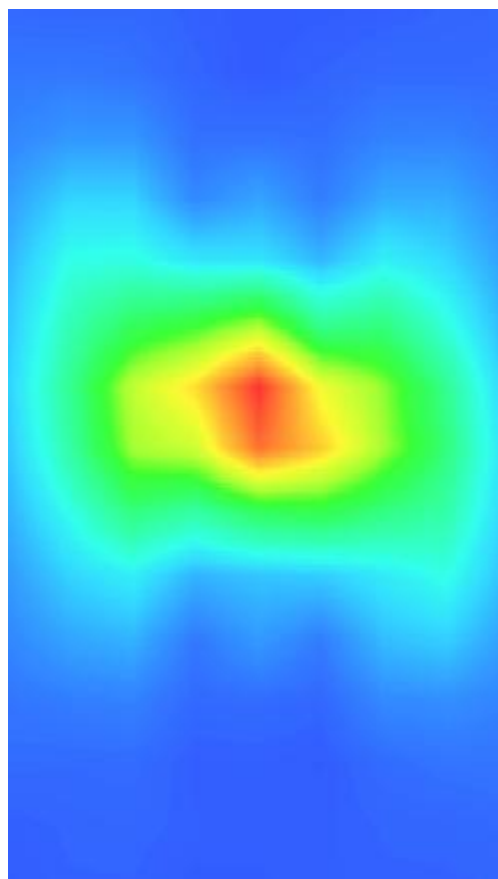

MEASUREMENT 9

Date of measurement: 22/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5400</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>


B. SAR Measurement Results

Frequency (MHz)	5400.000000
Relative permittivity (real part)	35.373103
Relative permittivity (imaginary part)	16.028469
Conductivity (S/m)	4.808541
Variation (%)	-3.040000

SURFACE SAR

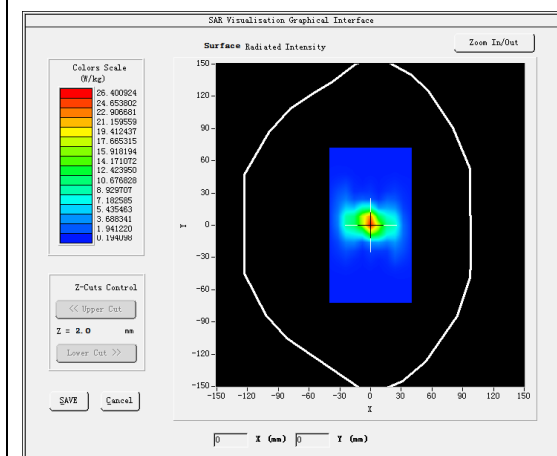



VOLUME SAR

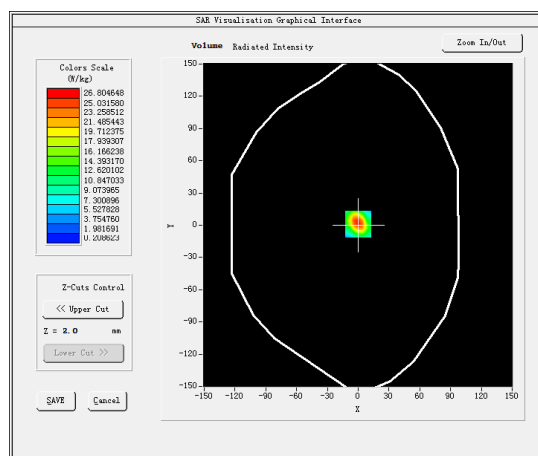

Maximum location: X=0.00, Y=1.00

SAR Peak: 46.18 W/kg

SAR 10g (W/Kg)	5.219035
SAR 1g (W/Kg)	15.983385

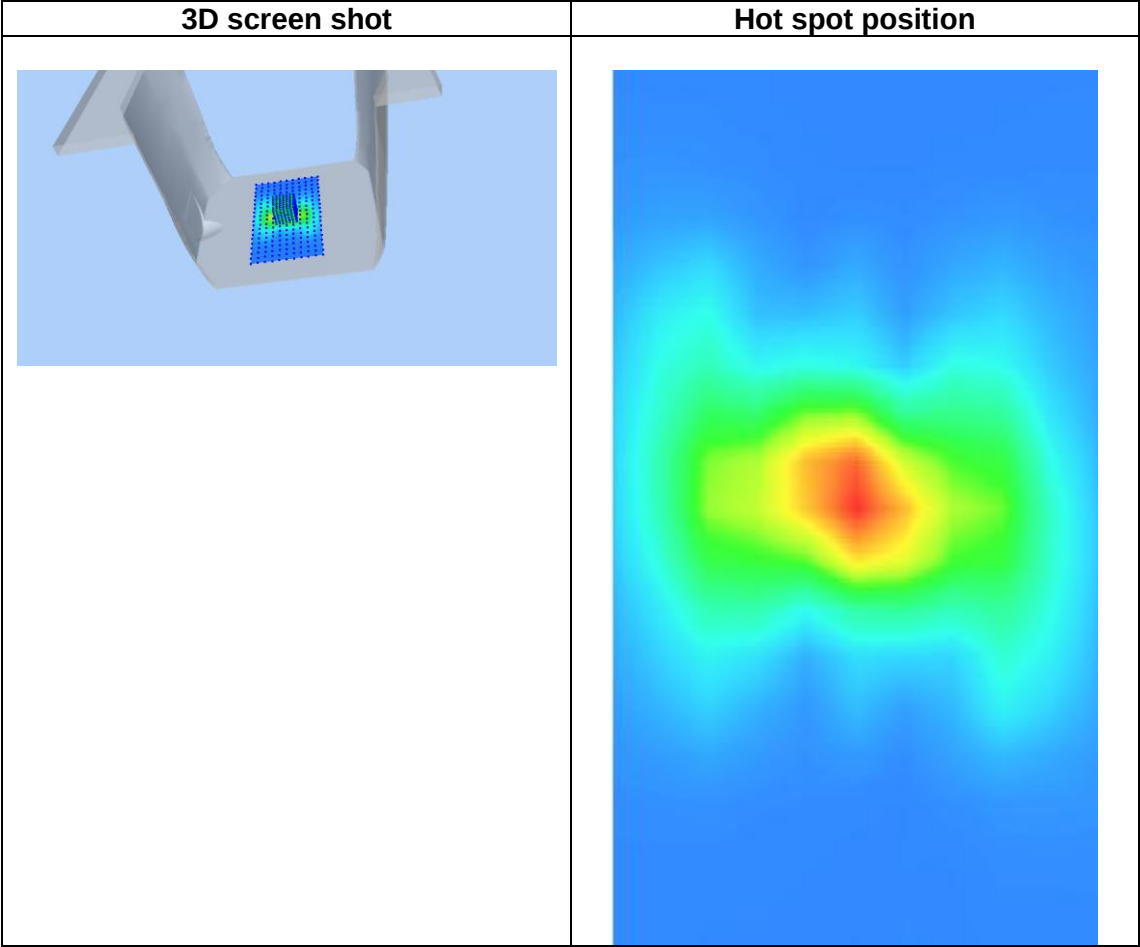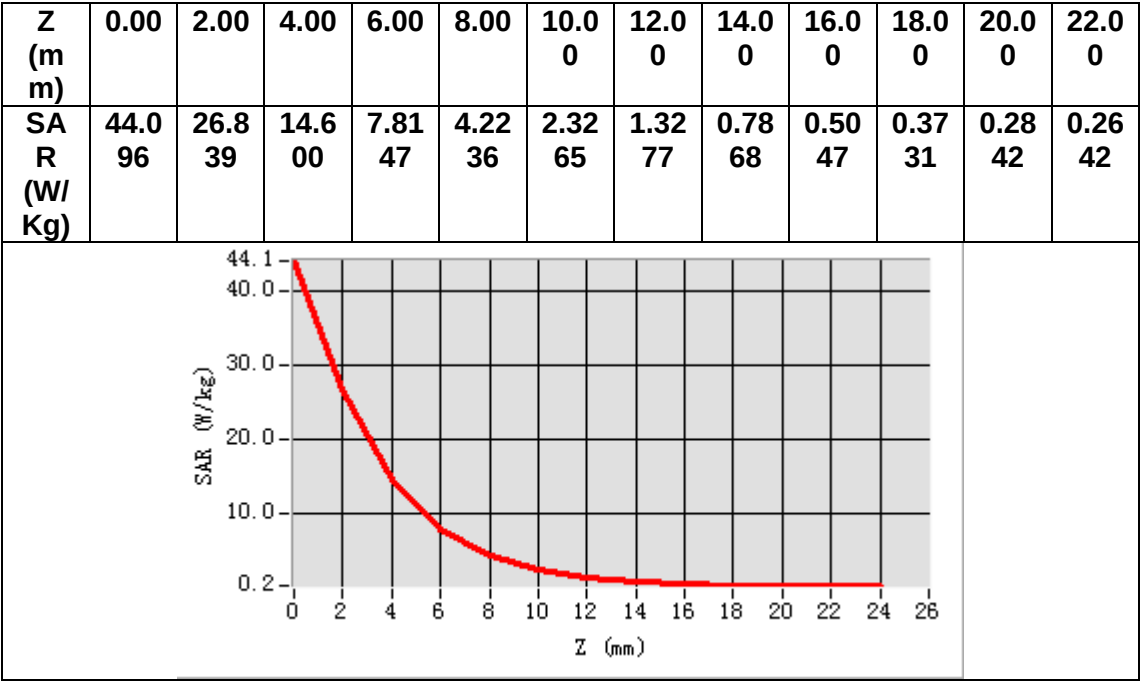

MEASUREMENT 10


Date of measurement: 23/7/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.16</u>

B. SAR Measurement Results

Frequency (MHz)	5600.000000
Relative permittivity (real part)	34.241755
Relative permittivity (imaginary part)	15.885017
Conductivity (S/m)	4.942005
Variation (%)	-3.450000

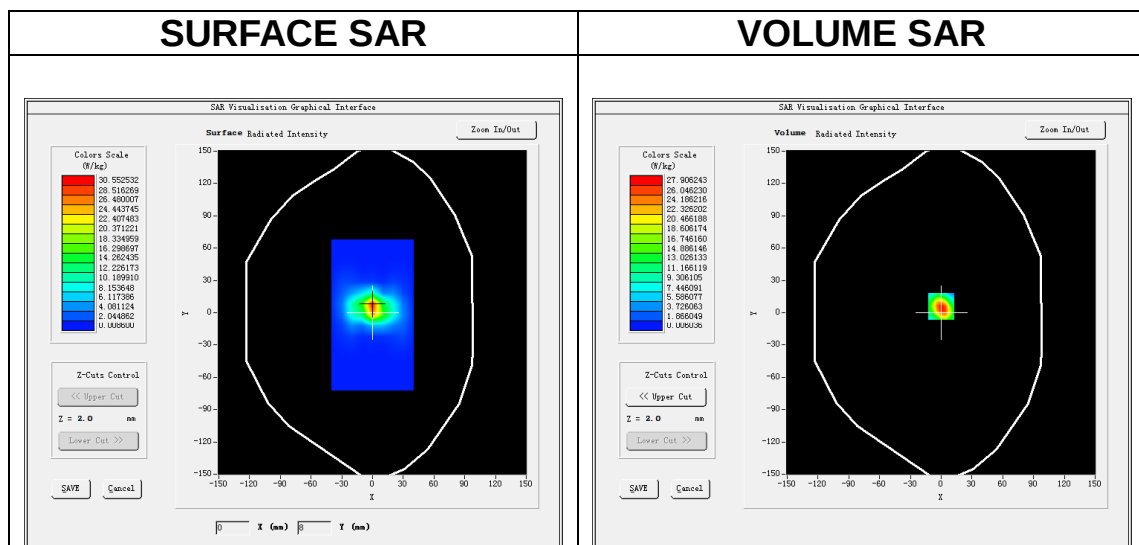


Maximum location: X=0.00, Y=6.00


SAR Peak: 51.23 W/kg

SAR 10g (W/Kg)	5.647178
SAR 1g (W/Kg)	16.928265


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	54.1 22	31.9 92	16.3 13	8.17 15	4.08 85	3.81 79	1.03 95	0.46 38	0.27 84	0.13 41	0.07 52	0.05 51

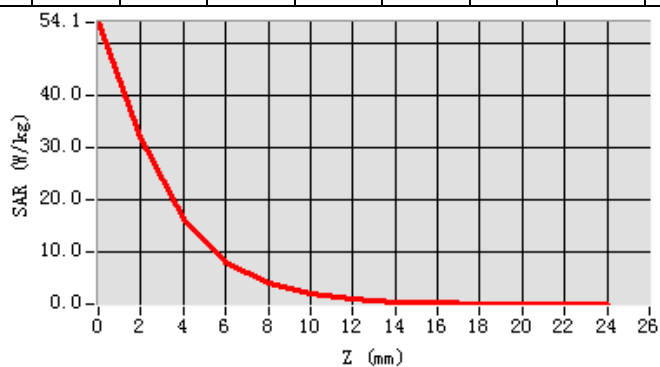

3D screen shot

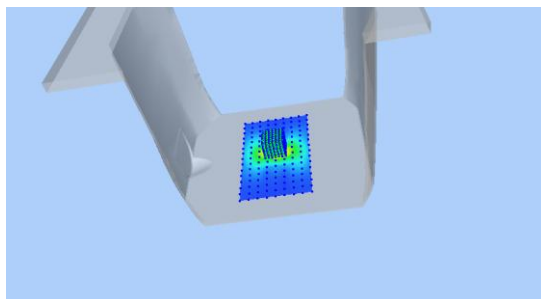

Hot spot position

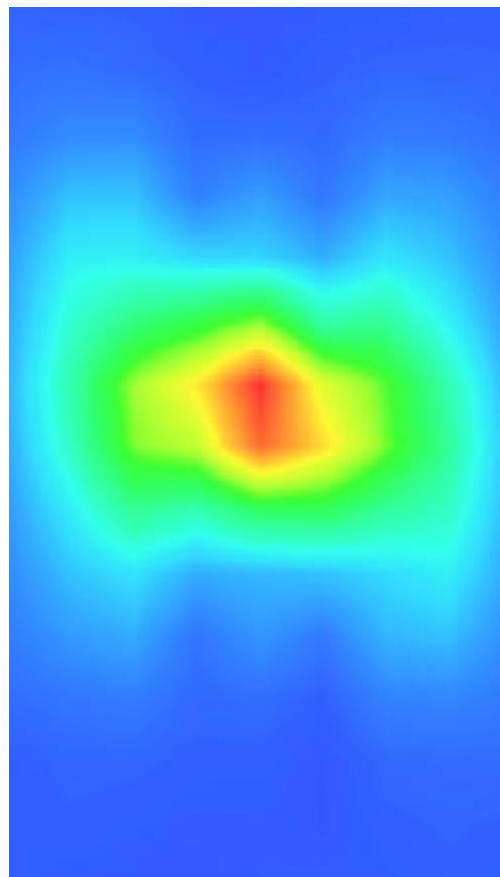

MEASUREMENT 11


Date of measurement: 24/7/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.07</u>

B. SAR Measurement Results

Frequency (MHz)	5800.000000
Relative permittivity (real part)	34.523516
Relative permittivity (imaginary part)	16.292511
Conductivity (S/m)	5.249809
Variation (%)	3.290000

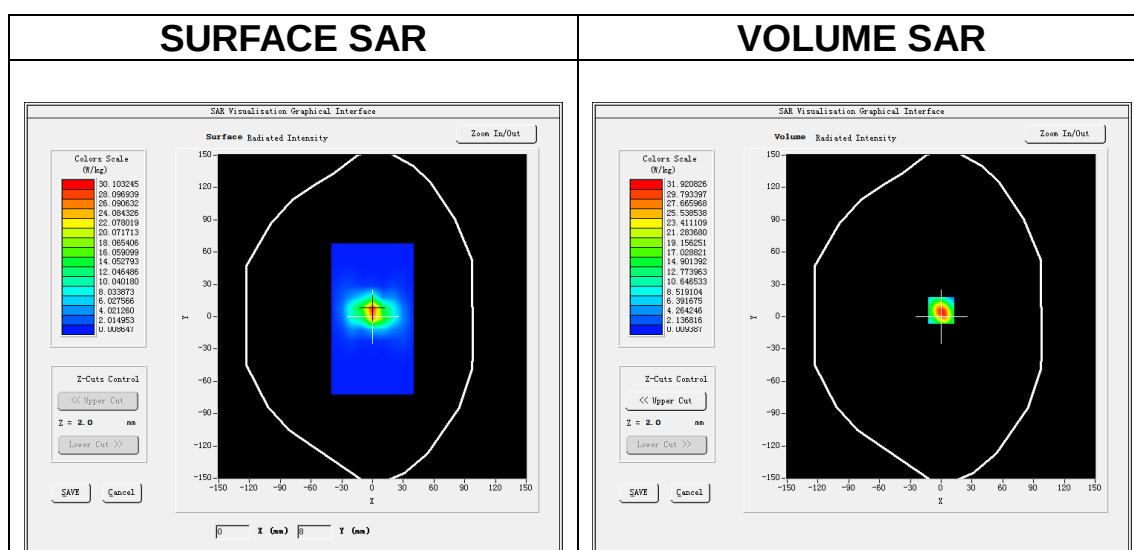


Maximum location: X=0.00, Y=6.00


SAR Peak: 57.37 W/kg

SAR 10g (W/Kg)	5.868352
SAR 1g (W/Kg)	18.130099


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	54.0 13	31.9 83	16.1 32	8.17 29	4.08 94	2.05 81	1.03 59	0.51 00	0.27 19	0.15 11	0.07 43	0.04 26

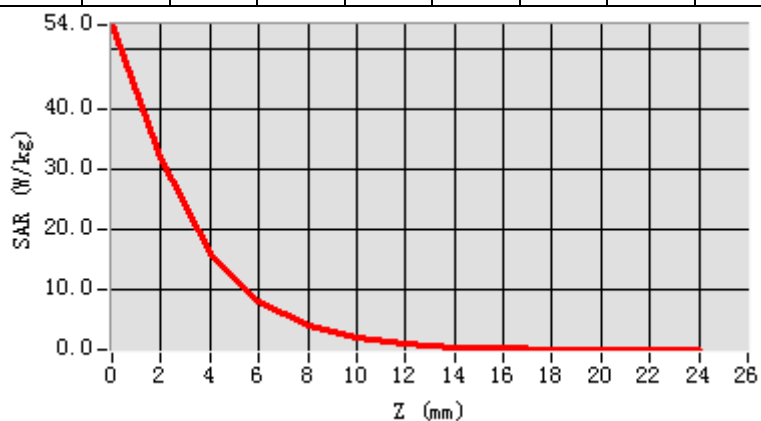

3D screen shot

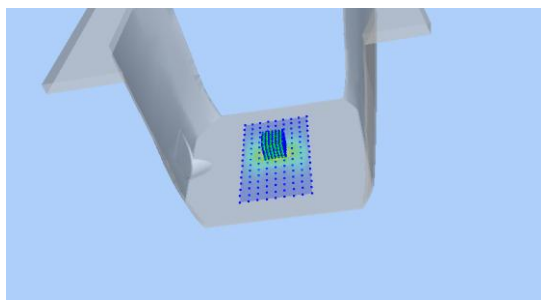

Hot spot position

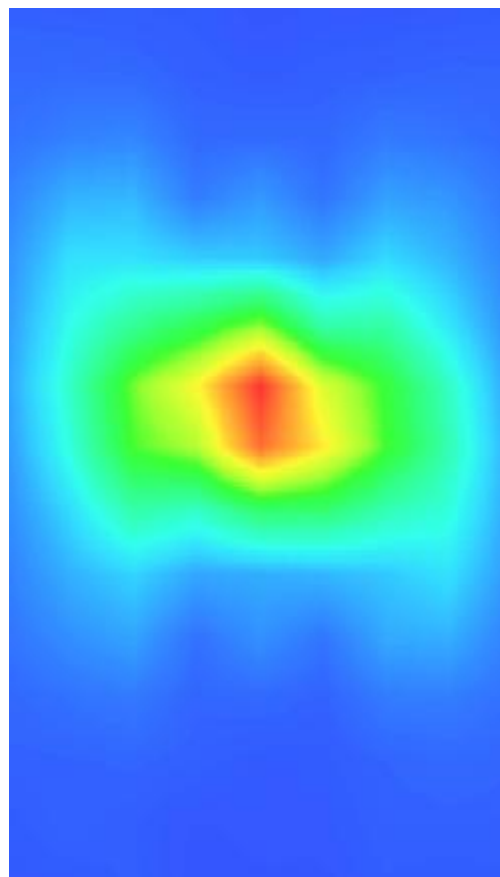

1. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 GSM 850 Head
MEASUREMENT 2 GSM 850 Body
MEASUREMENT 3 GSM 1900 Head
MEASUREMENT 4 GSM 1900 Body
MEASUREMENT 5 WCDMA Band 2 Head
MEASUREMENT 6 WCDMA Band 2 Body
MEASUREMENT 7 WCDMA Band 4 Head
MEASUREMENT 8 WCDMA Band 4 Body
MEASUREMENT 9 WCDMA Band 5 Head
MEASUREMENT 10 WCDMA Band 5 Body
MEASUREMENT 11 WLAN 2.4G Head
MEASUREMENT 12 WLAN 5.2G Head
MEASUREMENT 13 WLAN 5.3G Head
MEASUREMENT 14 WLAN 5.6G Head
MEASUREMENT 15 WLAN 5.8G Head
MEASUREMENT 16 WLAN 2.4G Body
MEASUREMENT 17 WLAN 5.2G Body
MEASUREMENT 18 WLAN 5.3G Body
MEASUREMENT 19 WLAN 5.6G Body
MEASUREMENT 20 WLAN 5.8G Body
MEASUREMENT 21 LTE Band 2 Head
MEASUREMENT 22 LTE Band 2 Body
MEASUREMENT 23 LTE Band 4 Head
MEASUREMENT 24 LTE Band 4 Body
MEASUREMENT 25 LTE Band 5 Head
MEASUREMENT 26 LTE Band 5 Body
MEASUREMENT 27 LTE Band 7 Head
MEASUREMENT 28 LTE Band 7 Body
MEASUREMENT 29 LTE Band 12 Head
MEASUREMENT 30 LTE Band 12 Body
MEASUREMENT 31 LTE Band 17 Head
MEASUREMENT 32 LTE Band 17 Body
MEASUREMENT 33 LTE Band 41 Head
MEASUREMENT 34 LTE Band 41 Body
MEASUREMENT 35 LTE Band 66 Head
MEASUREMENT 36 NR n78 Head

MEASUREMENT 37 LTE Band 66 Body

MEASUREMENT 38 NR n78 Body

MEASUREMENT 1

Date of measurement: 5/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	40.269619
Relative permittivity (imaginary part)	19.639992
Conductivity (S/m)	0.912605
Variation (%)	0.700000

SURFACE SAR

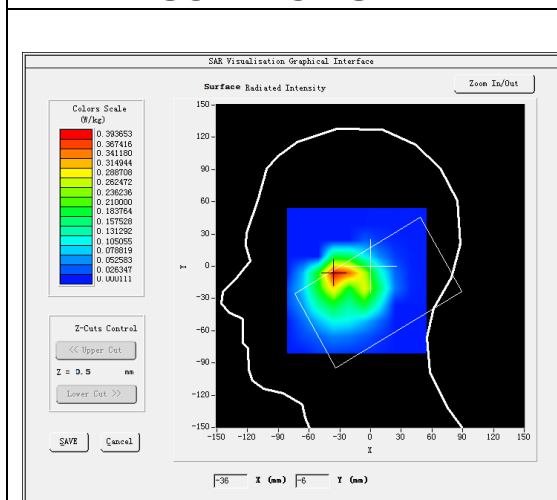



VOLUME SAR

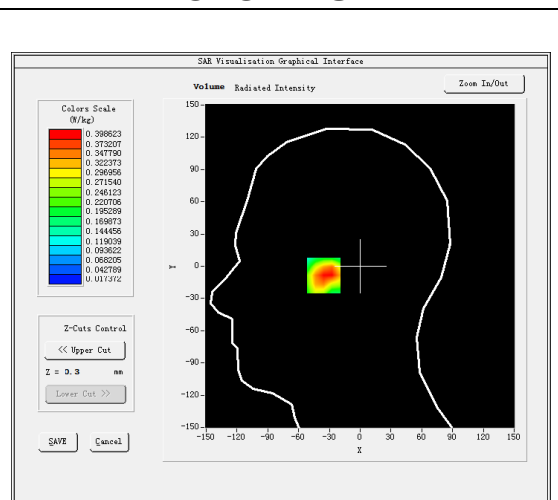

Maximum location: X=-33.00, Y=-8.00

SAR Peak: 0.66 W/kg

SAR 10g (W/Kg)	0.221768
SAR 1g (W/Kg)	0.394770

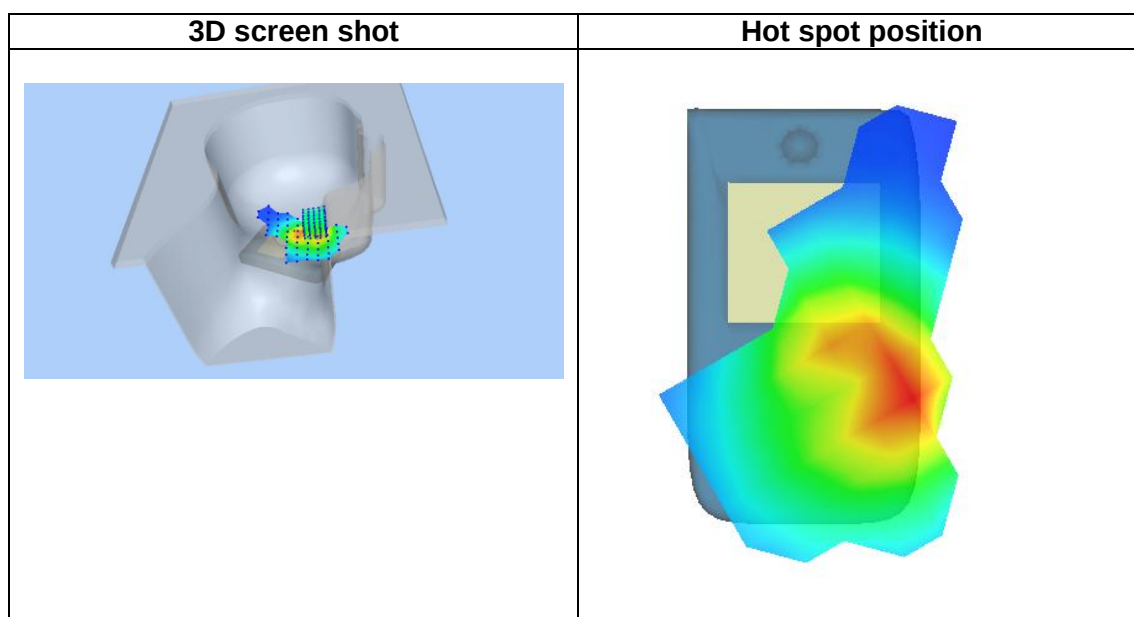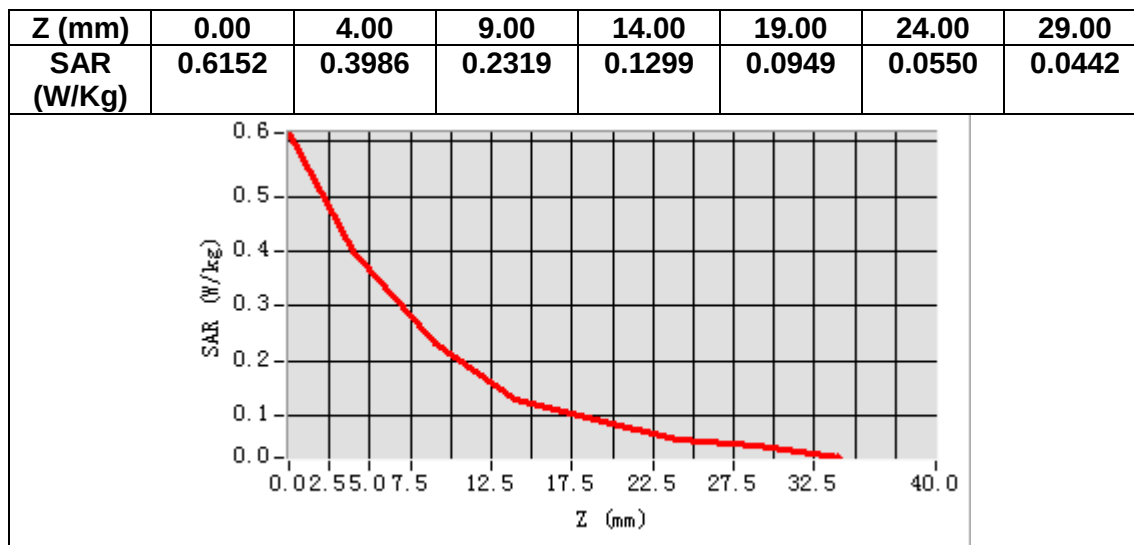

MEASUREMENT 2

Date of measurement: 5/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	40.269619
Relative permittivity (imaginary part)	19.639992
Conductivity (S/m)	0.912605
Variation (%)	-0.250000

SURFACE SAR

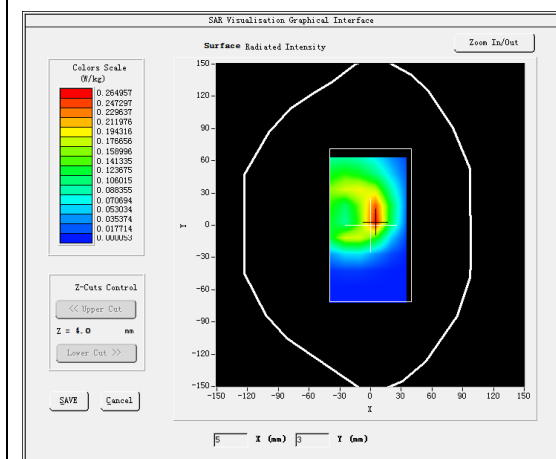


VOLUME SAR

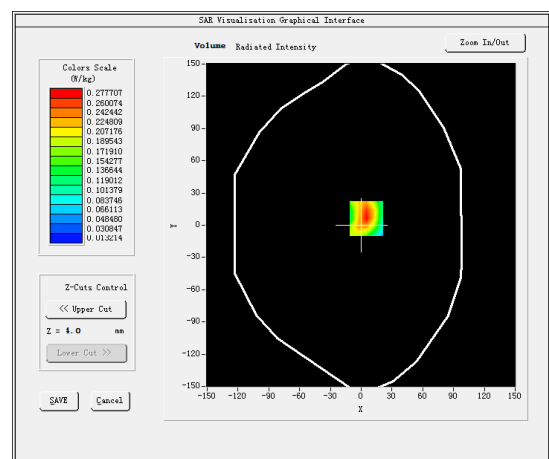


Maximum location: X=5.00, Y=6.00

SAR Peak: 0.42 W/kg


SAR 10g (W/Kg)	0.151731
SAR 1g (W/Kg)	0.266130

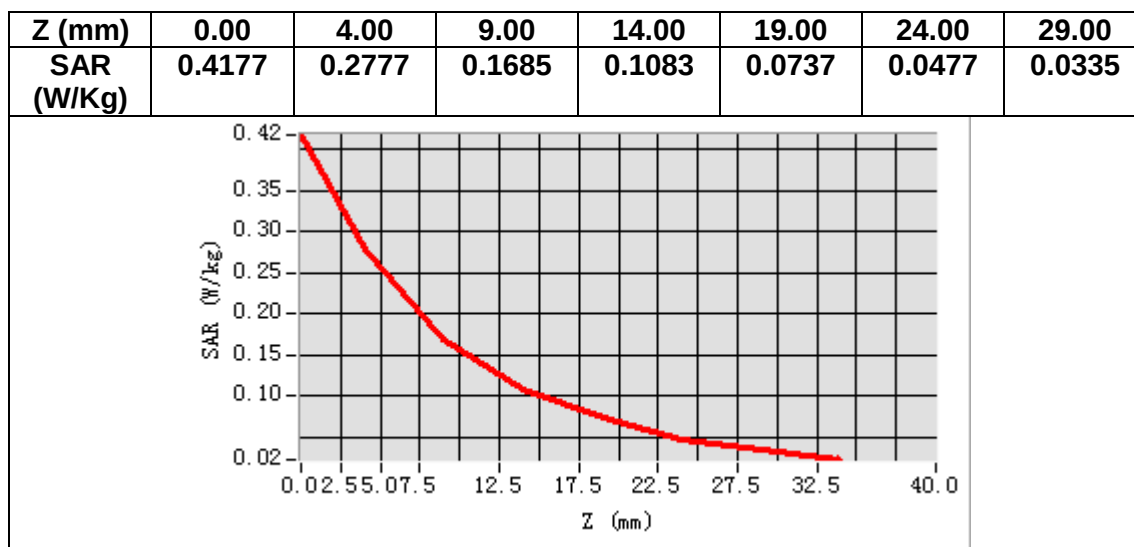

3D screen shot

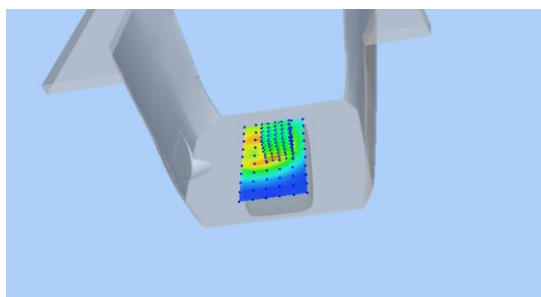

Hot spot position

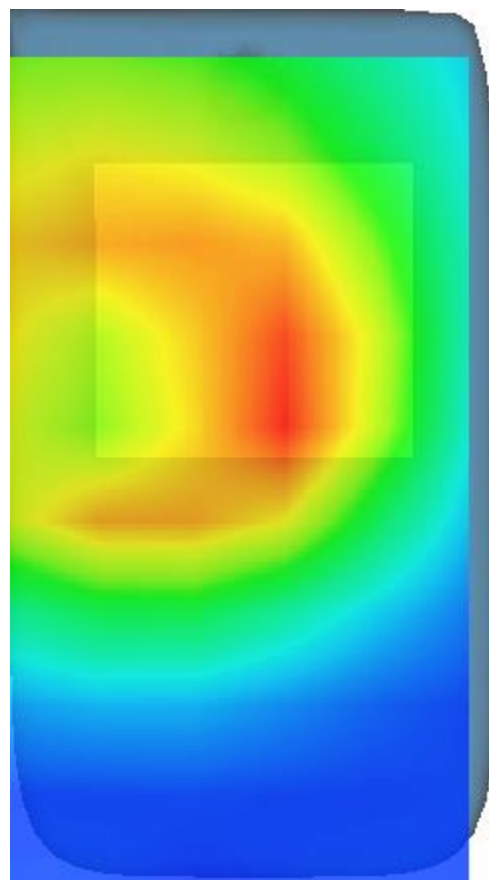

MEASUREMENT 3

Date of measurement: 9/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.461483
Relative permittivity (imaginary part)	13.876862
Conductivity (S/m)	1.449361
Variation (%)	-0.290000

SURFACE SAR

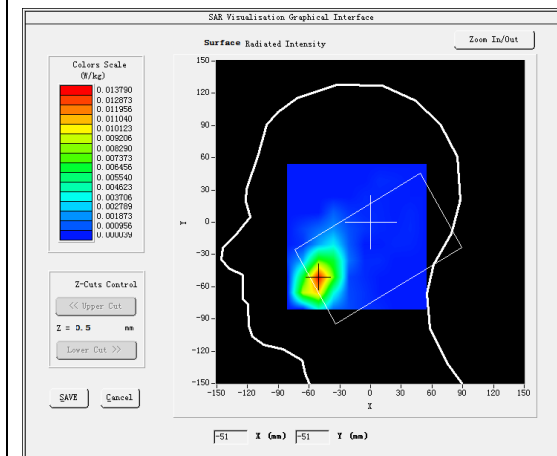


VOLUME SAR

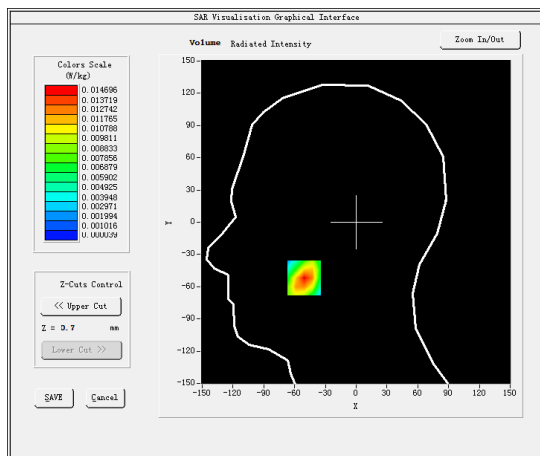


Maximum location: X=-51.00, Y=-52.00

SAR Peak: 0.02 W/kg


SAR 10g (W/Kg)	0.007608
SAR 1g (W/Kg)	0.013881

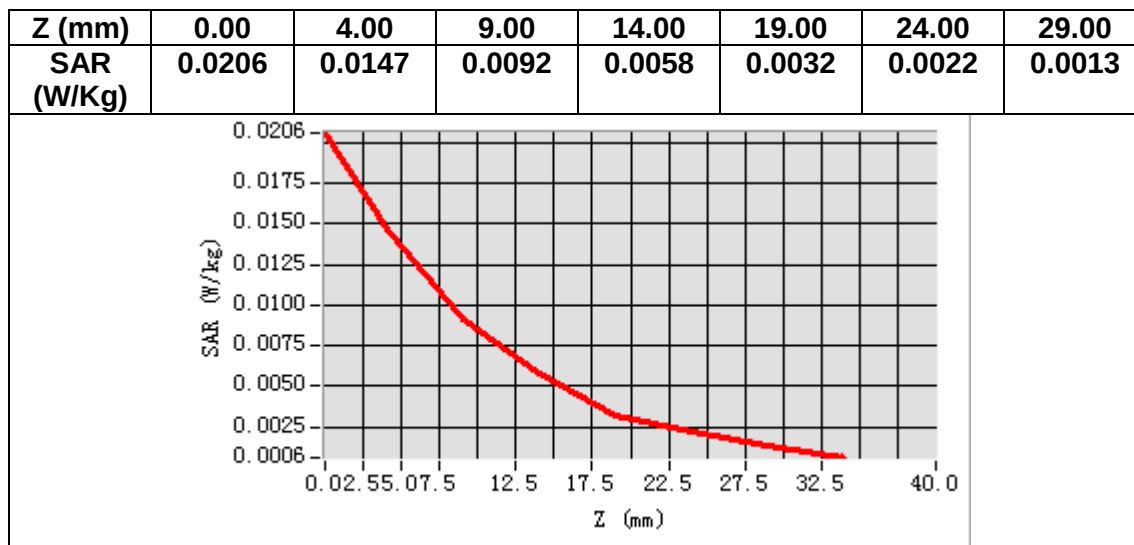

3D screen shot

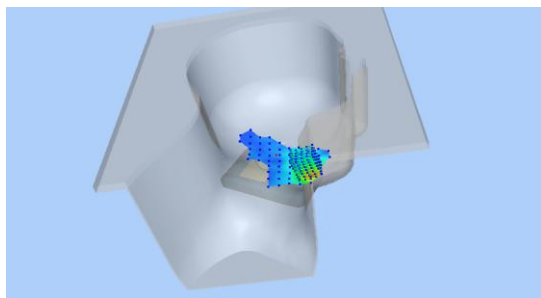

Hot spot position

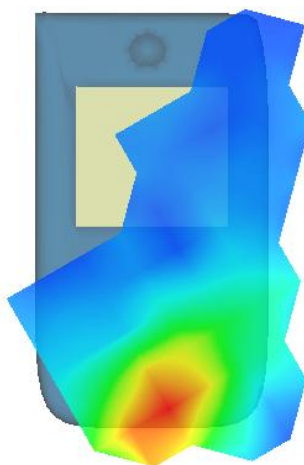

MEASUREMENT 4

Date of measurement: 9/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.461483
Relative permittivity (imaginary part)	13.876862
Conductivity (S/m)	1.449361
Variation (%)	-2.700000

SURFACE SAR

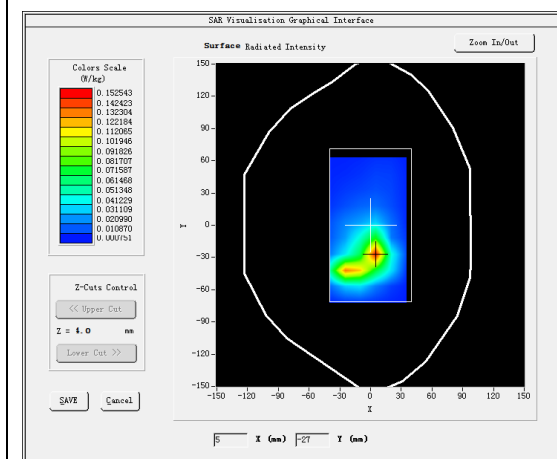



VOLUME SAR

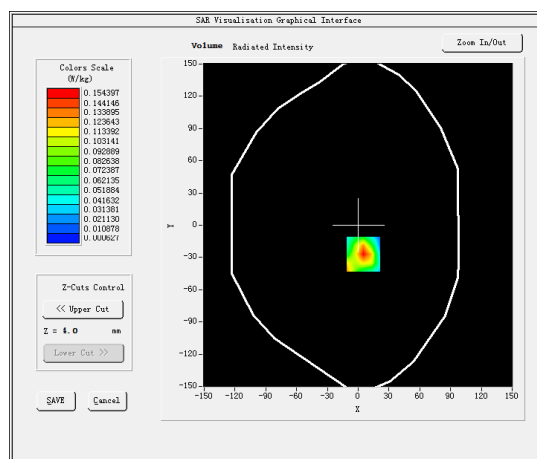

Maximum location: X=5.00, Y=-27.00

SAR Peak: 0.26 W/kg

SAR 10g (W/Kg)	0.069736
SAR 1g (W/Kg)	0.146913

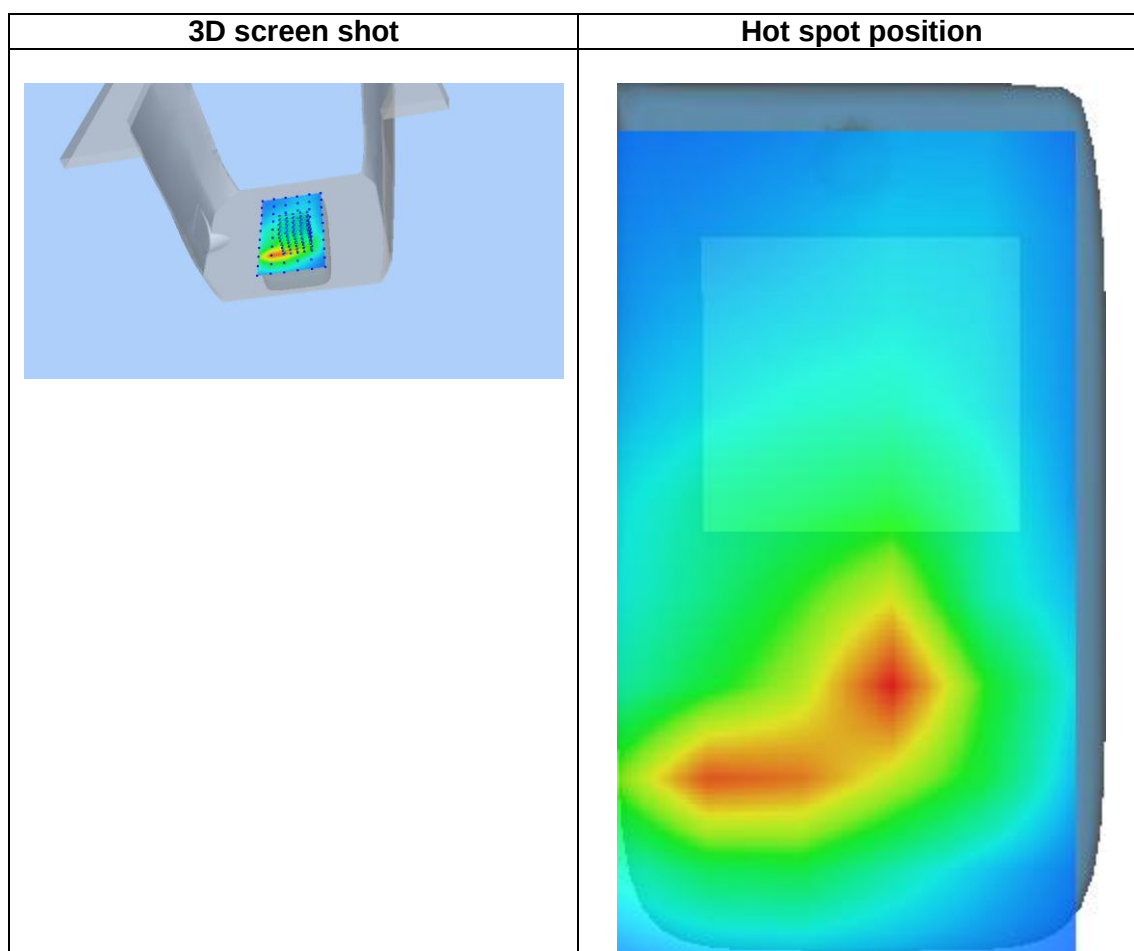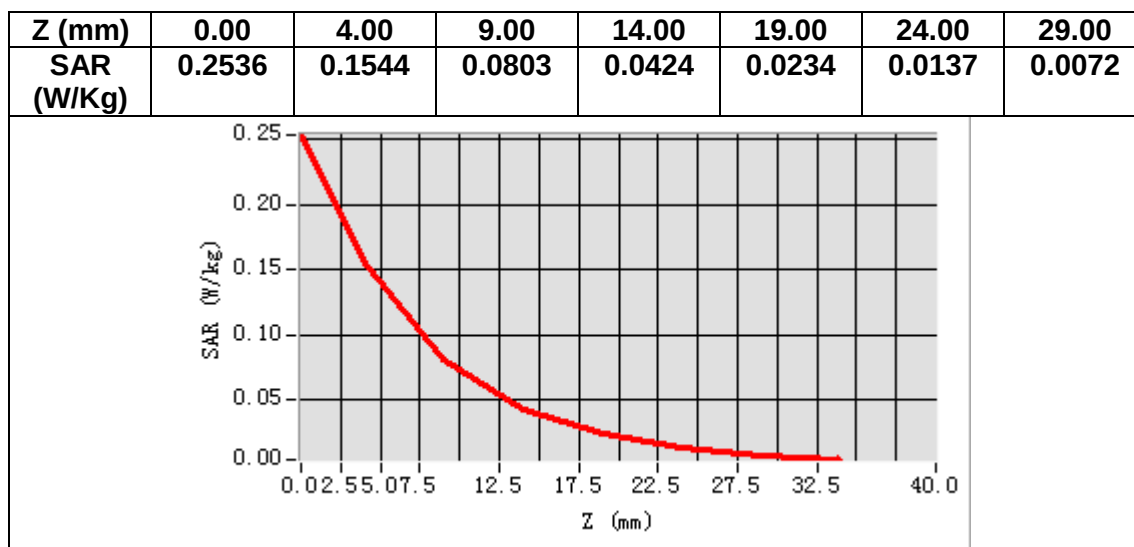

MEASUREMENT 5

Date of measurement: 9/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.461483
Relative permittivity (imaginary part)	13.876862
Conductivity (S/m)	1.449361
Variation (%)	-0.310000

SURFACE SAR

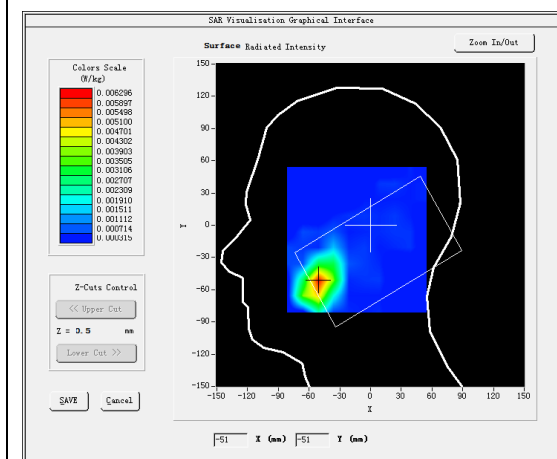



VOLUME SAR

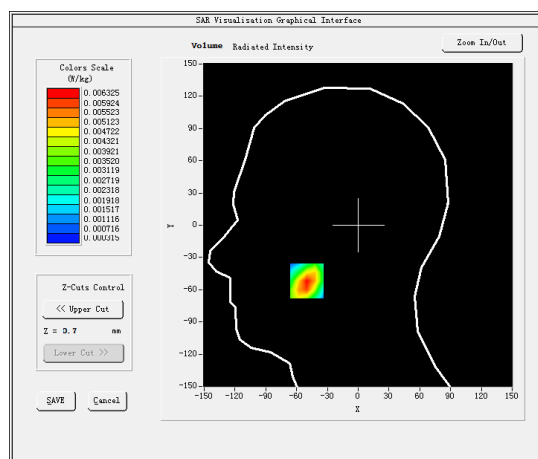

Maximum location: X=-50.00, Y=-52.00

SAR Peak: 0.01 W/kg

SAR 10g (W/Kg)	0.003348
SAR 1g (W/Kg)	0.006065

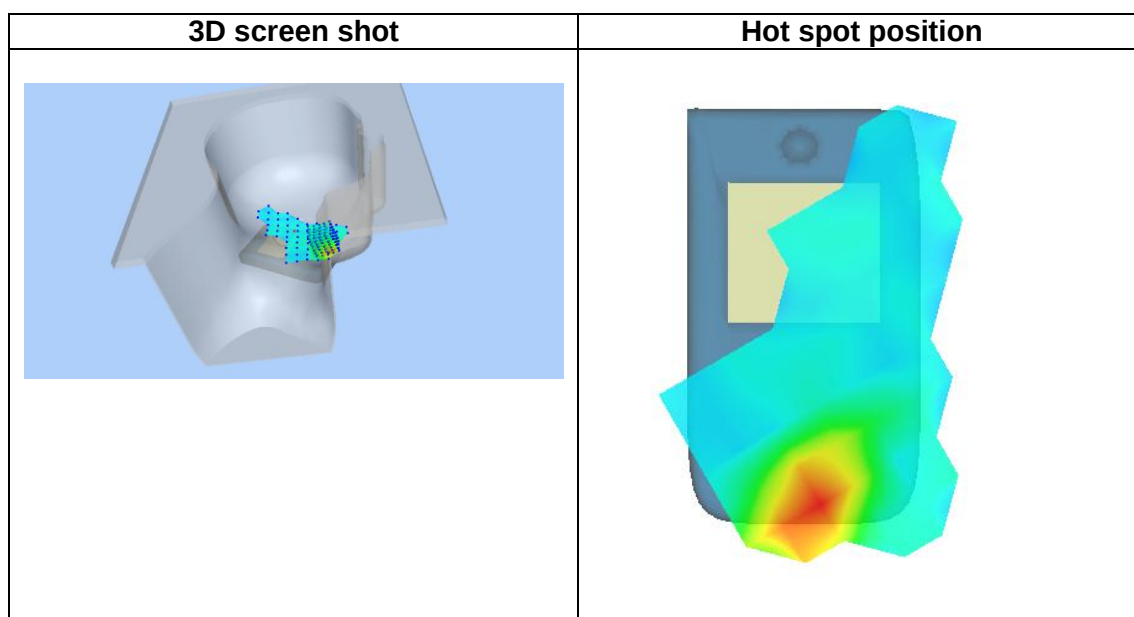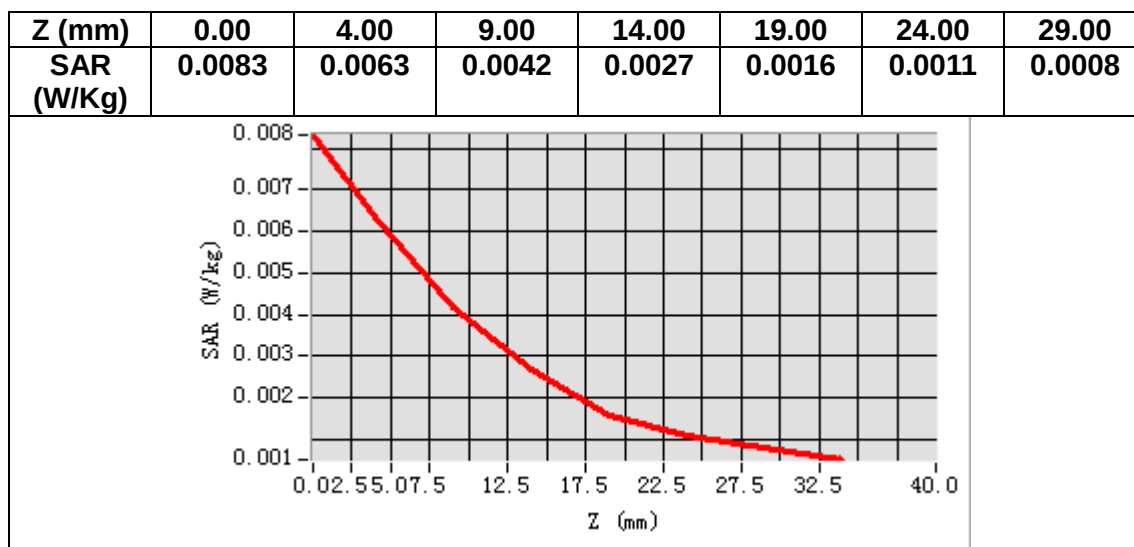

MEASUREMENT 6

Date of measurement: 9/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.461483
Relative permittivity (imaginary part)	13.876862
Conductivity (S/m)	1.449361
Variation (%)	2.690000

SURFACE SAR

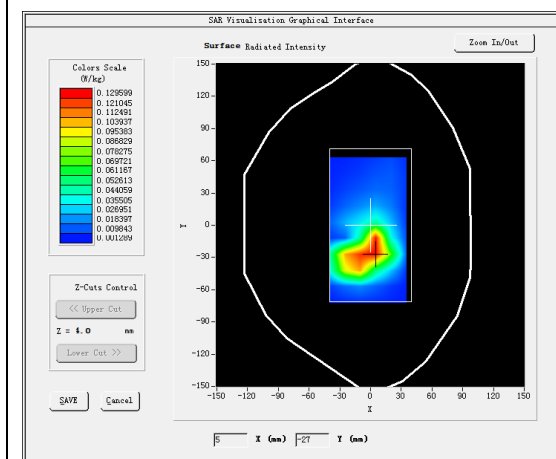


VOLUME SAR

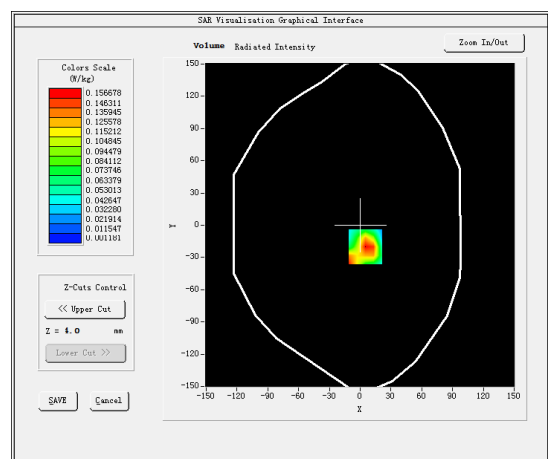


Maximum location: X=5.00, Y=-20.00

SAR Peak: 0.27 W/kg


SAR 10g (W/Kg)	0.074418
SAR 1g (W/Kg)	0.156242

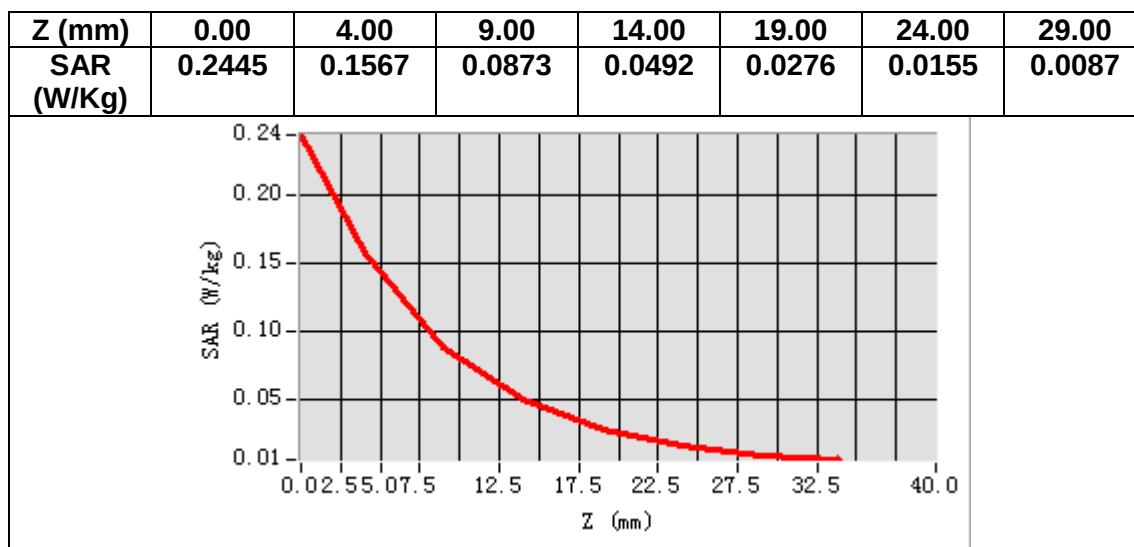

3D screen shot

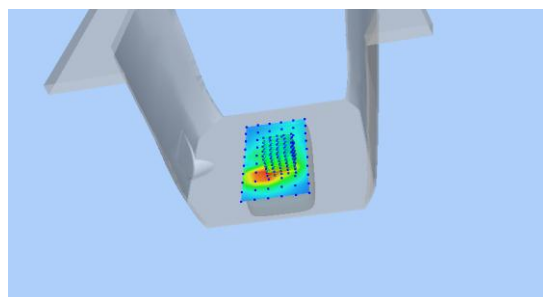

Hot spot position

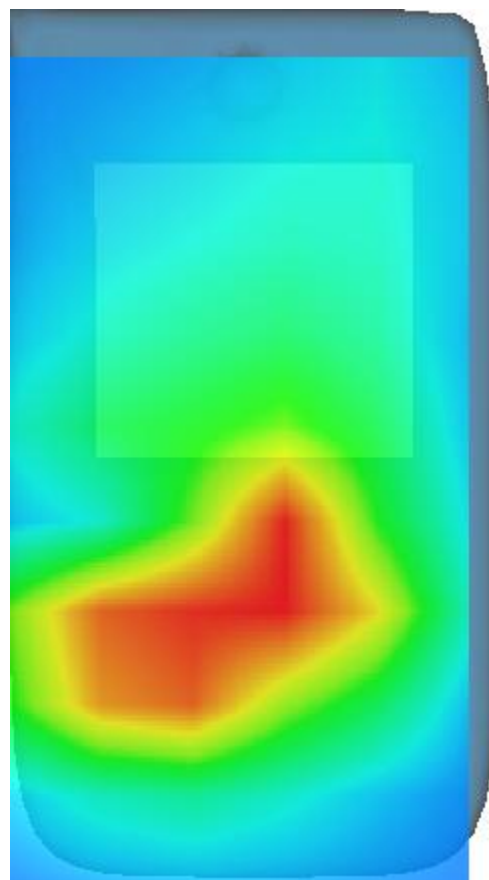

MEASUREMENT 7

Date of measurement: 8/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band4 WCDMA1700</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.73</u>


B. SAR Measurement Results

Frequency (MHz)	1732.600000
Relative permittivity (real part)	40.515720
Relative permittivity (imaginary part)	14.270945
Conductivity (S/m)	1.373182
Variation (%)	2.530000

SURFACE SAR

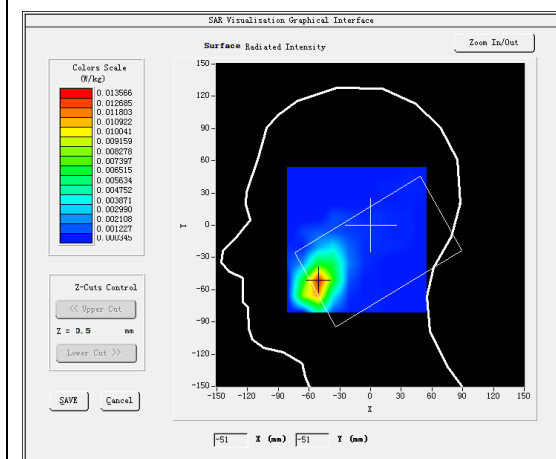


VOLUME SAR

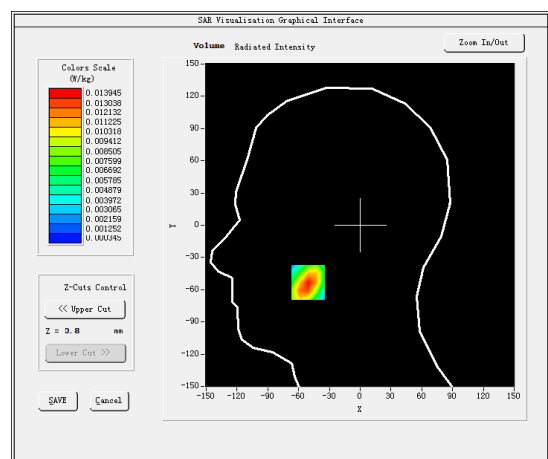


Maximum location: X=-51.00, Y=-53.00

SAR Peak: 0.02 W/kg


SAR 10g (W/Kg)	0.007691
SAR 1g (W/Kg)	0.013231

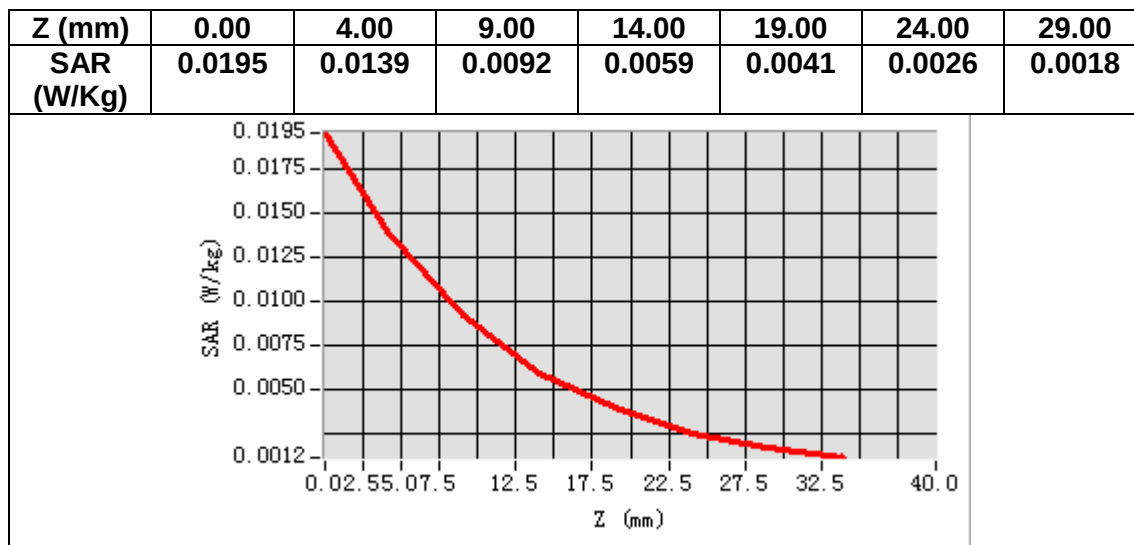

3D screen shot

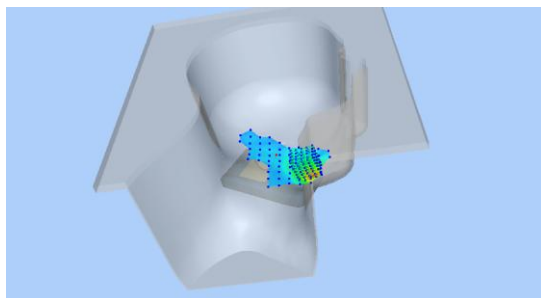

Hot spot position

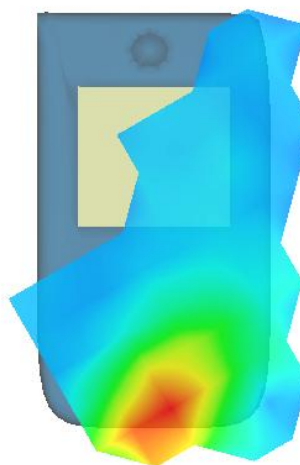

MEASUREMENT 8

Date of measurement: 8/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band4 WCDMA1700</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.73</u>


B. SAR Measurement Results

Frequency (MHz)	1732.600000
Relative permittivity (real part)	40.515720
Relative permittivity (imaginary part)	14.270945
Conductivity (S/m)	1.373182
Variation (%)	4.470000

SURFACE SAR

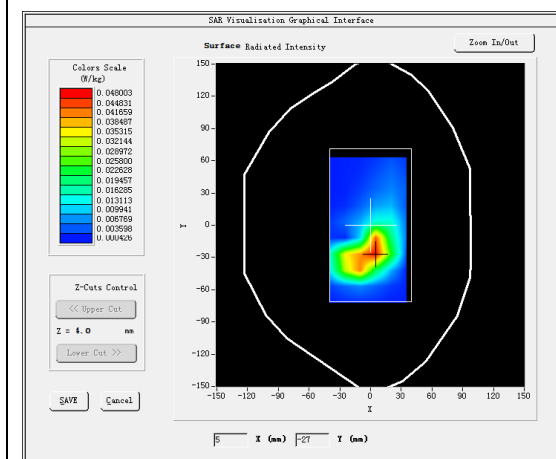



VOLUME SAR

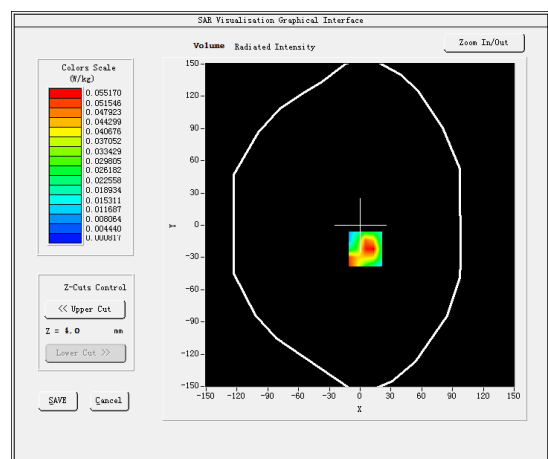

Maximum location: X=5.00, Y=-22.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.026506
SAR 1g (W/Kg)	0.054738

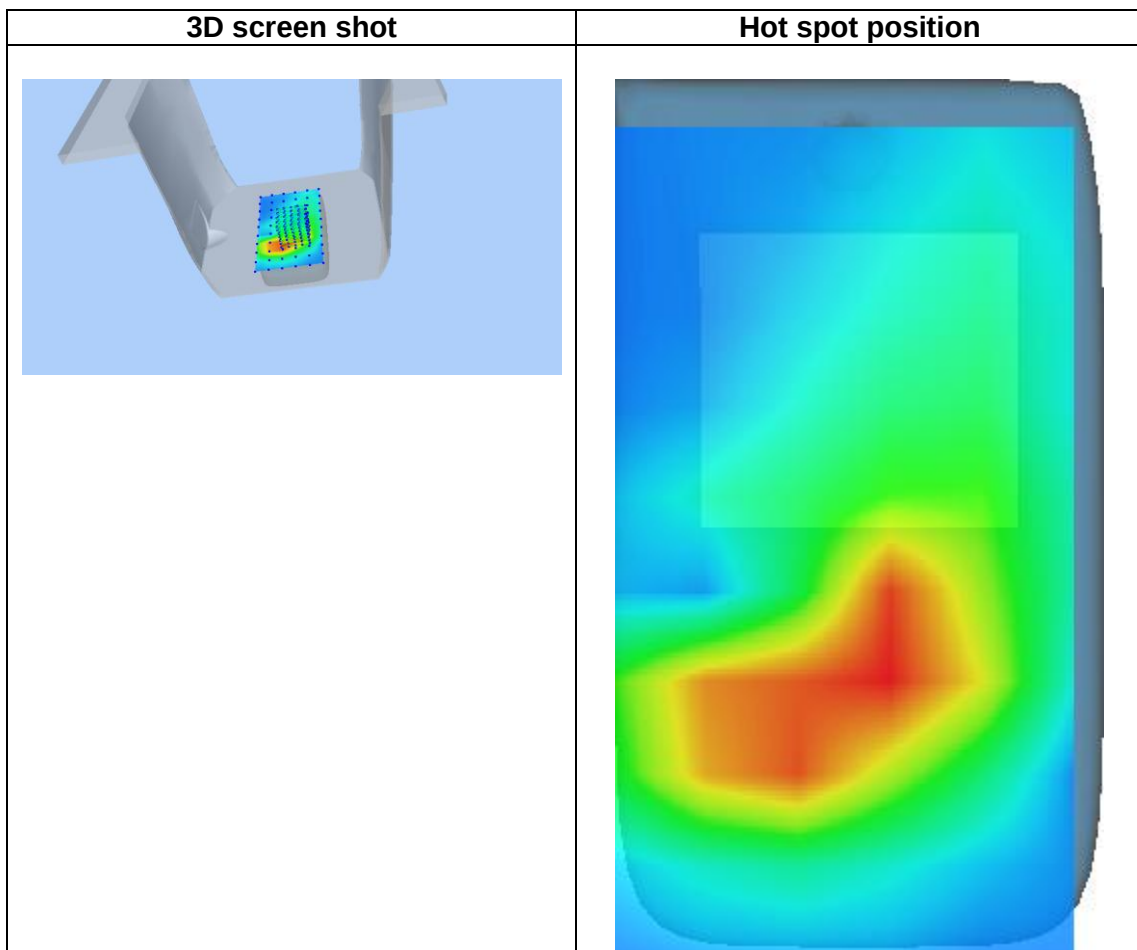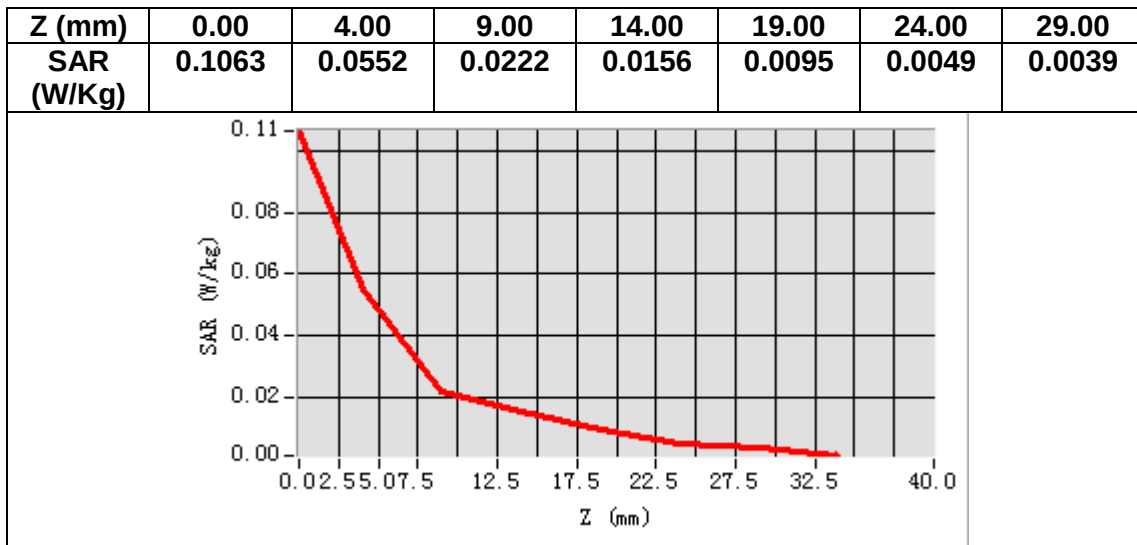

MEASUREMENT 9

Date of measurement: 5/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	40.269619
Relative permittivity (imaginary part)	19.639992
Conductivity (S/m)	0.912605
Variation (%)	1.270000

SURFACE SAR

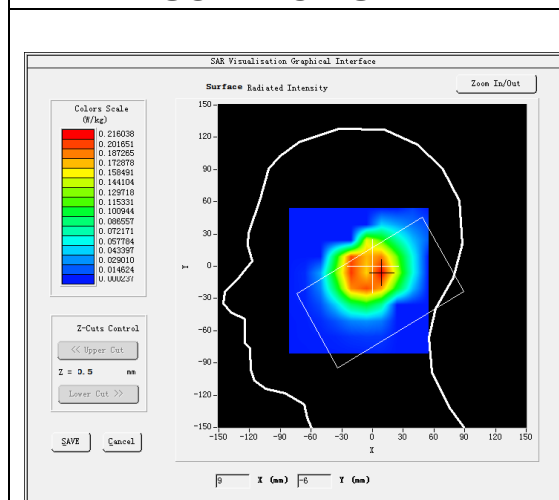


VOLUME SAR

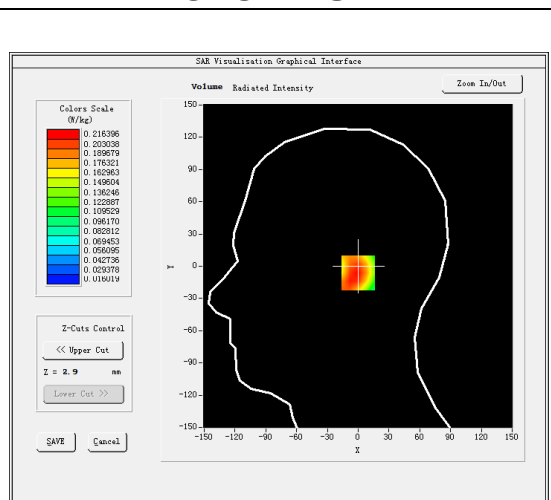


Maximum location: X=9.00, Y=-6.00

SAR Peak: 0.32 W/kg


SAR 10g (W/Kg)	0.137126
SAR 1g (W/Kg)	0.213761

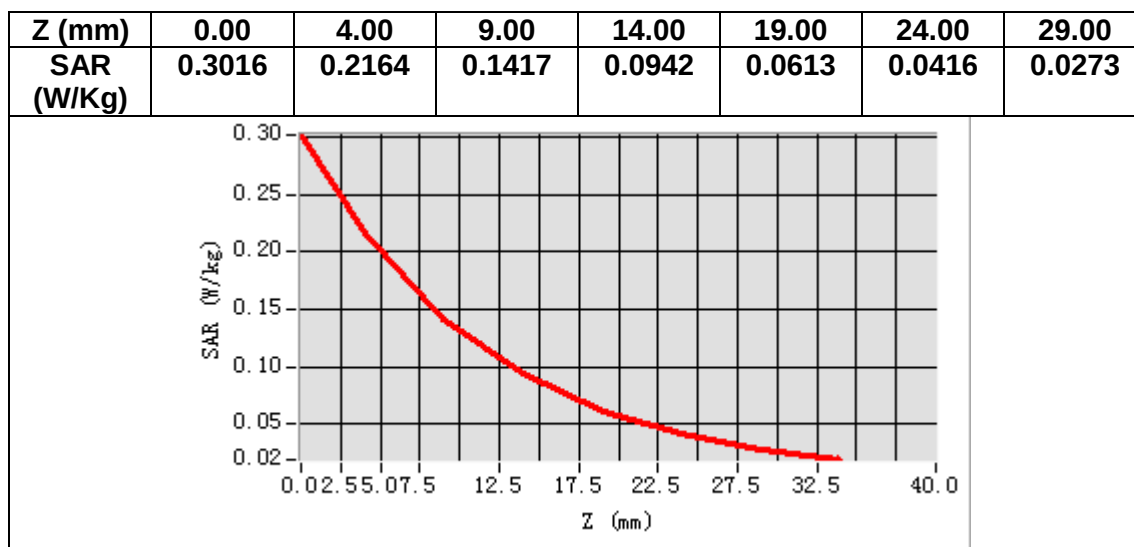

3D screen shot

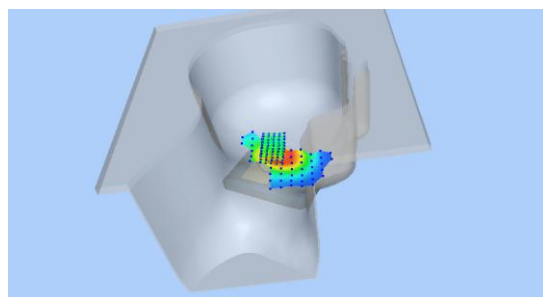

Hot spot position

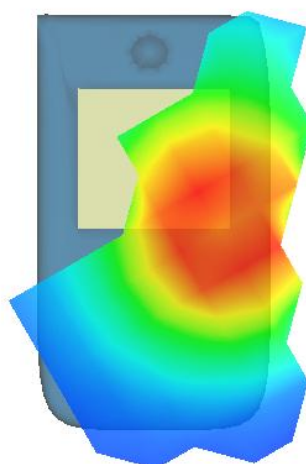

MEASUREMENT 10

Date of measurement: 5/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	40.269619
Relative permittivity (imaginary part)	19.639992
Conductivity (S/m)	0.912605
Variation (%)	1.810000

SURFACE SAR

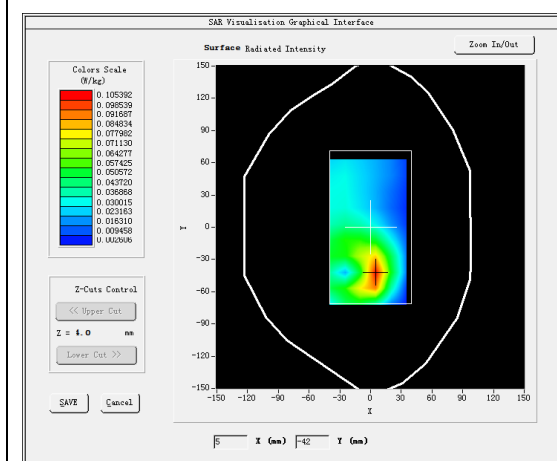



VOLUME SAR

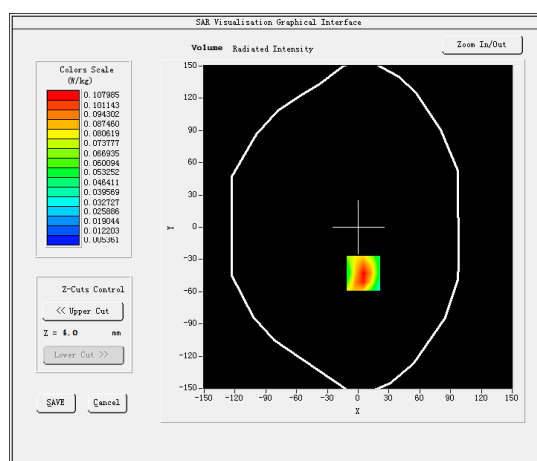

Maximum location: X=5.00, Y=-43.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.062811
SAR 1g (W/Kg)	0.104634

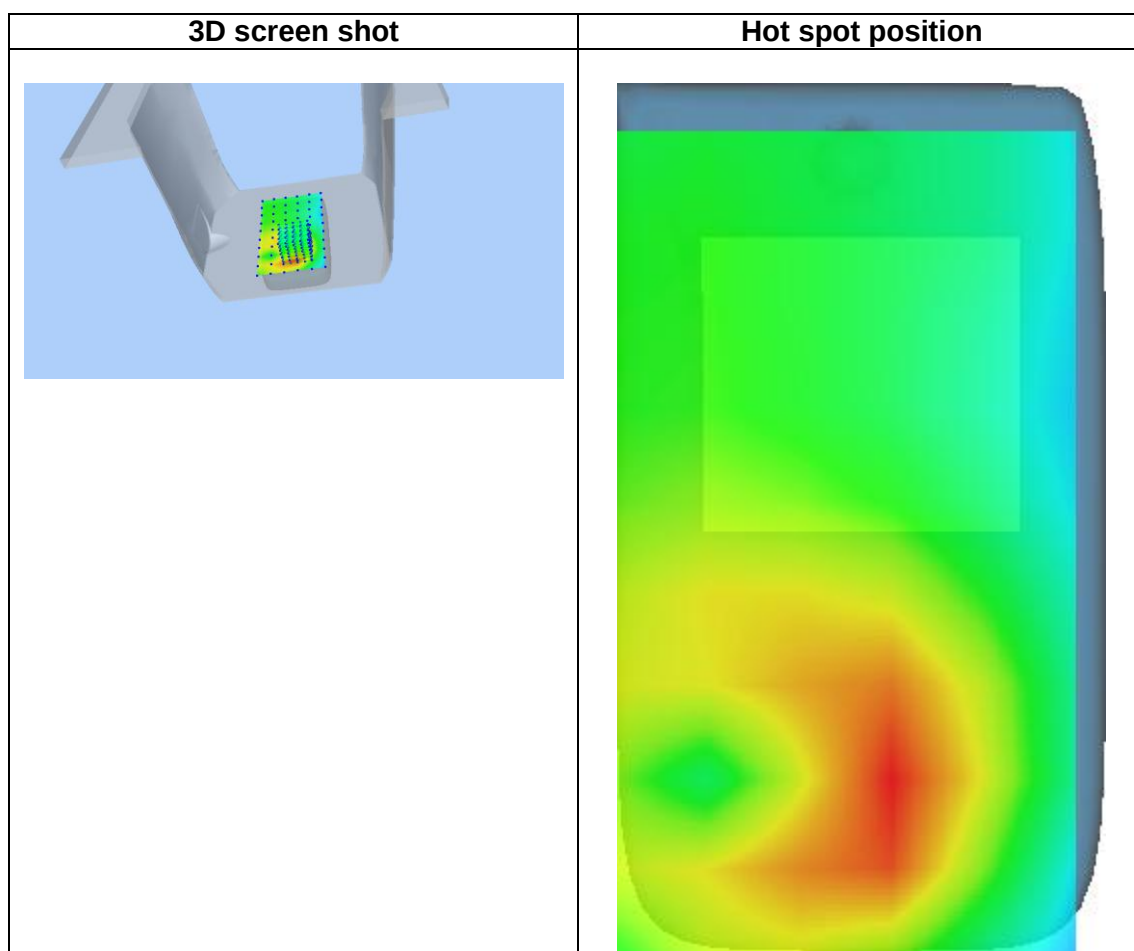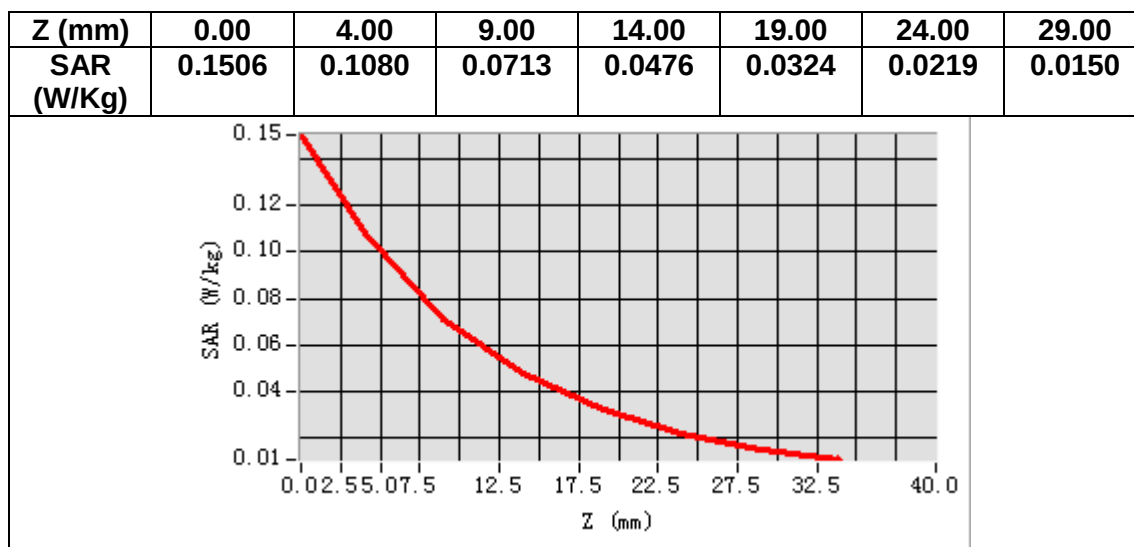

MEASUREMENT 11

Date of measurement: 26/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.98</u>


B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative permittivity (real part)	37.822538
Relative permittivity (imaginary part)	13.102747
Conductivity (S/m)	1.755768
Variation (%)	1.240000

SURFACE SAR

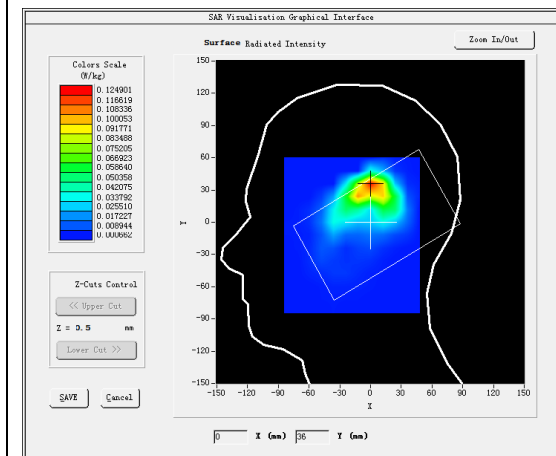



VOLUME SAR

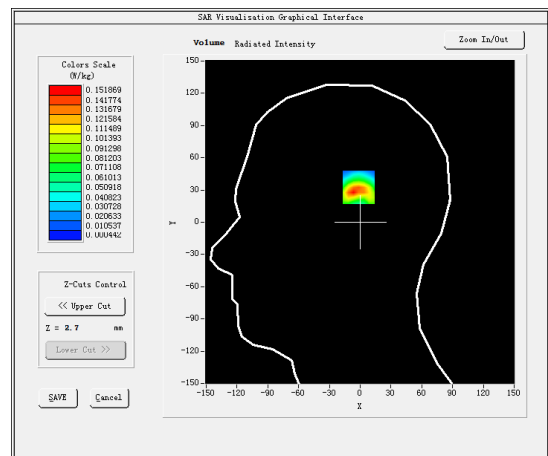

Maximum location: X=1.00, Y=35.00

SAR Peak: 0.27 W/kg

SAR 10g (W/Kg)	0.059694
SAR 1g (W/Kg)	0.135429

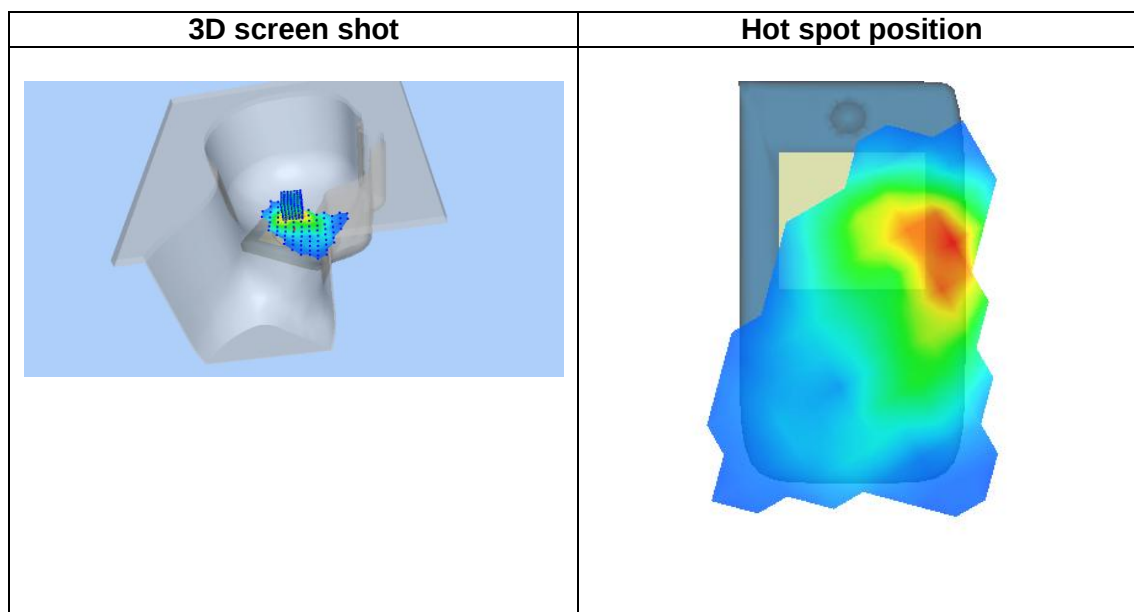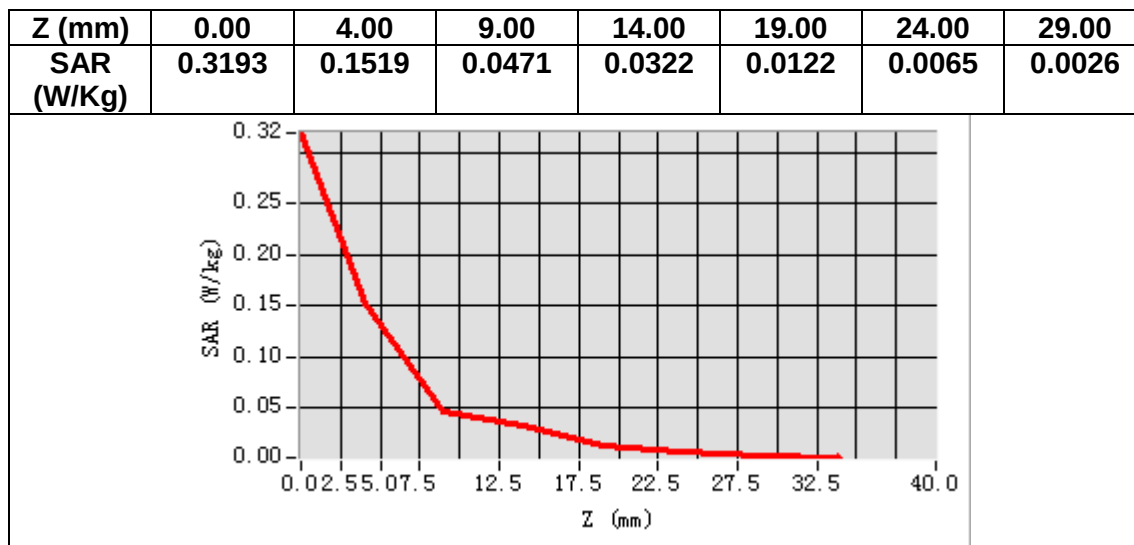

MEASUREMENT 12

Date of measurement: 10/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11ax U-NII</u>
<u>Channels</u>	<u>High</u>
<u>Signal</u>	<u>IEEE802.11ax (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.80</u>

B. SAR Measurement Results

Frequency (MHz)	5230.000000
Relative permittivity (real part)	34.807023
Relative permittivity (imaginary part)	16.011172
Conductivity (S/m)	4.652135
Variation (%)	-4.690000

SURFACE SAR

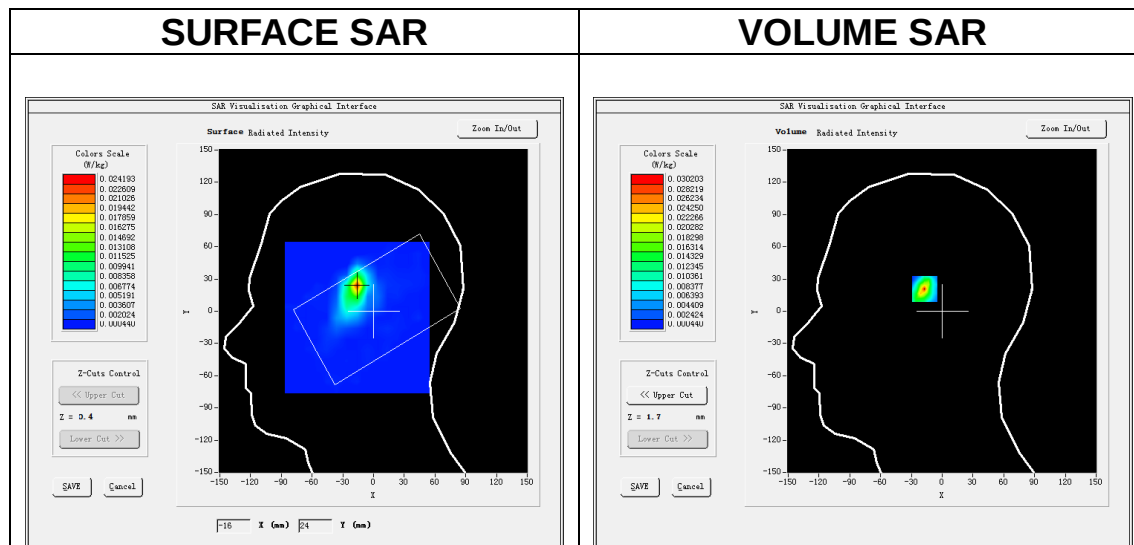


Maximum location: X=-16.00, Y=24.00


SAR Peak: 0.09 W/kg

SAR 10g (W/Kg)	0.007225
SAR 1g (W/Kg)	0.023978


Z (m m)	0.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0
SAR (W/ Kg)	0.09 27	0.03 02	0.00 96	0.00 66	0.00 20	0.00 08	0.00 04	0.00 04	0.00 05	0.00 04	0.00 04	0.00 07

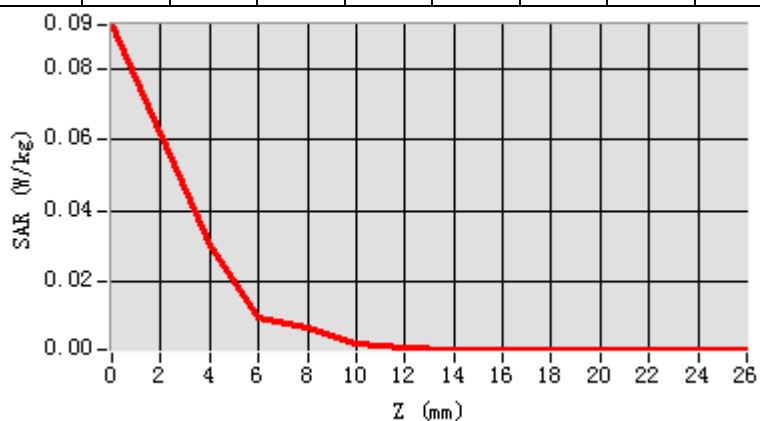

3D screen shot

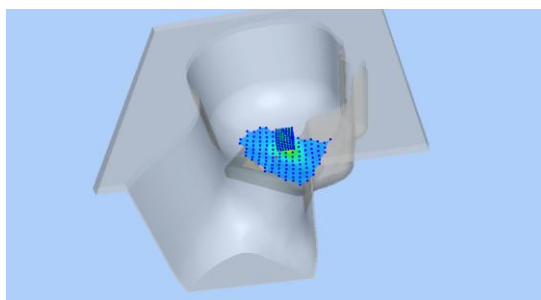

Hot spot position

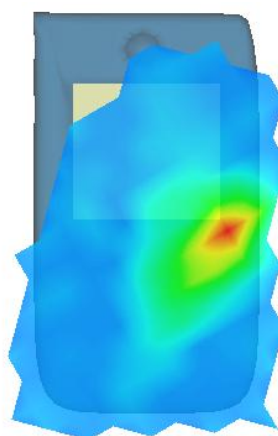

MEASUREMENT 13

Date of measurement: 22/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results

Frequency (MHz)	5260.000000
Relative permittivity (real part)	34.805766
Relative permittivity (imaginary part)	16.119013
Conductivity (S/m)	4.710334
Variation (%)	2.960000

SURFACE SAR

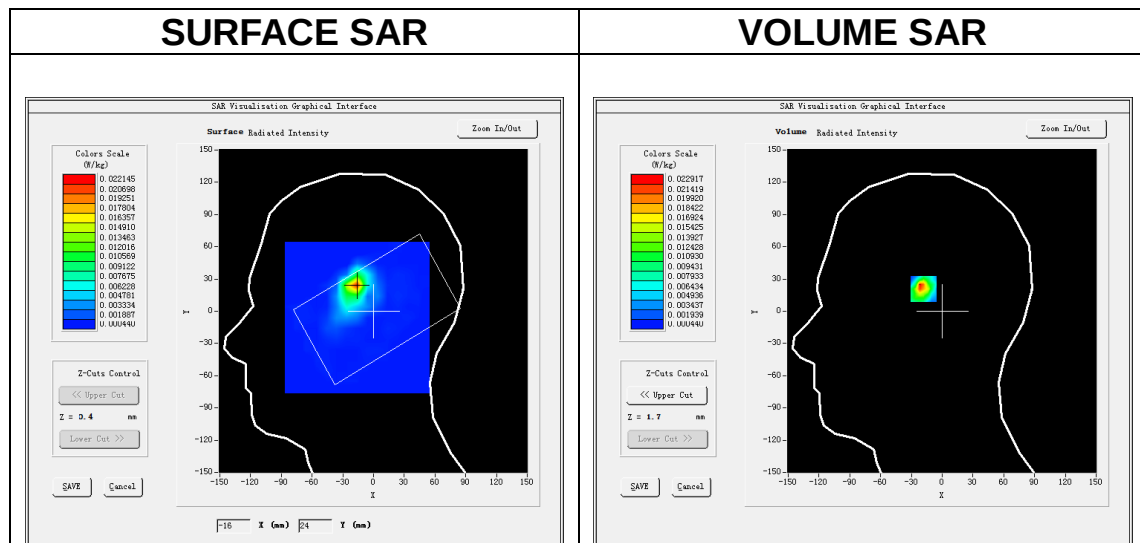


Maximum location: X=-17.00, Y=24.00


SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.006058
SAR 1g (W/Kg)	0.020067


Z (m m)	0.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0	24.0 0
SAR (W/ Kg)	0.07 84	0.02 29	0.00 57	0.00 34	0.00 05	0.00 06	0.00 06	0.00 07	0.00 06	0.00 04	0.00 04	0.00 04

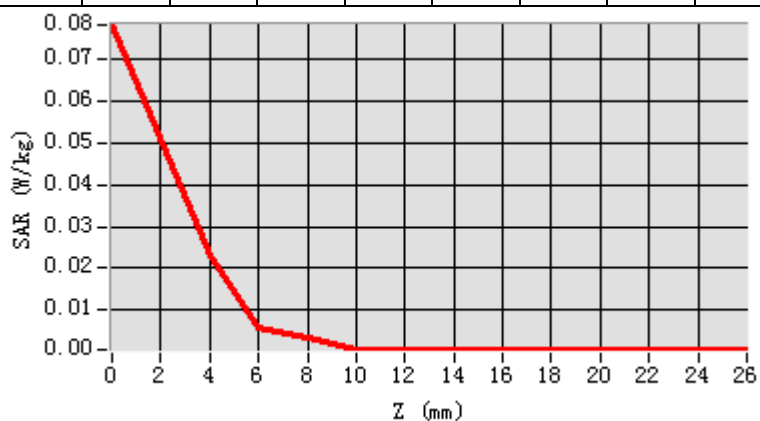

3D screen shot

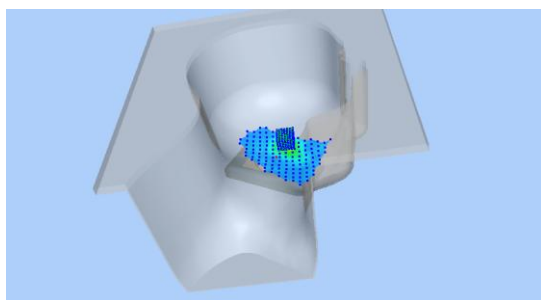

Hot spot position

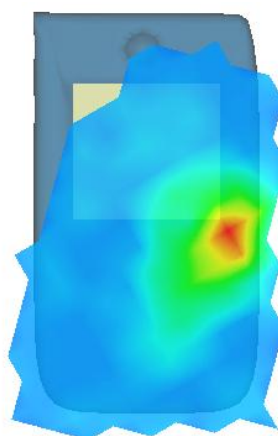

MEASUREMENT 14

Date of measurement: 23/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11ax U-NII</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>IEEE802.11ax (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.16</u>

B. SAR Measurement Results

Frequency (MHz)	5510.000000
Relative permittivity (real part)	34.567086
Relative permittivity (imaginary part)	15.780323
Conductivity (S/m)	4.830532
Variation (%)	-3.420000

SURFACE SAR

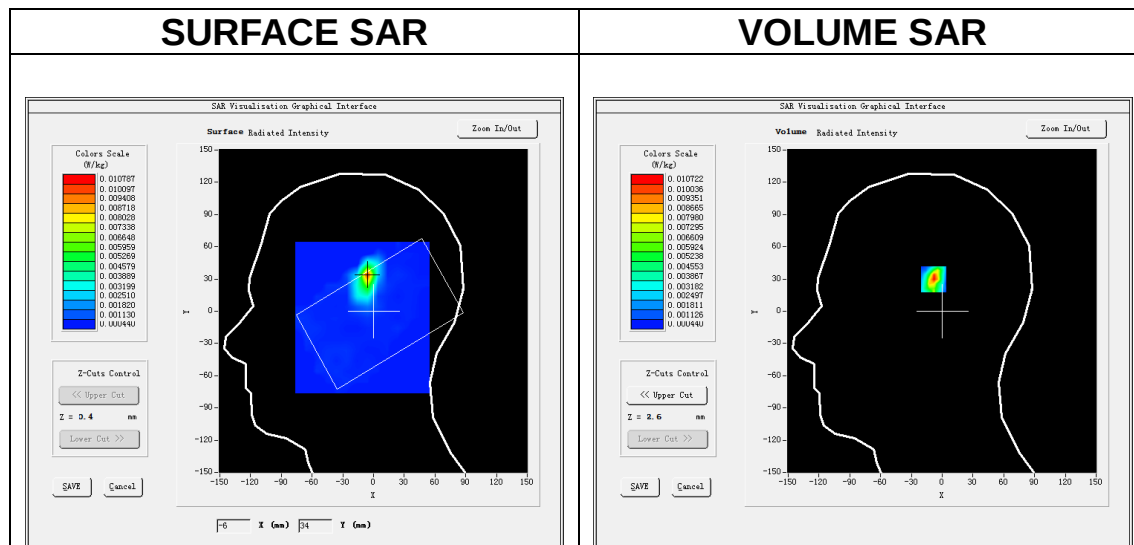


Maximum location: X=-6.00, Y=33.00


SAR Peak: 0.04 W/kg

SAR 10g (W/Kg)	0.002928
SAR 1g (W/Kg)	0.009908


Z (m m)	0.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0	24.0 0
SAR (W/ Kg)	0.03 47	0.01 07	0.00 43	0.00 15	0.00 06	0.00 04	0.00 05	0.00 04	0.00 05	0.00 05	0.00 04	0.00 05

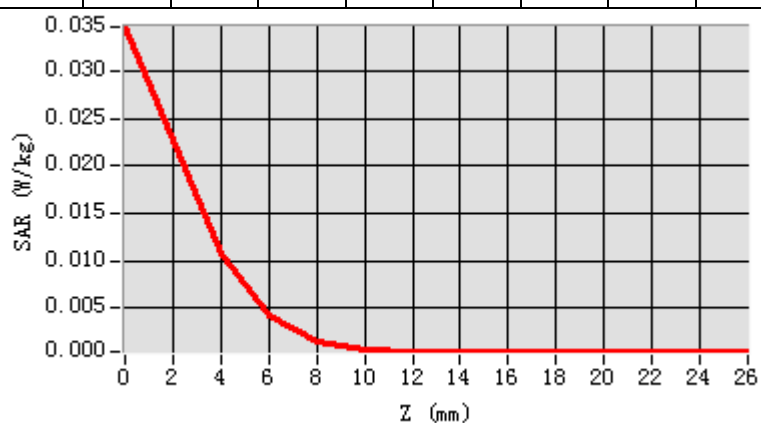

3D screen shot

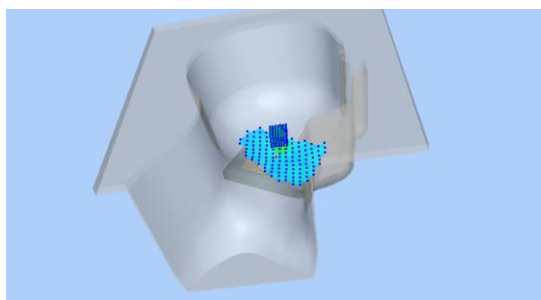

Hot spot position

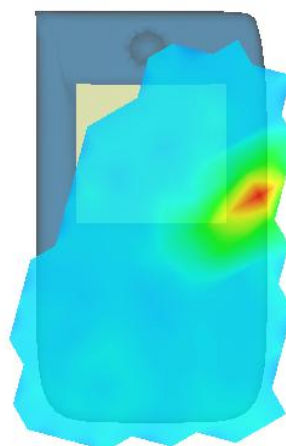

MEASUREMENT 15

Date of measurement: 24/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11ac U-NII</u>
<u>Channels</u>	<u>High</u>
<u>Signal</u>	<u>IEEE802.11ac (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.07</u>


B. SAR Measurement Results

Frequency (MHz)	5795.000000
Relative permittivity (real part)	34.513724
Relative permittivity (imaginary part)	16.339187
Conductivity (S/m)	5.260310
Variation (%)	-3.330000

SURFACE SAR

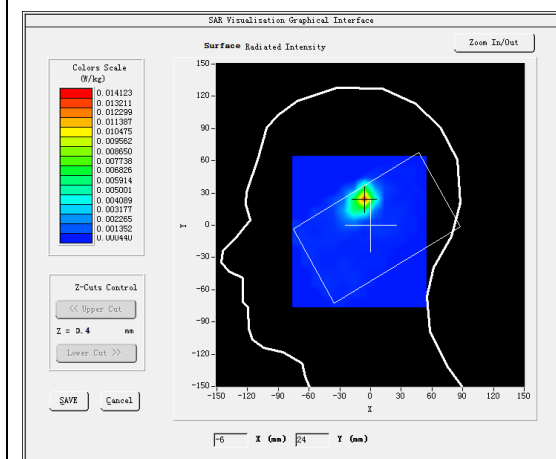

VOLUME SAR

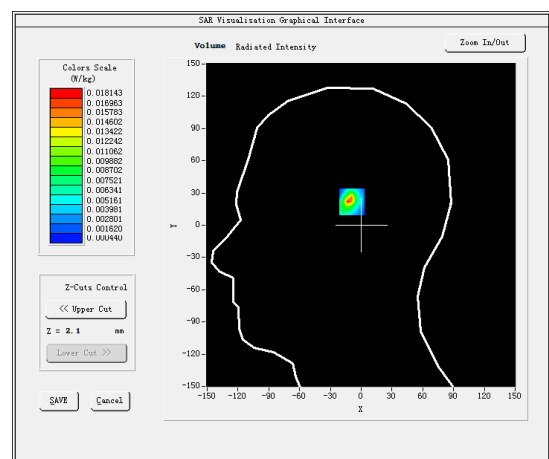


Maximum location: X=-6.00, Y=24.00


SAR Peak: 0.06 W/kg

SAR 10g (W/Kg)	0.004399
SAR 1g (W/Kg)	0.015909


Z (m m)	0.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0	24.0 0
SAR (W/ Kg)	0.06 31	0.01 81	0.00 38	0.00 24	0.00 05	0.00 05	0.00 05	0.00 04	0.00 04	0.00 04	0.00 04	0.00 04

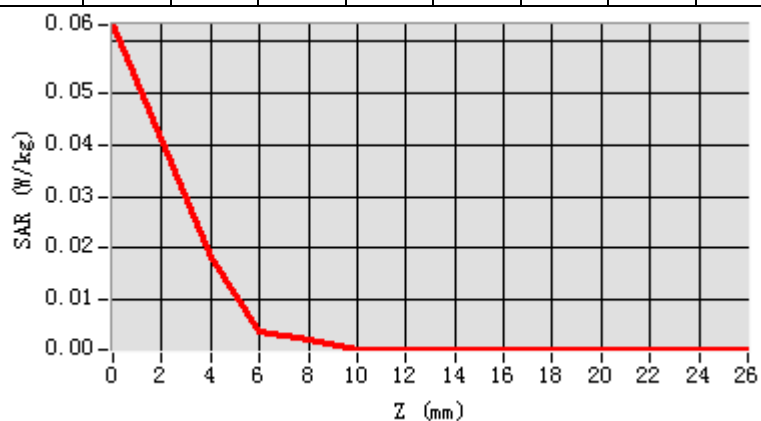

3D screen shot

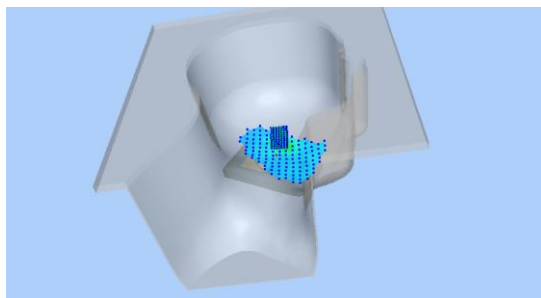

Hot spot position

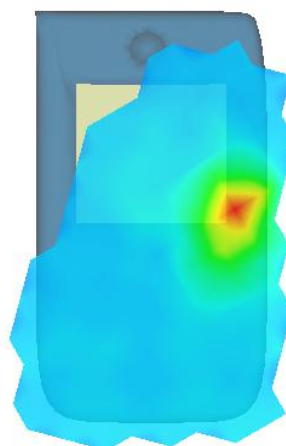

MEASUREMENT 16

Date of measurement: 26/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.98</u>


B. SAR Measurement Results



Frequency (MHz)	2412.000000
Relative permittivity (real part)	37.822538
Relative permittivity (imaginary part)	13.102747
Conductivity (S/m)	1.755768
Variation (%)	2.140000

SURFACE SAR

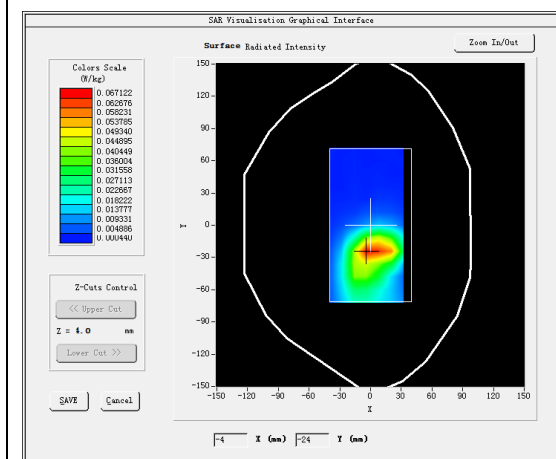

VOLUME SAR

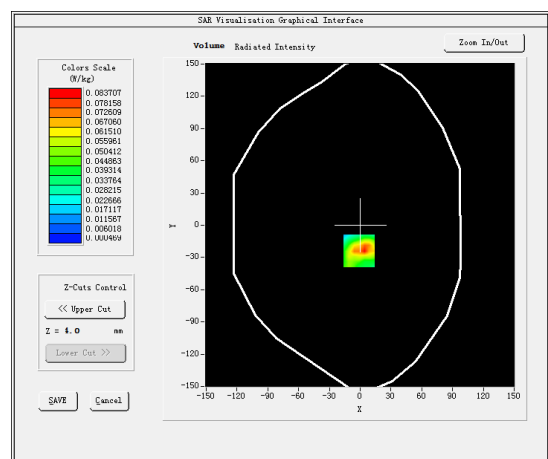

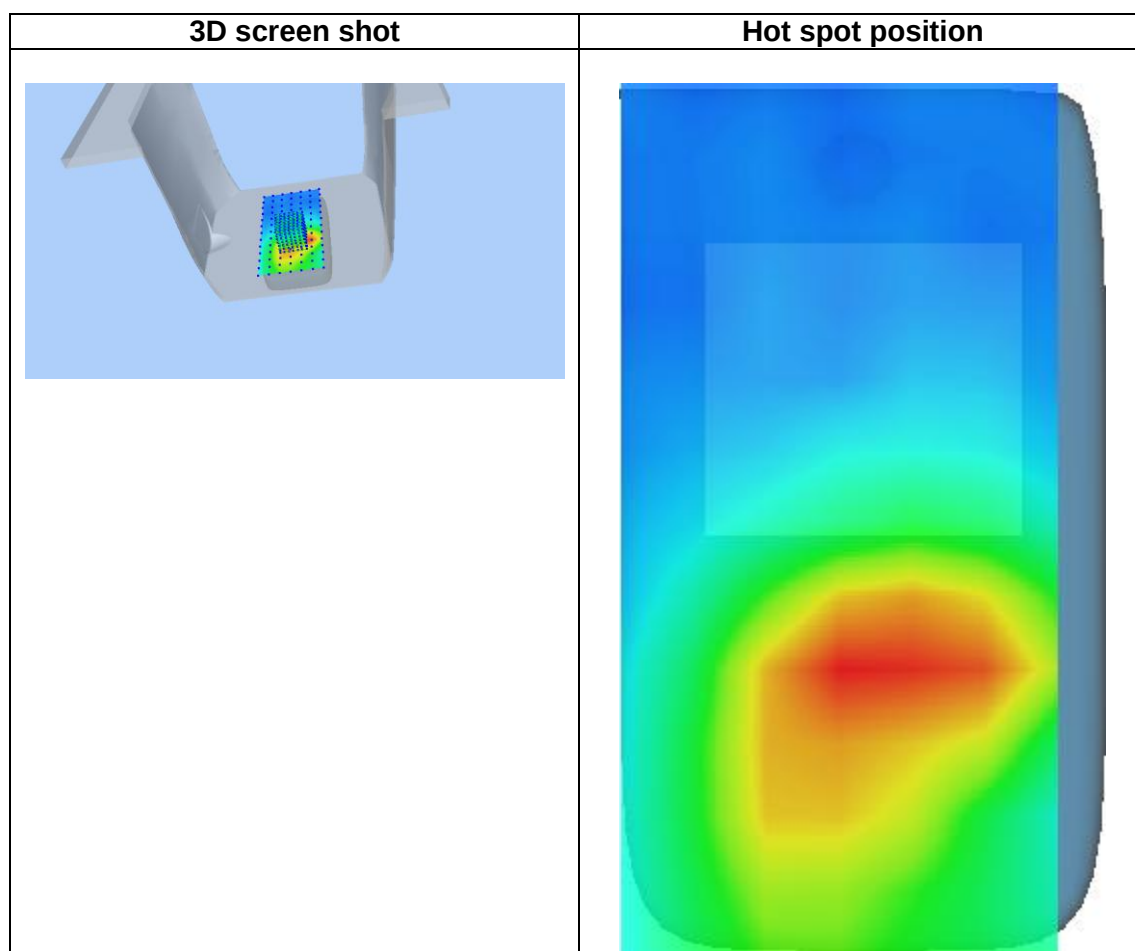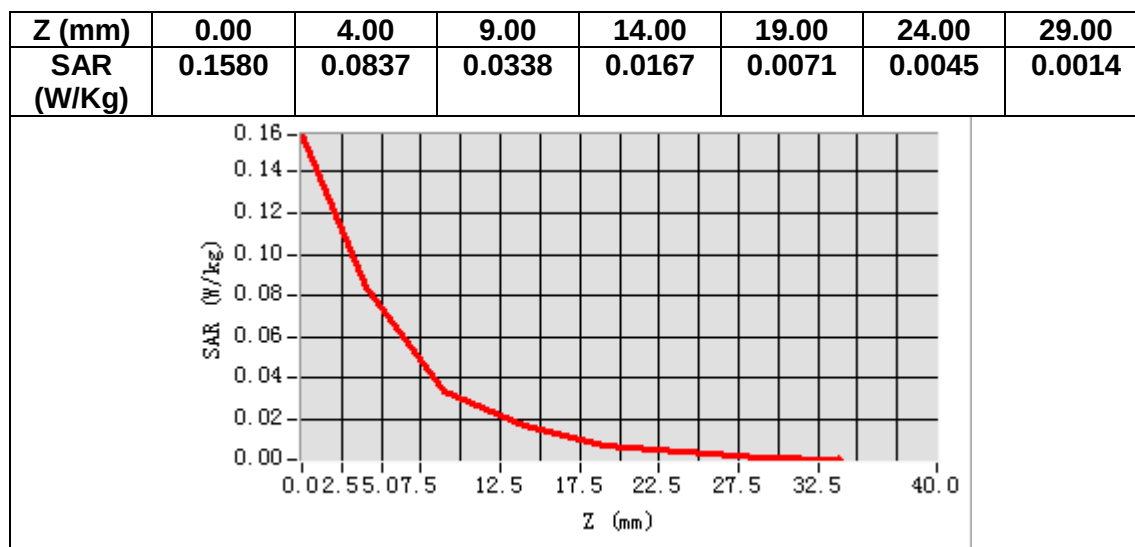

MEASUREMENT 17

Date of measurement: 10/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11ax U-NII</u>
<u>Channels</u>	<u>High</u>
<u>Signal</u>	<u>IEEE802.11ax (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.80</u>

B. SAR Measurement Results

Frequency (MHz)	5230.000000
Relative permittivity (real part)	34.807023
Relative permittivity (imaginary part)	16.011172
Conductivity (S/m)	4.652135
Variation (%)	-3.000000

SURFACE SAR

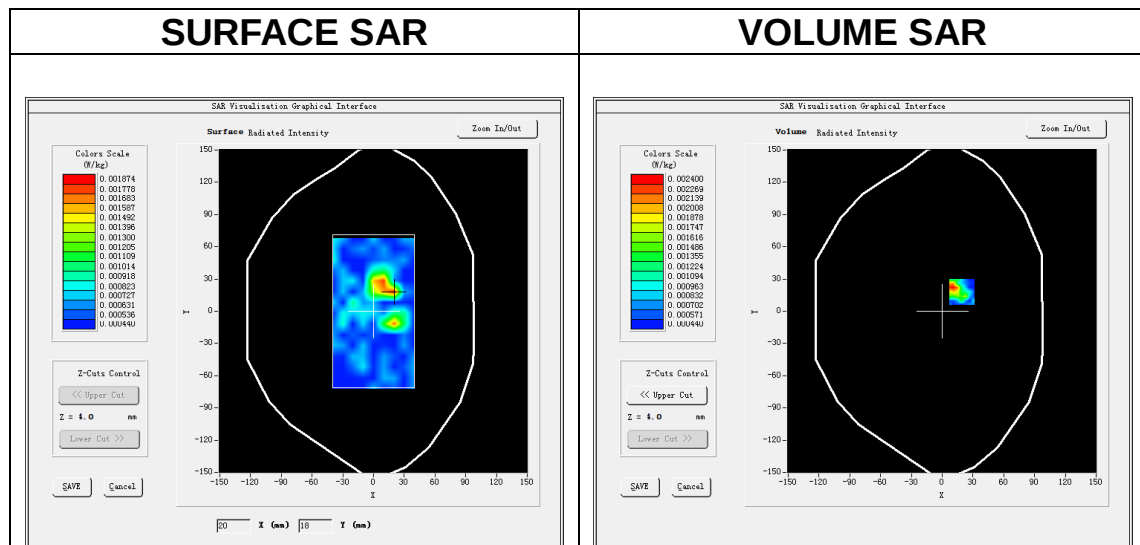


Maximum location: X=19.00, Y=18.00


SAR Peak: 0.01 W/kg

SAR 10g (W/Kg)	0.000940
SAR 1g (W/Kg)	0.002142


Z (m m)	0.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0	24.0 0
SA R (W/ Kg)	0.00 79	0.00 24	0.00 06	0.00 05	0.00 05	0.00 07	0.00 04	0.00 04	0.00 04	0.00 05	0.00 04	0.00 04

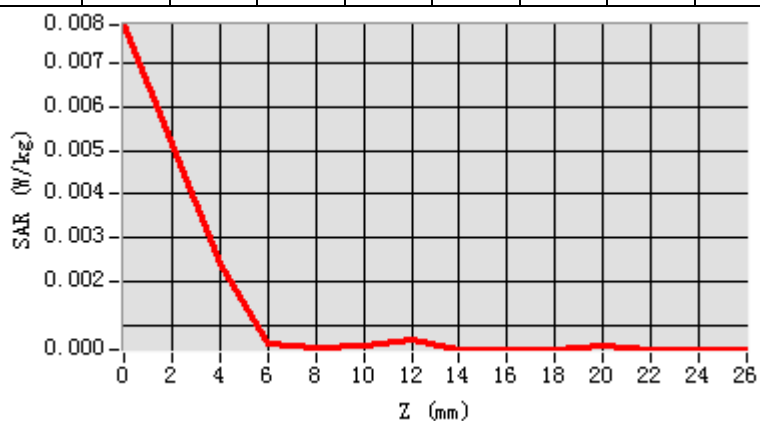

3D screen shot

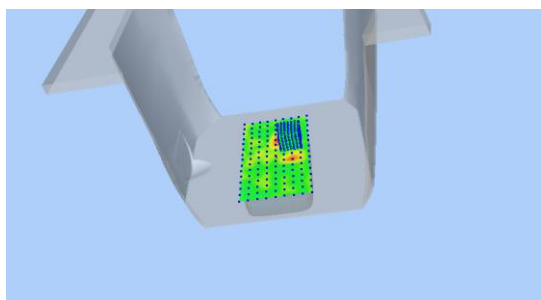

Hot spot position

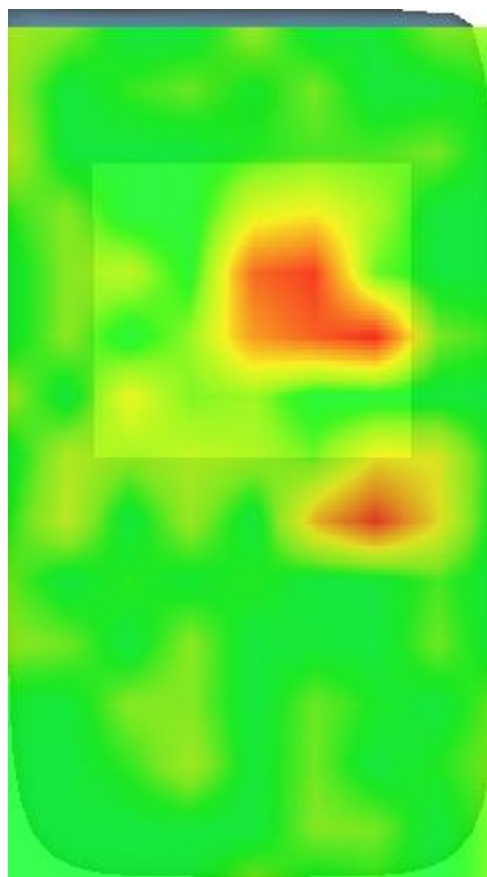

MEASUREMENT 18

Date of measurement: 22/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>


B. SAR Measurement Results

Frequency (MHz)	5280.000000
Relative permittivity (real part)	35.727096
Relative permittivity (imaginary part)	15.900010
Conductivity (S/m)	4.664003
Variation (%)	2.050000

SURFACE SAR

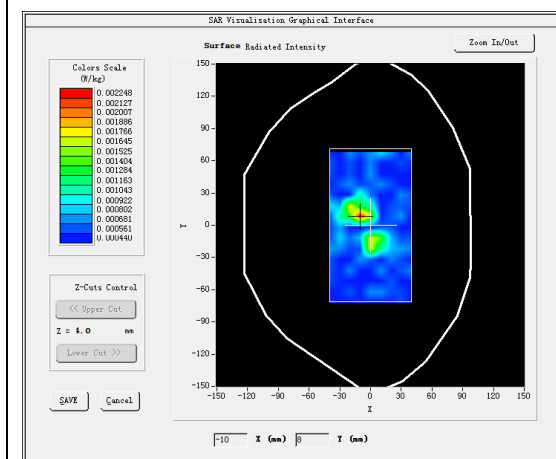


VOLUME SAR

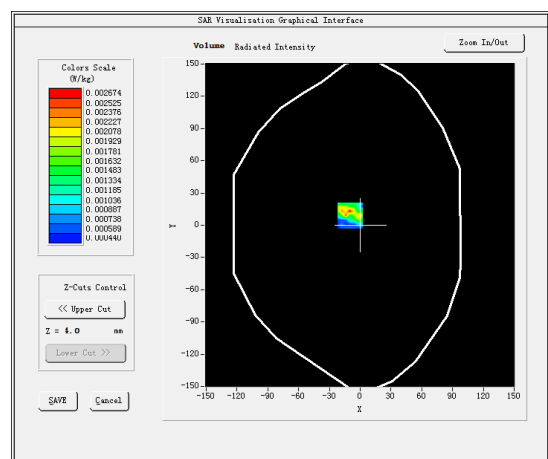


Maximum location: X=-10.00, Y=9.00

SAR Peak: 0.01 W/kg


SAR 10g (W/Kg)	0.001021
SAR 1g (W/Kg)	0.002294

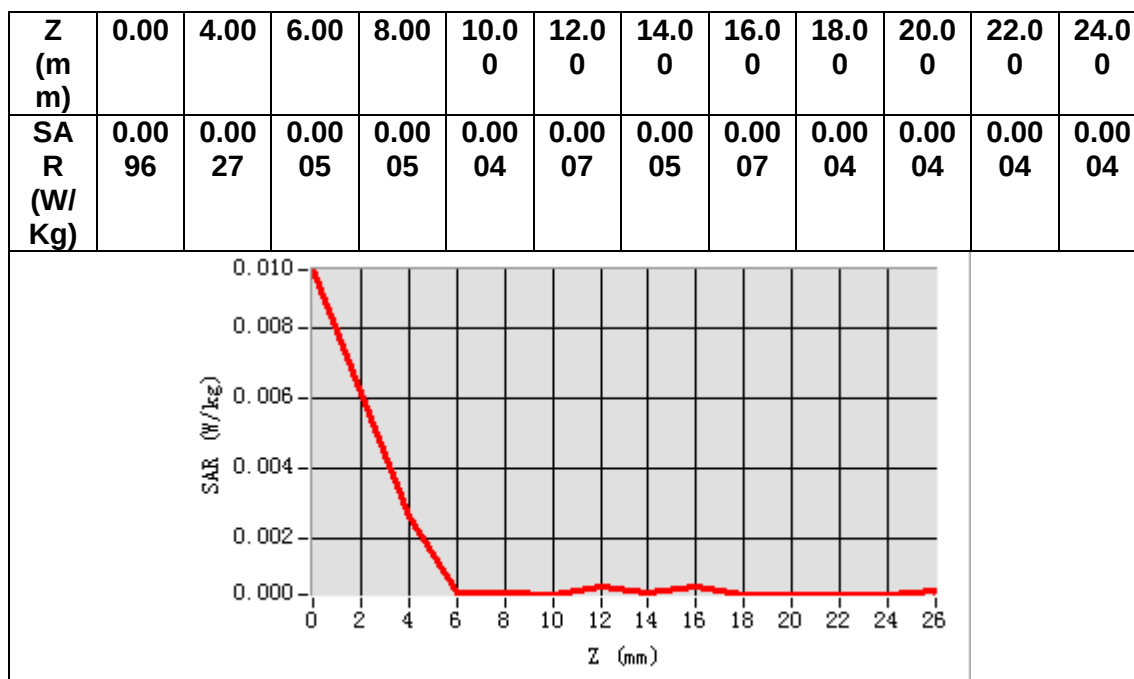

3D screen shot

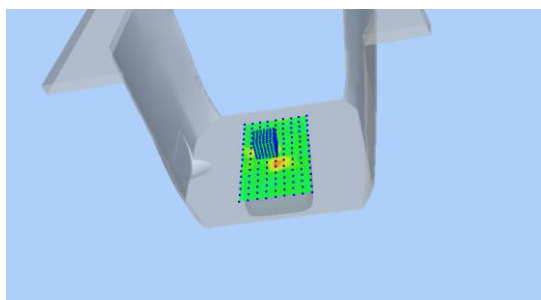

Hot spot position

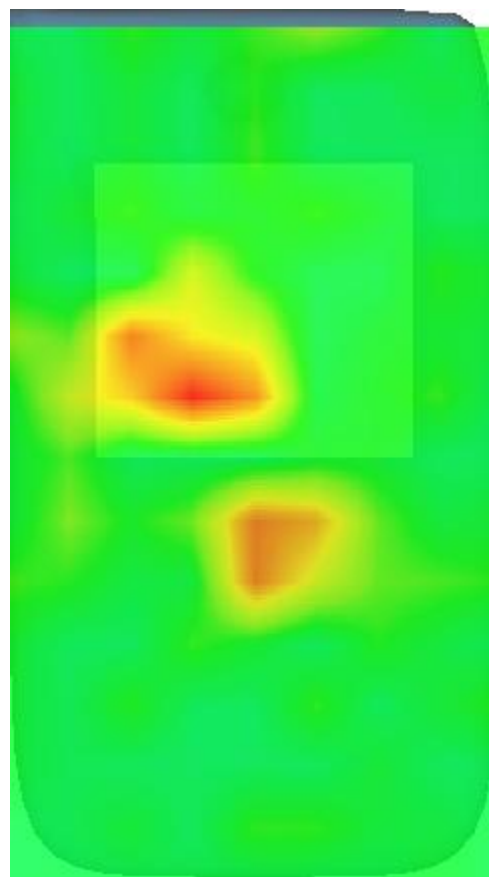

MEASUREMENT 19

Date of measurement: 23/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11ax U-NII</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>IEEE802.11ax (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.16</u>


B. SAR Measurement Results

Frequency (MHz)	5510.000000
Relative permittivity (real part)	34.567086
Relative permittivity (imaginary part)	15.780323
Conductivity (S/m)	4.830532
Variation (%)	1.230000

SURFACE SAR

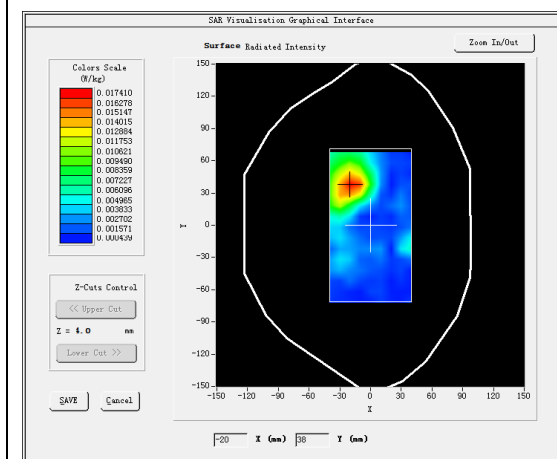



VOLUME SAR

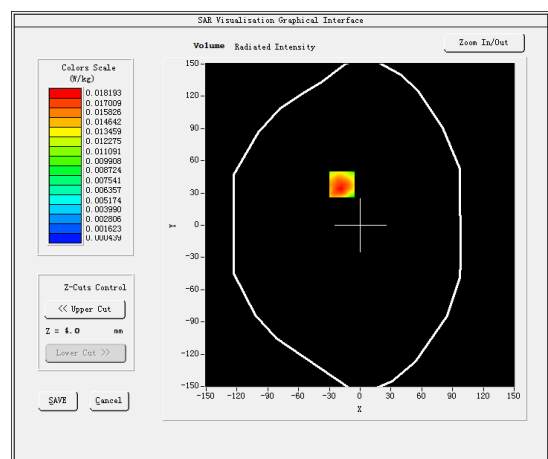

Maximum location: X=-18.00, Y=38.00

SAR Peak: 0.05 W/kg

SAR 10g (W/Kg)	0.008039
SAR 1g (W/Kg)	0.019134

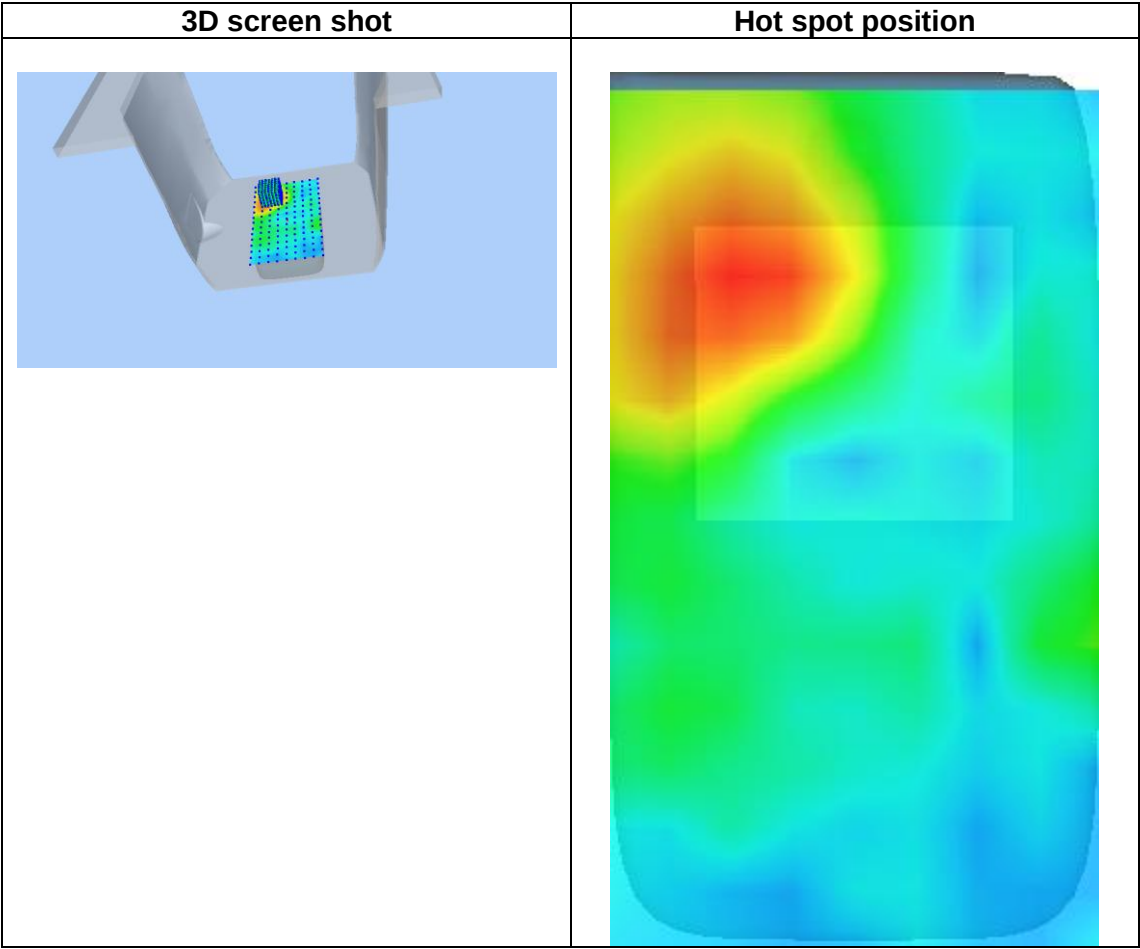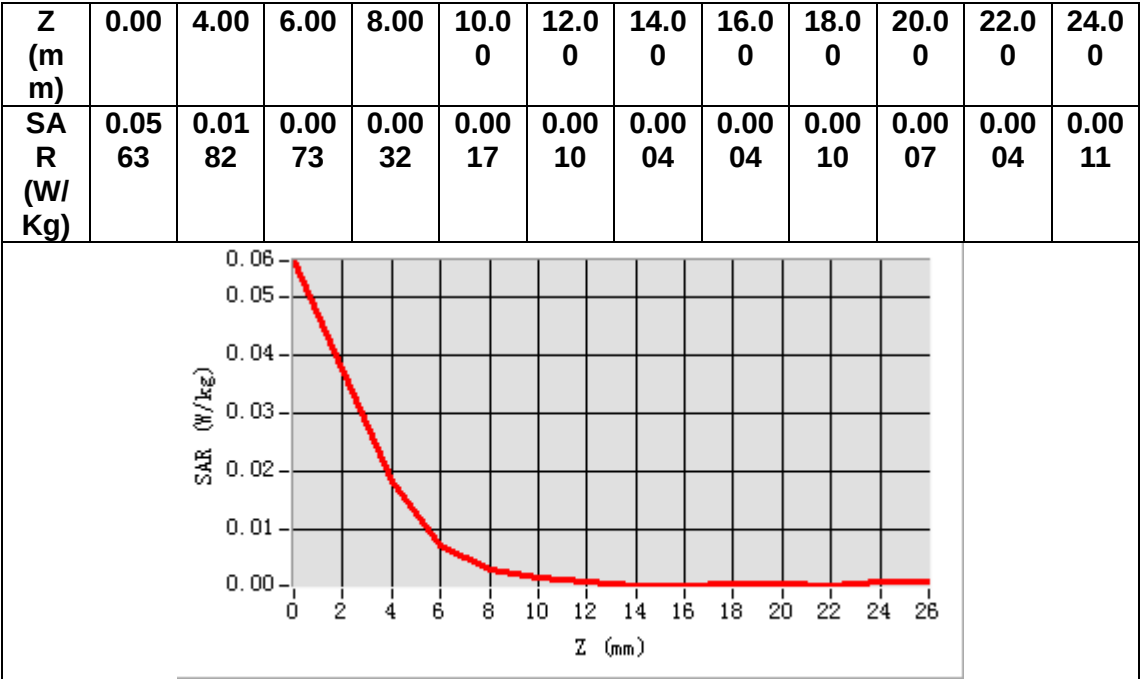

MEASUREMENT 20

Date of measurement: 24/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11ac U-NII</u>
<u>Channels</u>	<u>High</u>
<u>Signal</u>	<u>IEEE802.11ac (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.07</u>


B. SAR Measurement Results

Frequency (MHz)	5795.000000
Relative permittivity (real part)	34.513724
Relative permittivity (imaginary part)	16.339187
Conductivity (S/m)	5.260310
Variation (%)	-3.719999

SURFACE SAR

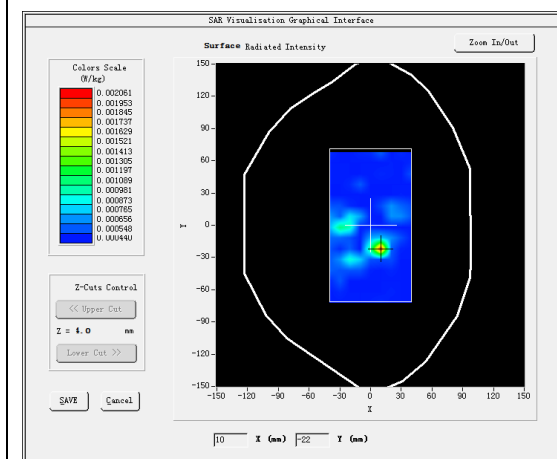

VOLUME SAR

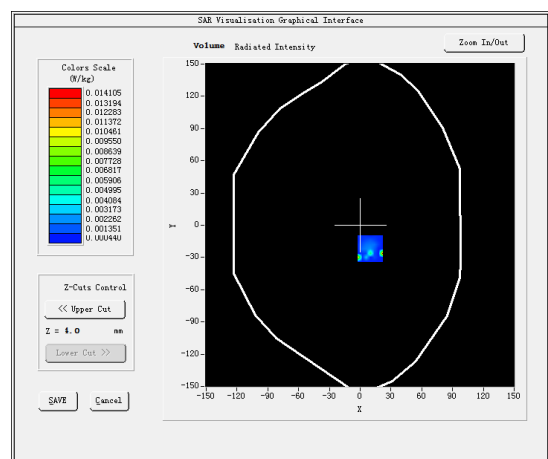


Maximum location: X=10.00, Y=-22.00


SAR Peak: 0.05 W/kg

SAR 10g (W/Kg)	0.001049
SAR 1g (W/Kg)	0.002637


Z (m m)	0.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0	24.0 0
SA R (W/ Kg)	0.05 52	0.01 41	0.00 06	0.00 04	0.00 04	0.00 05	0.00 05	0.00 06	0.00 05	0.00 05	0.00 05	0.00 05

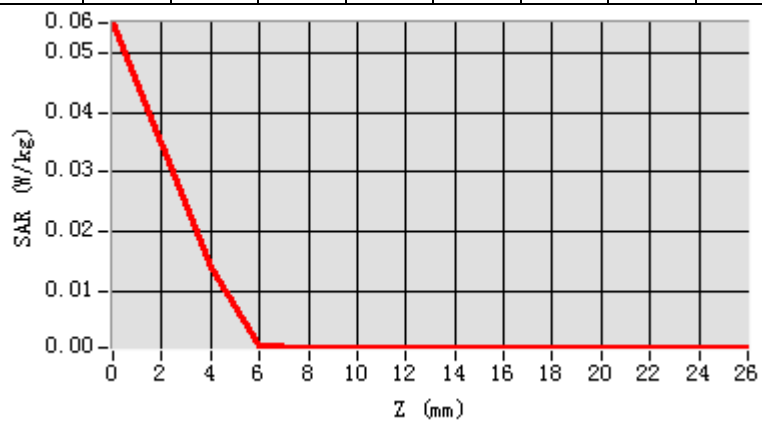

3D screen shot

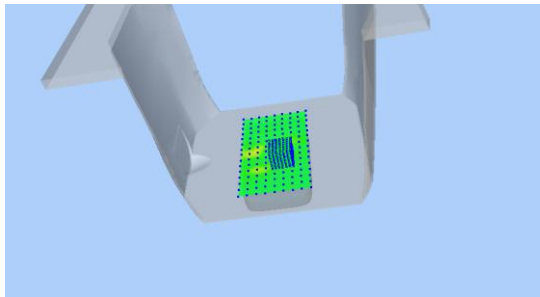

Hot spot position

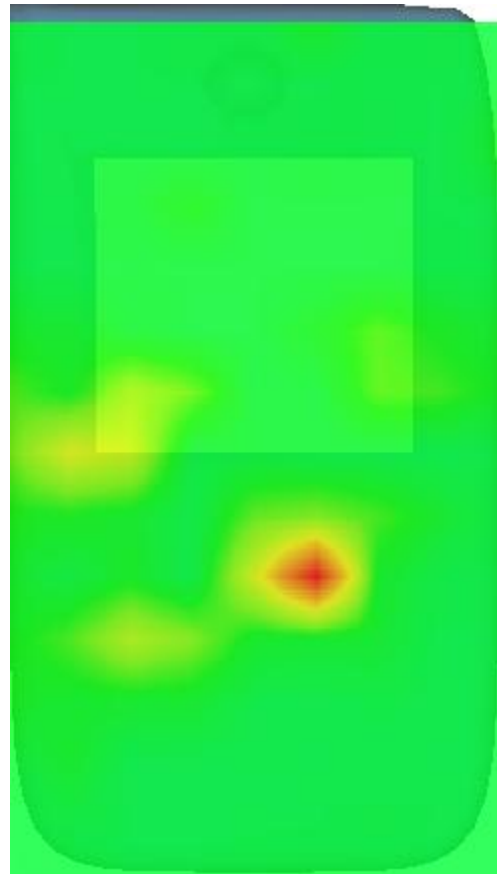

MEASUREMENT 21

Date of measurement: 9/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.91</u>

B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.461483
Relative permittivity (imaginary part)	13.876862
Conductivity (S/m)	1.449361
Variation (%)	-4.900002



SURFACE SAR

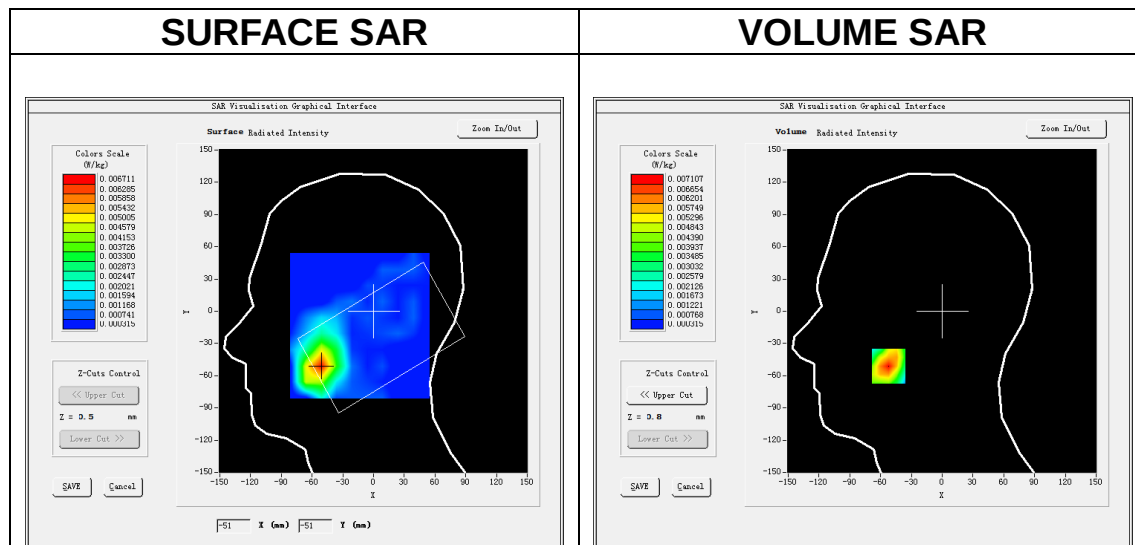

Maximum location: X=-52.00, Y=-51.00

SAR Peak: 0.01 W/kg

SAR 10g (W/Kg)	0.003762
SAR 1g (W/Kg)	0.006279

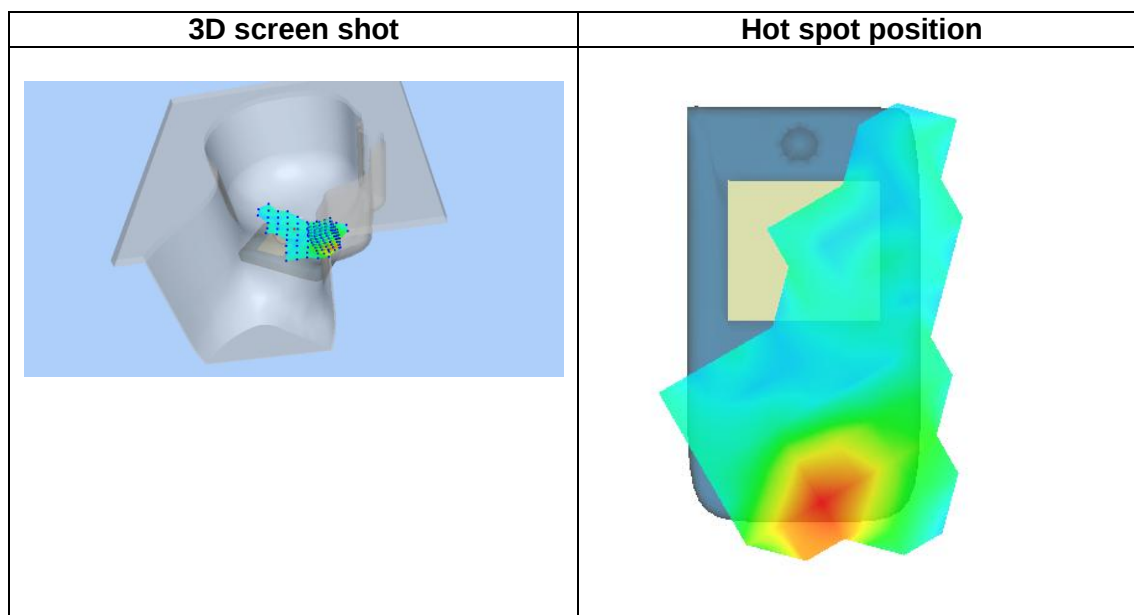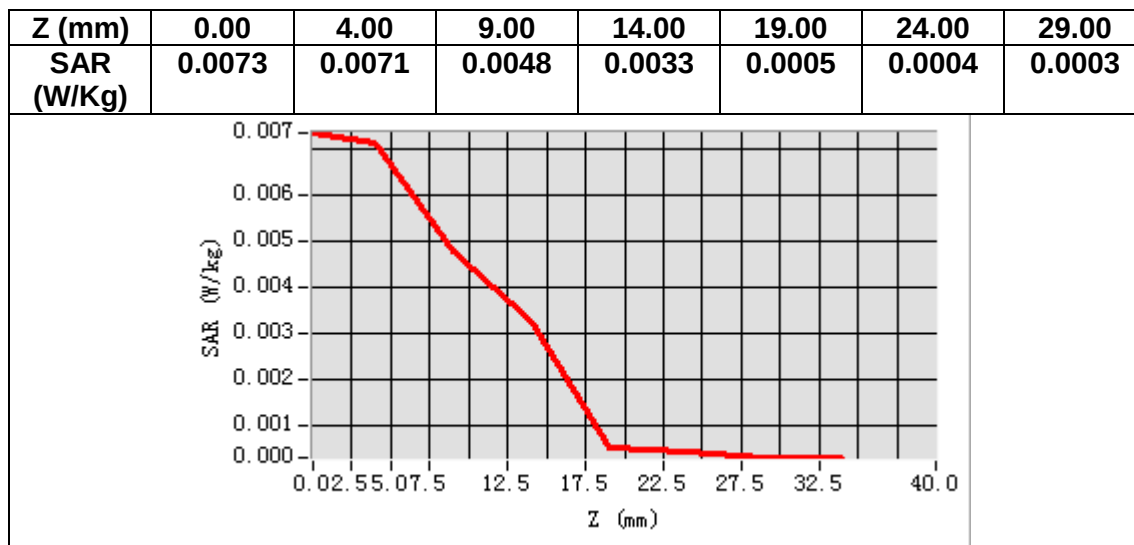

MEASUREMENT 22

Date of measurement: 9/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.461483
Relative permittivity (imaginary part)	13.876862
Conductivity (S/m)	1.449361
Variation (%)	1.360000

SURFACE SAR

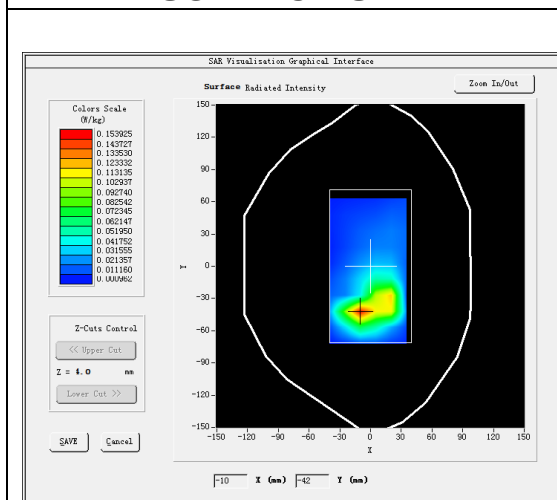



VOLUME SAR

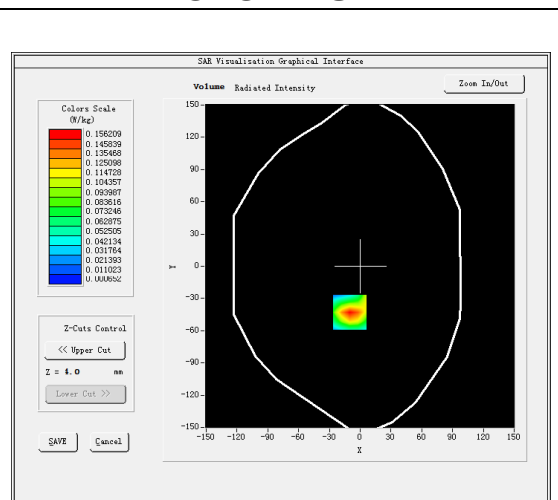

Maximum location: X=-10.00, Y=-43.00

SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.075430
SAR 1g (W/Kg)	0.148397

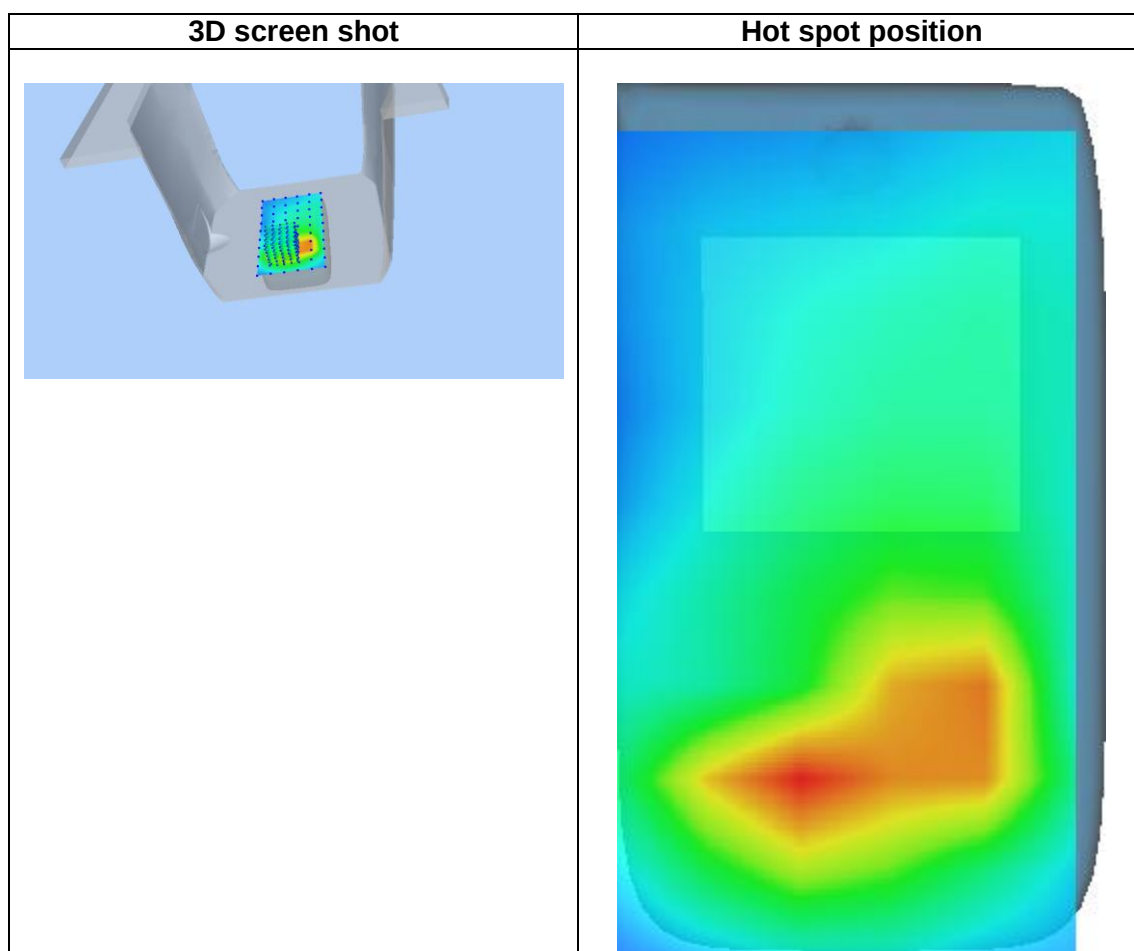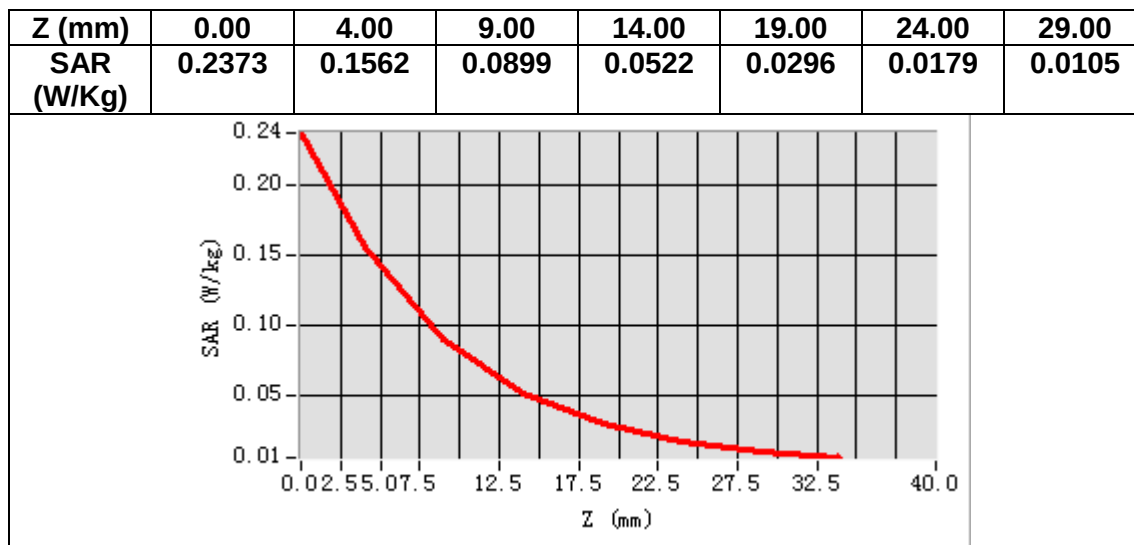

MEASUREMENT 23

Date of measurement: 8/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.73</u>

B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	40.523621
Relative permittivity (imaginary part)	14.255795
Conductivity (S/m)	1.372120
Variation (%)	-4.430000



SURFACE SAR

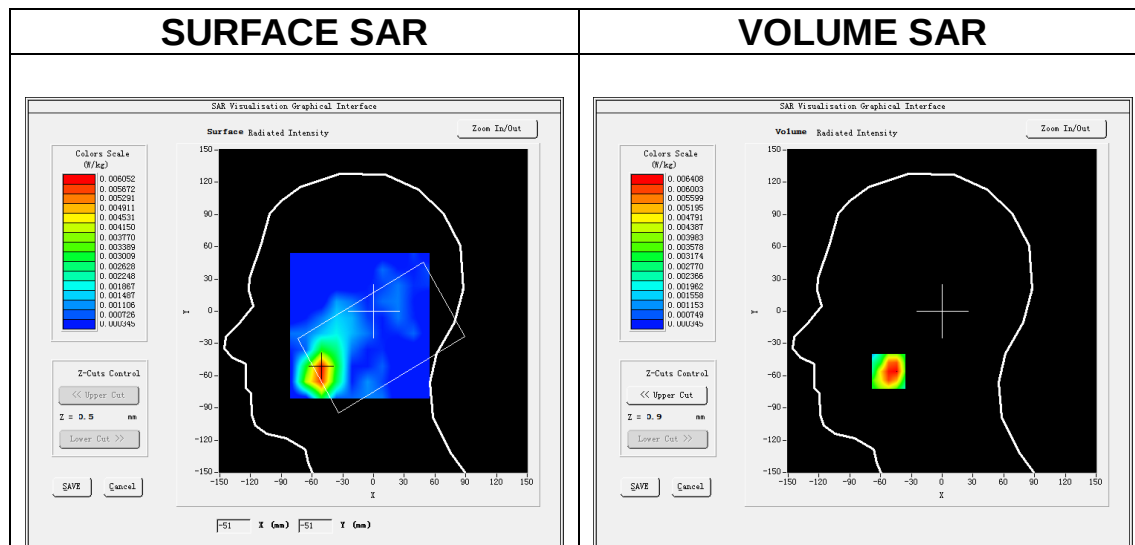

Maximum location: X=-52.00, Y=-56.00

SAR Peak: 0.01 W/kg

SAR 10g (W/Kg)	0.003678
SAR 1g (W/Kg)	0.006491

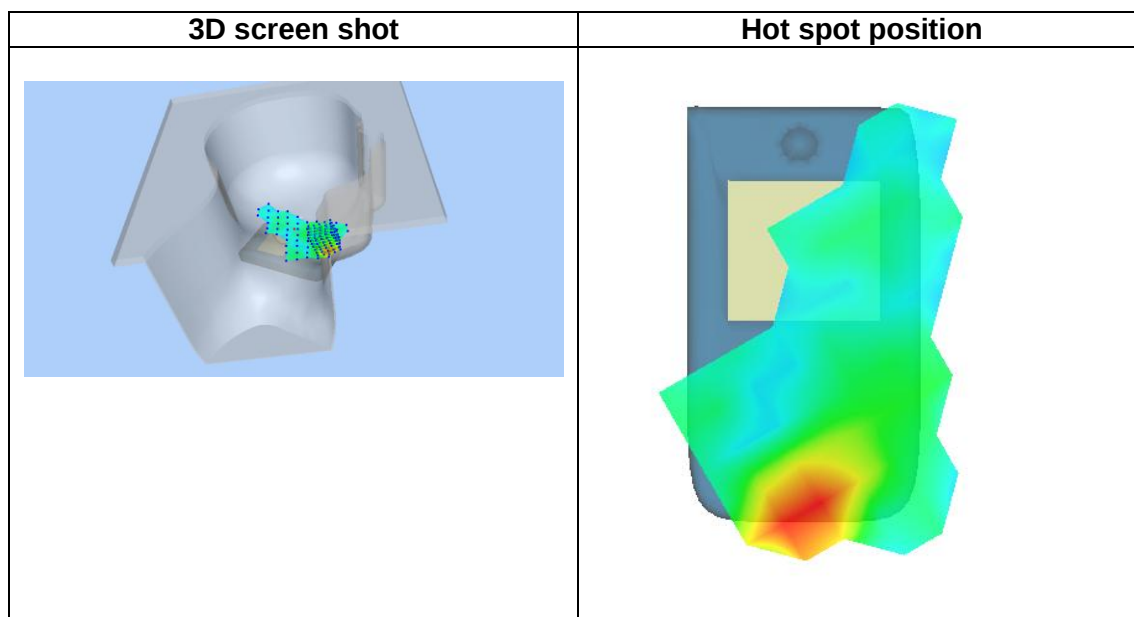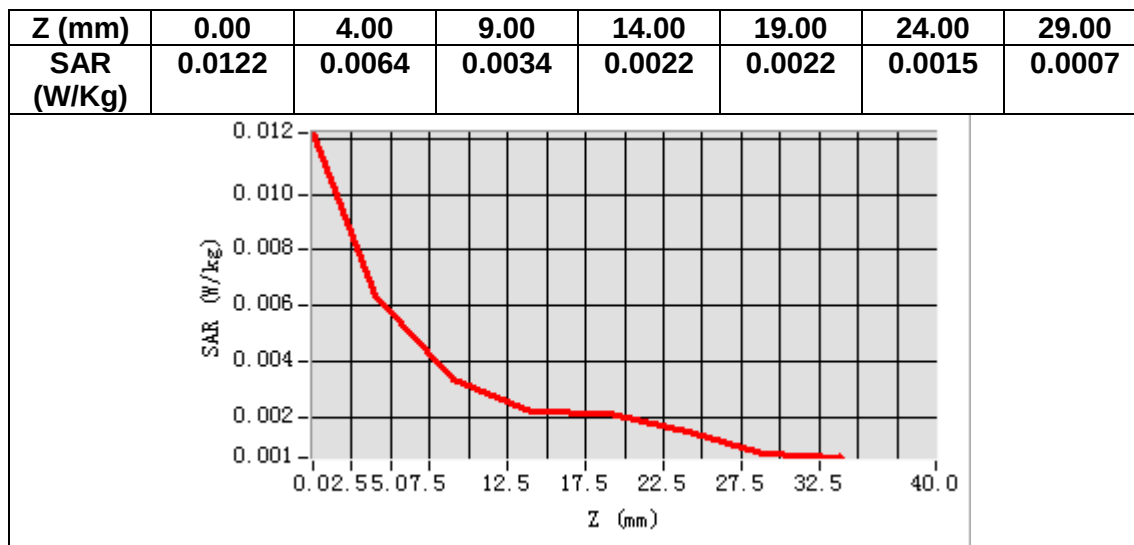

MEASUREMENT 24

Date of measurement: 8/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.73</u>


B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	40.523621
Relative permittivity (imaginary part)	14.255795
Conductivity (S/m)	1.372120
Variation (%)	3.620000

SURFACE SAR

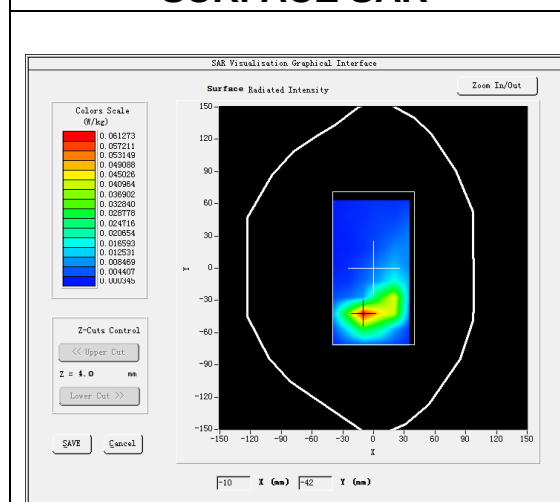



VOLUME SAR

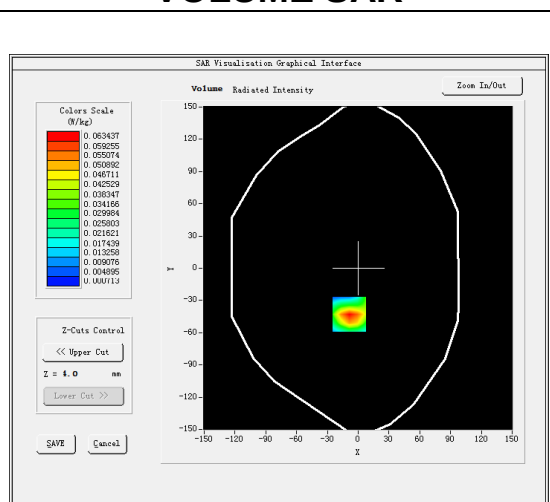

Maximum location: X=-9.00, Y=-43.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.031109
SAR 1g (W/Kg)	0.059275

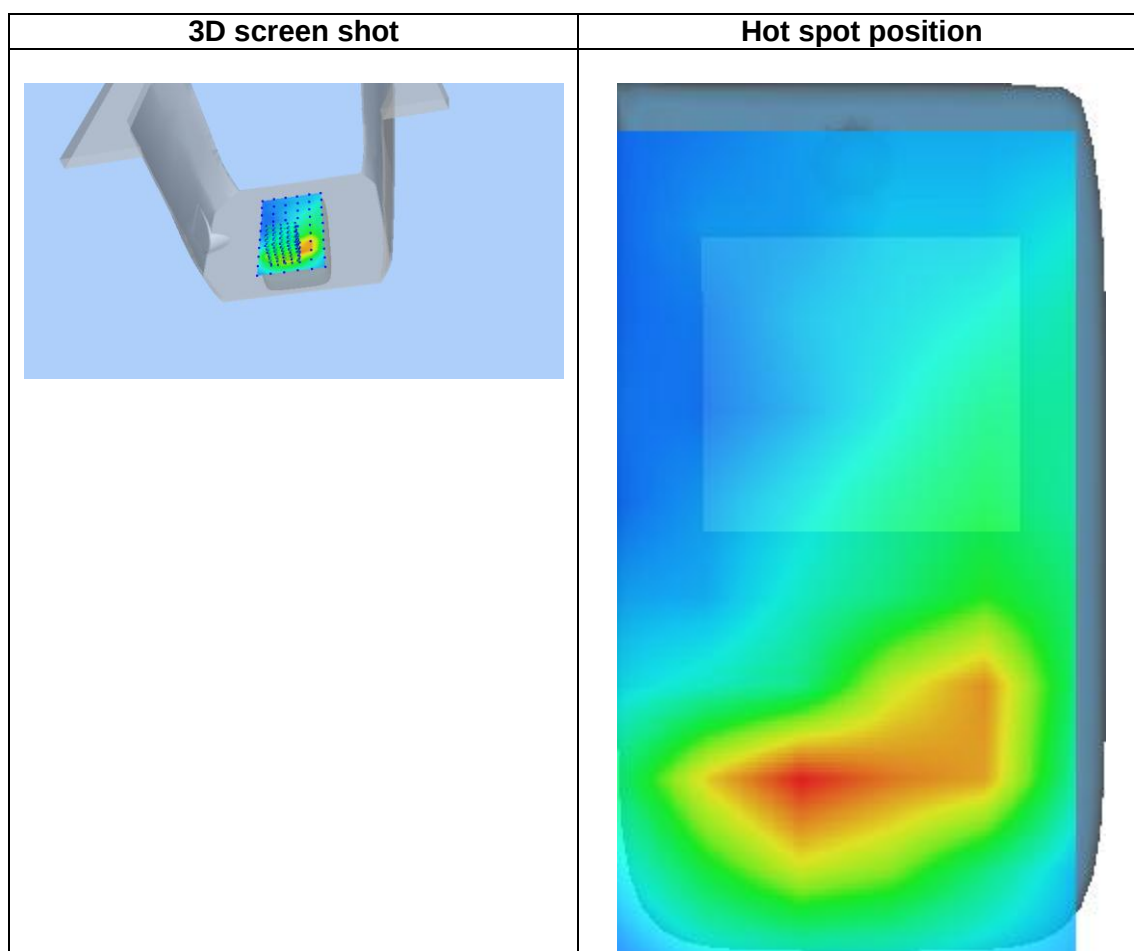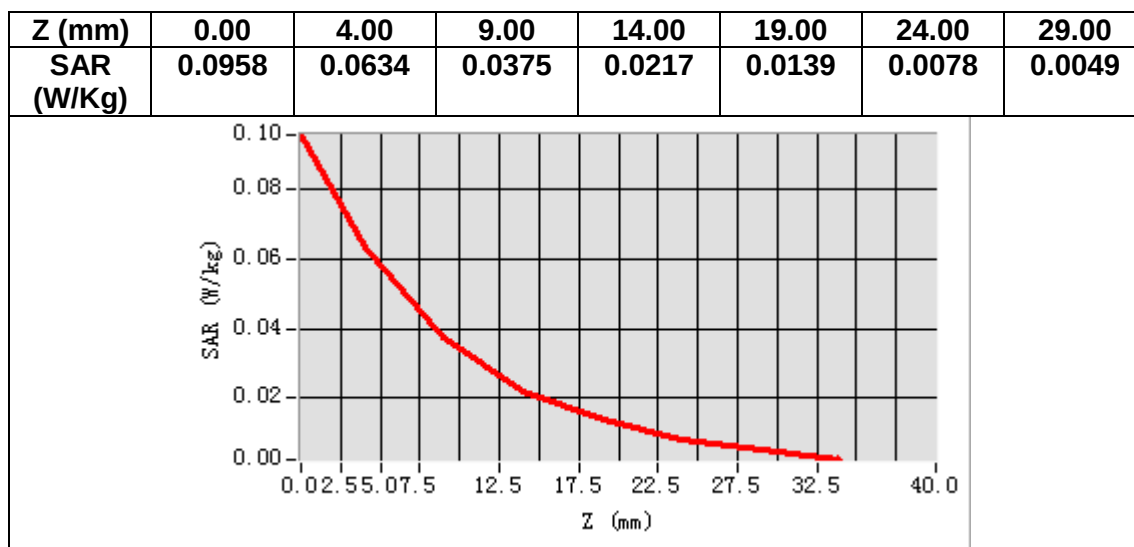

MEASUREMENT 25

Date of measurement: 5/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	40.272209
Relative permittivity (imaginary part)	19.638651
Conductivity (S/m)	0.912652
Variation (%)	0.330000

SURFACE SAR

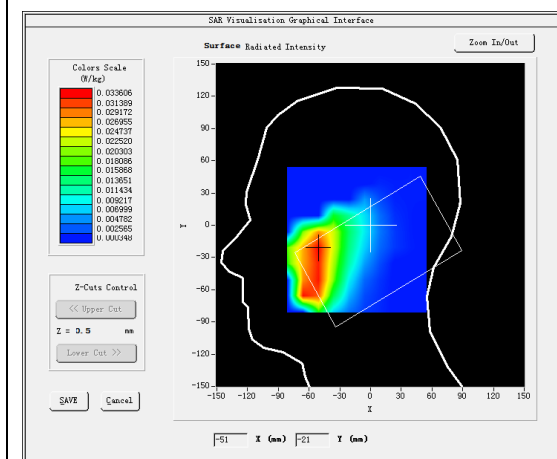


VOLUME SAR

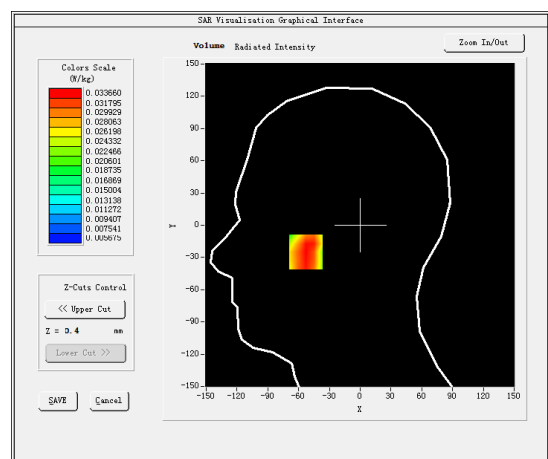


Maximum location: X=-53.00, Y=-25.00

SAR Peak: 0.04 W/kg


SAR 10g (W/Kg)	0.024913
SAR 1g (W/Kg)	0.033394

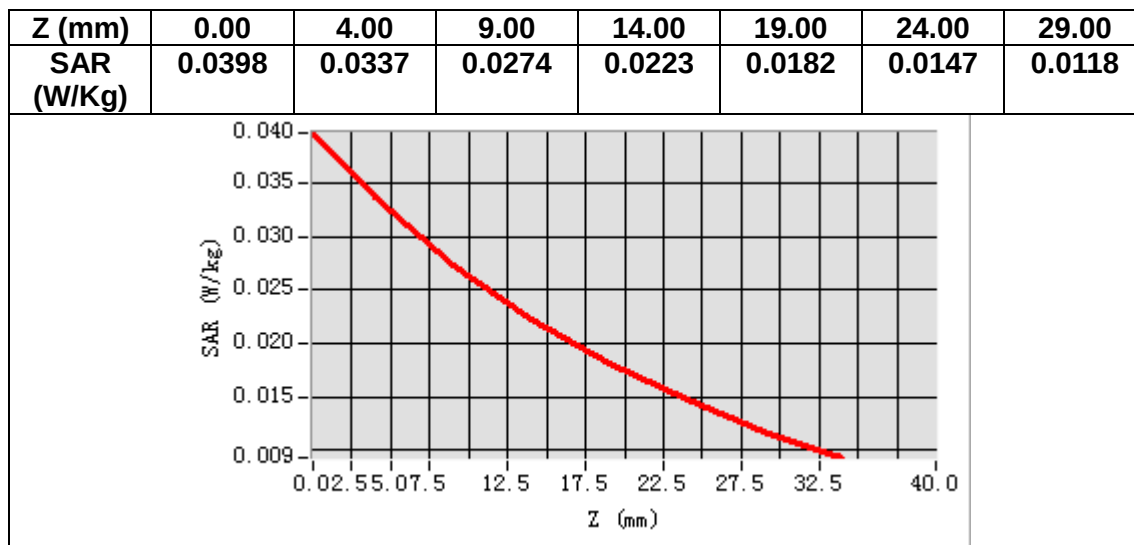

3D screen shot

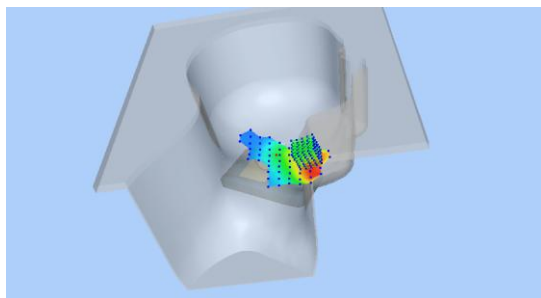

Hot spot position

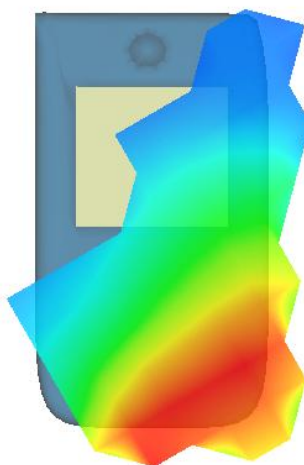

MEASUREMENT 26

Date of measurement: 5/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	40.272209
Relative permittivity (imaginary part)	19.638651
Conductivity (S/m)	0.912652
Variation (%)	0.020000

SURFACE SAR

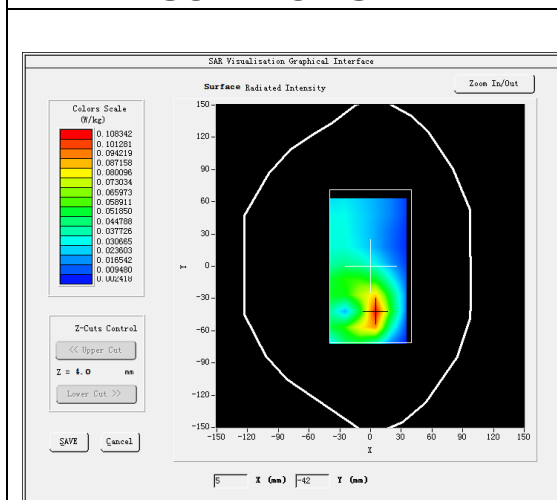



VOLUME SAR

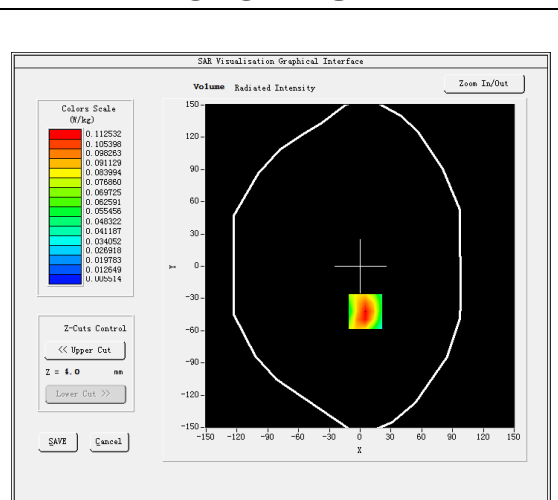

Maximum location: X=5.00, Y=-42.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.065903
SAR 1g (W/Kg)	0.109579

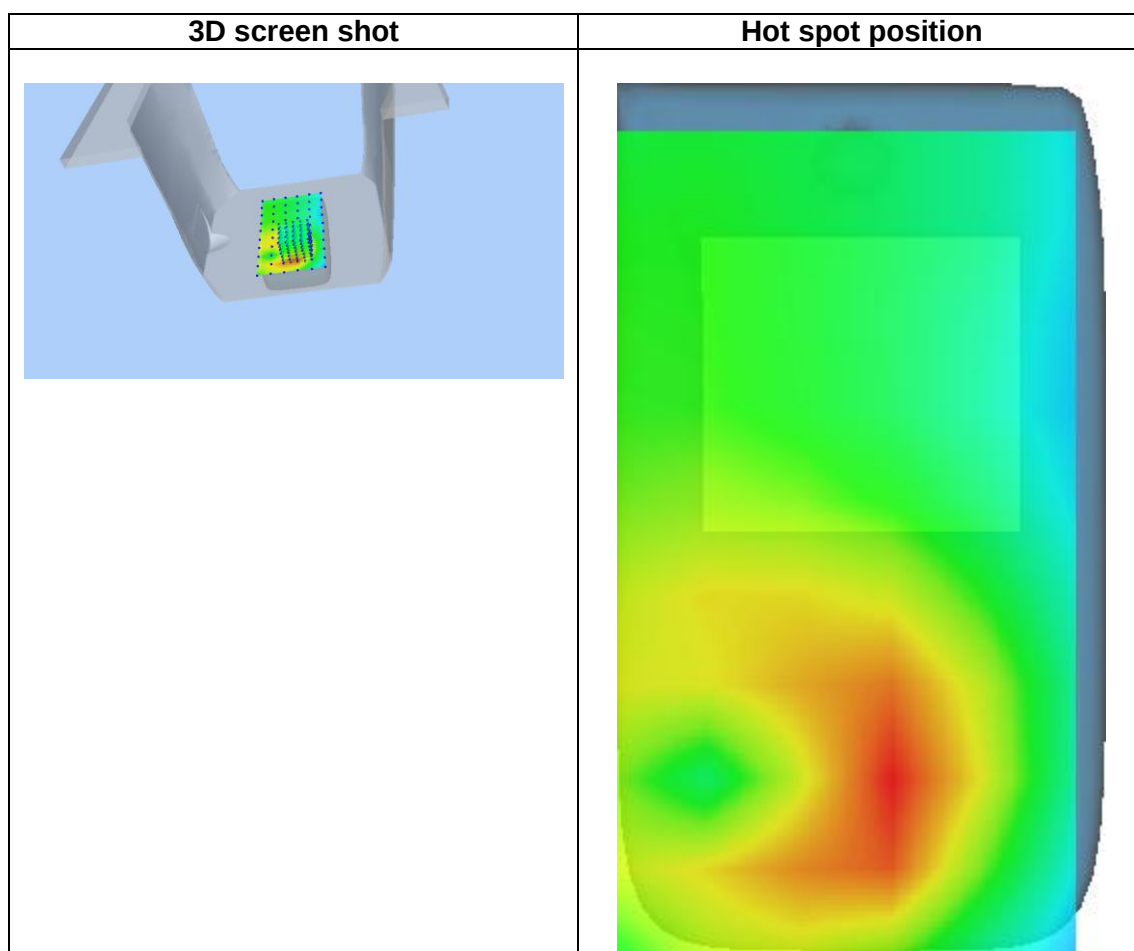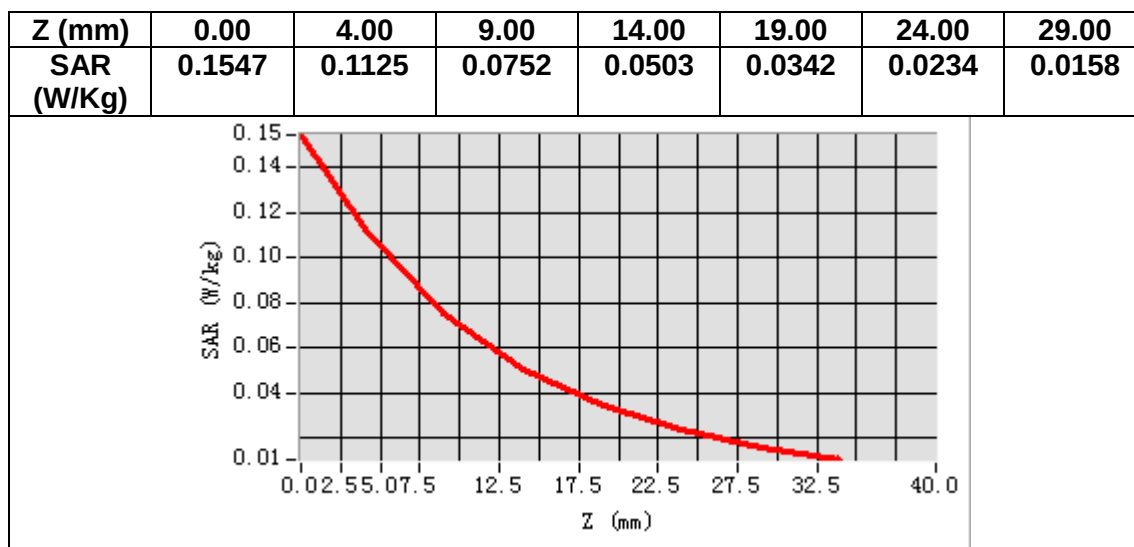

MEASUREMENT 27

Date of measurement: 27/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.87</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.476894
Relative permittivity (imaginary part)	13.503435
Conductivity (S/m)	1.901734
Variation (%)	-0.680000

SURFACE SAR

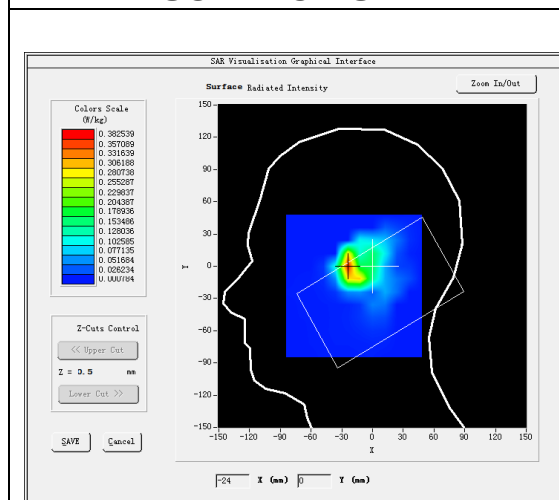



VOLUME SAR

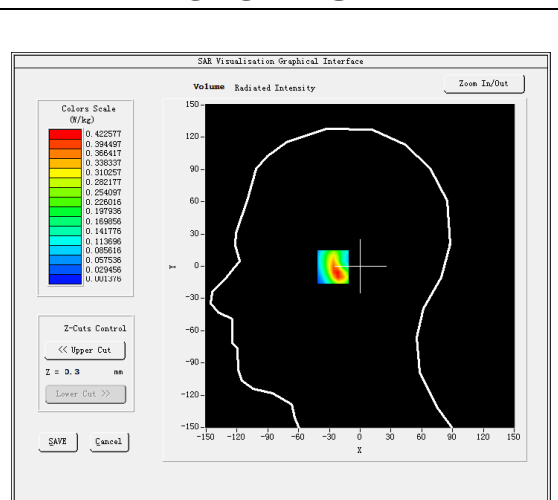

Maximum location: X=-24.00, Y=0.00

SAR Peak: 0.73 W/kg

SAR 10g (W/Kg)	0.170003
SAR 1g (W/Kg)	0.386531

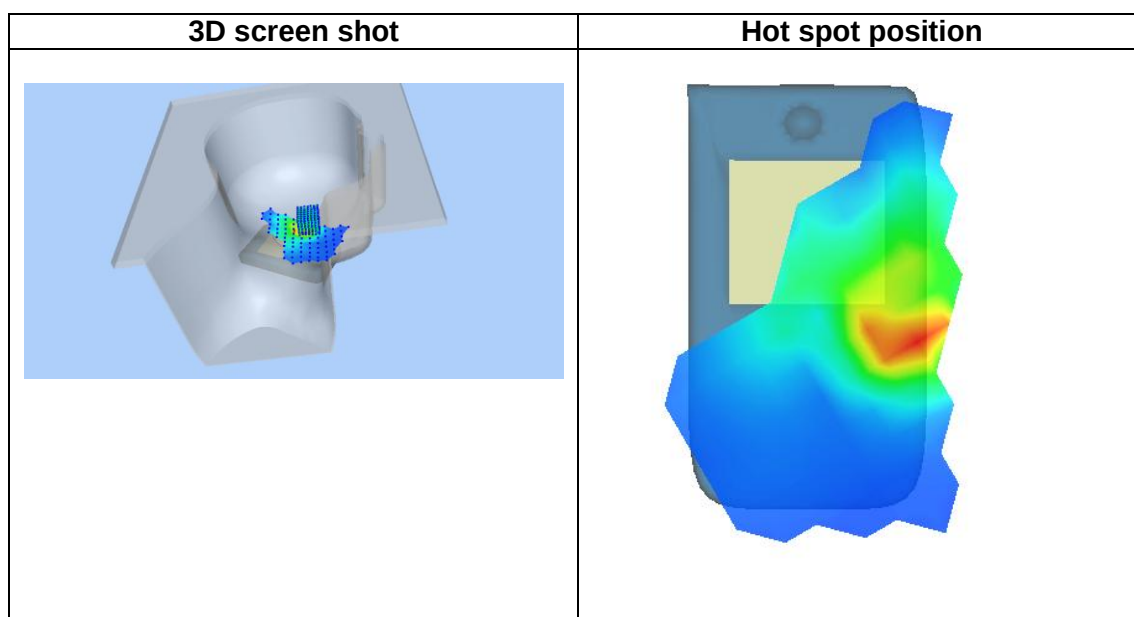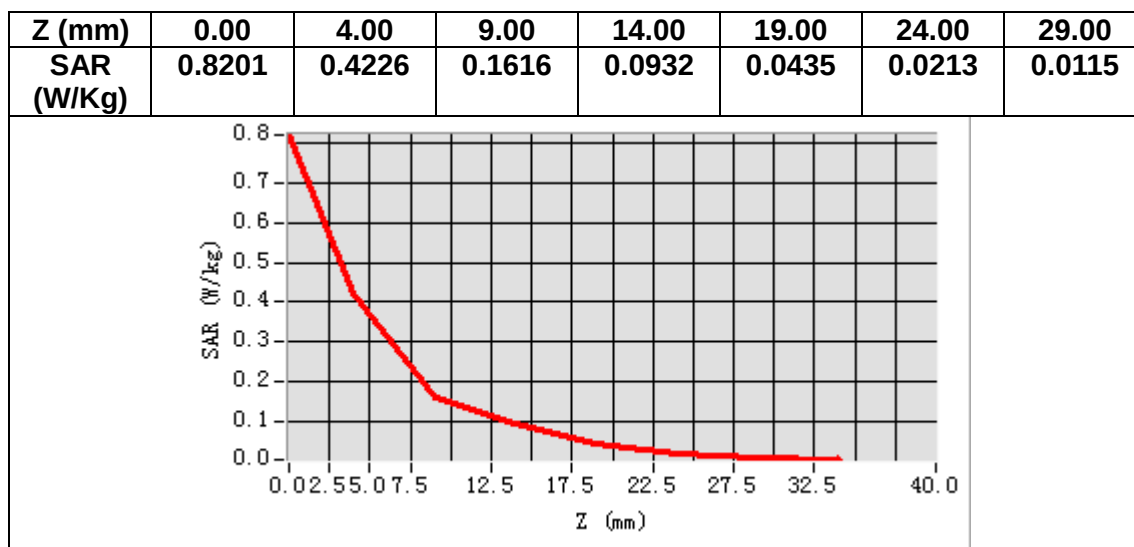

MEASUREMENT 28

Date of measurement: 27/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.87</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.476894
Relative permittivity (imaginary part)	13.503435
Conductivity (S/m)	1.901734
Variation (%)	-4.030000

SURFACE SAR

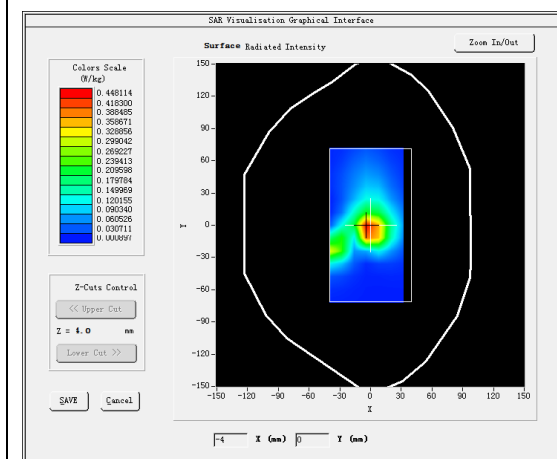



VOLUME SAR

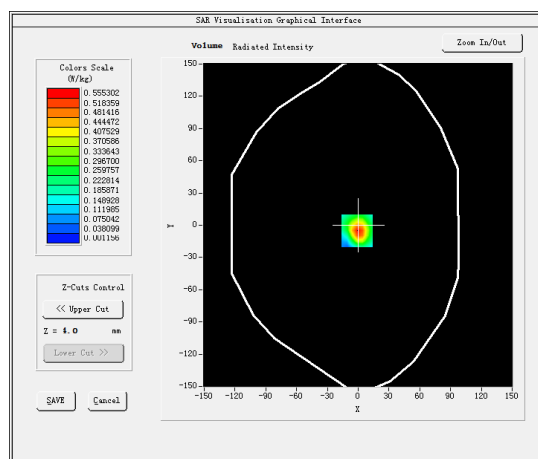

Maximum location: X=-1.00, Y=-5.00

SAR Peak: 0.92 W/kg

SAR 10g (W/Kg)	0.222535
SAR 1g (W/Kg)	0.501135

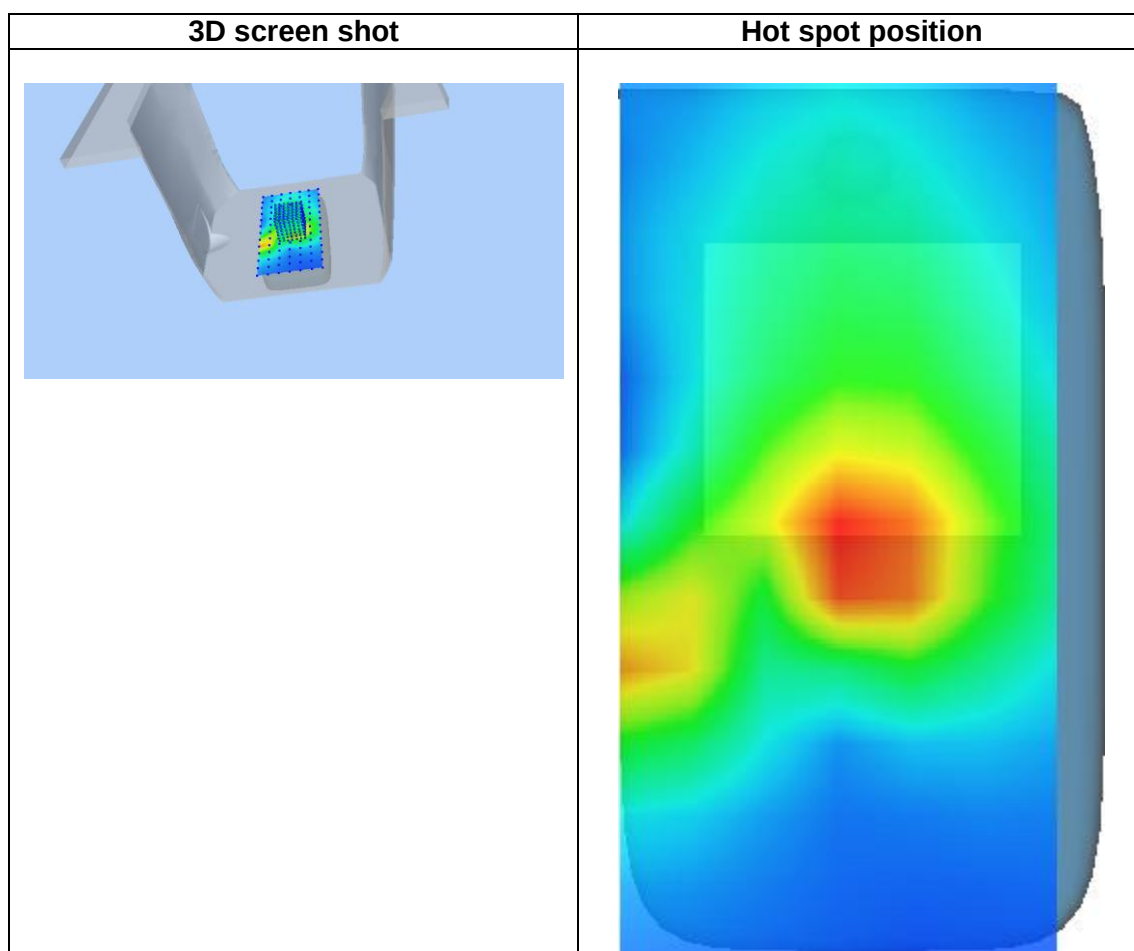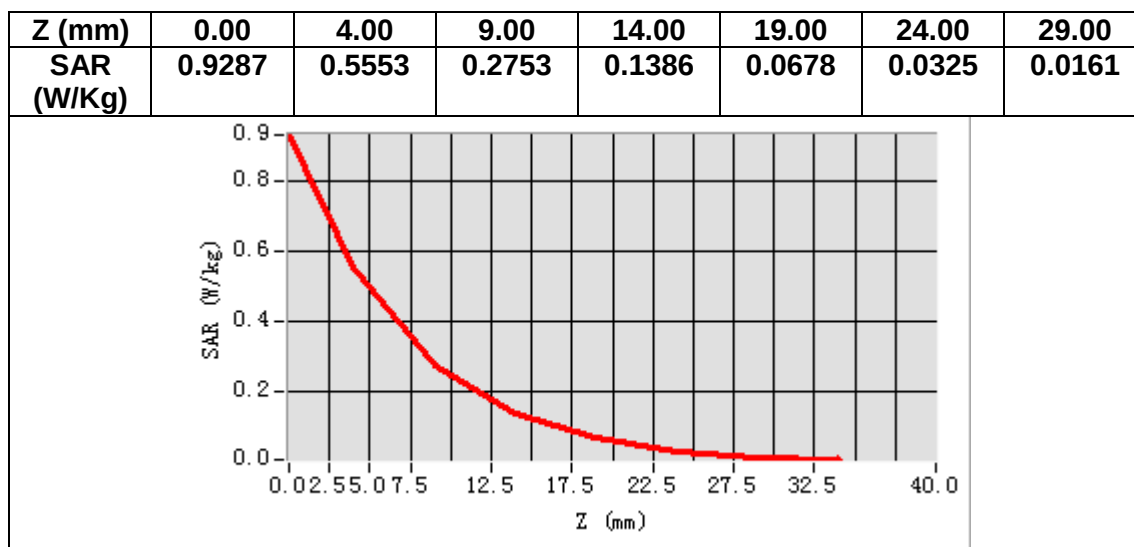

MEASUREMENT 29

Date of measurement: 28/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.49</u>


B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative permittivity (real part)	40.724422
Relative permittivity (imaginary part)	21.741562
Conductivity (S/m)	0.854564
Variation (%)	-0.040000

SURFACE SAR

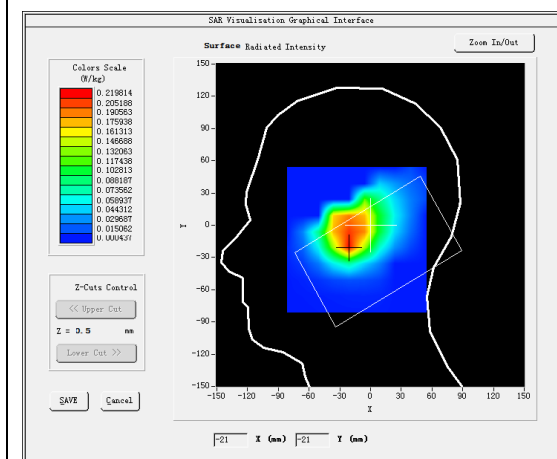



VOLUME SAR

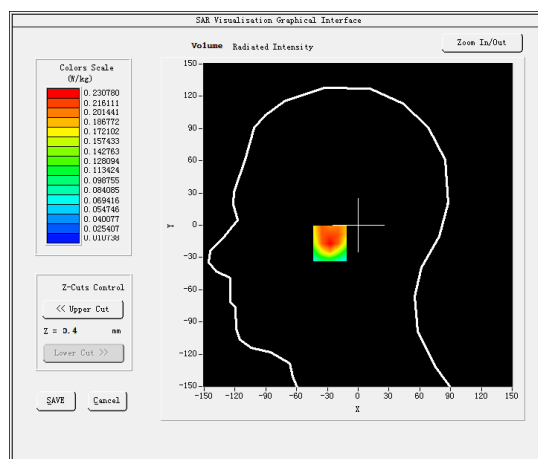

Maximum location: X=-21.00, Y=-17.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.132932
SAR 1g (W/Kg)	0.221579

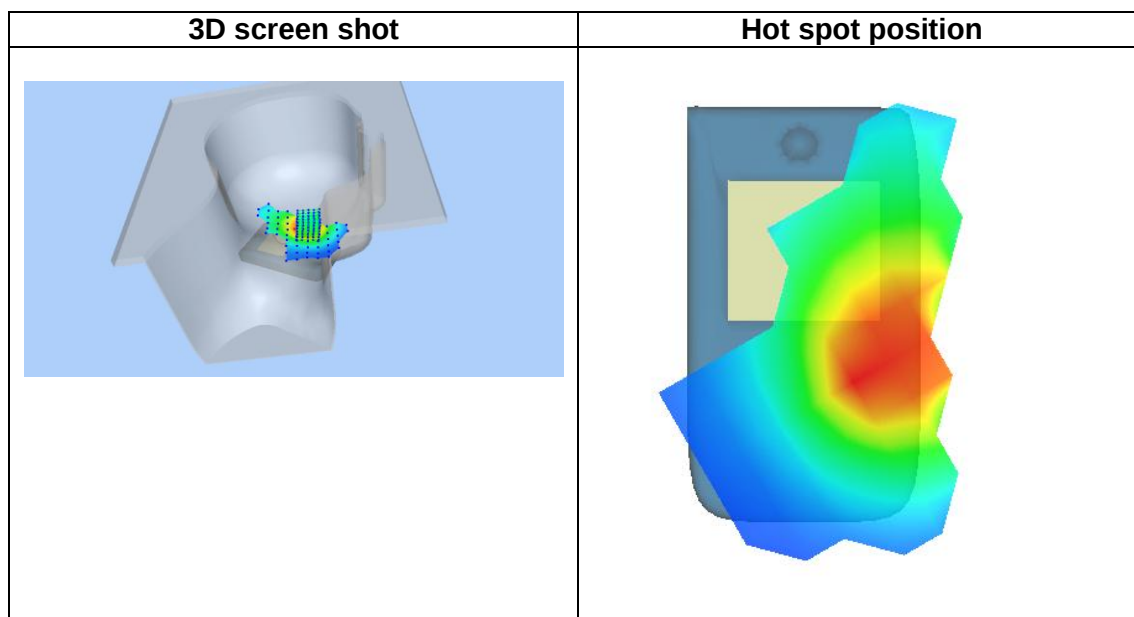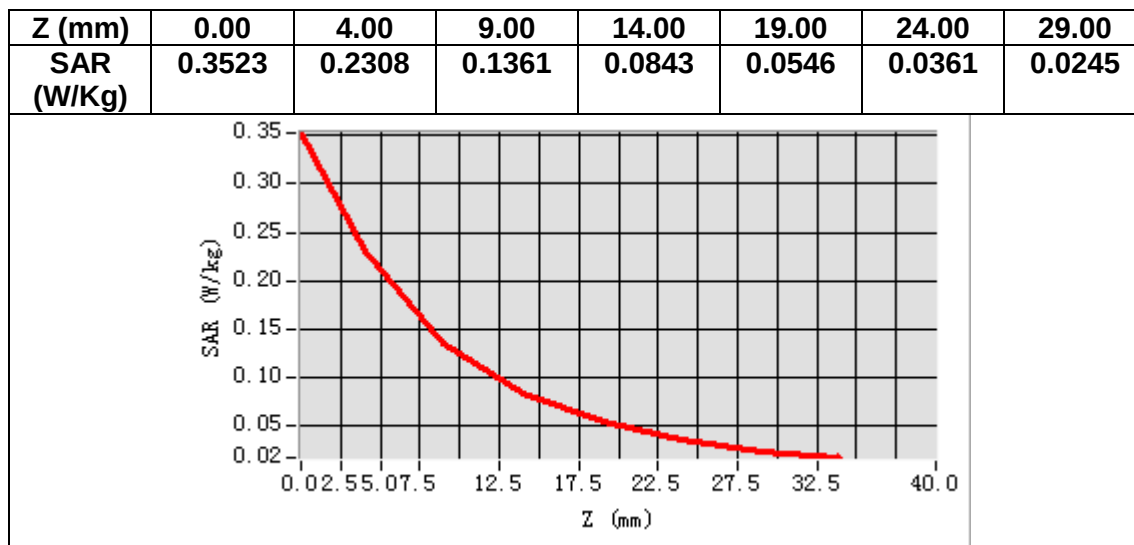

MEASUREMENT 30

Date of measurement: 28/8/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.49</u>


B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative permittivity (real part)	40.724422
Relative permittivity (imaginary part)	21.741562
Conductivity (S/m)	0.854564
Variation (%)	0.180000

SURFACE SAR

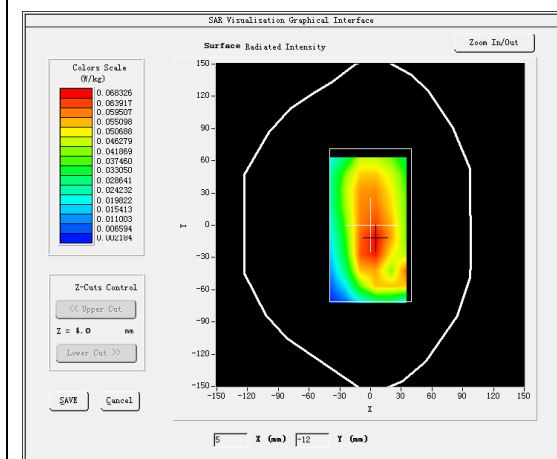



VOLUME SAR

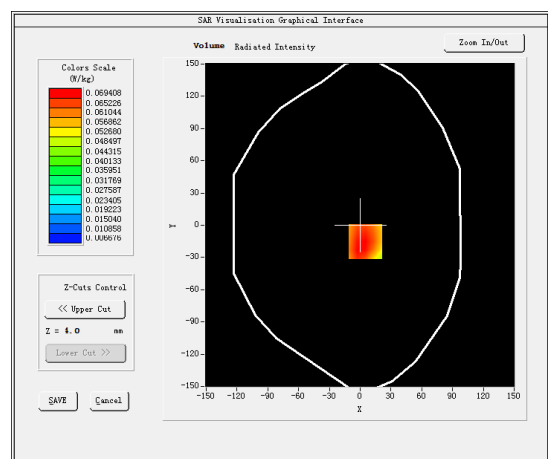

Maximum location: X=5.00, Y=-15.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.052055
SAR 1g (W/Kg)	0.068129

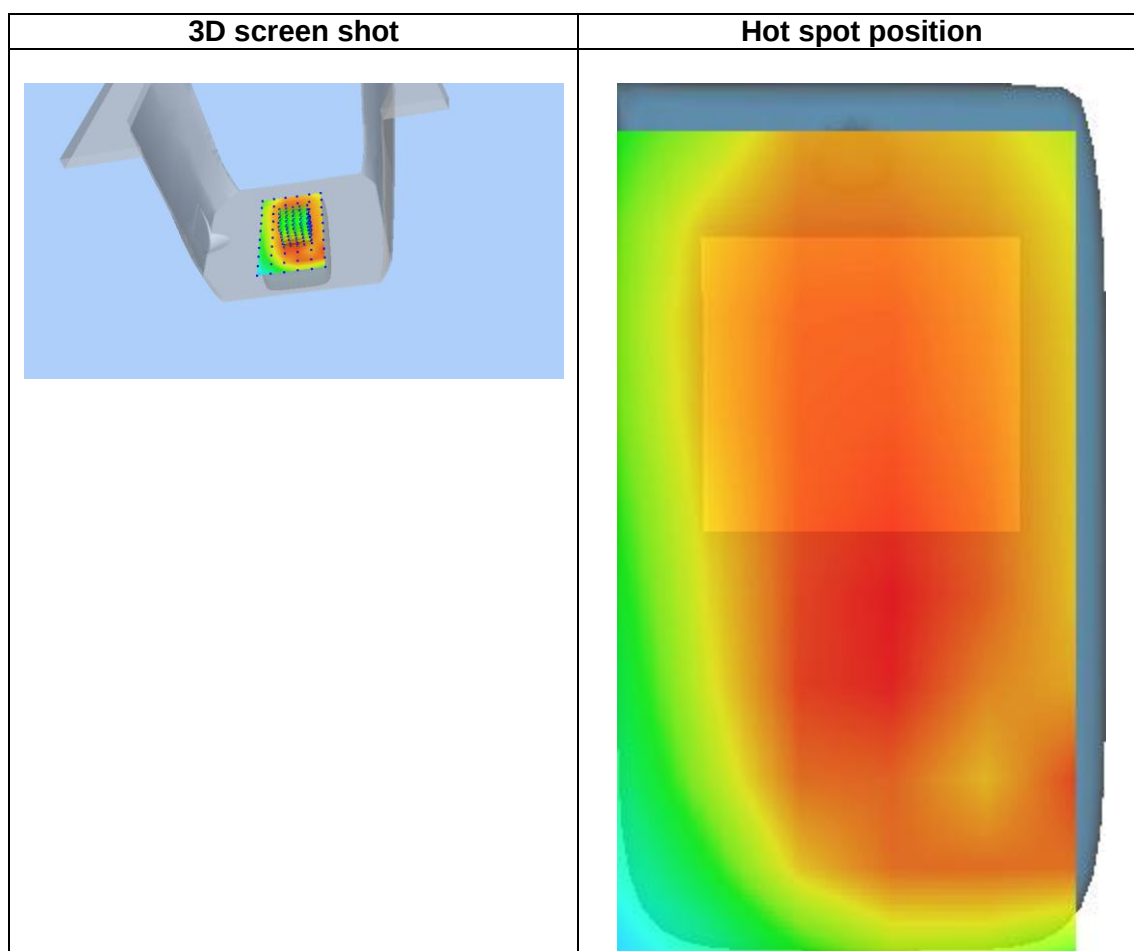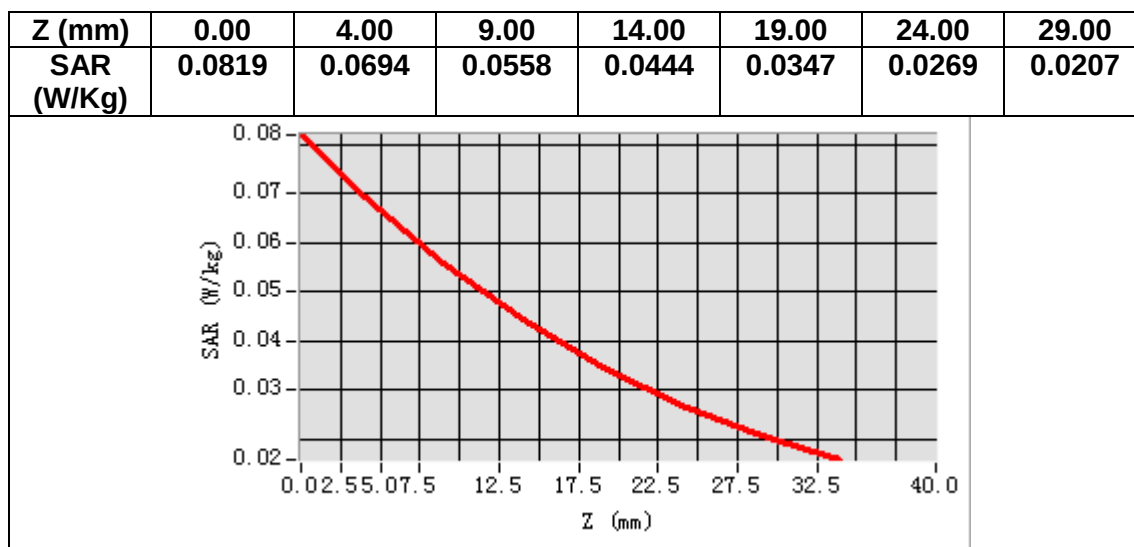

MEASUREMENT 31

Date of measurement: 28/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.49</u>


B. SAR Measurement Results

Frequency (MHz)	710.000000
Relative permittivity (real part)	40.709072
Relative permittivity (imaginary part)	21.682013
Conductivity (S/m)	0.855235
Variation (%)	1.010000

SURFACE SAR

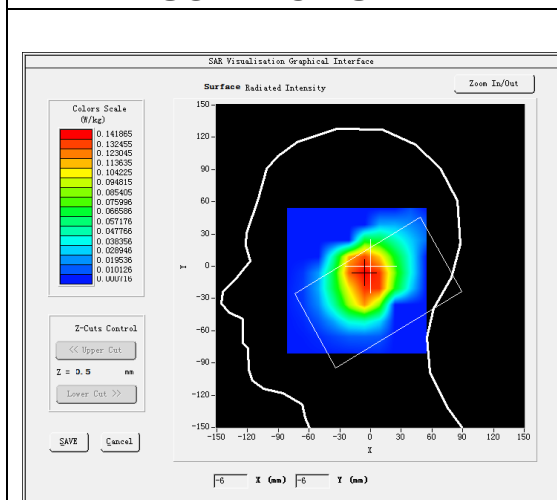


VOLUME SAR

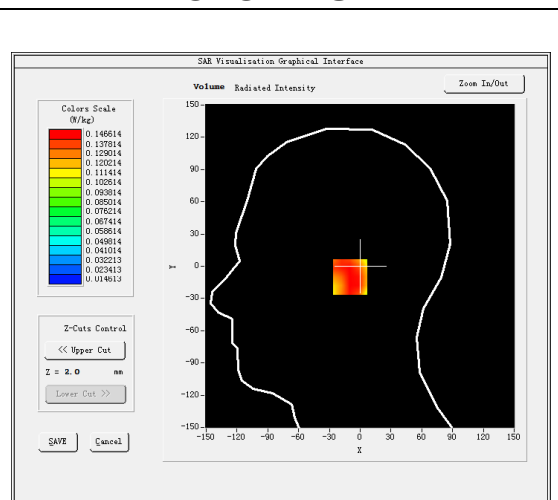


Maximum location: X=-2.00, Y=-10.00

SAR Peak: 0.21 W/kg


SAR 10g (W/Kg)	0.102544
SAR 1g (W/Kg)	0.146437

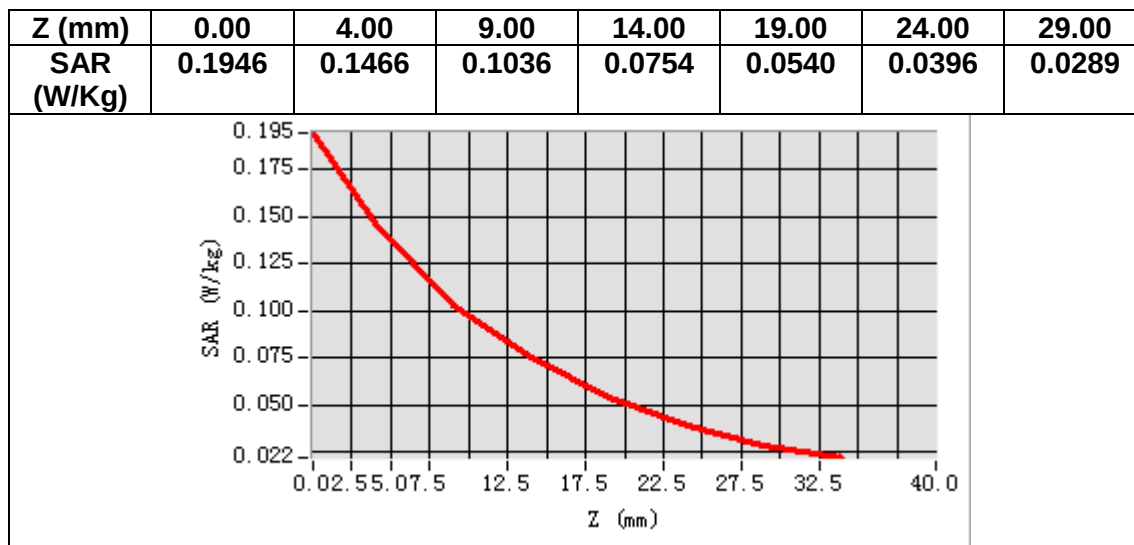

3D screen shot

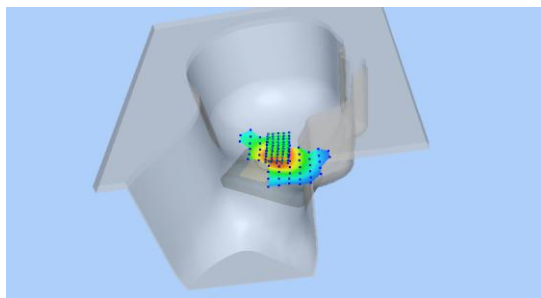

Hot spot position

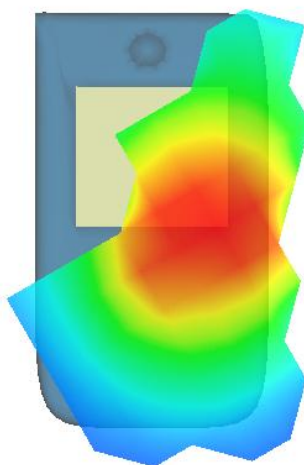

MEASUREMENT 32

Date of measurement: 28/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.49</u>


B. SAR Measurement Results

Frequency (MHz)	710.000000
Relative permittivity (real part)	40.709072
Relative permittivity (imaginary part)	21.682013
Conductivity (S/m)	0.855235
Variation (%)	-3.140000

SURFACE SAR

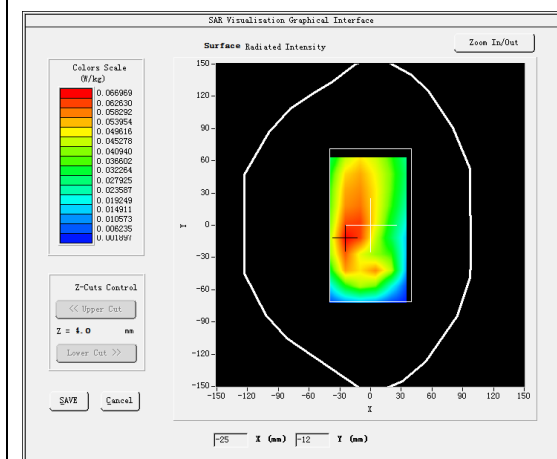


VOLUME SAR

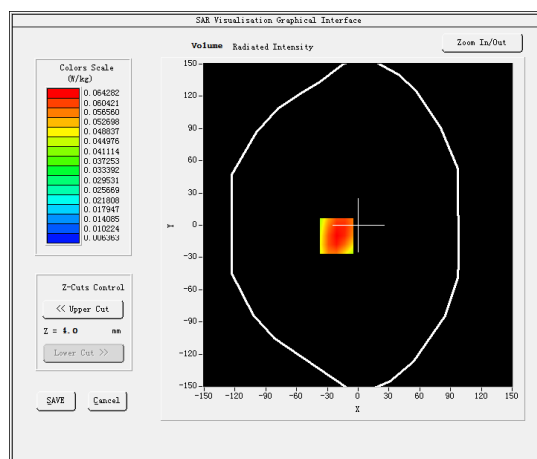


Maximum location: X=-21.00, Y=-10.00

SAR Peak: 0.08 W/kg


SAR 10g (W/Kg)	0.046919
SAR 1g (W/Kg)	0.062343

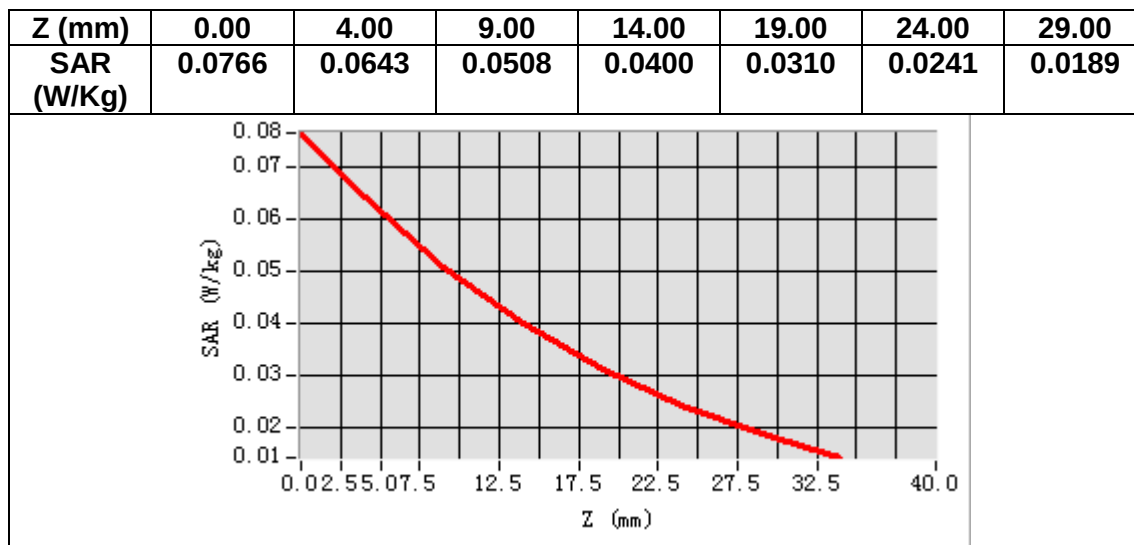

3D screen shot

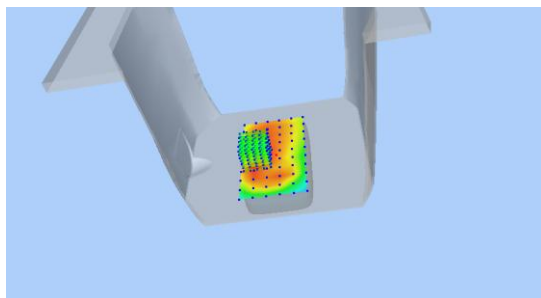

Hot spot position

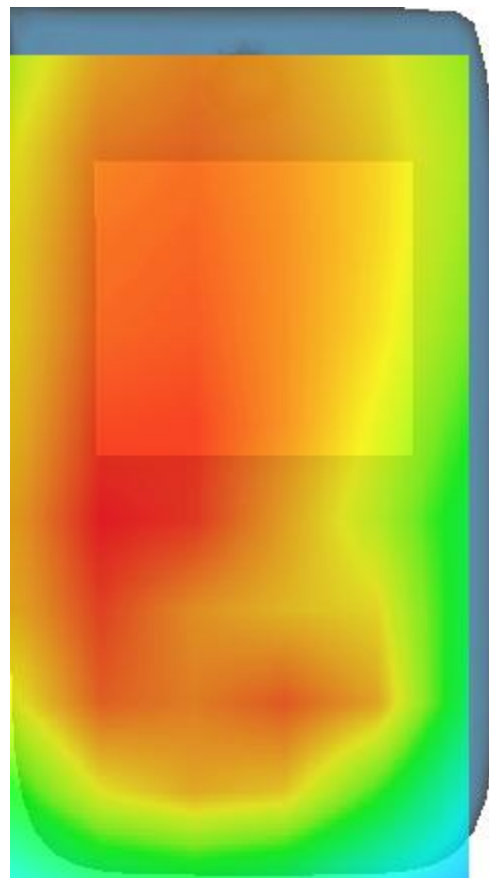

MEASUREMENT 33

Date of measurement: 27/7/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 41</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.87</u>

B. SAR Measurement Results

Frequency (MHz)	2593.000000
Relative permittivity (real part)	38.195396
Relative permittivity (imaginary part)	13.667035
Conductivity (S/m)	1.968812
Variation (%)	3.990000


SURFACE SAR

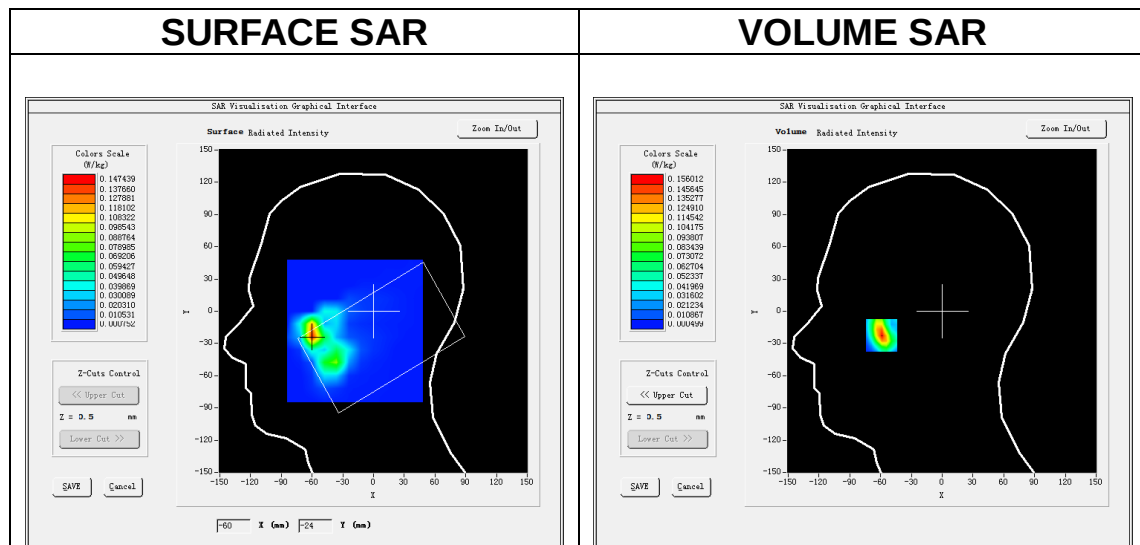


Maximum location: X=-59.00, Y=-22.00

SAR Peak: 0.27 W/kg

SAR 10g (W/Kg)	0.057335
SAR 1g (W/Kg)	0.137126

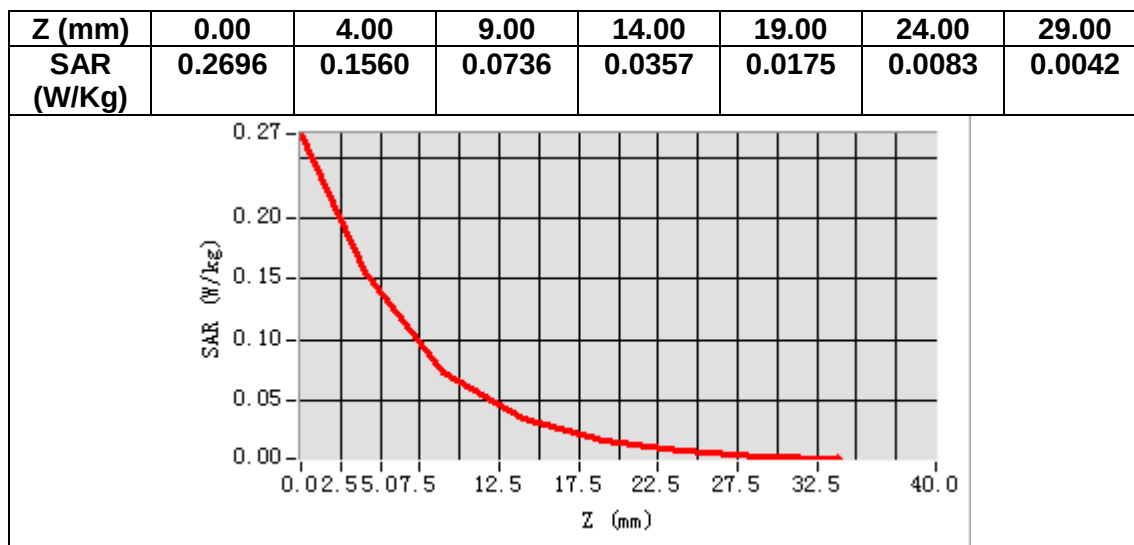

3D screen shot

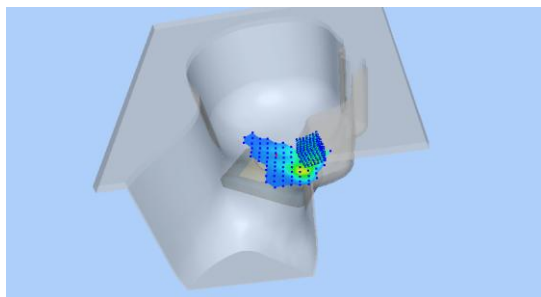

Hot spot position

