

BT Antenna Specification

Summary


ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-0.15	-2.04	-1.85	-8.59	-7.96	-7.38
MAX. Gain	-0.15dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	40mm					
Manufacture	Shenzhen Daiku Technology Co., Ltd.					



Horizontal: 2400 MHz 2450 MHz 2500 MHz


Power (dBm)

Max: 0 Min: -40 Scale: 5/div

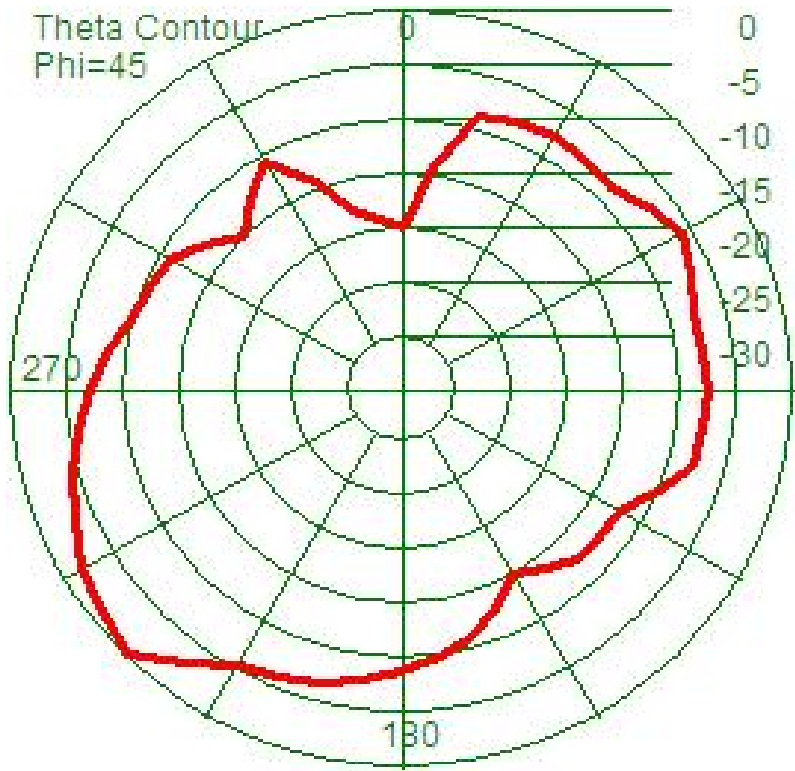

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-0.15	-25.31	-8.98
2450	-2.04	-21.94	-8.18
2500	-1.85	-24.44	-7.46

Vertical: 2400 MHz 2450 MHz 2500 MHz
 Power (dBm)
 Max: 0 Min: -30 Scale: 5/div

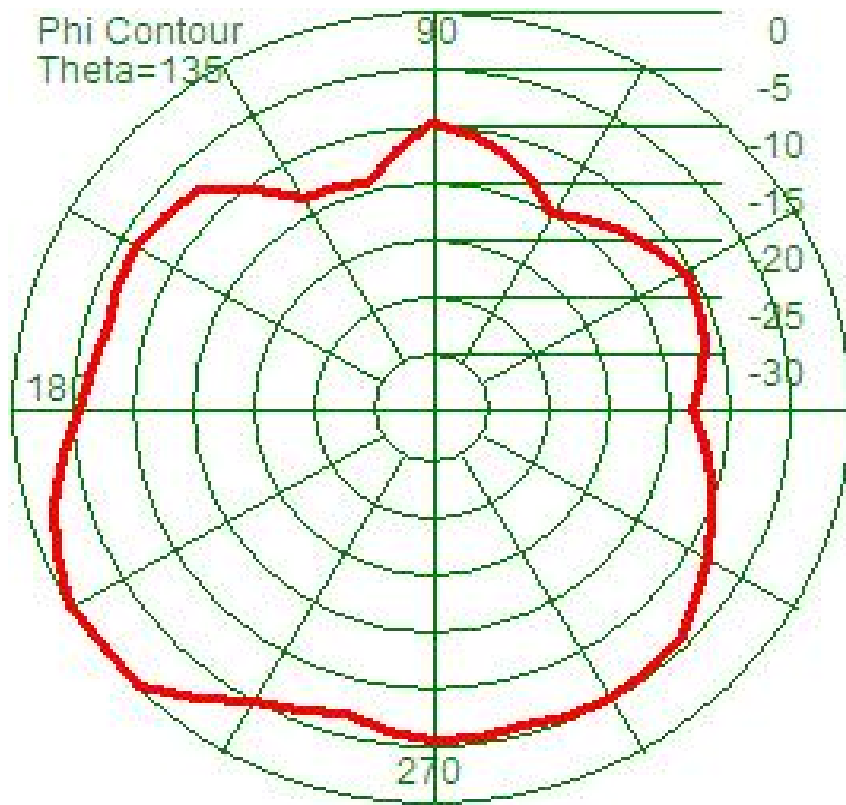

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-2.31	-16.33	-12.42
2450	-2.25	-17.34	-13.66
2500	-2.03	-17.25	-14.26