

FranklinWH Energy Storage Inc.

RF TEST REPORT

Report Type:

FCC Part 15.247 RF report

Model:

aGate X (may be followed by blank;
may be followed by A to Z; may be followed by 0 to 9;
may be followed by symbol.)

REPORT NUMBER:

240600353SHA-003

ISSUE DATE:

September 2, 2024

DOCUMENT CONTROL NUMBER:

TTRF15.247-03_V1 © 2018 Intertek



Applicant: FranklinWH Energy Storage Inc.
8 The Green ,Ste A, Dover, DE 19901,USA

Manufacturer: FranklinWH Technologies Co., Ltd.
Room 301, Building 5A Skyworth Innovation Park, No.8 Tangtou 1st Road,
Tangtou community Shiyan sub-district , Baoan District, Shenzhen,
Guangdong, China

Factory: Dongguan Shingi Electronics Co., Ltd.
No. 1 Yadi South Road, Qiaotou Town , Dongguan City , Guangdong
Province , China.

FCC ID: 2BCMR-AGATEX20

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2023): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

PREPARED BY:

REVIEWED BY:



Project Engineer
Sky Yang

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION	7
1.3 ANTENNA INFORMATION.....	8
1.4 DESCRIPTION OF TEST FACILITY	9
2 TEST SPECIFICATIONS.....	11
2.1 STANDARDS OR SPECIFICATION	11
2.2 MODE OF OPERATION DURING THE TEST.....	11
2.3 TEST SOFTWARE LIST	12
2.4 TEST PERIPHERALS LIST	12
2.5 TEST ENVIRONMENT CONDITION:.....	12
2.6 INSTRUMENT LIST	13
2.7 MEASUREMENT UNCERTAINTY	14
3 MINIMUM 6DB BANDWIDTH.....	15
3.1 LIMIT	15
3.2 MEASUREMENT PROCEDURE	15
3.3 TEST CONFIGURATION	15
3.4 TEST RESULTS OF MINIMUM 6DB BANDWIDTH	15
4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.....	16
4.1 LIMIT	16
4.2 MEASUREMENT PROCEDURE	16
4.3 TEST CONFIGURATION	17
4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER.....	17
5 POWER SPECTRUM DENSITY	18
5.1 LIMIT	18
5.2 MEASUREMENT PROCEDURE	18
5.3 TEST CONFIGURATION	19
5.4 TEST RESULTS OF POWER SPECTRUM DENSITY	19
6 EMISSION OUTSIDE THE FREQUENCY BAND	20
6.1 LIMIT	20
6.2 MEASUREMENT PROCEDURE	20
6.3 TEST CONFIGURATION	21
6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND.....	21
7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS.....	22
7.1 LIMIT	22
7.2 MEASUREMENT PROCEDURE	22
7.3 TEST CONFIGURATION	24
7.4 TEST RESULTS OF RADIATED EMISSIONS	25
8 POWER LINE CONDUCTED EMISSION.....	46
8.1 LIMIT	46
8.2 TEST CONFIGURATION	46

TEST REPORT

8.3	MEASUREMENT PROCEDURE	47
8.4	TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	48
9	OCCUPIED BANDWIDTH	50
9.1	LIMIT	50
9.2	MEASUREMENT PROCEDURE	50
9.3	TEST CONFIGURATION	50
9.4	THE RESULTS OF OCCUPIED BANDWIDTH	50
10	ANTENNA REQUIREMENT.....	51
	APPENDIX A: TEST RESULTS	52

Revision History

Report No.	Version	Description	Issued Date
240600353SHA-003	Rev. 01	Initial issue of report	September 2, 2024

Measurement result summary

TEST ITEM	FCC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	Pass
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	Pass
Power spectrum density	15.247(e)	Pass
Emission outside the frequency band	15.247(d)	Pass
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	Pass
Power line conducted emission	15.207(a)	Pass
Occupied bandwidth	-	Tested
Antenna requirement	15.203	Pass

Notes: 1: NA =Not Applicable

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	aGate
Type/Model:	aGate X (may be followed by blank; may be followed by A to Z; may be followed by 0 to 9; may be followed by symbol.)
Description of EUT:	The EUT is an Energy storage control system which supports 2.4G, 5G Wi-Fi (802.11b/g/n/a/ac mode), BT and LTE function. LTE function uses a certified module, the FCC ID is XMR201909EC25AFX.
Rating:	120/208VAC ; 120V/240VAC 120/208VAC is 3-wire form 3-phase, 4-wire network.
EUT type:	☐ Table top ☒ Floor standing
Sample received date:	June 27, 2024
Date of test:	July 11, 2024 to September 2, 2024

Note:

All models are same except for model name, different names represent different sales regions.

1.2 Technical Specification

Frequency Range:	2400MHz ~ 2483.5MHz
Support Standards:	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20, IEEE 802.11n-HT40
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT40: OFDM (64-QAM, 16-QAM, QPSK, BPSK)
Channel Number:	11 Channels for 802.11b, 802.11g and 802.11n(HT20) 9 Channels for 802.11n(HT40)
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS15 IEEE 802.11n-HT40: Up to MCS15
Channel Separation:	5 MHz

1.3 Antenna information

Antenna No.	Model	Antenna type	Antenna Gain	Note
1	Antenna 1	PCB Antenna	5.9dBi	/
2	Antenna 2	PCB Antenna	5.9dBi	/

Mode	Tx/Rx Function	Beamforming function	CDD function
802.11b	1Tx/1Rx	NO	NO
802.11g	1Tx/1Rx	NO	NO
802.11n(HT20)	2Tx/2Rx	NO	NO
802.11n(HT40)	2Tx/2Rx	NO	NO

Frequency band	Mode	Directional Gain	Note
2.4 GHz	802.11b	5.9dBi	/
	802.11g	5.9dBi	/
	802.11n20	8.91 dBi	/
	802.11n40	8.91 dBi	/

Note: Directional gain = GANT + 10 log(NANT) dBi

1.4 Description of Test Facility

Name:	Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L21189
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab Registration code No.: 2042B-1
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

All tests were sub-contracted.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng Science and Technology Park, Longhua District, Shenzhen, China 518109

Telephone: +86 (0) 755 282 0888

Fax: +86 (0) 755 2823 0886

TEST REPORT

The test facility is recognized, certified, or accredited by the following organizations:

Shenzhen UnionTrust Quality and Technology Co., Ltd.**CNAS-Lab Code: L9069**

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

IC-Registration No.: 21600-1

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2023)

ANSI C63.10 (2020)

KDB 558074 (v05r02)

2.2 Mode of operation during the test

While testing transmitting mode of EUT, the continuously transmission was applied by following software.

Software name	Manufacturer	Version	Supplied by
EmsDevTools.exe	NA	NA	Client

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)	Modulation	Lowest (L) (MHz)	Middle (M) (MHz)	Highest (H) (MHz)
2400-2483.5	802.11b	2412	2437	2462
	802.11g	2412	2437	2462
	802.11n20	2412	2437	2462
	802.11n40	2422	2437	2452

2.3 Test software list

Test Items	Manufacturer	Version
Conducted emission	EMC-CON	3A1.1
Radiated emission	Audix	9.160323

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Notebook	DELL, Latitude 3400	NA
2	Mouse	DELL, MS111	NA

2.5 Test environment condition:

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	24.1°C	48.6% RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Radiated Emissions in restricted frequency bands	24.8°C	54.1% RH
Power line conducted emission	24.4°C	49.6% RH

TEST REPORT

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Receiver	R&S	ESR7	1316.3003K07-101181-K3	26-Oct-2024
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	26-Oct-2024
☒	LISN	R&S	ESH2-Z5	860014/024	26-Oct-2024
☒	LISN	ETS-Lindgren	3816/2SH	00201088	26-Oct-2024
☒	Test Software	EZ-EMC	EZ-CON	Software Version: EMC-CON 3A1.1	
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	3m SAC	ETS-LINDGREN	3m	Euroshiedpn-CT001270-1317	10-Nov-2026
☒	Receiver	R&S	ESIB26	100114	26-Oct-2024
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	28-Mar-2025
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	29-Oct-2024
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	29-Oct-2024
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	29-Oct-2024
☒	Preamplifier	HP	8447F	2805A02960	30-Oct-2024
☒	Band Rejection Filter (2400MHz~2500MHz)	Micro-Tronics	BRM50702	G248	26-Oct-2024
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	31-Mar-2025
☒	Pre-amplifier	ETS-Lindgren	00118385	00201874	31-Mar-2025
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	29-Oct-2024
☒	Pre-amplifier	ETS-Lindgren	00118384	00202652	29-Oct-2024
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323	
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	EXA Spectrum Analyzer	KEYSIGHT	N9020A	MY51286807	26-Oct-2024
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	26-Oct-2024

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	$\pm 0.68\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 4.80\text{dB}$
Emission outside the frequency band	$\pm 4.80\text{dB}$
Power line conducted emission	$\pm 2.7\text{dB}$

3 Minimum 6dB bandwidth

Test result: Pass

3.1 Limit


For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Measurement Procedure

The minimum 6dB bandwidth is measured using the Spectrum Analyzer according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" (clause 8.2) for compliance requirements.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3 Test Configuration

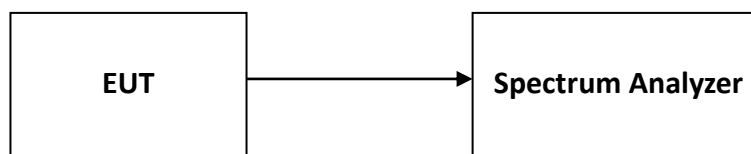

3.4 Test Results of Minimum 6dB bandwidth

Please refer to Appendix

TEST REPORT

4 Maximum conducted output power and e.i.r.p.

Test result: Pass

4.1 Limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W. (The e.i.r.p. shall not exceed 4 W)


If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 9.2.2.4) for compliance requirements.

- a) Measure the duty cycle, x , of the transmitter output signal as described in Section 6.0.
- b) Set span to at least $1.5 \times \text{OBW}$.
- c) Set RBW = 1 % to 5 % of the OBW, not to exceed 1 MHz.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to “free run”.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.
- j) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- k) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on- and off-times of the transmission). For example, add $10 \log (1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 %.

4.3 Test Configuration

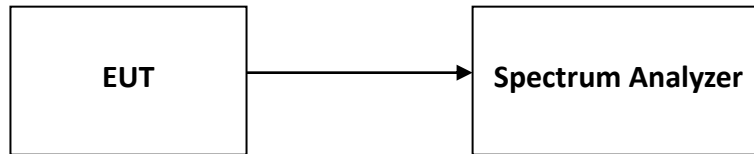

4.4 Test Results of Maximum conducted output power

Please refer to Appendix

5 Power spectrum density

Test result: Pass

5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and $8 + (6 - \text{antenna gain} - \text{beam forming gain})$.


5.2 Measurement Procedure

The power output was tested according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" (clause 10.5) for compliance requirements.

This procedure is applicable when the EUT cannot be configured to transmit continuously (i.e., duty cycle < 98 %), and when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than $\pm 2\%$):

- a) Measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least $1.5 \times \text{OBW}$.
- d) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e) Set VBW $\geq 3 \times \text{RBW}$.
- f) Detector = power averaging (RMS) or sample detector (when RMS not available).
- g) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- h) Sweep time = auto couple.
- i) Do not use sweep triggering. Allow sweep to "free run".
- j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.
- m) If resultant value exceeds the limit, then reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.3 Test Configuration

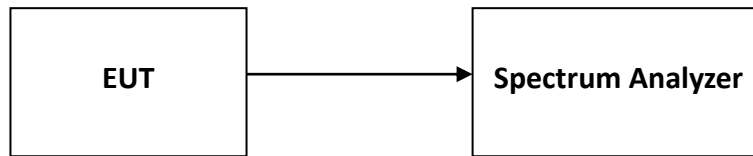

5.4 Test Results of Power spectrum density

Please refer to Appendix

6 Emission outside the frequency band

Test result: Pass

6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance requirements.

Reference level measurement

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Emission level measurement

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

6.3 Test Configuration

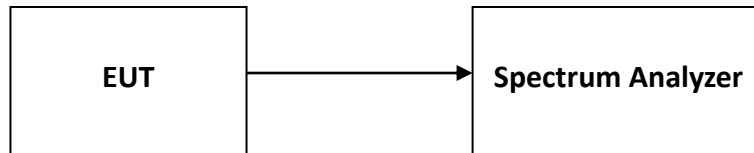

6.4 The results of Emission outside the frequency band

Please refer to Appendix

7 Radiated Emissions in restricted frequency bands

Test result: Pass

7.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 3 x RBW (Duty cycle $\geq$ 98%) for Average detection (AV) at frequency above 1GHz.
- 4. All modes of operation were investigated and the worst-case emissions are reported

7.3 Test Configuration


For Radiated emission below 30MHz:

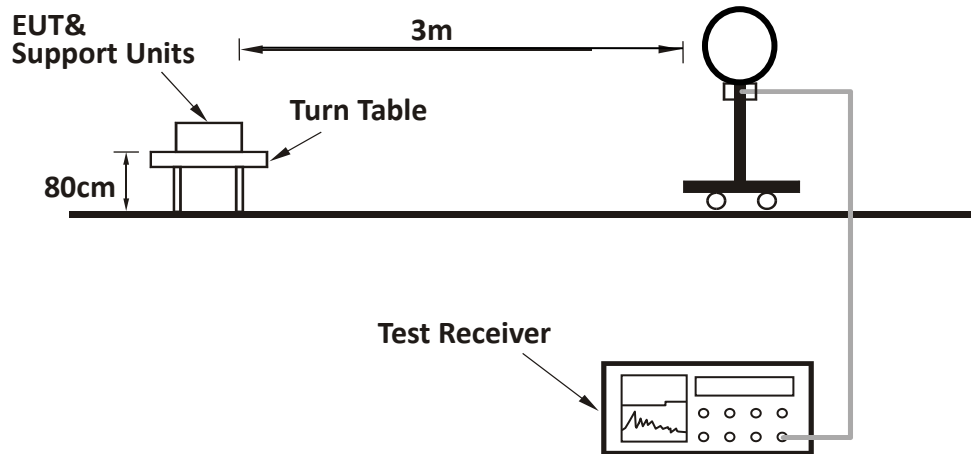

For Radiated emission 30MHz to 1GHz:

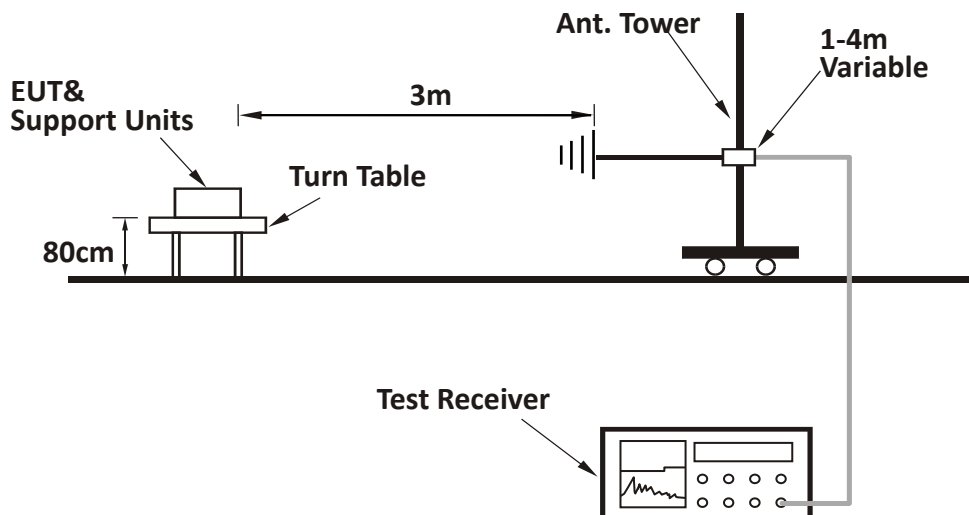


For Radiated emission above 1GHz:

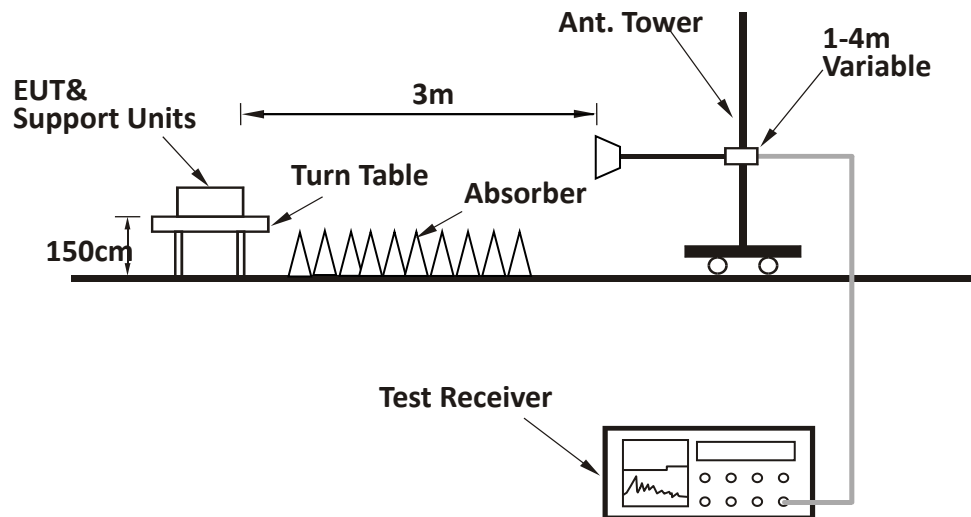


7.4 Test Results of Radiated Emissions

Radiated Emissions(30MHz-1GHz)

Test data 30MHz~1GHz:

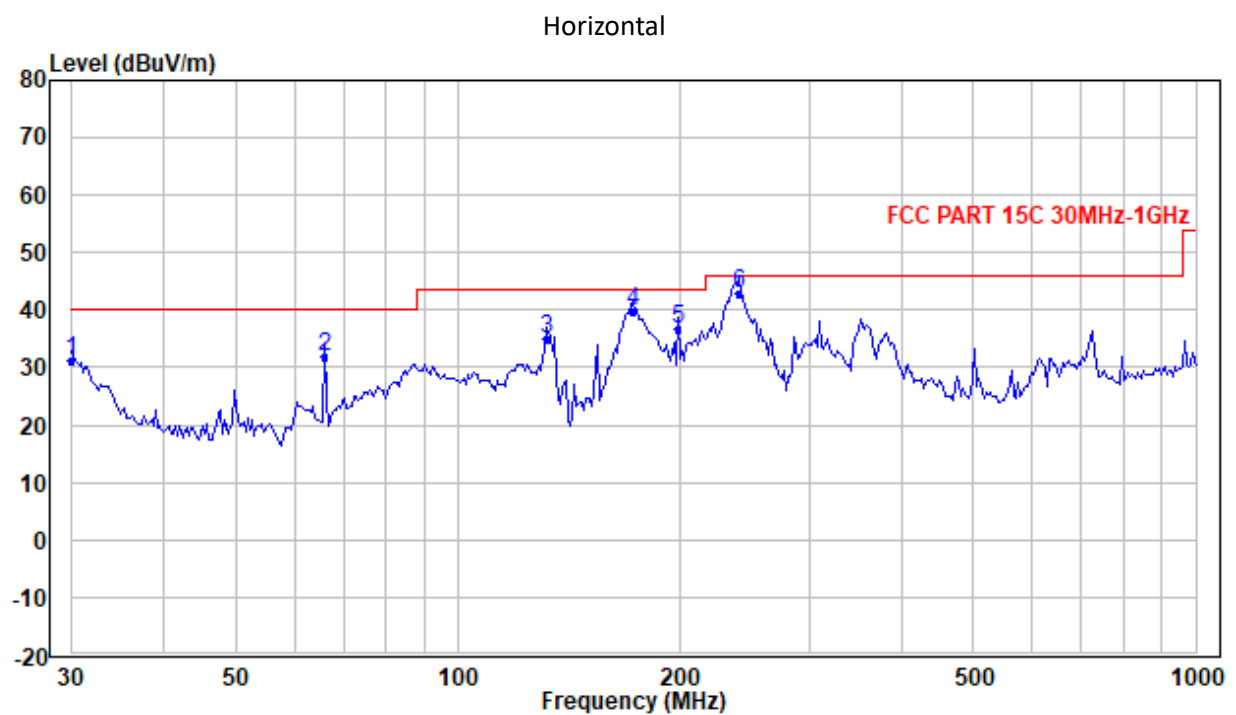

Vertical

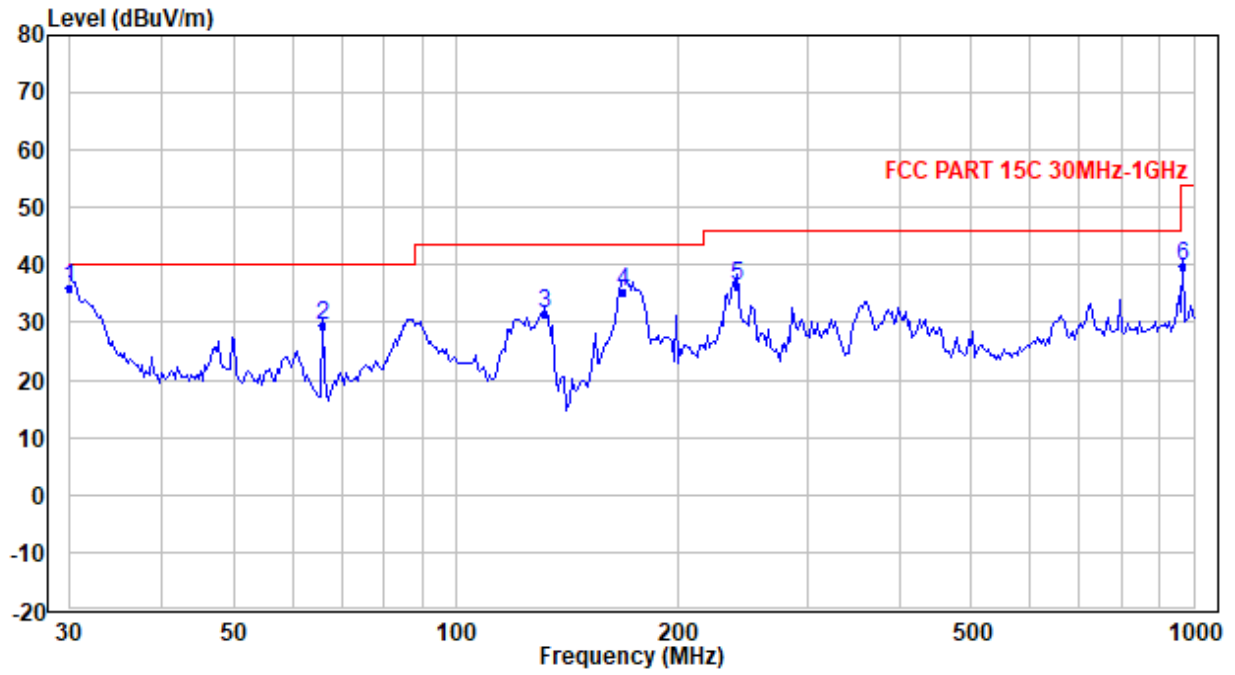

TEST REPORT

Test data 30MHz~1GHz:

Polarization	Frequency (MHz)	Measured level (dBμV/m)	Factor (dB/m)	Limits (dBμV/m)	Margin (dB)	Detector
H	30.000	31.08	-4.08	40.00	8.92	QP
	65.907	32.02	-17.73	40.00	7.98	QP
	132.149	34.93	-15.47	43.50	8.57	QP
	172.598	39.63	-11.56	43.50	3.87	QP
	198.642	36.85	-11.15	43.50	6.65	QP
	240.144	42.75	-10.62	46.00	3.25	QP
V	30.000	35.96	-4.08	40.00	4.04	QP
	65.907	29.49	-17.73	40.00	10.51	QP
	132.149	31.58	-15.47	43.50	11.92	QP
	168.997	35.41	-12.16	43.50	8.09	QP
	240.144	36.26	-10.62	46.00	9.74	QP
	965.474	39.75	5.32	54.00	14.25	QP

Remark:

- Factor= Antenna Factor + Cable Loss (-Amplifier, is employed)
- Measured level= Original Receiver Reading + Factor
- Margin = Limit – Measured level
- All possible modes of operation were investigated, only the worst-case emissions reported.

TEST REPORT

Radiated Emission Test Data (Above 1GHz):

SISO_Antenna 1_IIEEE 802.11b_Channel 1:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	37.21	-2.07	35.14	54.00	18.86	Average	Horizontal
2	4824	50.39	-2.07	48.32	74.00	25.68	Peak	Horizontal
3	7236	34.19	1.30	35.49	54.00	18.51	Average	Horizontal
4	7236	47.39	1.30	48.69	74.00	25.31	Peak	Horizontal
5	4824	36.08	-2.07	34.01	54.00	19.99	Average	Vertical
6	4824	50.33	-2.07	48.26	74.00	25.74	Peak	Vertical
7	7236	34.27	1.30	35.57	54.00	18.43	Average	Vertical
8	7236	47.18	1.30	48.48	74.00	25.52	Peak	Vertical

SISO_Antenna 1_IIEEE 802.11b_Channel 6:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4874	36.51	-2.05	34.46	54.00	19.54	Average	Horizontal
2	4874	48.60	-2.05	46.55	74.00	27.45	Peak	Horizontal
3	7311	36.33	1.31	37.64	54.00	16.36	Average	Horizontal
4	7311	48.34	1.31	49.65	74.00	24.35	Peak	Horizontal
5	4874	36.23	-2.05	34.18	54.00	19.82	Average	Vertical
6	4874	49.09	-2.05	47.04	74.00	26.96	Peak	Vertical
7	7311	36.34	1.31	37.65	54.00	16.35	Average	Vertical
8	7311	48.19	1.31	49.50	74.00	24.50	Peak	Vertical

SISO_Antenna 1_IIEEE 802.11b_Channel 11:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4924	36.54	-2.03	34.51	54.00	19.49	Average	Horizontal
2	4924	49.28	-2.03	47.25	74.00	26.75	Peak	Horizontal
3	7386	35.61	1.31	36.92	54.00	17.08	Average	Horizontal
4	7386	48.02	1.31	49.33	74.00	24.67	Peak	Horizontal
5	4924	36.07	-2.03	34.04	54.00	19.96	Average	Vertical
6	4924	47.54	-2.03	45.51	74.00	28.49	Peak	Vertical
7	7386	34.96	1.31	36.27	54.00	17.73	Average	Vertical
8	7386	46.09	1.31	47.40	74.00	26.60	Peak	Vertical

SISO_Antenna 1_ IEEE 802.11g _ Channel 1:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	36.24	-2.07	34.17	54.00	19.83	Average	Horizontal
2	4824	48.11	-2.07	46.04	74.00	27.96	Peak	Horizontal
3	7236	34.47	1.30	35.77	54.00	18.23	Average	Horizontal
4	7236	46.44	1.30	47.74	74.00	26.26	Peak	Horizontal
5	4824	36.09	-2.07	34.02	54.00	19.98	Average	Vertical
6	4824	48.39	-2.07	46.32	74.00	27.68	Peak	Vertical
7	7236	34.64	1.30	35.94	54.00	18.06	Average	Vertical
8	7236	46.53	1.30	47.83	74.00	26.17	Peak	Vertical

SISO_Antenna 1_ IEEE 802.11g _ Channel 6:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4874	36.76	-2.05	34.71	54.00	19.29	Average	Horizontal
2	4874	47.43	-2.05	45.38	74.00	28.62	Peak	Horizontal
3	7311	36.14	1.31	37.45	54.00	16.55	Average	Horizontal
4	7311	47.27	1.31	48.58	74.00	25.42	Peak	Horizontal
5	4874	36.25	-2.05	34.20	54.00	19.80	Average	Vertical
6	4874	48.13	-2.05	46.08	74.00	27.92	Peak	Vertical
7	7311	36.37	1.31	37.68	54.00	16.32	Average	Vertical
8	7311	48.15	1.31	49.46	74.00	24.54	Peak	Vertical

SISO_Antenna 1_ IEEE 802.11g _ Channel 11:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4924	36.48	-2.03	34.45	54.00	19.55	Average	Horizontal
2	4924	48.31	-2.03	46.28	74.00	27.72	Peak	Horizontal
3	7386	35.39	1.31	36.70	54.00	17.30	Average	Horizontal
4	7386	47.27	1.31	48.58	74.00	25.42	Peak	Horizontal
5	4924	36.08	-2.03	34.05	54.00	19.95	Average	Vertical
6	4924	47.46	-2.03	45.43	74.00	28.57	Peak	Vertical
7	7386	35.61	1.31	36.92	54.00	17.08	Average	Vertical
8	7386	47.88	1.31	49.19	74.00	24.81	Peak	Vertical

Remark:

- Correction Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
- Result = Reading + Correction Factor.
- Margin = Limit - Result
- WiFi transmitting generated the higher emission than WiFi and LTE simultaneously, so the data of WiFi transmitting was recorded as final result.

TEST REPORT

Radiated Emission Test Data (Above 1GHz):

SISO_Antenna 2_IIEEE 802.11b_Channel 1:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	36.45	-2.07	34.38	54.00	19.62	Average	Horizontal
2	4824	50.69	-2.07	48.62	74.00	25.38	Peak	Horizontal
3	7236	34.16	1.30	35.46	54.00	18.54	Average	Horizontal
4	7236	46.06	1.30	47.36	74.00	26.64	Peak	Horizontal
5	4824	36.05	-2.07	33.98	54.00	20.02	Average	Vertical
6	4824	47.29	-2.07	45.22	74.00	28.78	Peak	Vertical
7	7236	34.28	1.30	35.58	54.00	18.42	Average	Vertical
8	7236	45.40	1.30	46.70	74.00	27.30	Peak	Vertical

SISO_Antenna 2_IIEEE 802.11b_Channel 6:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4874	36.79	-2.05	34.74	54.00	19.26	Average	Horizontal
2	4874	48.56	-2.05	46.51	74.00	27.49	Peak	Horizontal
3	7311	35.94	1.31	37.25	54.00	16.75	Average	Horizontal
4	7311	48.10	1.31	49.41	74.00	24.59	Peak	Horizontal
5	4874	36.41	-2.05	34.36	54.00	19.64	Average	Vertical
6	4874	49.82	-2.05	47.77	74.00	26.23	Peak	Vertical
7	7311	37.28	1.31	38.59	54.00	15.41	Average	Vertical
8	7311	50.11	1.31	51.42	74.00	22.58	Peak	Vertical

SISO_Antenna 2_IIEEE 802.11b_Channel 11:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4924	36.04	-2.03	34.01	54.00	19.99	Average	Horizontal
2	4924	48.96	-2.03	46.93	74.00	27.07	Peak	Horizontal
3	7386	35.75	1.31	37.06	54.00	16.94	Average	Horizontal
4	7386	47.88	1.31	49.19	74.00	24.81	Peak	Horizontal
5	4924	36.50	-2.03	34.47	54.00	19.53	Average	Vertical
6	4924	47.96	-2.03	45.93	74.00	28.07	Peak	Vertical
7	7386	36.57	1.31	37.88	54.00	16.12	Average	Vertical
8	7386	48.87	1.31	50.18	74.00	23.82	Peak	Vertical

SISO_ Antenna 2_ IEEE 802.11g_ Channel 1:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	36.53	-2.07	34.46	54.00	19.54	Average	Horizontal
2	4824	47.78	-2.07	45.71	74.00	28.29	Peak	Horizontal
3	7236	34.44	1.30	35.74	54.00	18.26	Average	Horizontal
4	7236	46.91	1.30	48.21	74.00	25.79	Peak	Horizontal
5	4824	36.35	-2.07	34.28	54.00	19.72	Average	Vertical
6	4824	47.95	-2.07	45.88	74.00	28.12	Peak	Vertical
7	7236	34.90	1.30	36.20	54.00	17.80	Average	Vertical
8	7236	46.71	1.30	48.01	74.00	25.99	Peak	Vertical

SISO_ Antenna 2_ IEEE 802.11g_ Channel 6:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4874	36.96	-2.05	34.91	54.00	19.09	Average	Horizontal
2	4874	48.08	-2.05	46.03	74.00	27.97	Peak	Horizontal
3	7311	35.97	1.31	37.28	54.00	16.72	Average	Horizontal
4	7311	48.28	1.31	49.59	74.00	24.41	Peak	Horizontal
5	4874	36.42	-2.05	34.37	54.00	19.63	Average	Vertical
6	4874	48.40	-2.05	46.35	74.00	27.65	Peak	Vertical
7	7311	37.04	1.31	38.35	54.00	15.65	Average	Vertical
8	7311	49.08	1.31	50.39	74.00	23.61	Peak	Vertical

SISO_ Antenna 2_ IEEE 802.11g_ Channel 11:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4924	36.35	-2.03	34.32	54.00	19.68	Average	Horizontal
2	4924	47.16	-2.03	45.13	74.00	28.87	Peak	Horizontal
3	7386	35.48	1.31	36.79	54.00	17.21	Average	Horizontal
4	7386	46.25	1.31	47.56	74.00	26.44	Peak	Horizontal
5	4924	36.46	-2.03	34.43	54.00	19.57	Average	Vertical
6	4924	47.64	-2.03	45.61	74.00	28.39	Peak	Vertical
7	7386	36.67	1.31	37.98	54.00	16.02	Average	Vertical
8	7386	48.76	1.31	50.07	74.00	23.93	Peak	Vertical

MIMO_Antenna 1+2_IEEE 802.11n-HT20_Channel 1:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	38.80	-2.07	36.73	54.00	17.27	Average	Horizontal
2	4824	49.42	-2.07	47.35	74.00	26.65	Peak	Horizontal
3	7236	34.71	1.30	36.01	54.00	17.99	Average	Horizontal
4	7236	47.23	1.30	48.53	74.00	25.47	Peak	Horizontal
5	4824	36.26	-2.07	34.19	54.00	19.81	Average	Vertical
6	4824	47.70	-2.07	45.63	74.00	28.37	Peak	Vertical
7	7236	34.89	1.30	36.19	54.00	17.81	Average	Vertical
8	7236	46.78	1.30	48.08	74.00	25.92	Peak	Vertical

MIMO_Antenna 1+2_IEEE 802.11n-HT20_Channel 6:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	36.22	-2.07	34.15	54.00	19.85	Average	Horizontal
2	4824	47.10	-2.07	45.03	74.00	28.97	Peak	Horizontal
3	7236	34.05	1.30	35.35	54.00	18.65	Average	Horizontal
4	7236	46.80	1.30	48.10	74.00	25.90	Peak	Horizontal
5	4824	36.10	-2.07	34.03	54.00	19.97	Average	Vertical
6	4824	47.32	-2.07	45.25	74.00	28.75	Peak	Vertical
7	7236	37.04	1.30	38.34	54.00	15.66	Average	Vertical
8	7236	49.12	1.30	50.42	74.00	23.58	Peak	Vertical

MIMO_Antenna 1+2_IEEE 802.11n-HT20_Channel 11:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	36.18	-2.07	34.11	54.00	19.89	Average	Horizontal
2	4824	47.55	-2.07	45.48	74.00	28.52	Peak	Horizontal
3	7236	33.99	1.30	35.29	54.00	18.71	Average	Horizontal
4	7236	45.47	1.30	46.77	74.00	27.23	Peak	Horizontal
5	4824	36.17	-2.07	34.10	54.00	19.90	Average	Vertical
6	4824	47.50	-2.07	45.43	74.00	28.57	Peak	Vertical
7	7236	34.03	1.30	35.33	54.00	18.67	Average	Vertical
8	7236	45.72	1.30	47.02	74.00	26.98	Peak	Vertical

MIMO_Antenna 1+2_ IEEE 802.11n-HT40_Channel 3:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	36.59	-2.07	34.52	54.00	19.48	Average	Horizontal
2	4824	47.91	-2.07	45.84	74.00	28.16	Peak	Horizontal
3	7236	34.49	1.30	35.79	54.00	18.21	Average	Horizontal
4	7236	45.74	1.30	47.04	74.00	26.96	Peak	Horizontal
5	4824	36.22	-2.07	34.15	54.00	19.85	Average	Vertical
6	4824	47.62	-2.07	45.55	74.00	28.45	Peak	Vertical
7	7236	34.63	1.30	35.93	54.00	18.07	Average	Vertical
8	7236	45.87	1.30	47.17	74.00	26.83	Peak	Vertical

MIMO_Antenna 1+2_ IEEE 802.11n-HT40_Channel 6:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	36.23	-2.07	34.16	54.00	19.84	Average	Horizontal
2	4824	48.28	-2.07	46.21	74.00	27.79	Peak	Horizontal
3	7236	34.01	1.30	35.31	54.00	18.69	Average	Horizontal
4	7236	46.13	1.30	47.43	74.00	26.57	Peak	Horizontal
5	4824	36.23	-2.07	34.16	54.00	19.84	Average	Vertical
6	4824	48.02	-2.07	45.95	74.00	28.05	Peak	Vertical
7	7236	33.99	1.30	35.29	54.00	18.71	Average	Vertical
8	7236	46.00	1.30	47.30	74.00	26.70	Peak	Vertical

MIMO_Antenna 1+2_ IEEE 802.11n-HT40_Channel 9:

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	36.18	-2.07	34.11	54.00	19.89	Average	Horizontal
2	4824	47.21	-2.07	45.14	74.00	28.86	Peak	Horizontal
3	7236	34.02	1.30	35.32	54.00	18.68	Average	Horizontal
4	7236	45.92	1.30	47.22	74.00	26.78	Peak	Horizontal
5	4824	36.18	-2.07	34.11	54.00	19.89	Average	Vertical
6	4824	47.40	-2.07	45.33	74.00	28.67	Peak	Vertical
7	7236	34.05	1.30	35.35	54.00	18.65	Average	Vertical
8	7236	46.08	1.30	47.38	74.00	26.62	Peak	Vertical



Remark:



1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Limit - Result
4. WiFi transmitting generated the higher emission than WiFi and LTE simultaneously, so the data of WiFi transmitting was recorded as final result.

TEST REPORT

Band Edge Measurements (Radiated)



SISO_ Antenna 1_ IEEE 802.11b

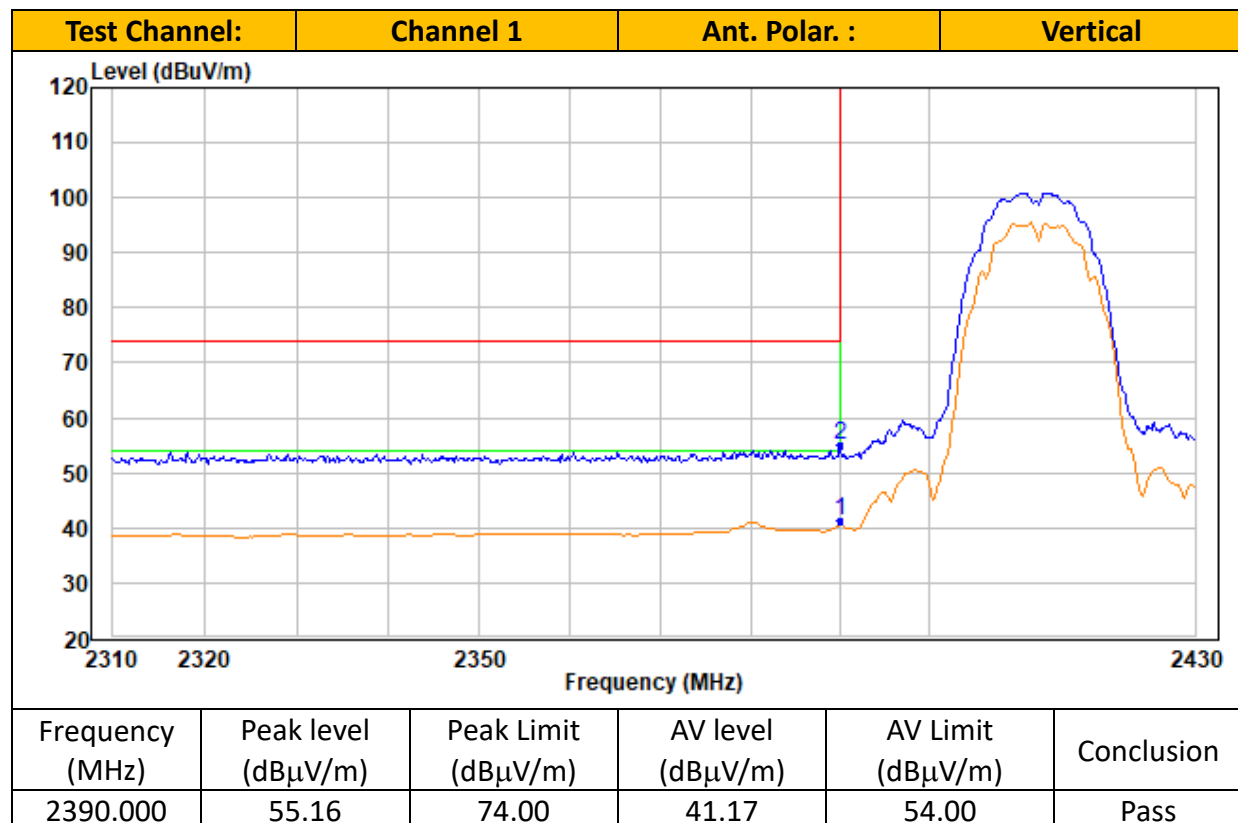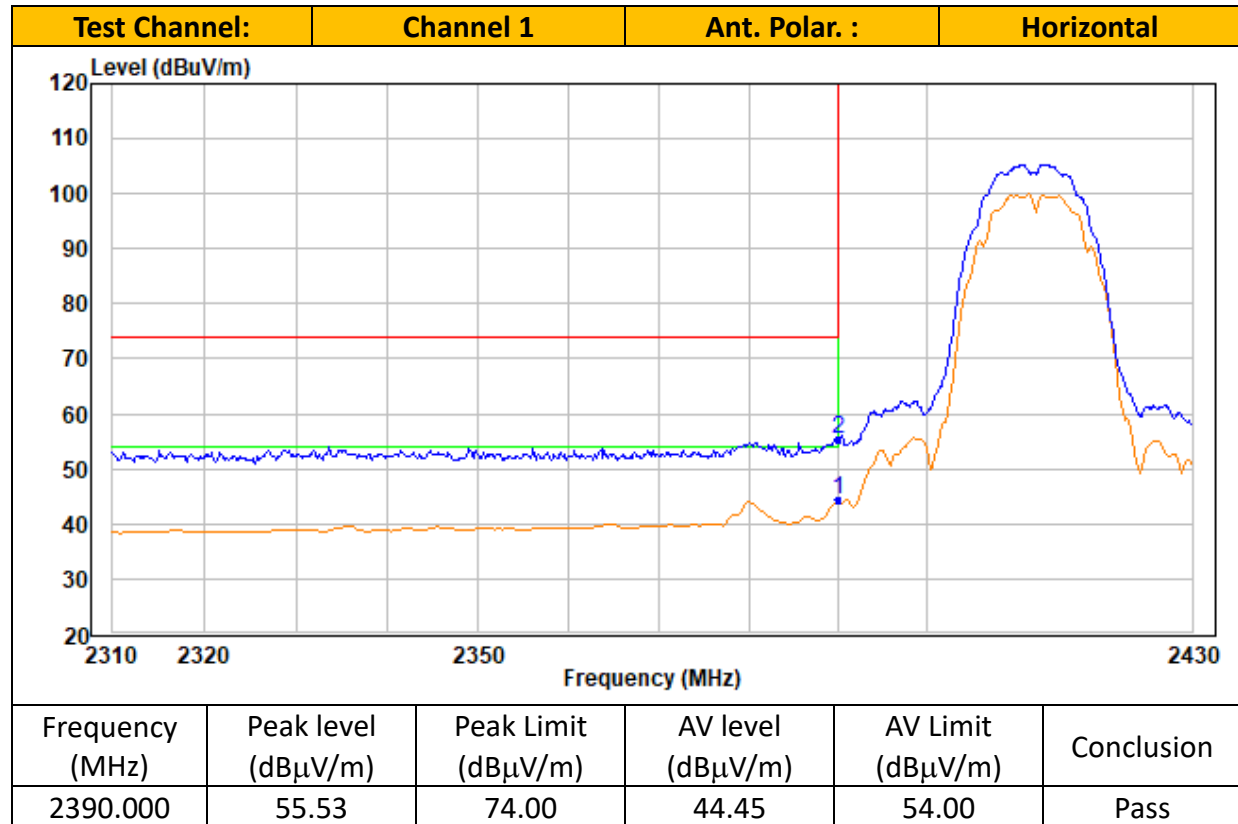

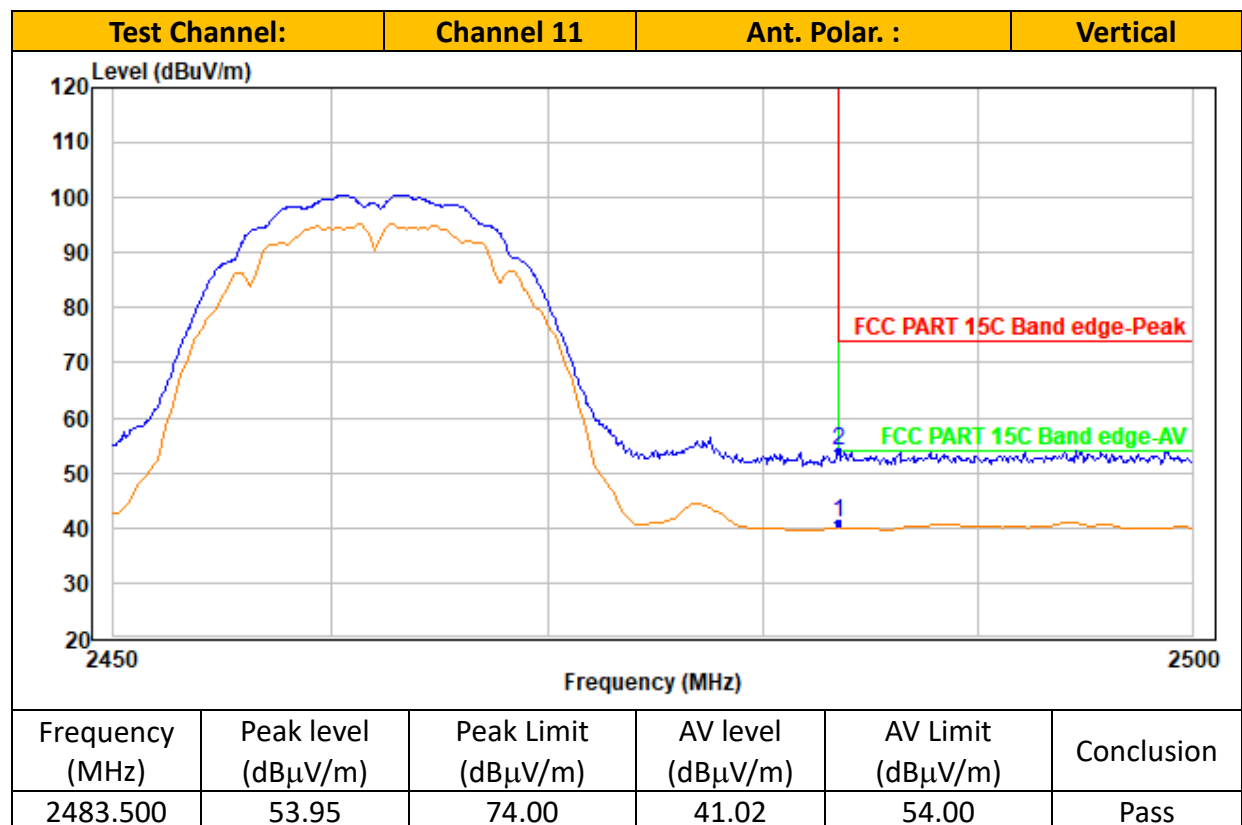
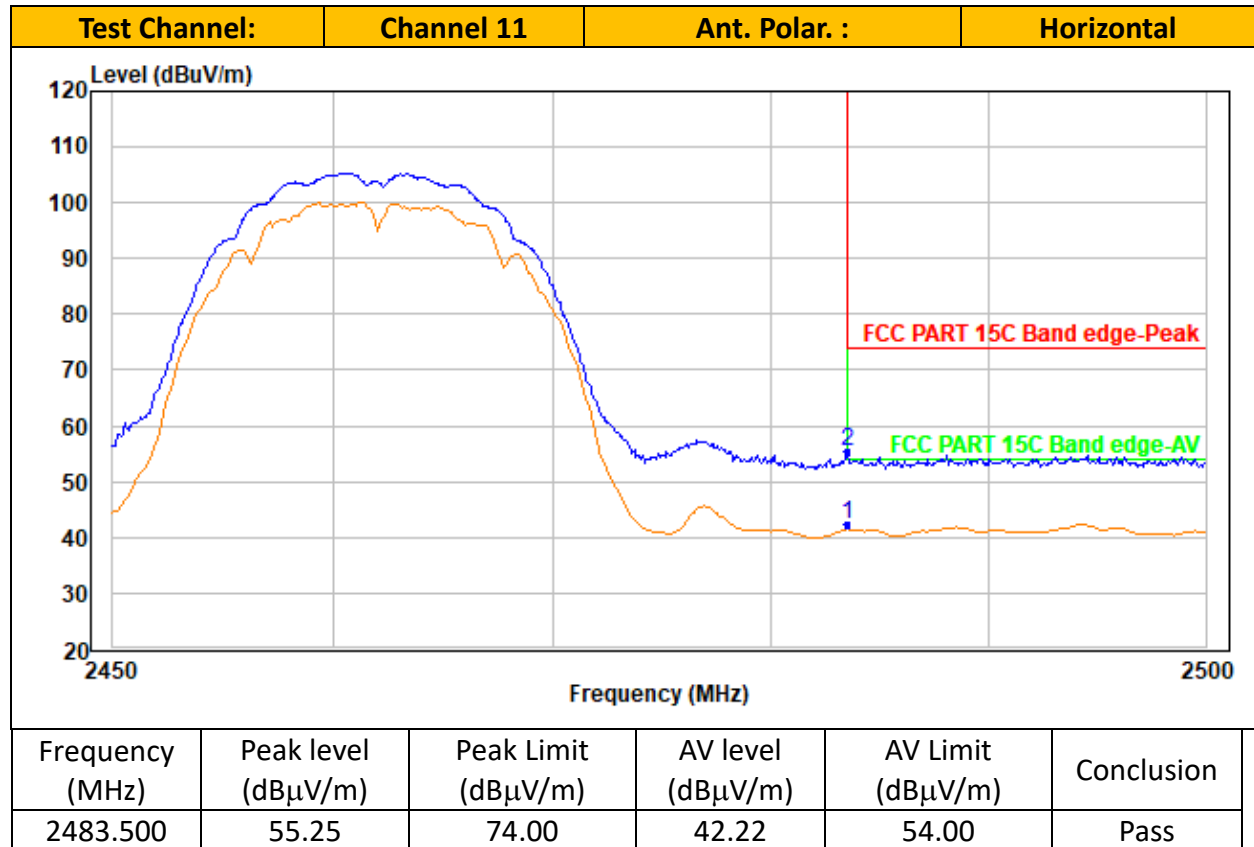


TEST REPORT

SISO_ Antenna 1_ IEEE 802.11g

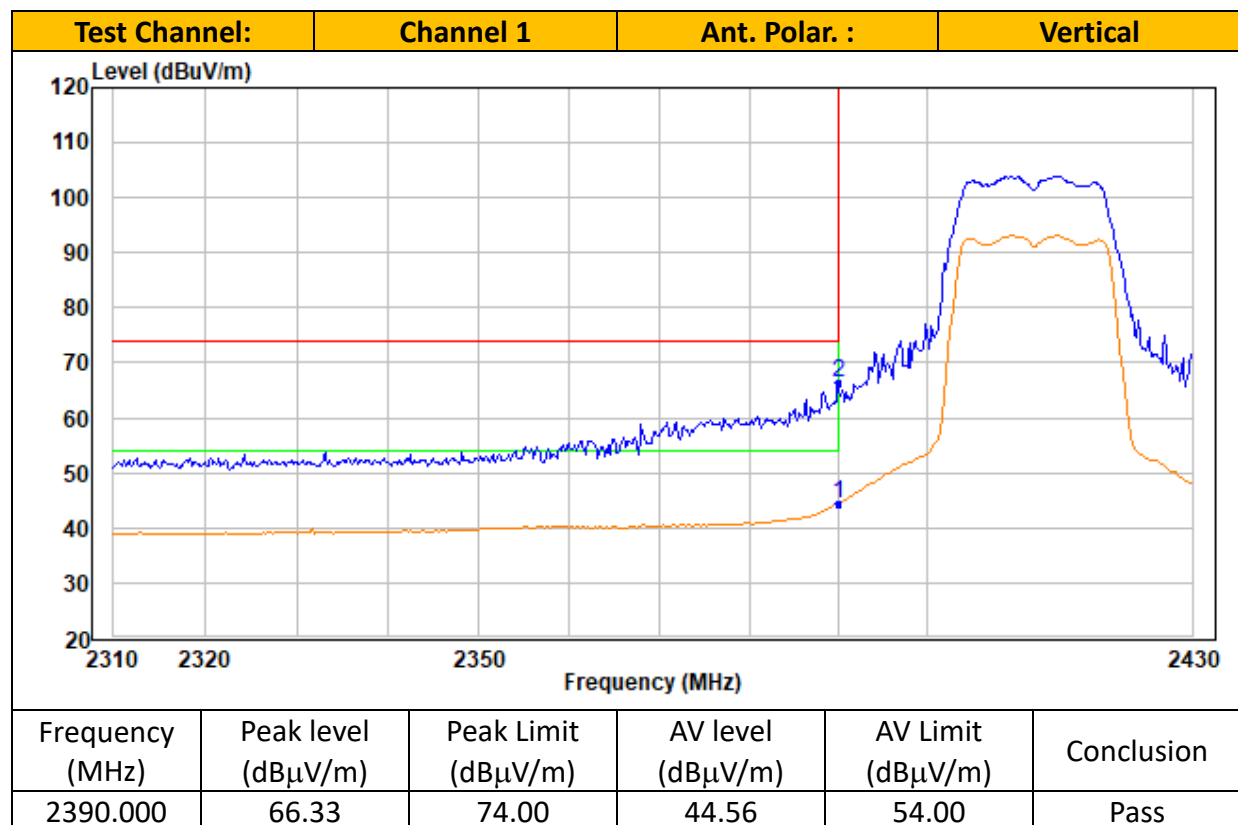
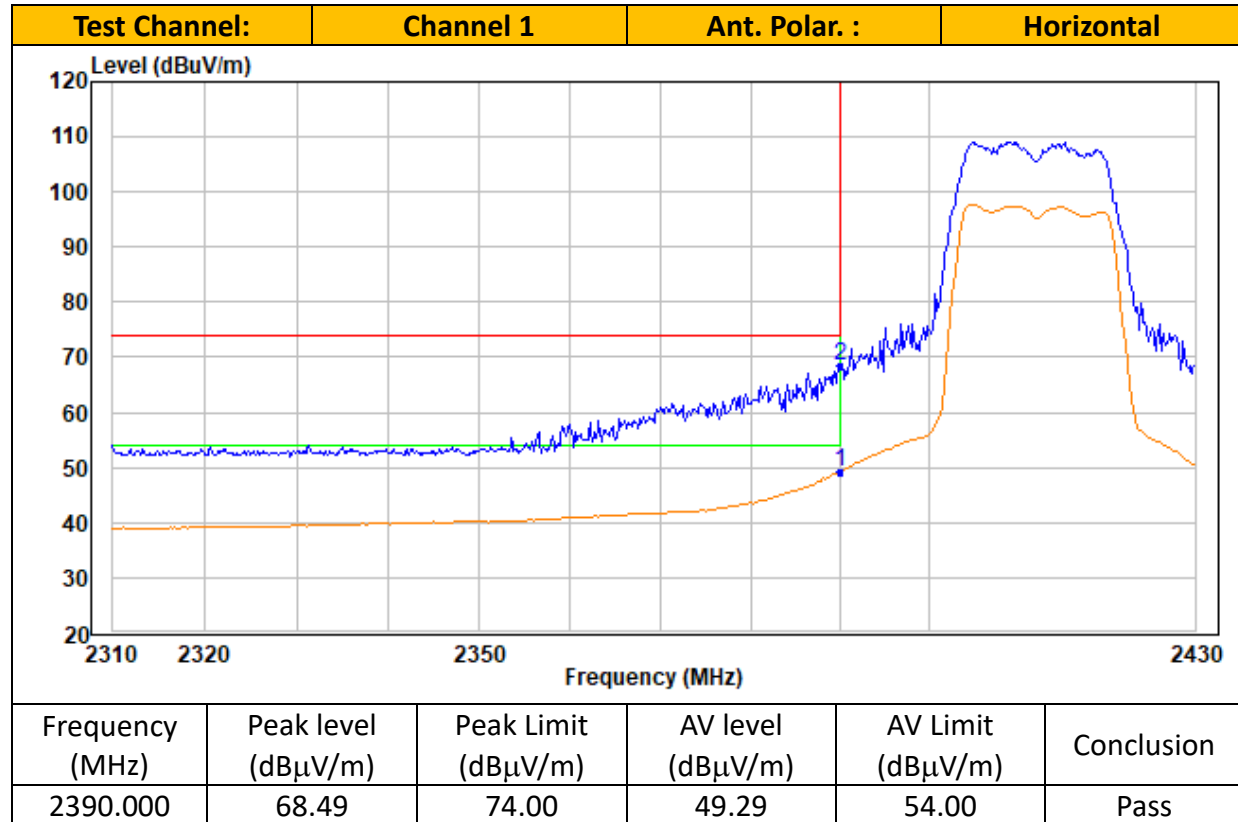


TEST REPORT

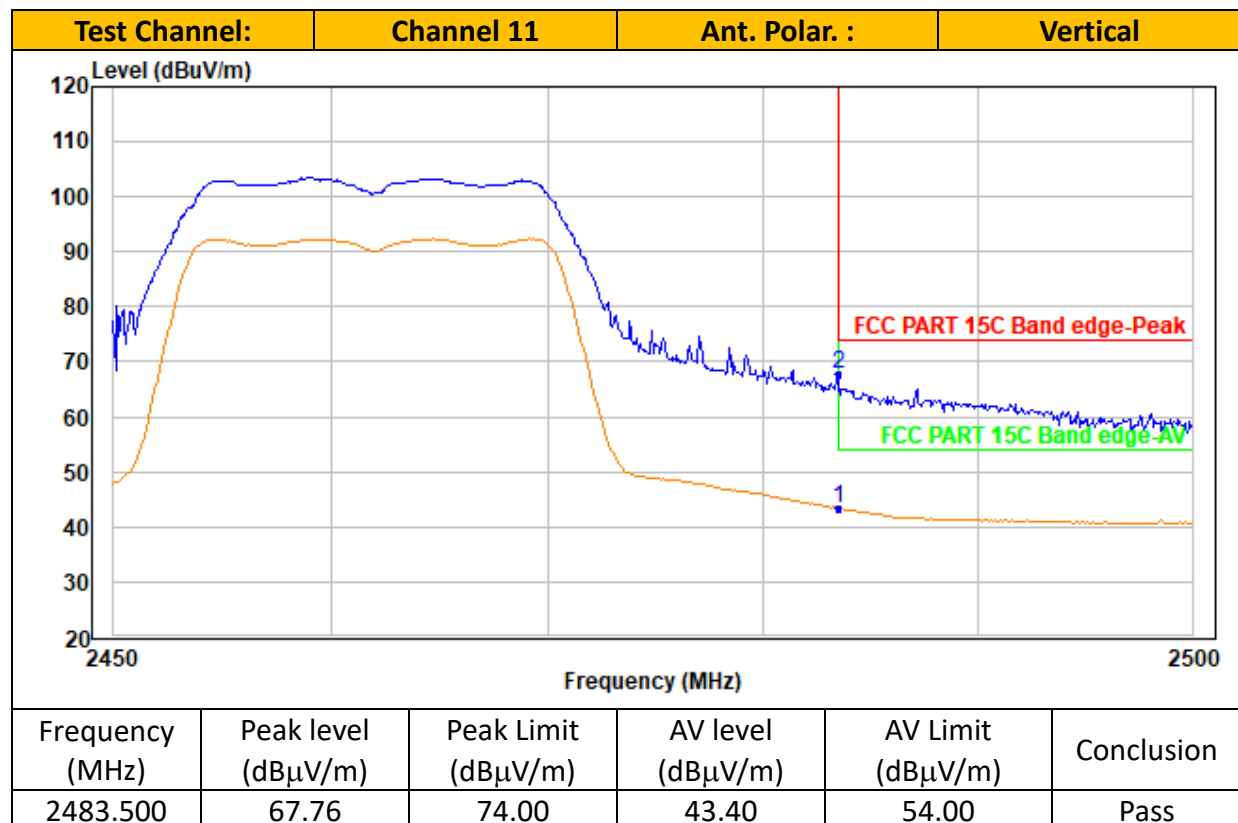
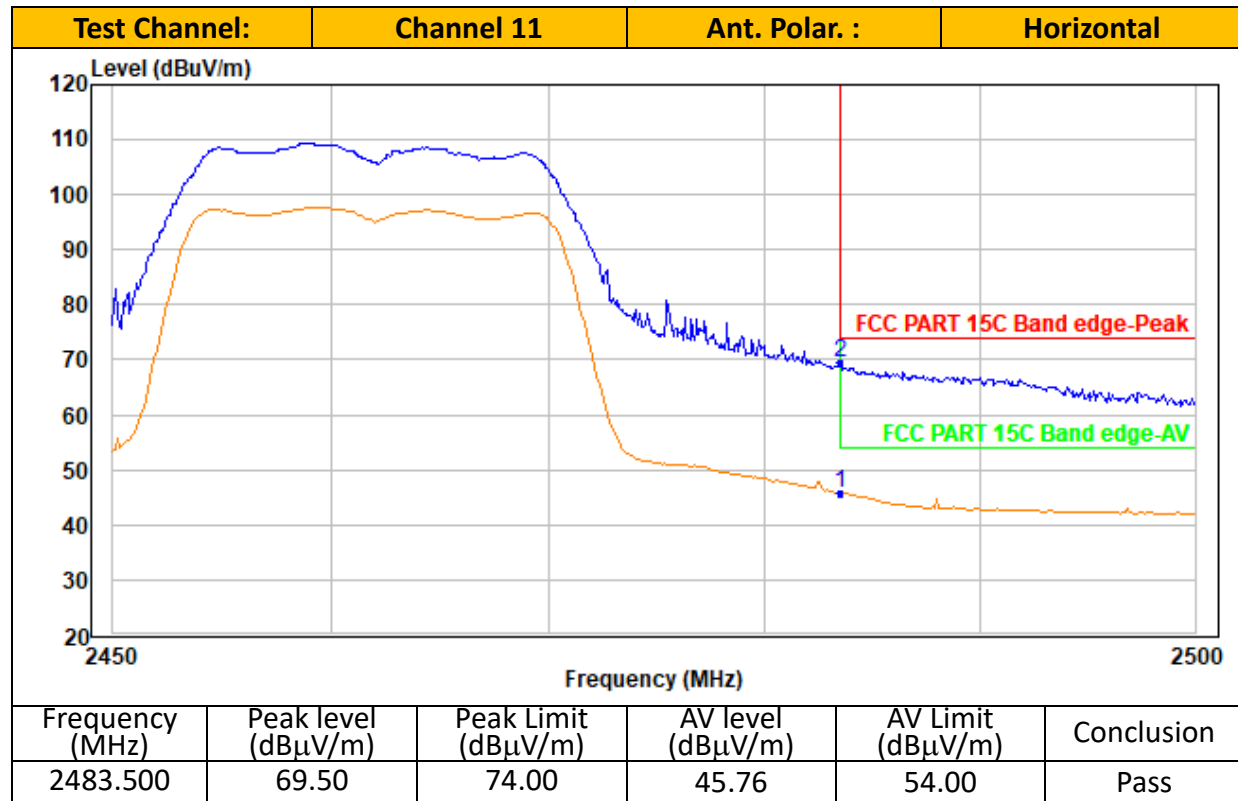


TEST REPORT



SISO_ Antenna 2_ IEEE 802.11b

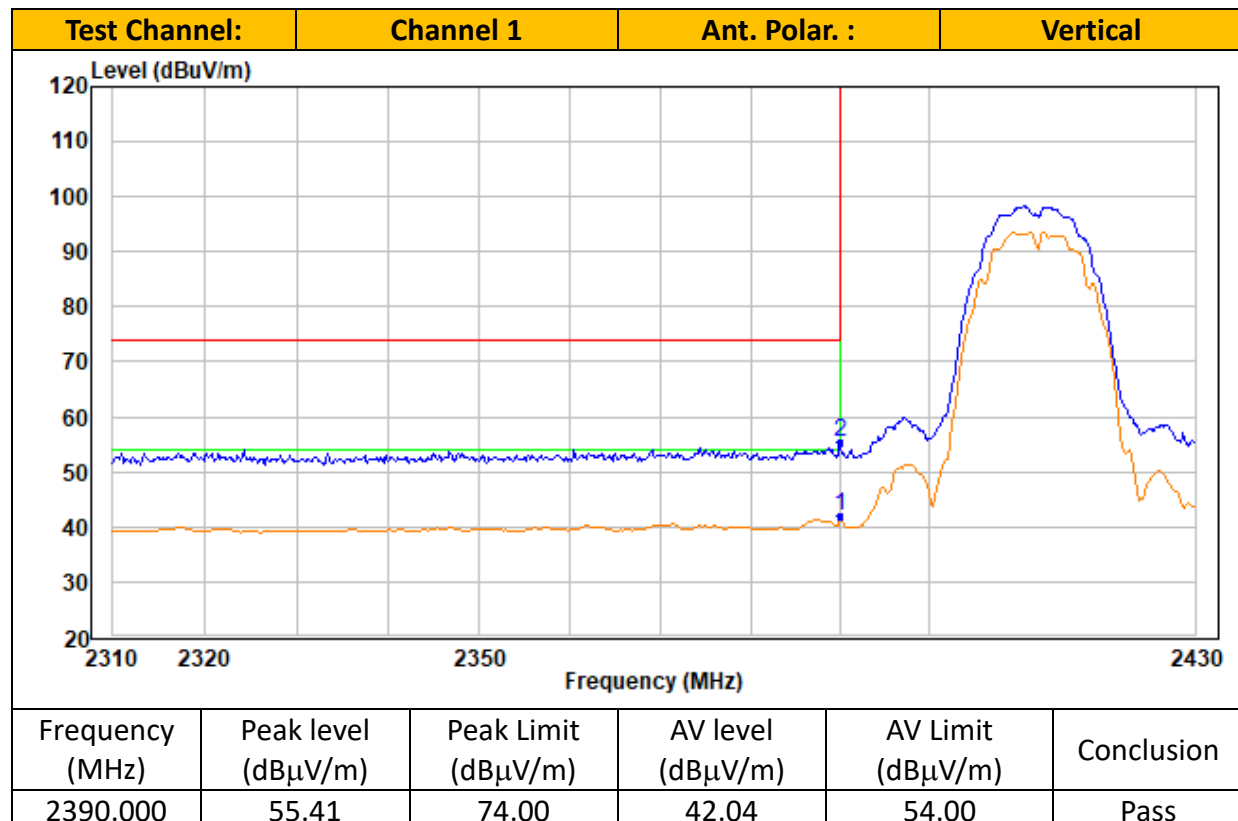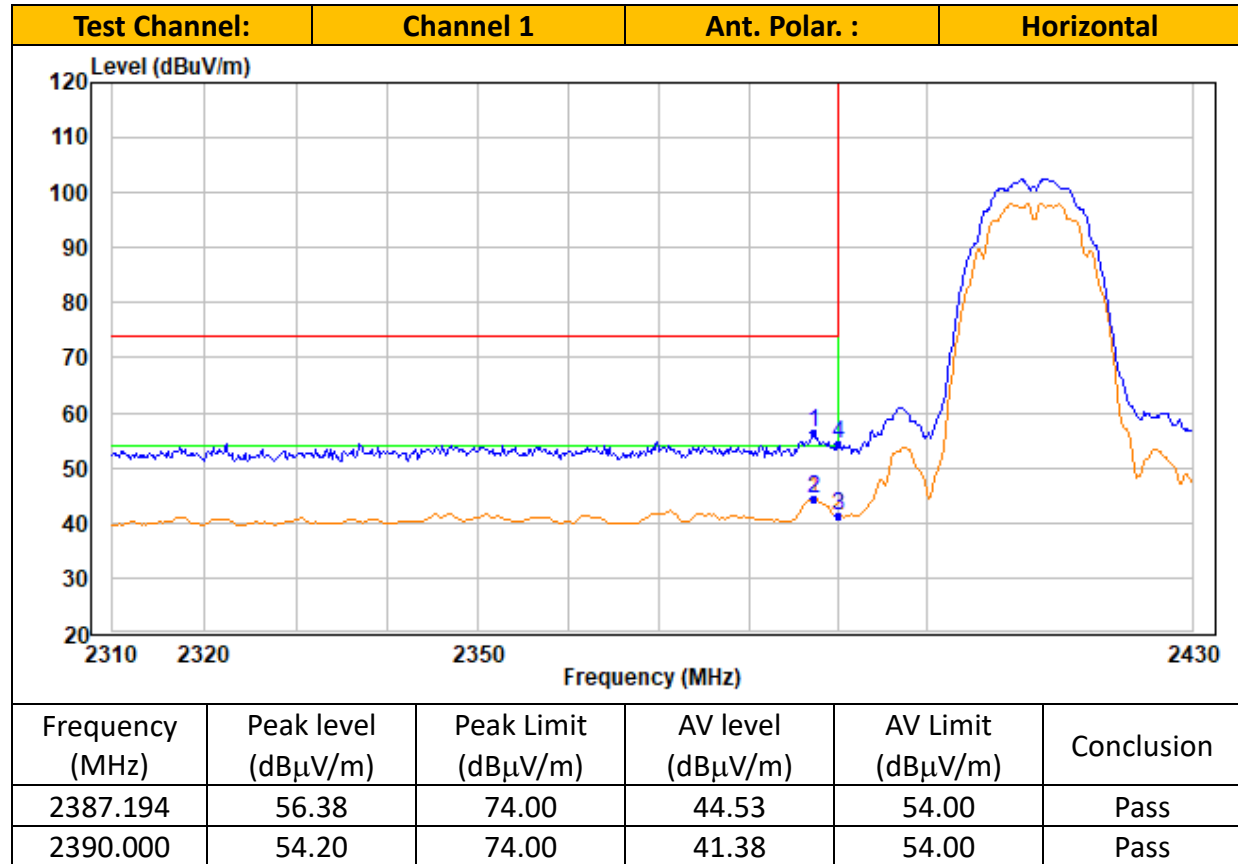



TEST REPORT

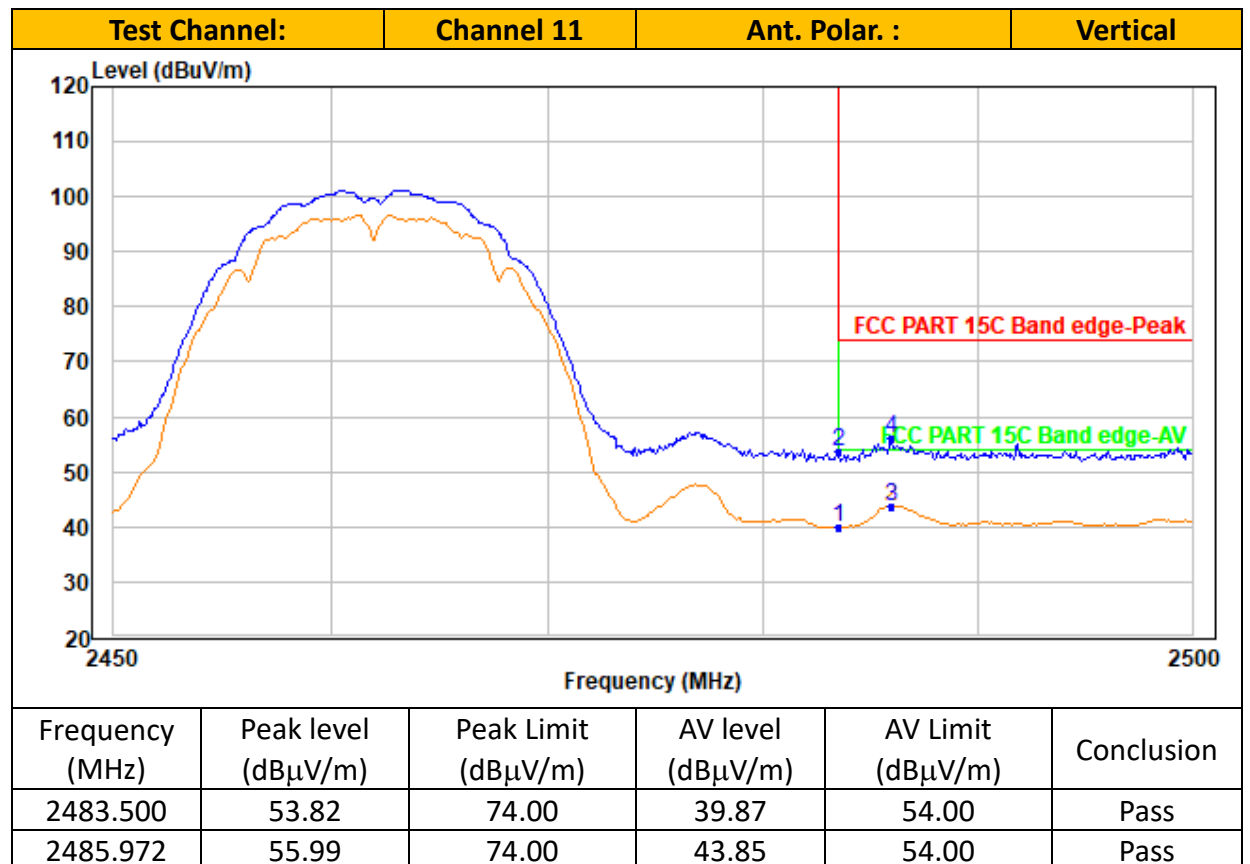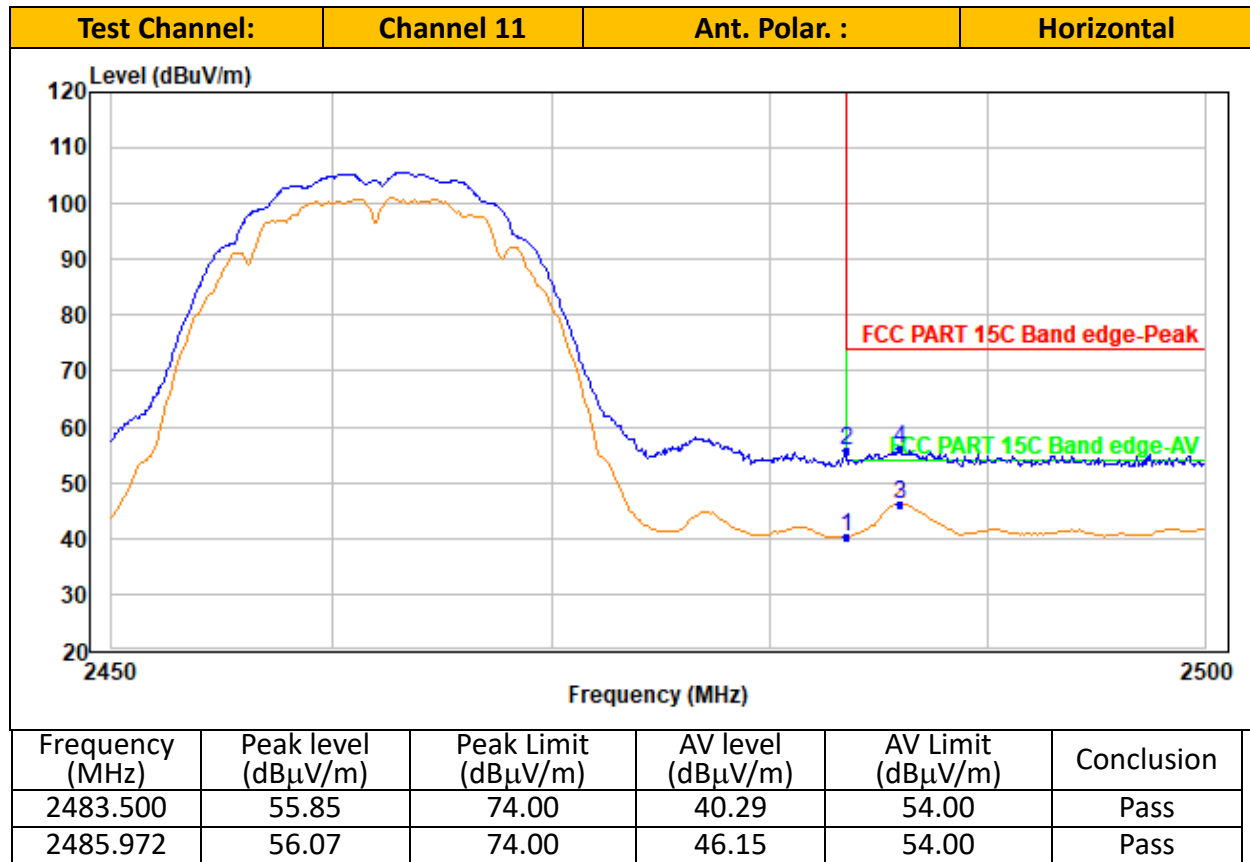

SISO_ Antenna 2_ IEEE 802.11g

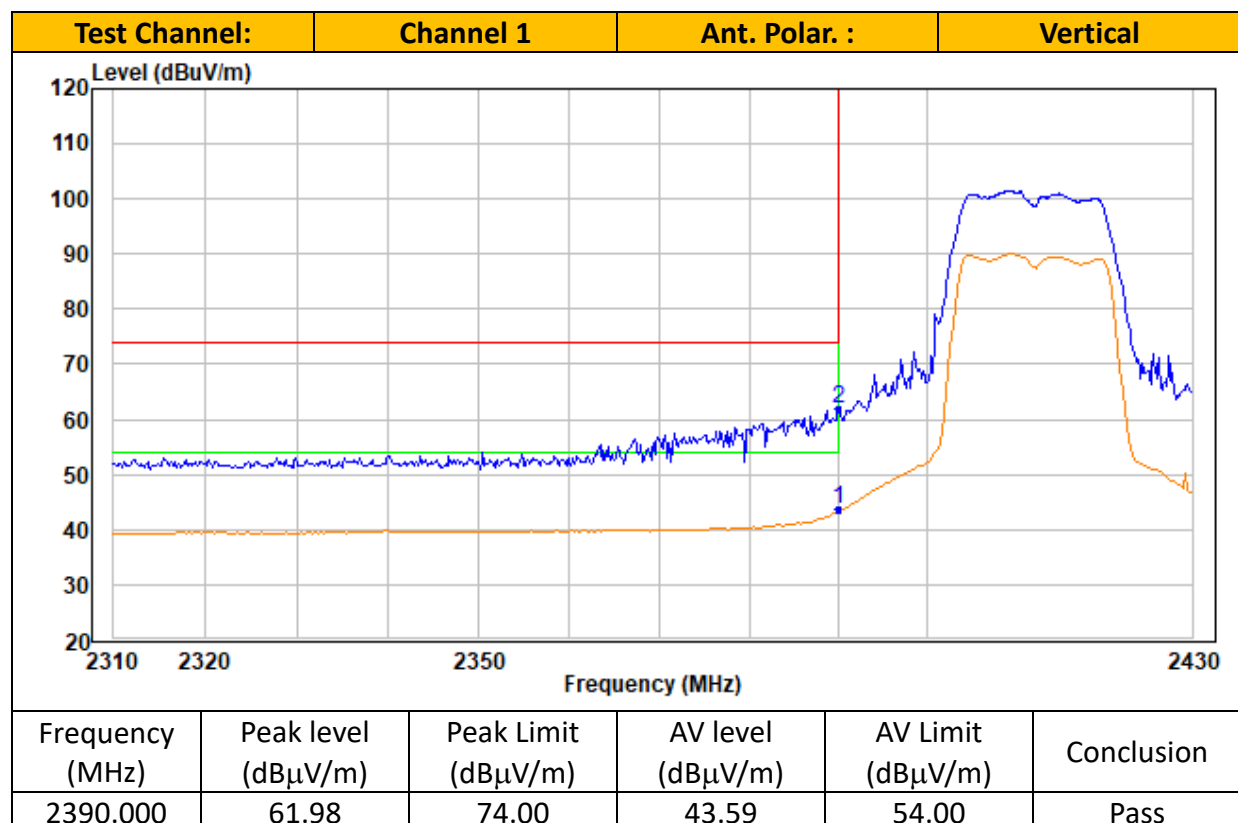
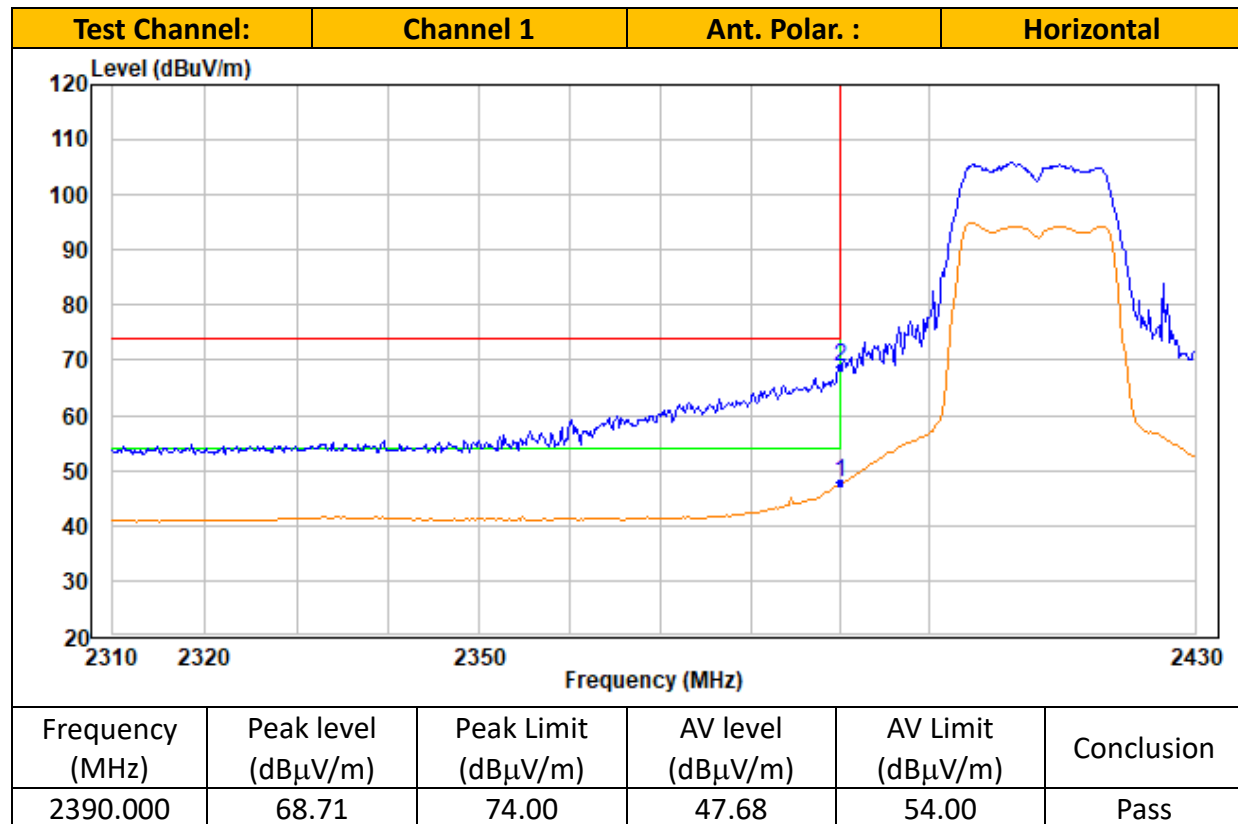


TEST REPORT

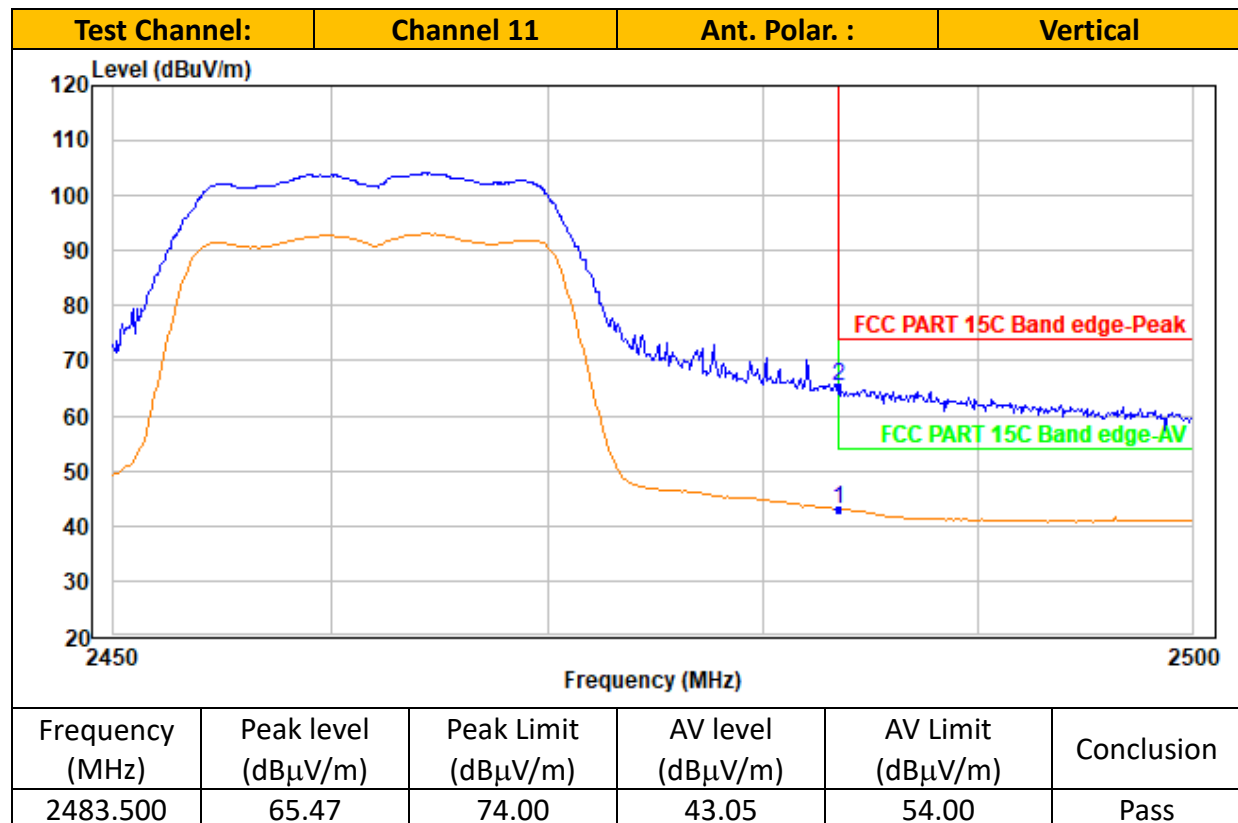
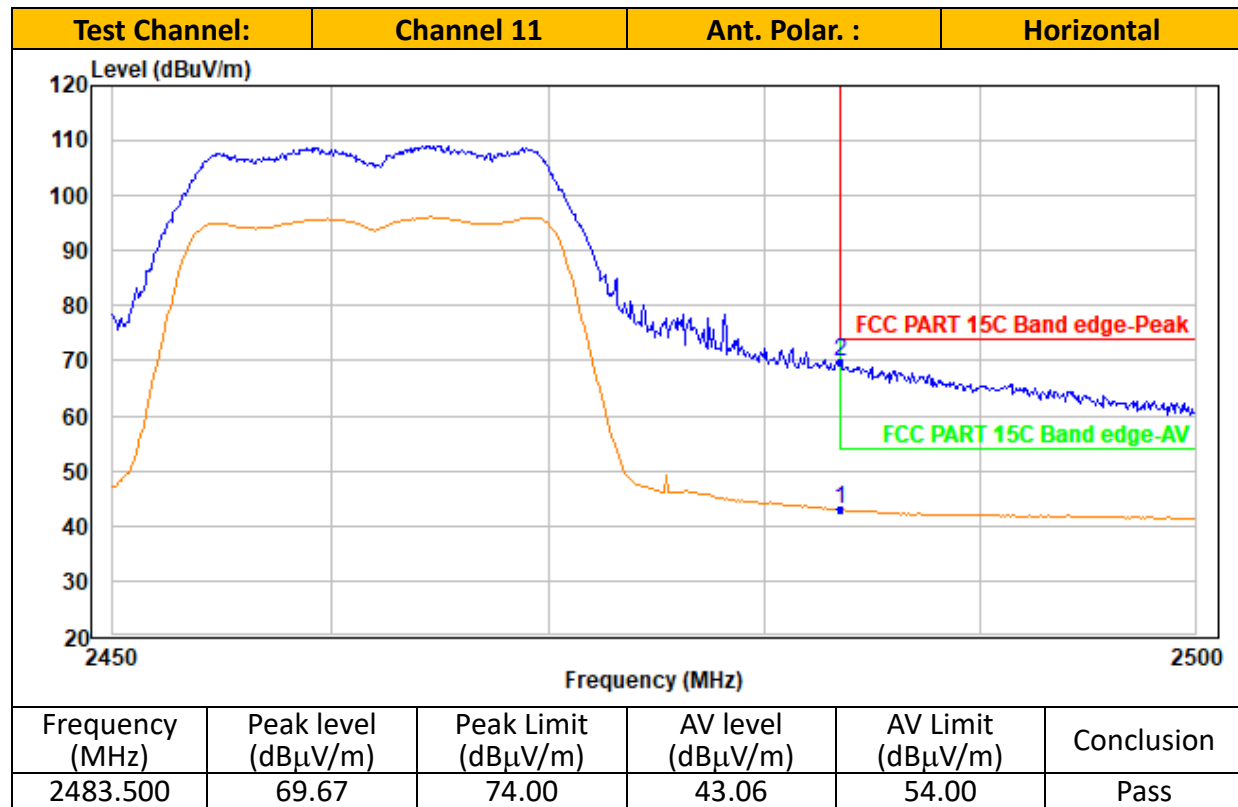


TEST REPORT



MIMO_Antenna 1+2_ IEEE 802.11n-HT20

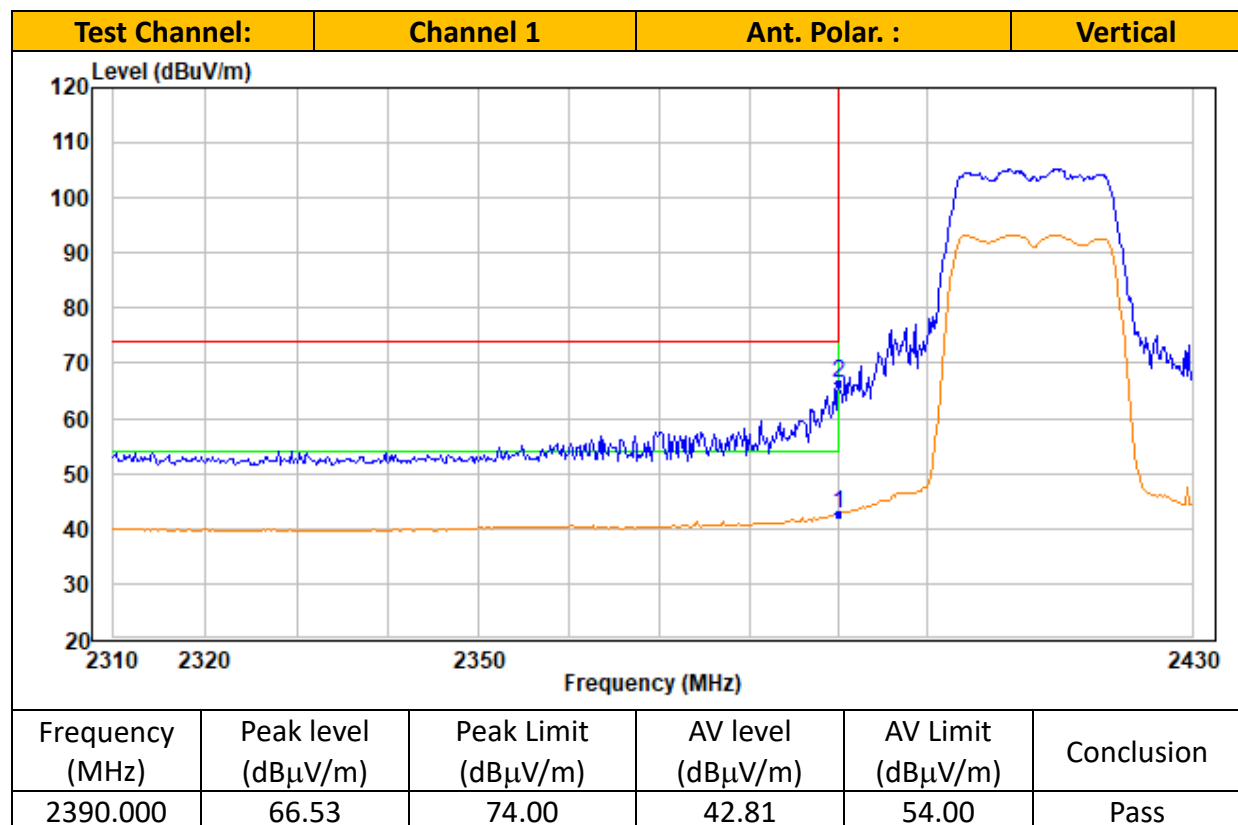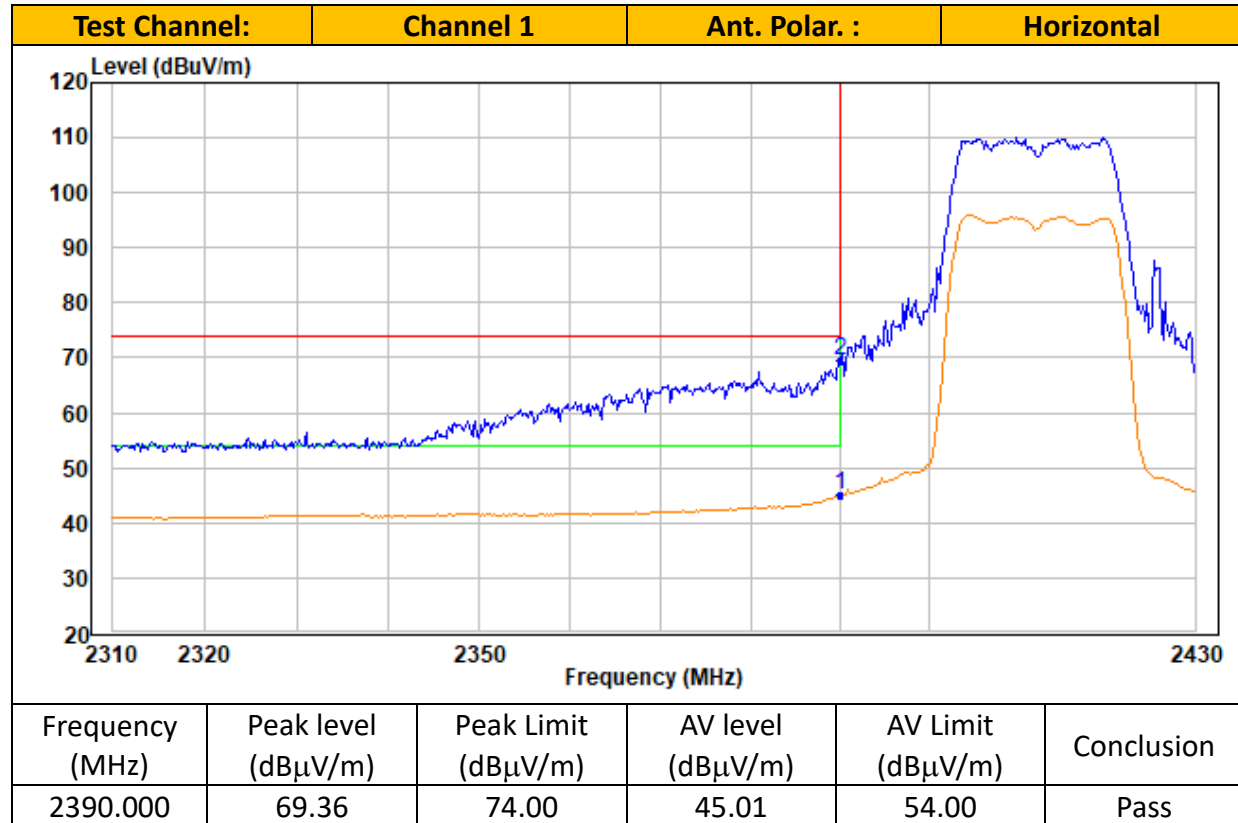



TEST REPORT

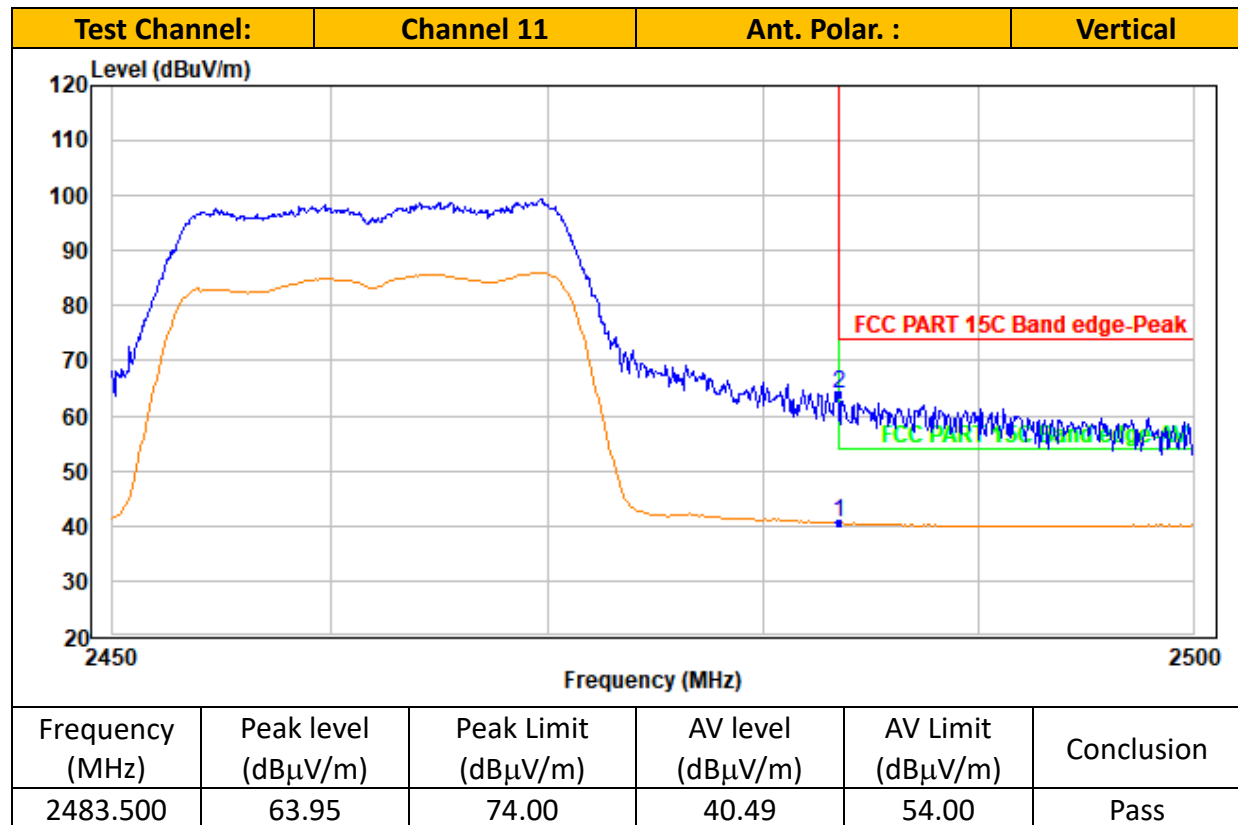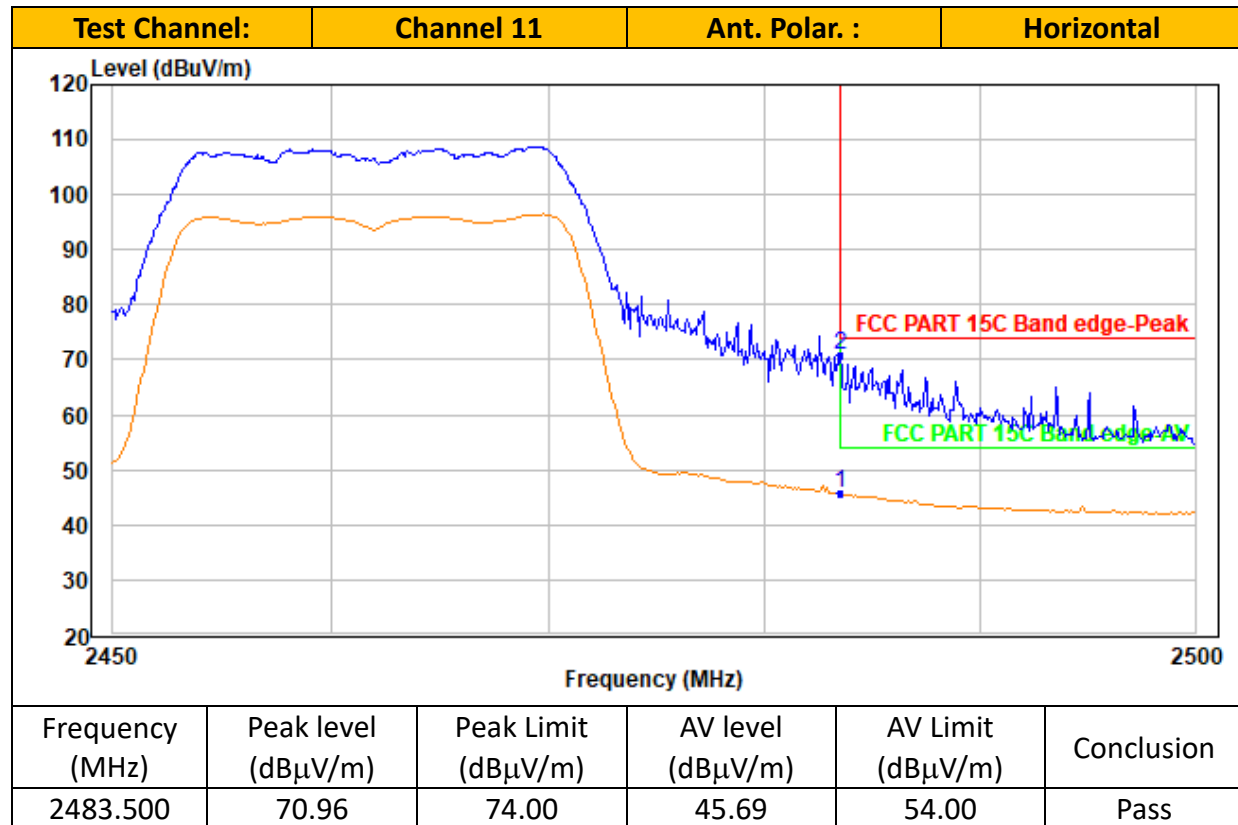

MIMO_Antenna 1+2_IEEE 802.11n-HT40

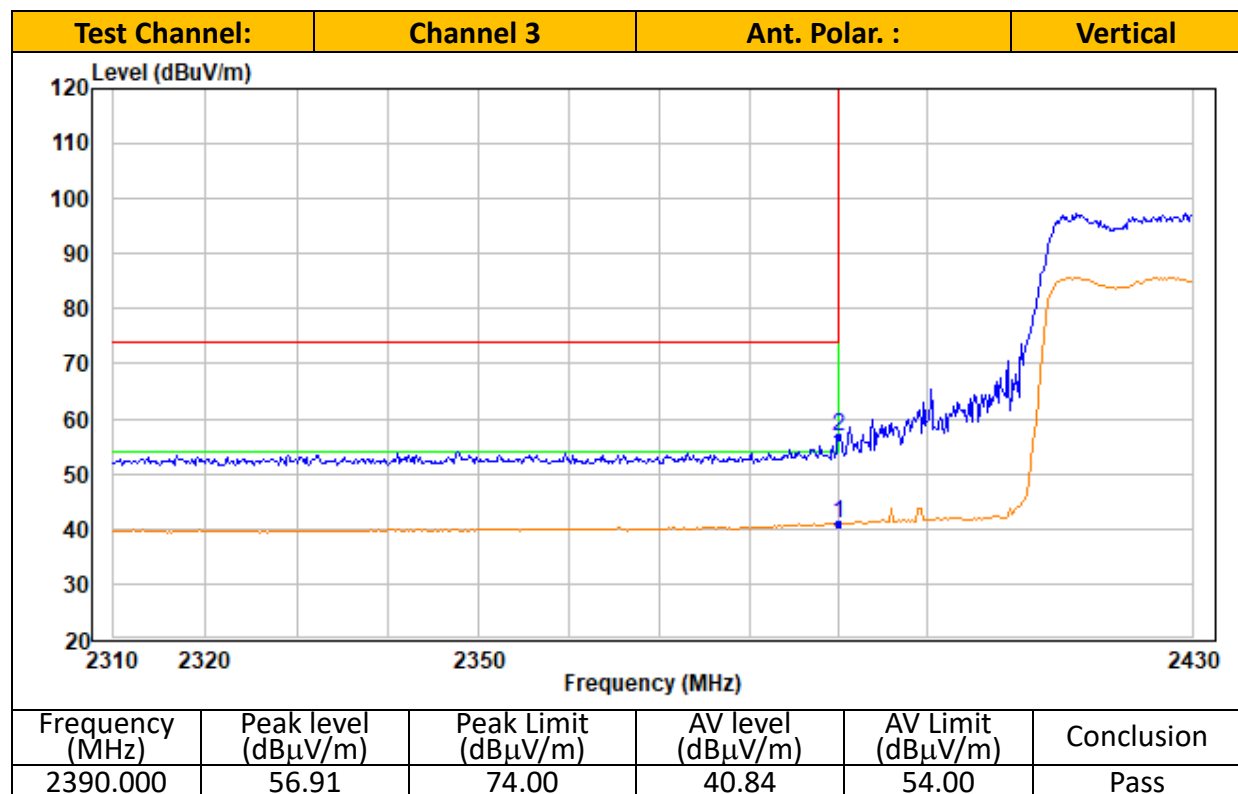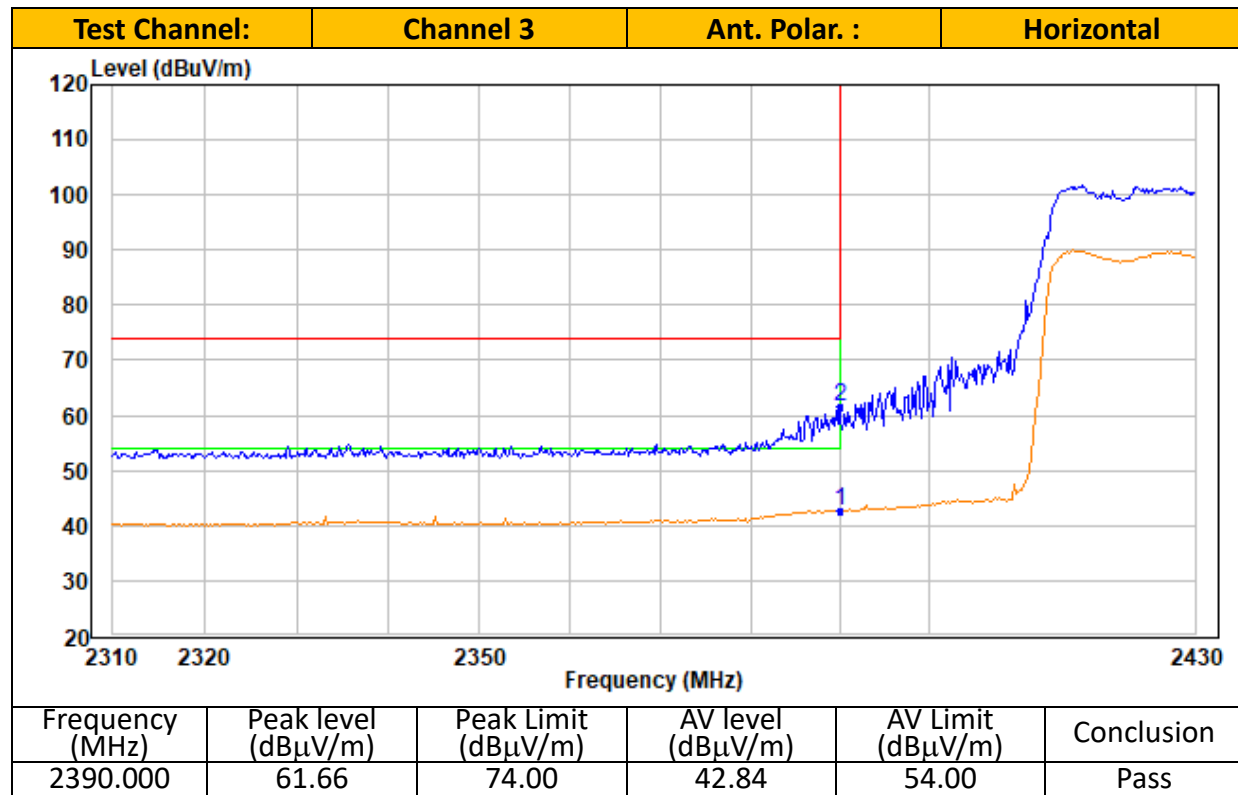

TEST REPORT

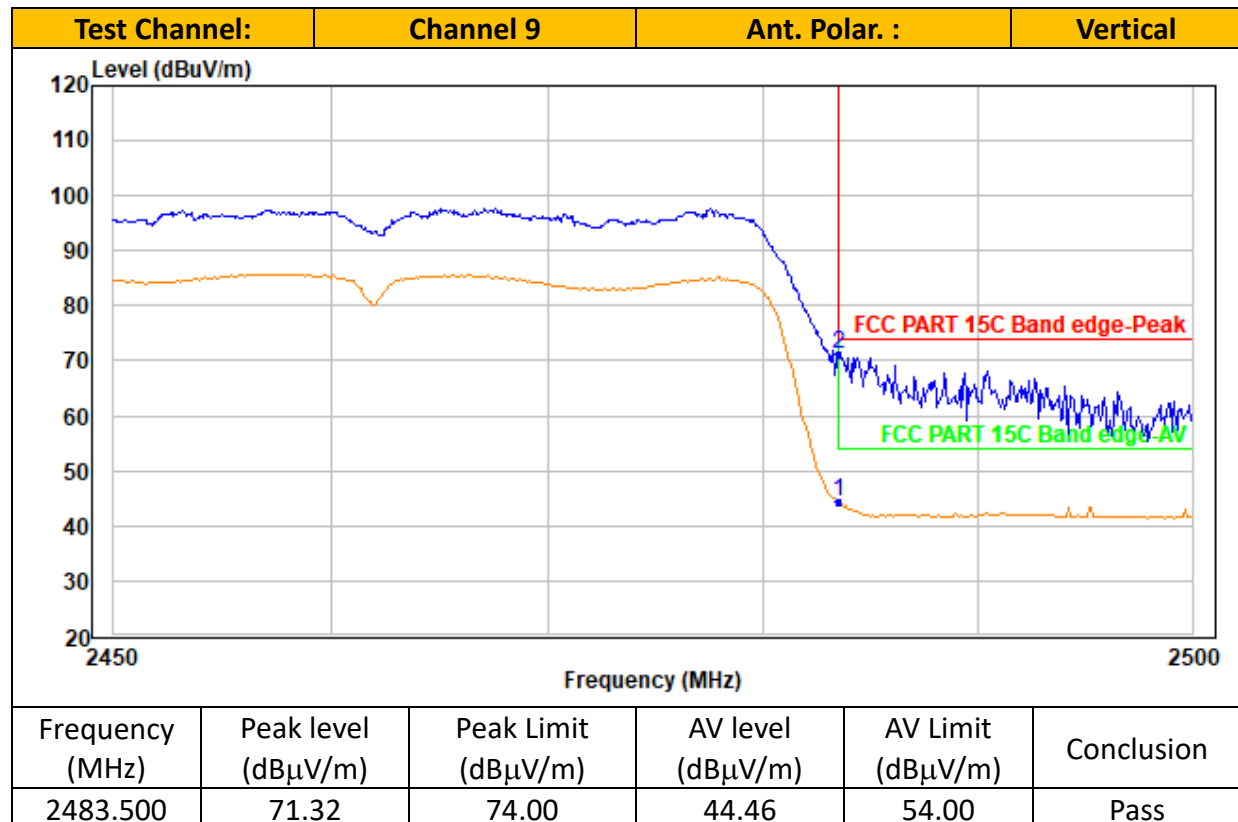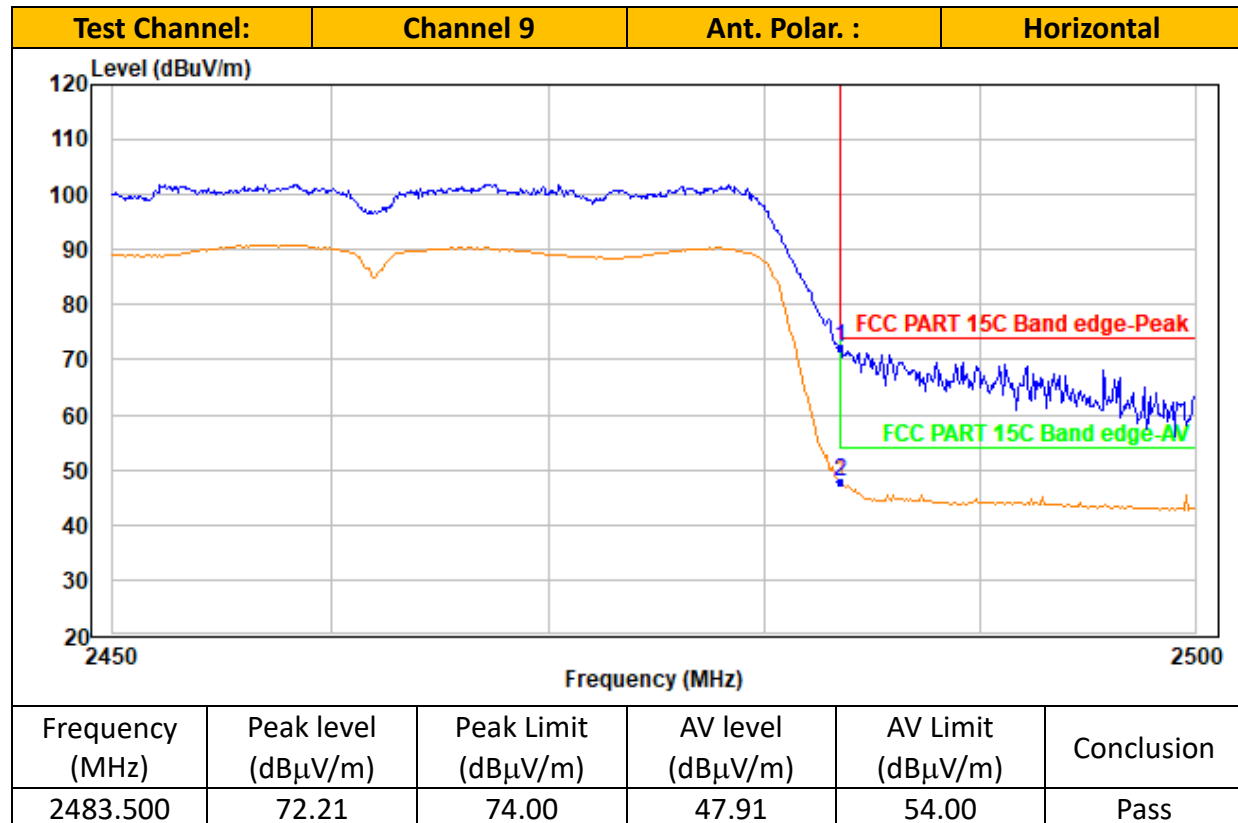

8 Power line conducted emission


Test result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

8.2 Test Configuration

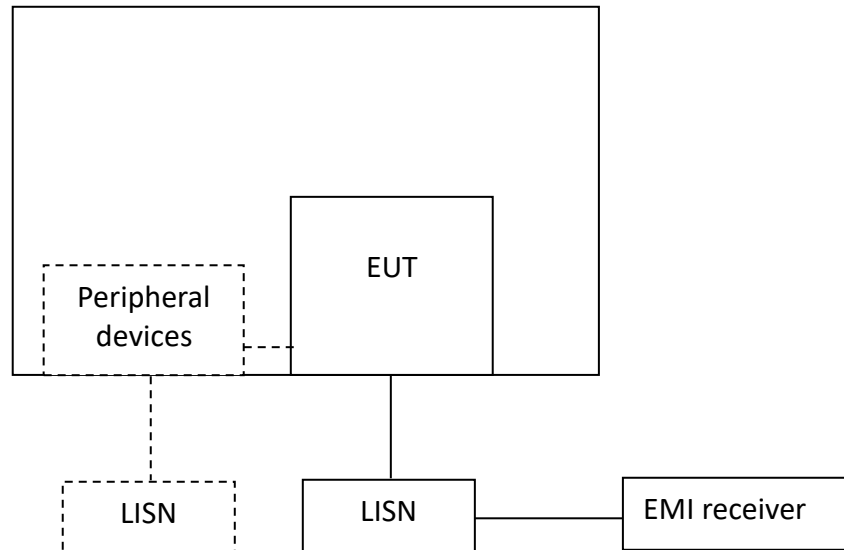

8.3 Measurement Procedure


Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

8.4 Test Results of Power line conducted emission

Test Curve:

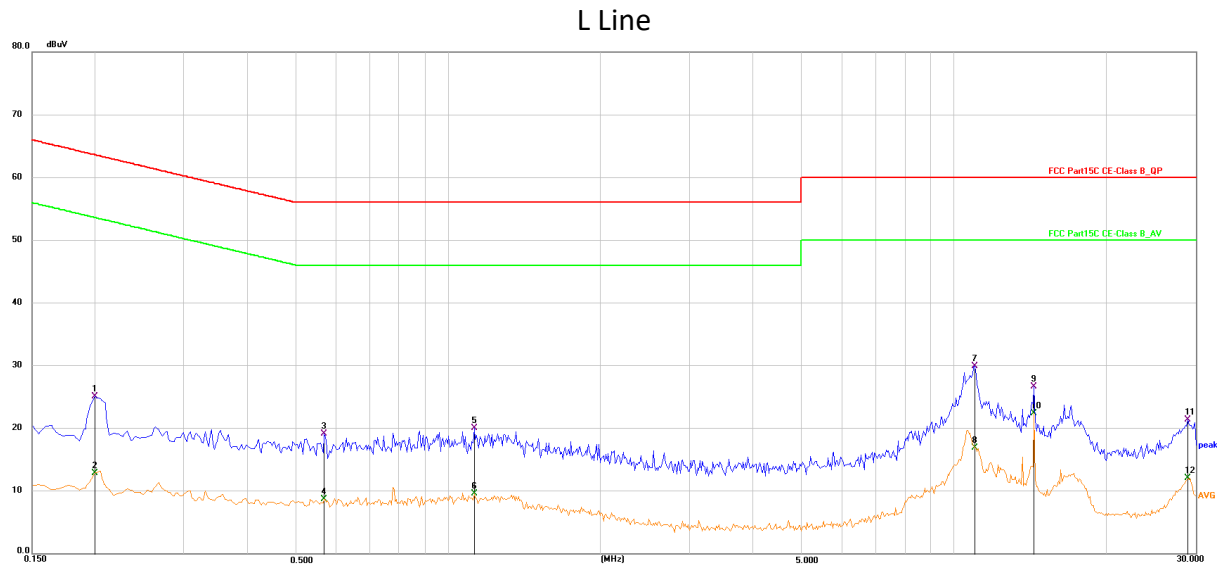


Test Data:

Frequency (MHz)	Quasi-peak			Average		
	Level dB(µV)	Limit dB(µV)	Margin (dB)	Level dB(µV)	Limit dB(µV)	Margin (dB)
0.1995	25.07	63.63	38.56	12.86	53.63	40.77
0.5685	19.11	56.00	36.89	8.73	46.00	37.27
1.1265	20.04	56.00	35.96	9.54	46.00	36.46
10.9950	29.95	60.00	30.05	16.87	50.00	33.13
14.3834	26.67	60.00	33.33	22.38	50.00	27.62
28.9274	21.36	60.00	38.64	12.04	50.00	37.96

TEST REPORT

N Line

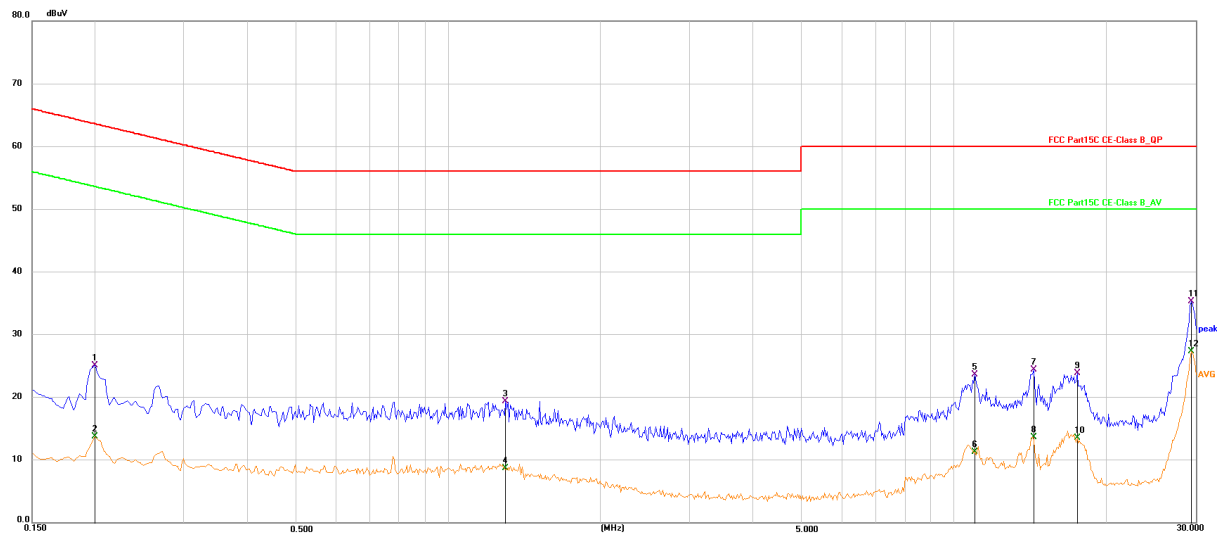

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	Level dB(μV)	Limit dB(μV)	Margin (dB)	Level dB(μV)	Limit dB(μV)	Margin (dB)
0.1995	25.07	63.63	38.56	13.71	53.63	39.92
1.2975	19.32	56.00	36.68	8.74	46.00	37.26
10.9994	23.62	60.00	36.38	11.27	50.00	38.73
14.3655	24.39	60.00	35.61	13.67	50.00	36.33
17.4974	23.79	60.00	36.21	13.48	50.00	36.52
29.4450	35.24	60.00	24.76	27.29	50.00	22.71

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor

3. Margin = Limit - Level

9 Occupied Bandwidth

Test result: Tested

9.1 Limit

None


9.2 Measurement Procedure

The occupied bandwidth per RSS-Gen Issue 4 Clause 6.6 was measured using the Spectrum Analyzer.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

9.3 Test Configuration

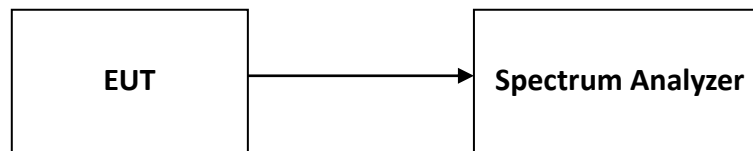

9.4 The results of Occupied Bandwidth

Please refer to Appendix

10 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

Appendix A: Test results

Refer to Appendix A for test results.

***** END *****