



FCC TEST REPORT

FCC ID:2BCSP-CARPOD

Report Number.....: ZKT-2308236614E-2

Date of Test..... Aug. 28, 2023 to Sep. 04, 2023

Date of issue.....: Sep. 04, 2023

Total number of pages..... 35

Test Result: PASS

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: Tianjin Yunfan Electronic Technology Co., LtdAddress Binhai High tech Zone Tanggu Marine Science and Technology Park
Tianjin Bay 18- 1-2902 Tianjin**Manufacturer's name: Qiu Ran Technology (Dongguan) Co. Ltd**Address Room 301, Building 2, No. 18 Tiansha Road, Tangxia Town,
Dongguan City

Test specification:

Standard..... FCC CFR Title 47 Part 15 239
ANSI C63.10:2013

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No.....: TRF-EL-112_V0**Test Report Form(s) Originator.....: ZKT Testing****Master TRF: Dated: 2020-01-06**

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: CarpodGo

Trademark: CarpodGo

Model/Type reference.....: Carpod
T3

Ratings.....: Input: DC 9V/1.5A



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

**Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China**

Tested by (name + signature).....: Jim Liu

Jim Liu

Reviewer (name + signature).....: Jackson Fang

Jackson Fang

Approved (name + signature).....: Lake Xie





Table of Contents	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.3 DESCRIPTION OF TEST MODES	9
3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION Limits	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
5. CHANNEL BANDWIDTH	29
6.1 APPLIED PROCEDURES / LIMIT	29
6.2 TEST PROCEDURE	29
6.3 DEVIATION FROM STANDARD	29
6.4 TEST SETUP	29
6.5 EUT OPERATION CONDITIONS	29
6.6 TEST RESULT	30
7. BAND EDGE MEASUREMENT	32
7.1 APPLICABLE STANDARD / LIMIT	32
7.2 TEST PROCEDURE	32
7.3 DEVIATION FROM STANDARD	32
7.4 TEST SETUP	32
7.5 EUT OPERATION CONDITIONS	32



Table of Contents	Page
8. ANTENNA REQUIREMENT	34
9. TEST SETUP PHOTO	35
10. EUT CONSTRUCTIONAL DETAILS	35



1. VERSION

Report No.	Version	Description	Approved
ZKT-2308236614E-2	Rev.01	Initial issue of report	Sep. 04, 2023



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.239) , Subpart C			
Standard Section	Test Item	Judgment	Remark
FCC part 15.203	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	N/A	
FCC part 15.209 & 15.239 c	Fundamental & Radiated / Conducted Spurious Emission Measurement	PASS	
FCC part 15.239 a	Channel Bandwidth	PASS	
FCC part 15.239 c	Band Edge Measurement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % ·

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF conducted Spurious Emission	U=2.2dB
7	RF Band Edge	U=1.68dB
8	RF Occupied Bandwidth	U=1.8MHz
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	CarpodGo
Model No.:	Carpod
Model Different.:	Only the model name is different.
Serial No.:	T3
Hardware Version:	H1.0
Software Version:	S1.0
Sample(s) Status:	Engineer sample
Sample Number:	E-1
Operation Frequency:	88.1 MHz ~ 107.9MHz
Channel Numbers:	199
Channel Separation:	100kHz
Modulation Type:	FM
Antenna Type:	Exterior Antenna
Antenna gain:	0dBi
Power supply:	Input: DC 9V/1.5A

3.2 TEST CHANNEL

For All Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH100
Mode 3	CH199

Channel	Frequency (MHz)
01	88.1
02	88.2
03	88.3
~	~
198	107.8
199	107.9

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.




3.3 DESCRIPTION OF TEST MODES


Transmitting mode	Keep the EUT in continuously transmitting FM mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Emission



Conducted Spurious



3.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	CarpodGo	CarpodGo	Carpod	T3	EUT
A1	Storage Battery	Narada	ZKT-00	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C1	N/A	N/A	1.5M	Car Charger

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) EUT used new batteries during test.



3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Oct. 21, 2022	Oct. 20, 2023
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Oct. 21, 2022	Oct. 20, 2023
3	Test Cable	N/A	C-01	N/A	N/A	Oct. 21, 2022	Oct. 20, 2023
4	Test Cable	N/A	C-02	N/A	N/A	Oct. 21, 2022	Oct. 20, 2023
5	Test Cable	N/A	C-03	N/A	N/A	Oct. 21, 2022	Oct. 20, 2023
6	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Oct. 28, 2022	Oct. 27, 2023
7	Triple-Loop Antenna	N/A	RF300	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
8	Absorbing Clamp	DZ	ZN23201	15034	N/A	Oct. 31, 2022	Oct. 30, 2023
9	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	A.17.05	Oct. 28, 2022	Oct. 27, 2023
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Oct. 28, 2022	Oct. 27, 2023
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	4.32	Oct. 28, 2022	Oct. 27, 2023
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	N/A	Nov. 02, 2022	Nov. 01, 2023
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Nov. 01, 2022	Oct. 31, 2023
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Oct. 28, 2022	Oct. 27, 2023
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Nov. 01, 2022	Oct. 31, 2023
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	N/A	Nov. 15, 2022	Nov. 14, 2023
9	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	N/A	Oct. 28, 2022	Oct. 27, 2023
10	Amplifier (500MHz-40GHz)	Quanjuda	DLE-161	097	N/A	Oct. 28, 2022	Oct. 27, 2023
11	Test Cable	N/A	R-01	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
12	Test Cable	N/A	R-02	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
13	Test Cable	N/A	R-03	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802B S	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802B S	N/A	N/A	\	\



RF Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	A.17.05	Oct. 28, 2022	Oct. 27, 2023
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Oct. 28, 2022	Oct. 27, 2023
3	Test Cable	N/A	RF-01	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
4	Test Cable	N/A	RF-02	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
5	Test Cable	N/A	RF-03	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
6	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Oct. 21, 2022	Oct. 20, 2023
7	Signal Generator	Agilent	N5182A	N/A	A.01.87	Oct. 21, 2022	Oct. 20, 2023
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Nov. 15, 2022	Nov. 14, 2023
9	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Oct. 28, 2022	Oct. 27, 2023
10	MWRF Power Meter Test system	MW	MW100-RF CB	N/A	N/A	Oct. 21, 2022	Oct. 20, 2023
11	Power Meter	KEYSIGHT	N1912A P	N/A	A.05.00	Oct. 21, 2022	Oct. 20, 2023
12	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
13	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quas-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

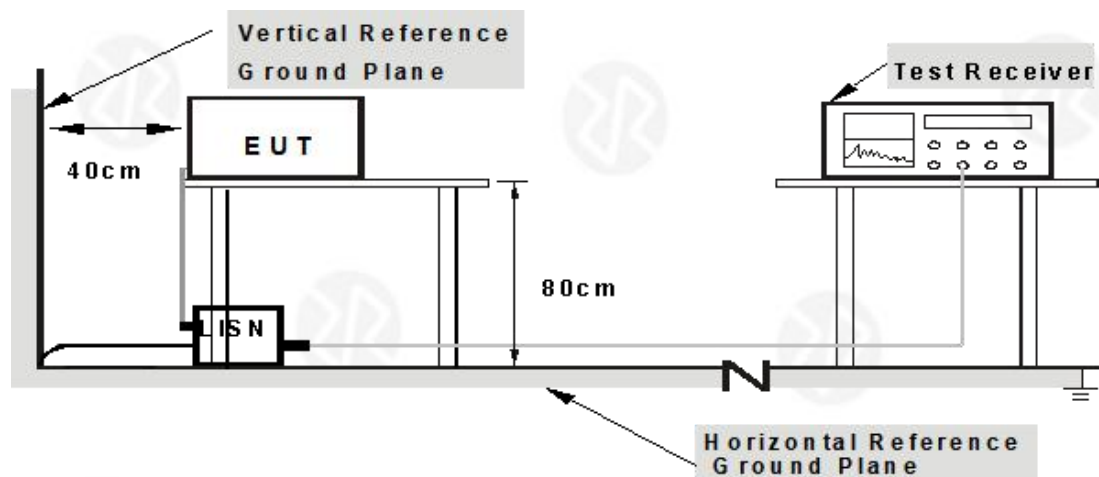

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 Test Result

N/A

Remark: Only AC products need to test this item, DC products are not applicable to this item.



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.209&15.239 limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

**FUNDAMENTAL AND HARMONICS EMISSION LIMITS**

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

** linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

4.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

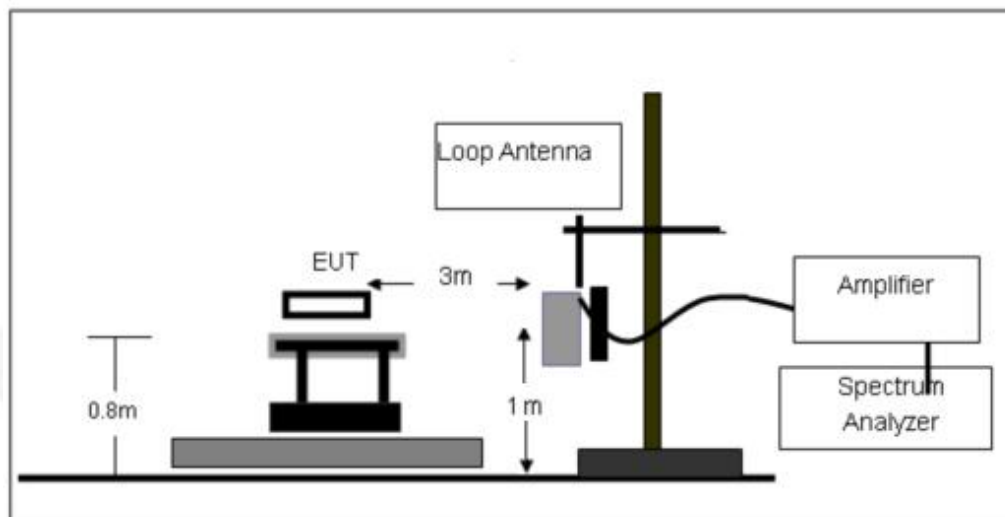

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

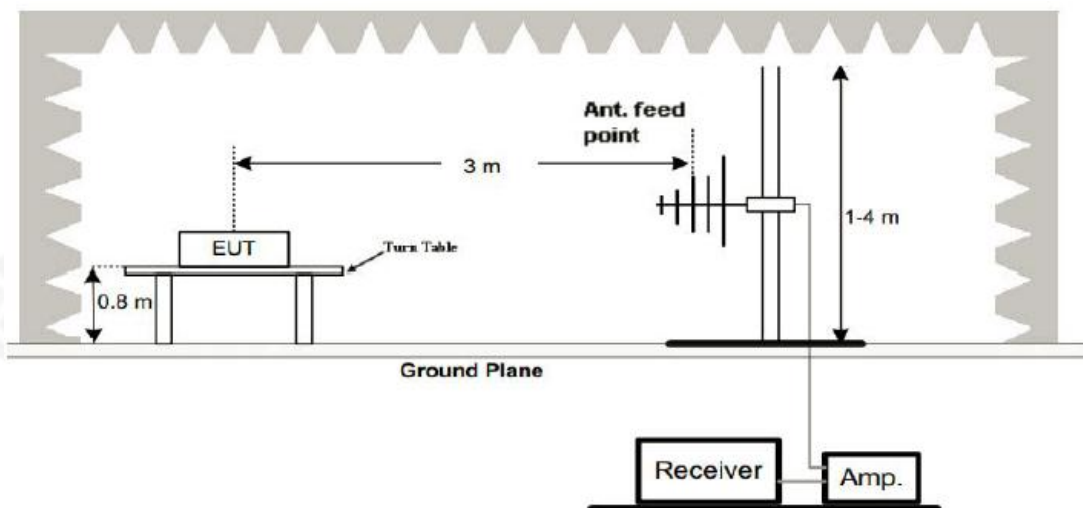

(C) Radiated Emission Test-Up Frequency Above 1GHz

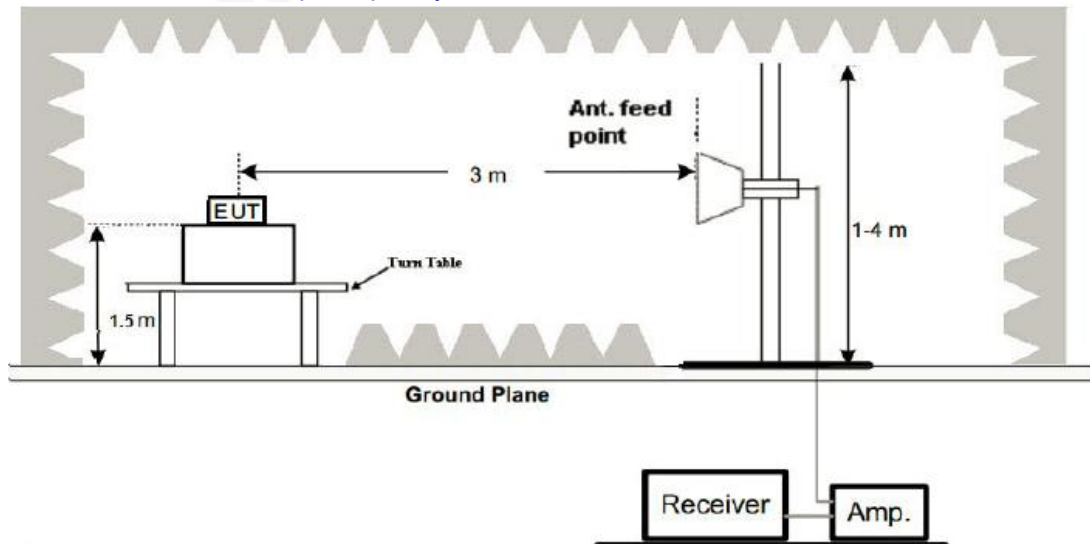



4.2.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.2.6 TEST RESULTS

Field Strength of Fundamental


Between 9KHz – 30 MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 9V	Test Mode:	Mode 1 (88.1MHz)

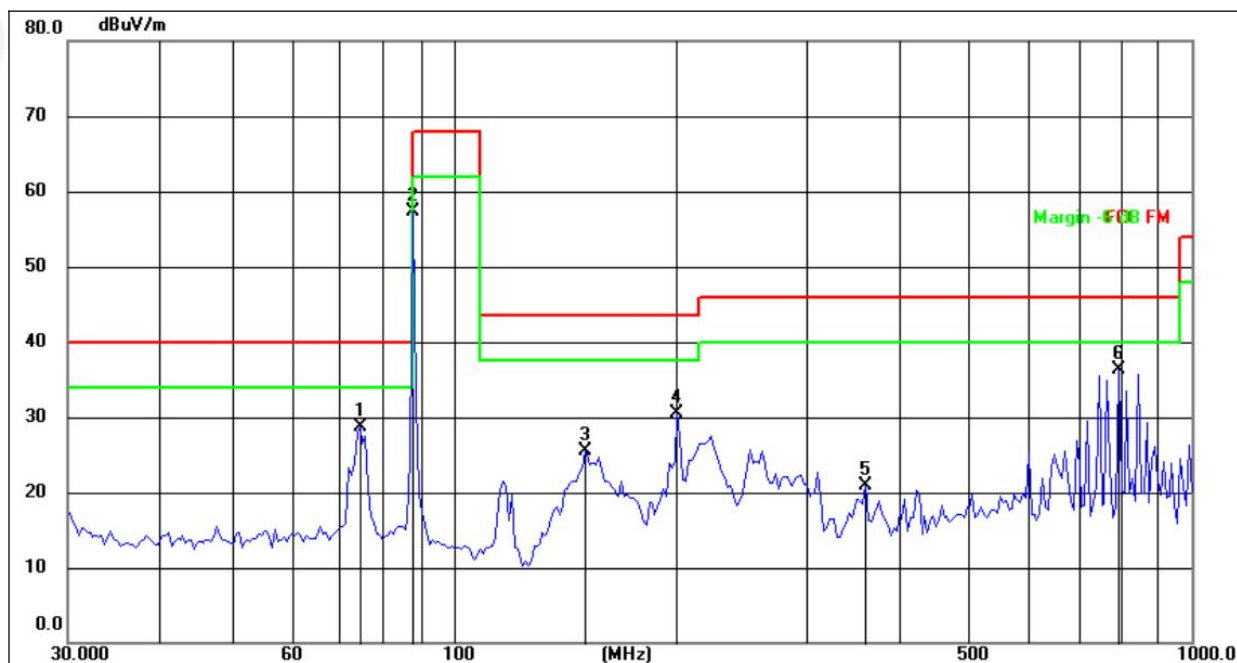

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	74.6568	46.78	-18.09	28.69	40.00	-11.31	QP
2	88.1000	77.37	-20.07	57.30	68.00	-10.70	peak
3	150.5377	41.97	-16.54	25.43	43.50	-18.07	QP
4	201.0399	49.28	-18.74	30.54	43.50	-12.96	QP
5	361.7137	37.57	-16.73	20.84	46.00	-25.16	QP
6	796.1829	43.20	-6.95	36.25	46.00	-9.75	QP




Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 9V	Test Mode:	Mode 1 (88.1MHz)

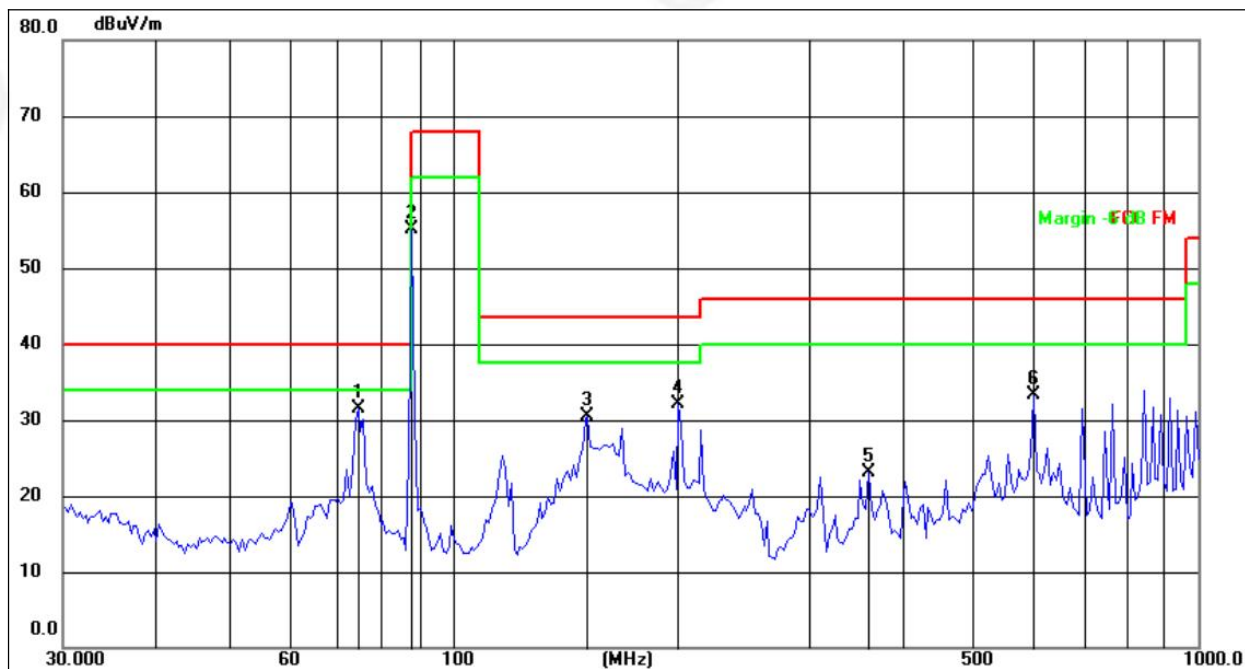

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	74.6568	52.02	-20.52	31.50	40.00	-8.50	QP
2	88.1000	76.72	-21.56	55.16	68.00	-12.84	peak
3	151.8632	51.02	-20.49	30.53	43.50	-12.97	QP
4	201.0399	52.83	-20.68	32.15	43.50	-11.35	QP
5	361.7137	39.50	-16.30	23.20	46.00	-22.80	QP
6	601.4265	41.07	-7.76	33.31	46.00	-12.69	QP




Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 9V	Test Mode:	Mode 2 (98MHz)

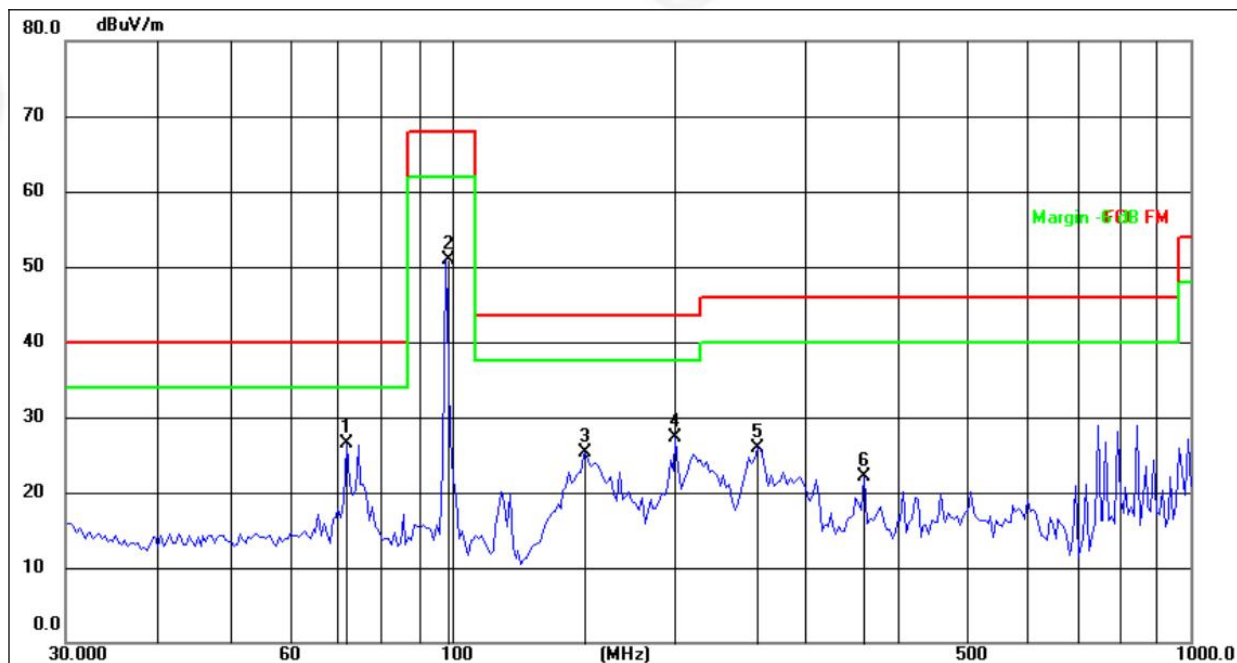

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	72.0841	43.85	-17.43	26.42	40.00	-13.58	QP
2	98.0000	70.72	-19.89	50.83	68.00	-17.17	peak
3	151.8632	41.72	-16.49	25.23	43.50	-18.27	QP
4	201.0399	45.99	-18.74	27.25	43.50	-16.25	QP
5	259.2336	41.42	-15.59	25.83	46.00	-20.17	QP
6	361.7137	38.76	-16.73	22.03	46.00	-23.97	QP




Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 9V	Test Mode:	Mode 2 (98MHz)

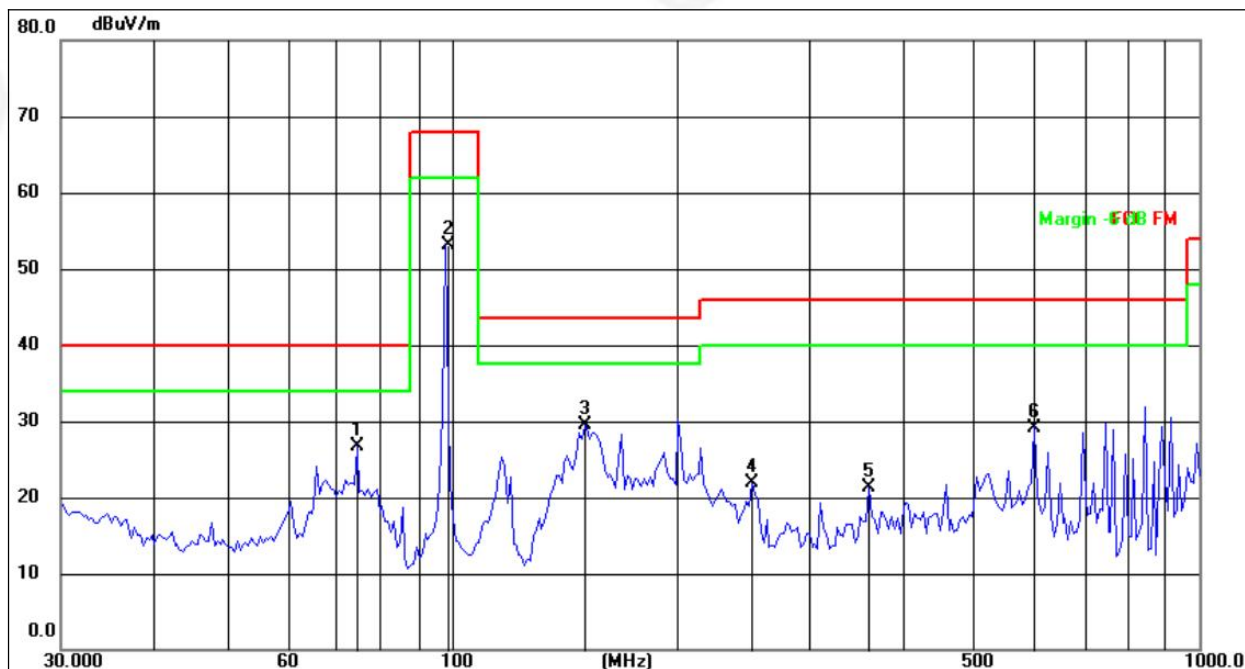

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	74.6568	47.26	-20.52	26.74	40.00	-13.26	QP
2	98.0000	74.36	-21.27	53.09	68.00	-14.91	peak
3	150.5377	50.07	-20.54	29.53	43.50	-13.97	QP
4	252.5047	41.83	-19.89	21.94	46.00	-24.06	QP
5	361.7137	37.52	-16.30	21.22	46.00	-24.78	QP
6	601.4265	36.96	-7.76	29.20	46.00	-16.80	QP




Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 9V	Test Mode:	Mode 3 (107.9MHz)

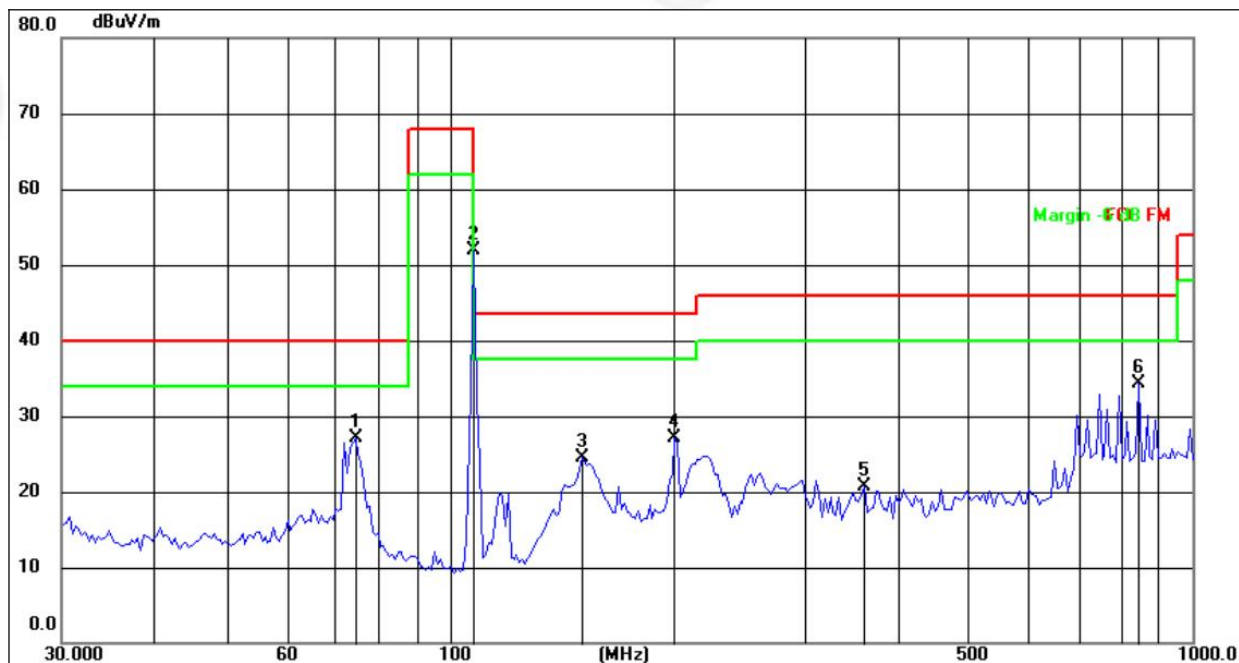

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	74.6568	45.14	-18.09	27.05	40.00	-12.95	QP
2	107.9000	71.23	-19.33	51.90	68.00	-16.10	peak
3	150.5377	41.03	-16.54	24.49	43.50	-19.01	QP
4	201.0399	45.86	-18.74	27.12	43.50	-16.38	QP
5	361.7137	37.35	-16.73	20.62	46.00	-25.38	QP
6	846.5706	41.23	-6.97	34.26	46.00	-11.74	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 9V	Test Mode:	Mode 3 (107.9MHz)

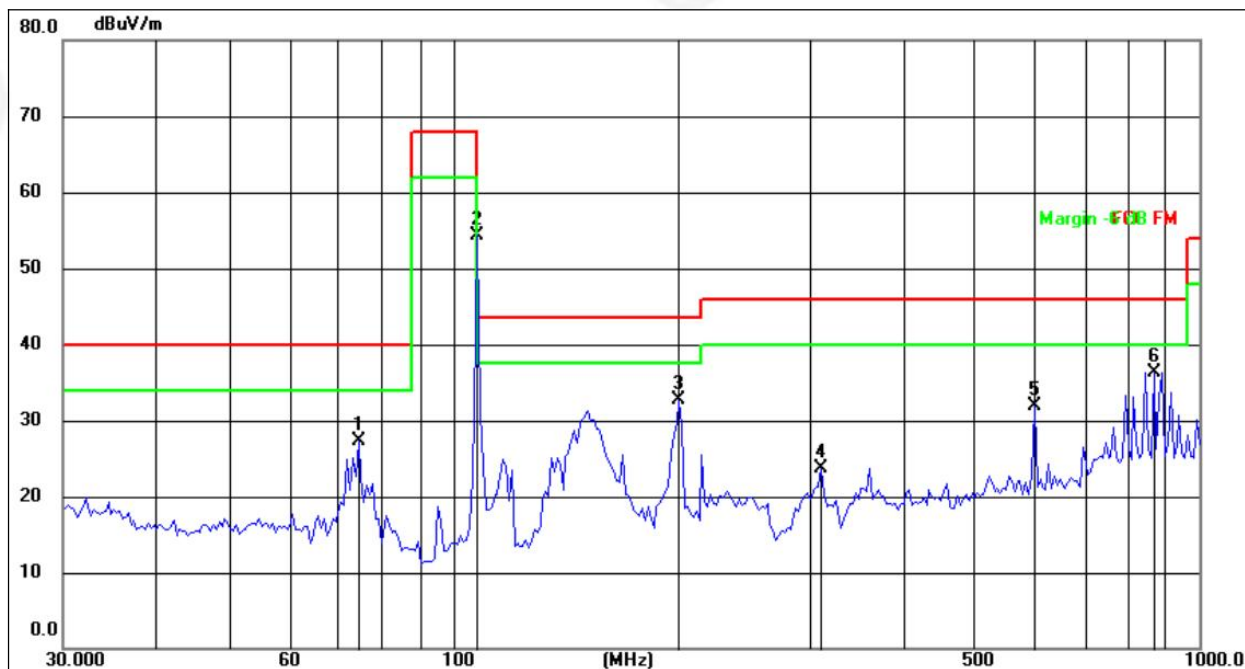

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	74.6568	47.91	-20.52	27.39	40.00	-12.61	QP
2	107.9000	75.65	-21.28	54.37	68.00	-13.63	peak
3	201.0399	53.38	-20.68	32.70	43.50	-10.80	QP
4	311.6324	41.69	-17.95	23.74	46.00	-22.26	QP
5	601.4265	39.64	-7.76	31.88	46.00	-14.12	QP
6	869.1300	37.98	-1.62	36.36	46.00	-9.64	QP

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.



FIELD STRENGTH CALCULATION

Frequency	Emission Level	Limits	Margin	Horizontal / Vertical	Detector Type
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)		
88.10	57.30	68.00	-10.70	H	PK
88.10	44.14	48.00	-3.86	H	AV
88.10	55.16	68.00	-12.84	V	PK
88.10	43.62	48.00	-4.38	V	AV
98.00	50.53	68.00	-17.47	H	PK
98.00	42.25	48.00	-5.75	H	AV
98.00	53.09	68.00	-14.91	V	PK
98.00	43.43	48.00	-4.57	V	AV
107.90	51.90	68.00	-16.10	H	PK
107.90	41.07	48.00	-6.93	H	AV
107.90	54.37	68.00	-13.63	V	PK
107.90	42.85	48.00	-5.15	V	AV



TEST RESULTS (1GHZ ~ 6GHZ)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenn a Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1057.20	42.10	39.55	7.77	25.66	35.98	74.00	-38.02	PK
V	1057.20	36.45	39.55	7.77	25.66	30.33	54.00	-23.67	AV
V	1176.00	42.97	38.33	7.30	24.55	36.49	74.00	-37.51	PK
V	1176.00	37.53	38.33	7.30	24.55	31.05	54.00	-22.95	AV
V	1294.80	44.95	38.33	7.60	24.55	38.77	74.00	-35.23	PK
V	1294.80	35.15	35.23	7.60	26.59	34.11	54.00	-19.89	AV
H	1145.30	44.29	39.55	7.77	25.66	38.17	74.00	-35.83	PK
H	1145.30	38.47	39.55	7.77	25.66	32.35	54.00	-21.65	AV
H	1274.00	45.80	38.33	7.30	23.55	38.32	74.00	-35.68	PK
H	1274.00	40.55	38.33	7.30	23.22	32.74	54.00	-21.26	AV
H	1402.70	43.57	38.33	7.60	24.55	37.39	74.00	-36.61	PK
H	1402.70	35.74	35.45	7.60	27.88	35.77	54.00	-18.23	AV


Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.




CONDUCTED EMISSION MEASUREMENT


88.1MHz

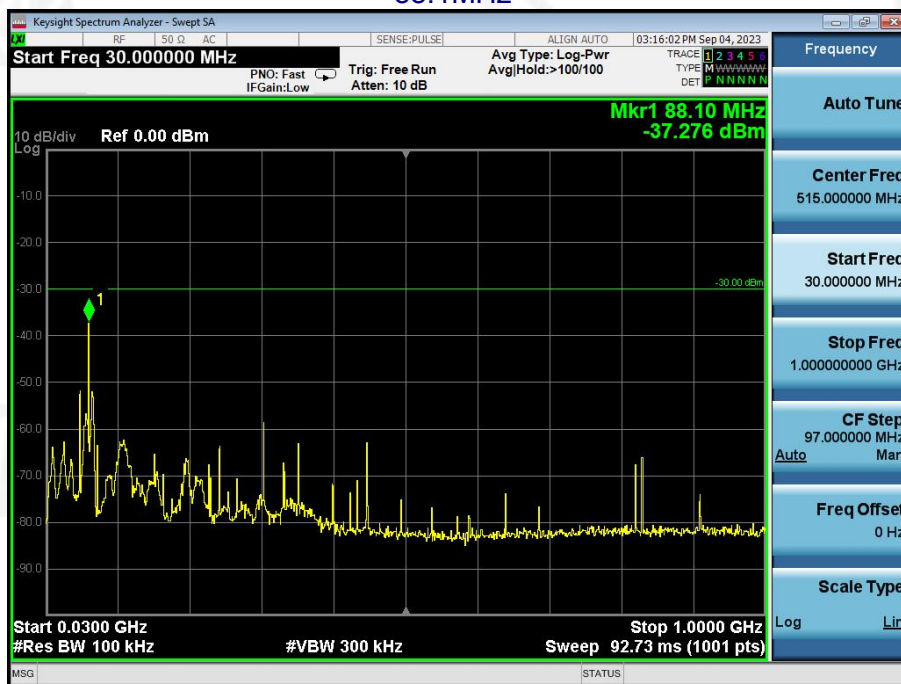


88.1MHz

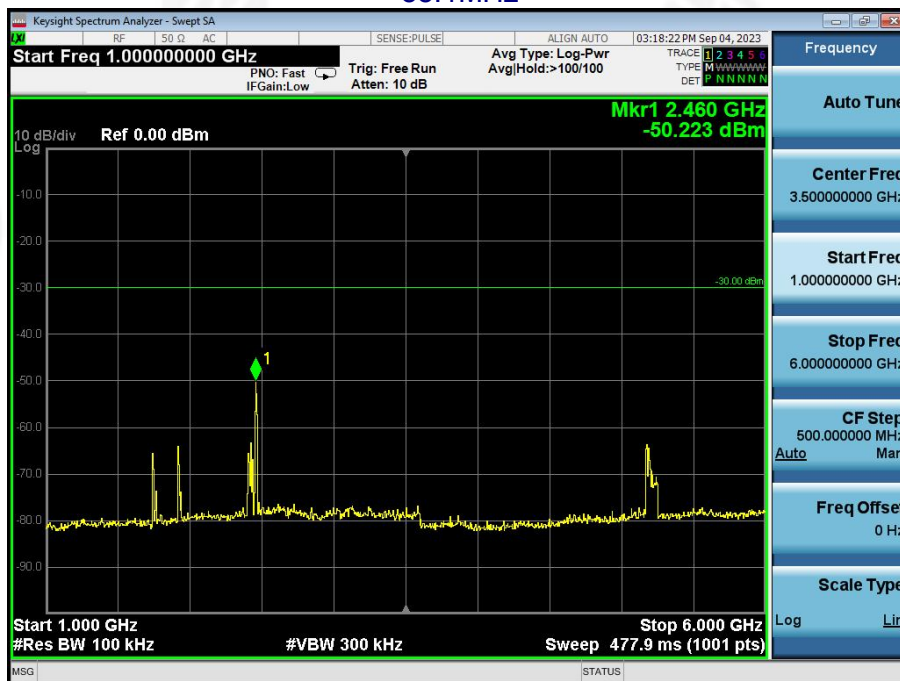

98MHz

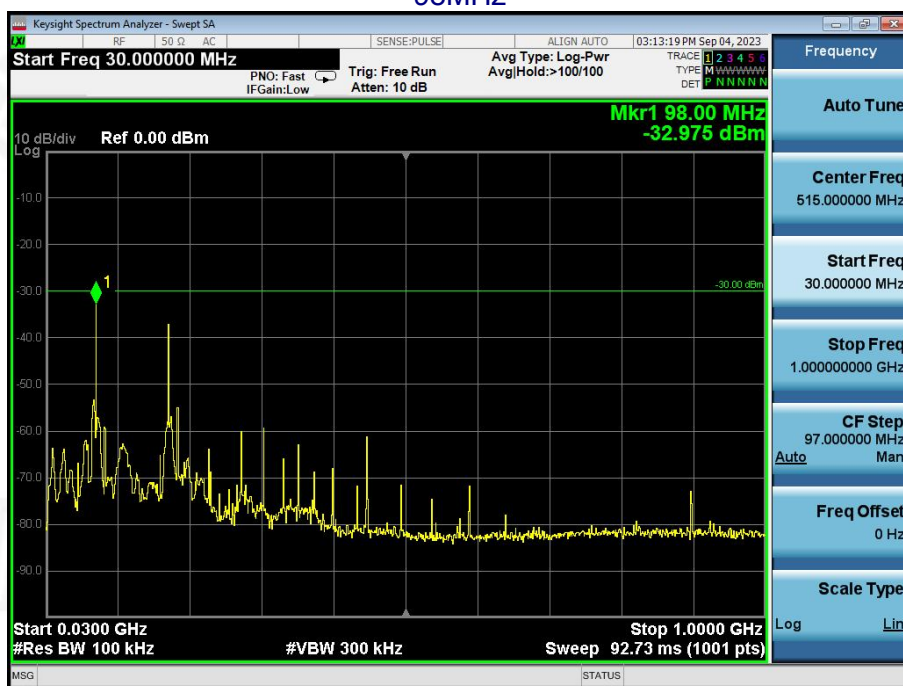


98MHz

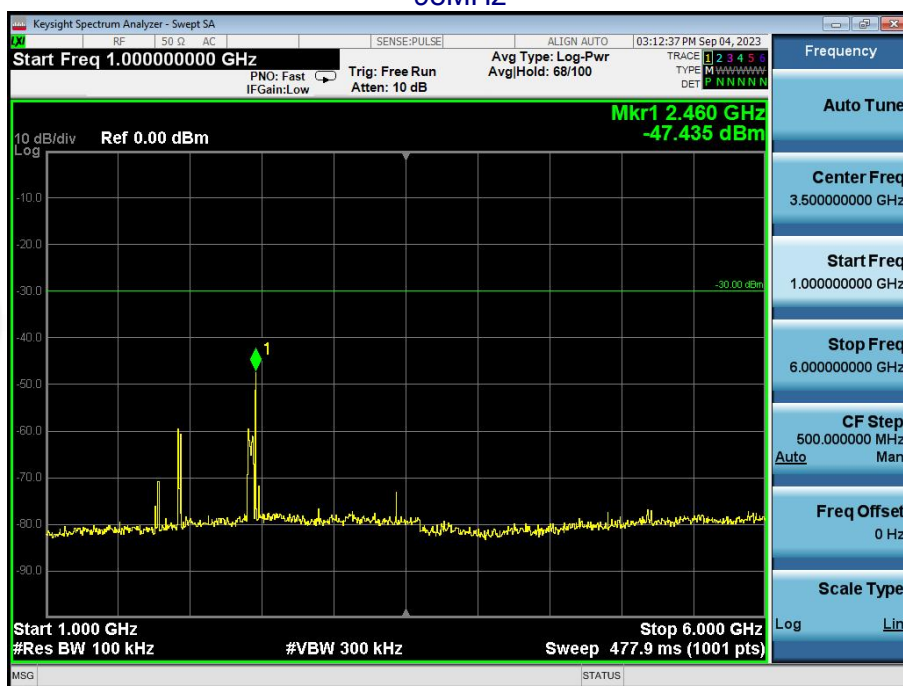




107.9MHz

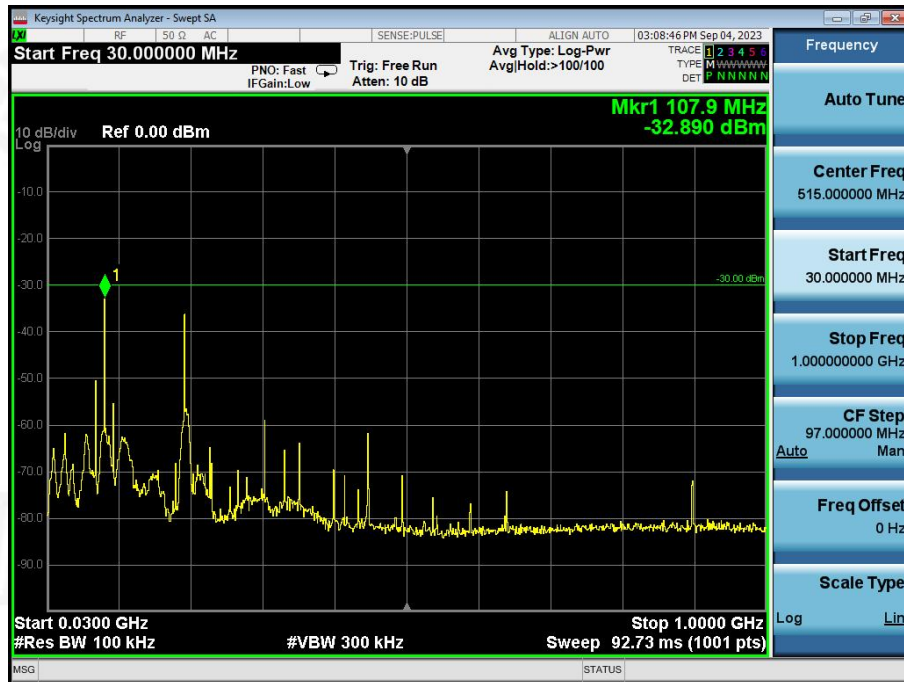

107.9MHz

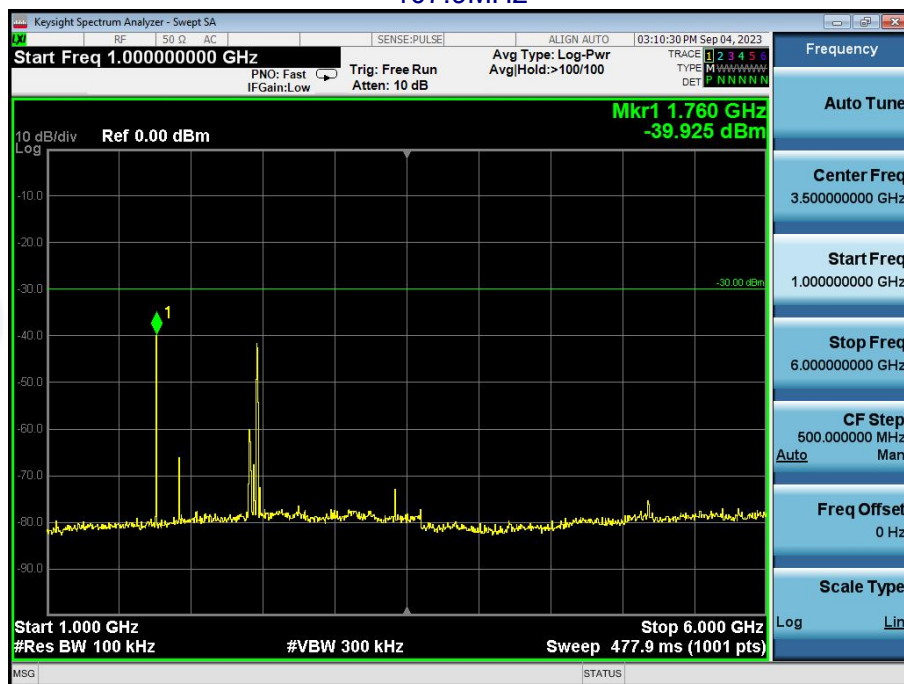



5. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.209 & 15.239
Test Method:	ANSI C63.10: 2013

6.1 APPLIED PROCEDURES / LIMIT

According to 15.209 & 15.239 requirement:
The bandwidth of the emission shall not exceed 200 kHz.


6.2 TEST PROCEDURE

1. Set RBW = 2 kHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

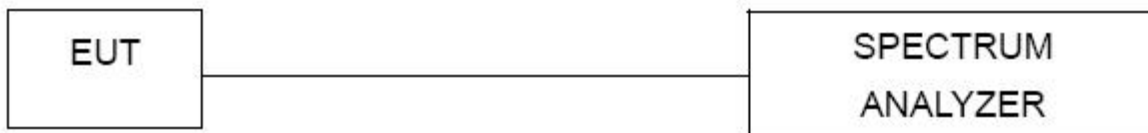

6.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.6 TEST RESULT


Temperature :	26°C	Relative Humidity :	54%
Test Mode :	TX Mode	Test Voltage :	DC 9V

Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Result
88.1	40.73	200	PASS
98	40.77	200	PASS
107.9	40.77	200	PASS

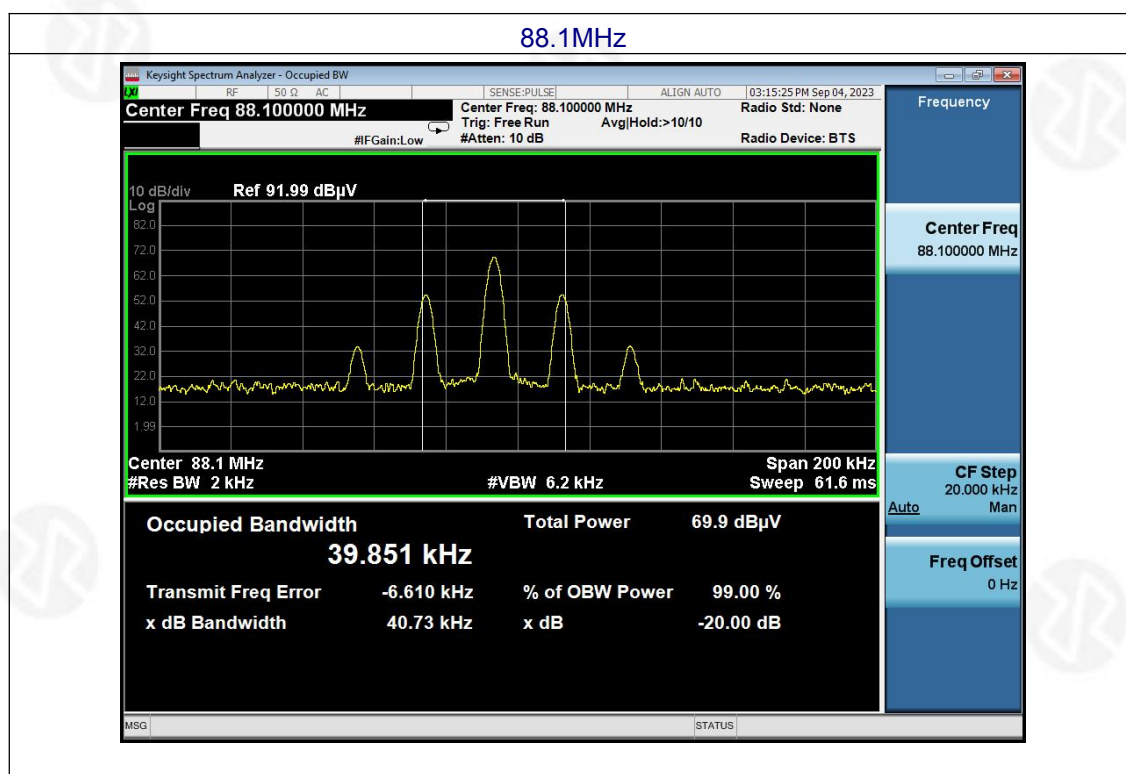




98 MHz

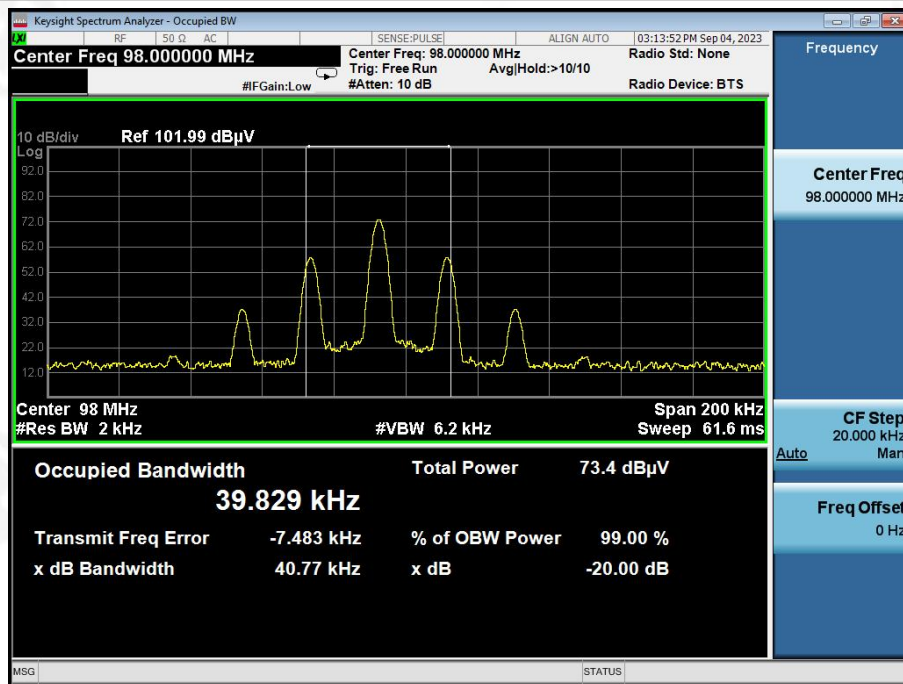

107.9 MHz

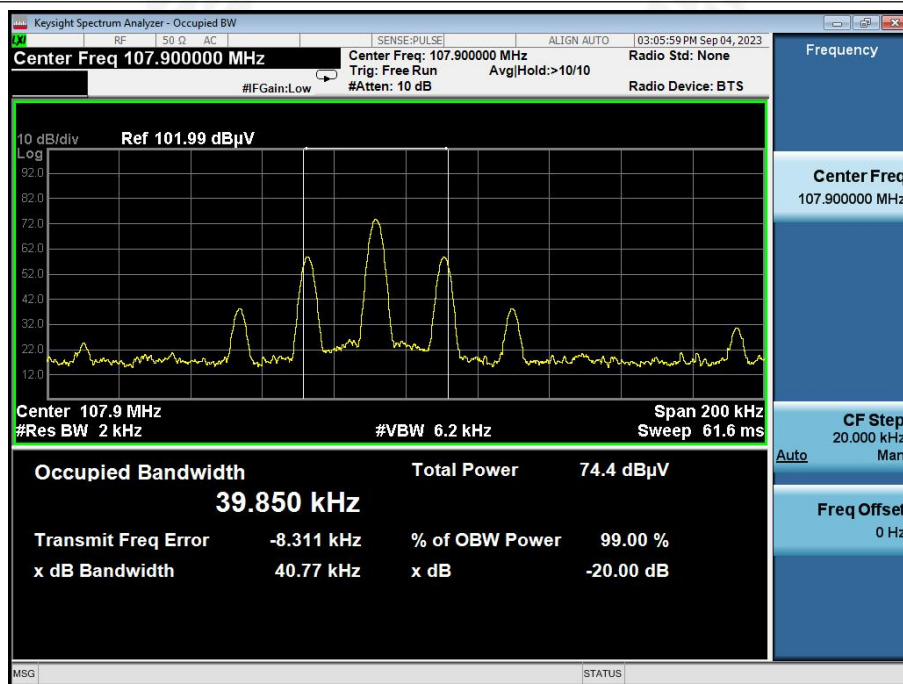



7. BAND EDGE MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209 & 15.239
Test Method:	ANSI C63.10: 2013

7.1 APPLICABLE STANDARD / LIMIT

FCC Part15 Paragraph 15.209 & 15.239

Outside the 200kHz band(as well as outside the 88-108MHz band), the general field strength limits listed in 15.209 apply.

7.2 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- VBW for Peak, Quasi-peak, or Average Detector Function: 3 x RBW
- Repeat above procedures until all measured frequencies were complete.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis.

The worst case emissions were reported.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

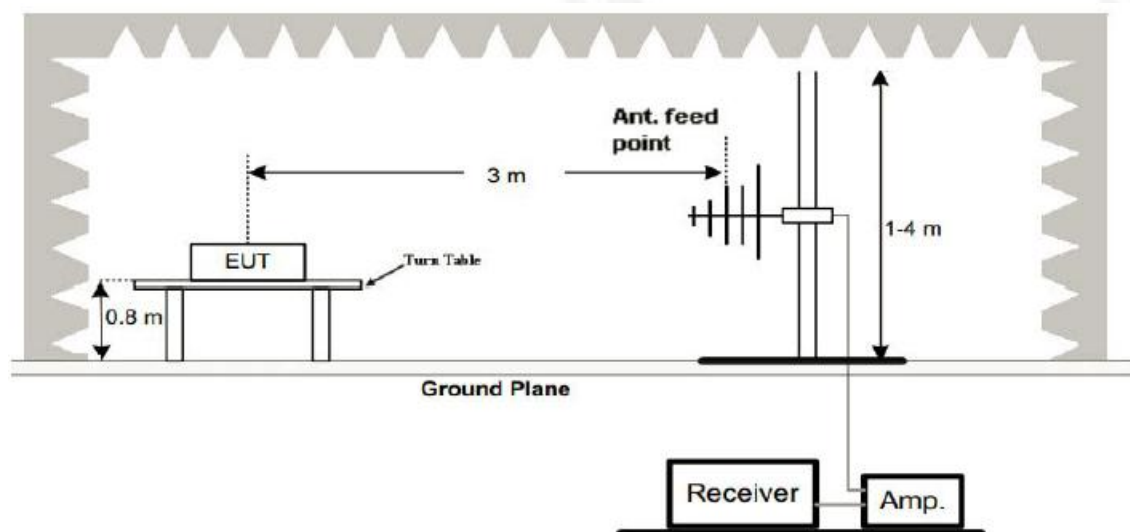

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS

Mode	Polar(HV)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- Ment (dBuV/m)	Limits (dBuV/m)	Result
					QP	QP	
FM	88.1MHz						
	H	75.05	37.00	-19.55	17.45	40.00	PASS
	H	88.00	39.87	-19.58	20.29	40.00	PASS
	V	75.05	34.75	-19.55	15.20	40.00	PASS
	V	88.00	37.69	-19.58	18.11	40.00	PASS
	107.9MHz						
	H	108.00	43.48	-16.67	26.81	43.50	PASS
	H	109.24	42.23	-16.69	25.54	43.50	PASS
	V	108.00	38.34	-16.67	21.67	43.50	PASS
	V	109.24	41.06	-16.69	24.37	43.50	PASS

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss - Pre-amplifier.
Over= Emission Level - Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antennas is Exterior Antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details	



9. TEST SETUP PHOTO

Reference to the appendix I for details.

10. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****