

TEST REPORT

Product Name : WIRELESS SPEAKER
Brand Mark : N/A
Model No. : G06
FCC ID : 2BD4X-G06
Report Number : BLA-EMC-202312-A0902
Date of Sample Receipt : 2023/12/6
Date of Test : 2023/12/7 to 2023/12/8
Date of Issue : 2023/12/29
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Dongguan Qinuo Electronic Technology Co., LTD.
No. 1901, Building N7, Tianan Digital City, Fenggang Town, Dongguan,
Guangdong

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyao Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

Lucas

Review by:

Sueels

Approved by:

Blue Zheng

Date:

2023/12/29



REPORT REVISE RECORD

Version No.	Date	Description
00	2023/12/29	Original

BlueAsia

TABLE OF CONTENTS

1 TEST SUMMARY	6
2 GENERAL INFORMATION	7
3 GENERAL DESCRIPTION OF E.U.T.....	7
4 TEST ENVIRONMENT	8
5 TEST MODE	8
6 MEASUREMENT UNCERTAINTY	8
7 DESCRIPTION OF SUPPORT UNIT	9
8 LABORATORY LOCATION	9
9 TEST INSTRUMENTS LIST	10
10 DWELL TIME	13
10.1 LIMITS	13
10.2 BLOCK DIAGRAM OF TEST SETUP	13
10.3 TEST DATA	14
11 HOPPING CHANNEL NUMBER	15
11.1 LIMITS	15
11.2 BLOCK DIAGRAM OF TEST SETUP	15
11.3 TEST DATA	15
12 CARRIER FREQUENCIES SEPARATION	16
12.1 LIMITS	16
12.2 BLOCK DIAGRAM OF TEST SETUP	16
12.3 TEST DATA	16
13 20DB BANDWIDTH	17
13.1 BLOCK DIAGRAM OF TEST SETUP	17
13.2 TEST DATA	17
14 CONDUCTED PEAK OUTPUT POWER	18
14.1 LIMITS	18
14.2 BLOCK DIAGRAM OF TEST SETUP	18
14.3 TEST DATA	19
15 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	20

15.1 LIMITS	20
15.2 BLOCK DIAGRAM OF TEST SETUP	20
15.3 PROCEDURE	20
15.4 TEST DATA	22
16 RADIATED SPURIOUS EMISSIONS	24
16.1 LIMITS	24
16.2 BLOCK DIAGRAM OF TEST SETUP	25
16.3 PROCEDURE	25
16.4 TEST DATA	27
17 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	35
17.1 LIMITS	35
17.2 BLOCK DIAGRAM OF TEST SETUP	36
17.3 PROCEDURE	36
17.4 TEST DATA	38
18 ANTENNA REQUIREMENT	42
18.1 CONCLUSION	42
19 CONDUCTED SPURIOUS EMISSIONS	43
19.1 LIMITS	43
19.2 BLOCK DIAGRAM OF TEST SETUP	44
19.3 TEST DATA	44
20 CONDUCTED BAND EDGES MEASUREMENT	45
20.1 LIMITS	45
20.2 BLOCK DIAGRAM OF TEST SETUP	46
20.3 TEST DATA	46
21 APPENDIX	47
21.1 MAXIMUM CONDUCTED OUTPUT POWER	47
21.2 -20dB BANDWIDTH	52
21.3 OCCUPIED CHANNEL BANDWIDTH	57
21.4 BAND EDGE	62
21.5 BAND EDGE(HOPPING)	69
21.6 CONDUCTED RF SPURIOUS EMISSION	76
21.7 CARRIER FREQUENCIES SEPARATION	86
21.8 NUMBER OF HOPPING CHANNEL	88

21.9 DWELL TIME	90
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	100
APPENDIX B: PHOTOGRAPHS OF EUT	102

BlueAsia

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass

2 GENERAL INFORMATION

Applicant	Dongguan Qinuo Electronic Technology Co., LTD.
Address	No. 1901, Building N7, Tianan Digital City, Fenggang Town, Dongguan, Guangdong
Manufacturer	Dongguan Qinuo Electronic Technology Co., LTD.
Address	No. 1901, Building N7, Tianan Digital City, Fenggang Town, Dongguan, Guangdong
Factory	Dongguan Qinuo Electronic Technology Co., LTD.
Address	No. 1901, Building N7, Tianan Digital City, Fenggang Town, Dongguan, Guangdong
Product Name	WIRELESS SPEAKER
Test Model No.	G06

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	N/A
Software Version	N/A
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	PCB Antenna
Antenna Gain:	-0.58 dBi(Provided by the customer)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC 5V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in continuously transmitting mode with modulation. (hopping and non hopping mode all have been tested, non hopping mode is worse case for RE)
Remark: Full battery is used during all test except ac conducted emission, DH1,DH3, DH5 all have been tested, during the test, GFSK, Pi/4DQPSK,8DPSK,modulation were all pre-scanned Only the 8DPSK of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	lenovo	E46OC	N/A	From lab (No.BLA-ZC-BS-2022005)
AC Adapter	UGREEN	CD112	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2023/11/16	2026/11/15
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Receiver	R&S	ESR7	101199	2023/08/30	2024/08/29
Receiver	R&S	ESPI7	101477	2023/07/07	2024/07/06
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/10/12	2025/10/11
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Horn Antenna	Schwarzbeck	BBHA 9170	1106	2022/04/24	2024/04/23
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2023/07/07	2024/07/06
Amplifier	SKET	PA-000318G-45	N/A	2023/08/30	2024/08/29
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2023/07/14	2024/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2023/07/07	2024/07/06
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/09/14	2025/09/13
1kHz calibration audio source	SKET	MCS-ABT-C35	N/A	2023/09/04	2024/09/03
Free Field Microphone	SKET	MGs MP 663	0414	2023/09/04	2024/09/03
Audio shielding box	SKET	SB-ABT-C35	N/A	2023/03/30	2024/03/29
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A

Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A
Signal Generator DTV	ECREDIX	DSG-1000	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2023/11/16	2025/11/15
Receiver	R&S	ESPI3	101082	2023/08/30	2024/08/29
LISN	R&S	ENV216	3560.6550.15	2023/08/30	2024/08/29
LISN	AT	AT166-2	AKK1806000003	2023/08/30	2024/08/29
ISN	TESEQ	ISNT8-cat6	53580	2023/08/30	2024/08/29
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2023/07/07	2024/07/06
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2023/07/07	2024/07/06
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of RF Conducted Test

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY49100060	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY54420161	2023/08/30	2024/08/29
Signal Generator	Agilent	N5182A	MY47420955	2023/08/30	2024/08/29
Signal Generator	Agilent	N5181A	MY46240904	2023/07/07	2024/07/06
Signal Generator	R&S	CMW500	132429	2023/08/30	2024/08/29
BluetoothTester	Anritsu	MT8852B	06262047872	2023/08/30	2024/08/29

Power probe	DARE	RPR3006W	14I00889SN042	2023/09/01	2024/08/31
Power detection box	CDKMV	MW100-PSB	MW201020JYT	2023/07/07	2024/07/06
DC Powersupply	zhaoxin	KXN-305D	20K305D1221363	2023/08/30	2024/08/29
DC Powersupply	zhaoxin	RXN-1505D	19R1505D050168	2023/08/30	2024/08/29
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A
Audio Analyzer	Audio Precision	ATS-1	ATS141094	2023/07/07	2024/07/06


10 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Niki
Temperature	24℃
Humidity	53%

10.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

10.2 BLOCK DIAGRAM OF TEST SETUP

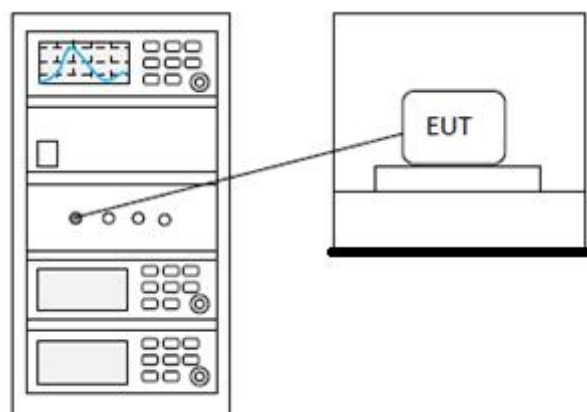

10.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


11 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Niki
Temperature	24℃
Humidity	53%

11.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

11.2 BLOCK DIAGRAM OF TEST SETUP

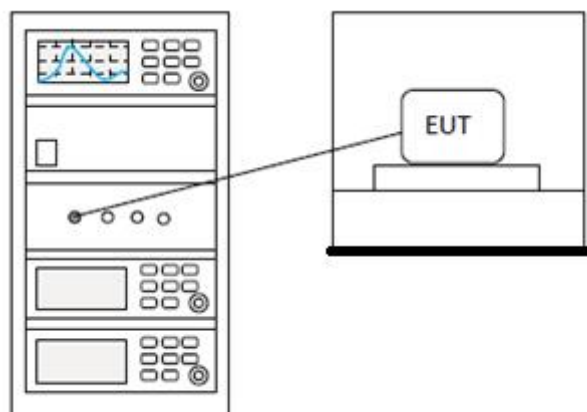

11.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


12 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Niki
Temperature	24℃
Humidity	53%

12.1 LIMITS

Limit:	2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W
---------------	--

12.2 BLOCK DIAGRAM OF TEST SETUP

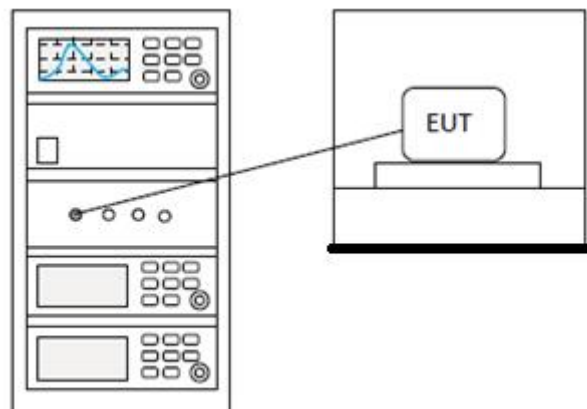


12.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

13 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Niki
Temperature	24℃
Humidity	53%

13.1 BLOCK DIAGRAM OF TEST SETUP

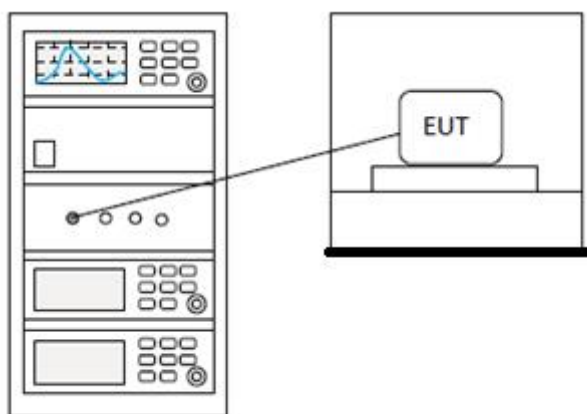

13.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


14 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Niki
Temperature	24℃
Humidity	53%

14.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

14.2 BLOCK DIAGRAM OF TEST SETUP

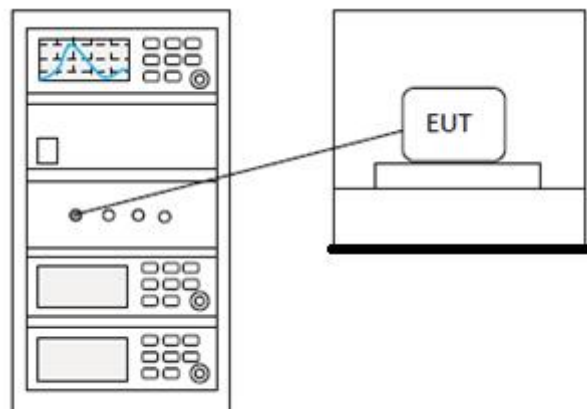

14.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

15 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Niki
Temperature	23℃
Humidity	53%

15.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

15.2 BLOCK DIAGRAM OF TEST SETUP

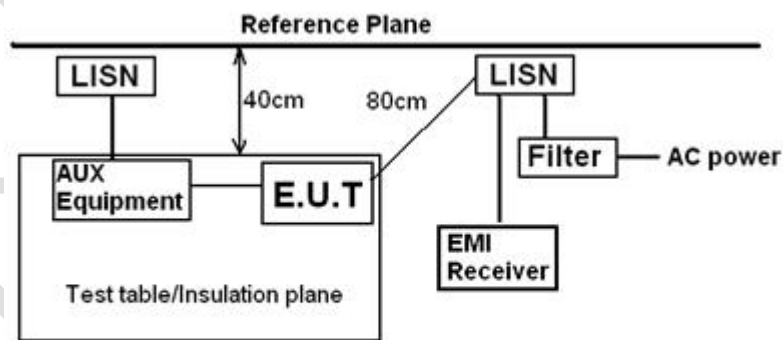

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

15.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,


4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: $LISN = Read\ Level + Cable\ Loss + LISN\ Factor$

15.4 TEST DATA

[TestMode: TX mode]; [Line: Line]; [Power:120V/60Hz]

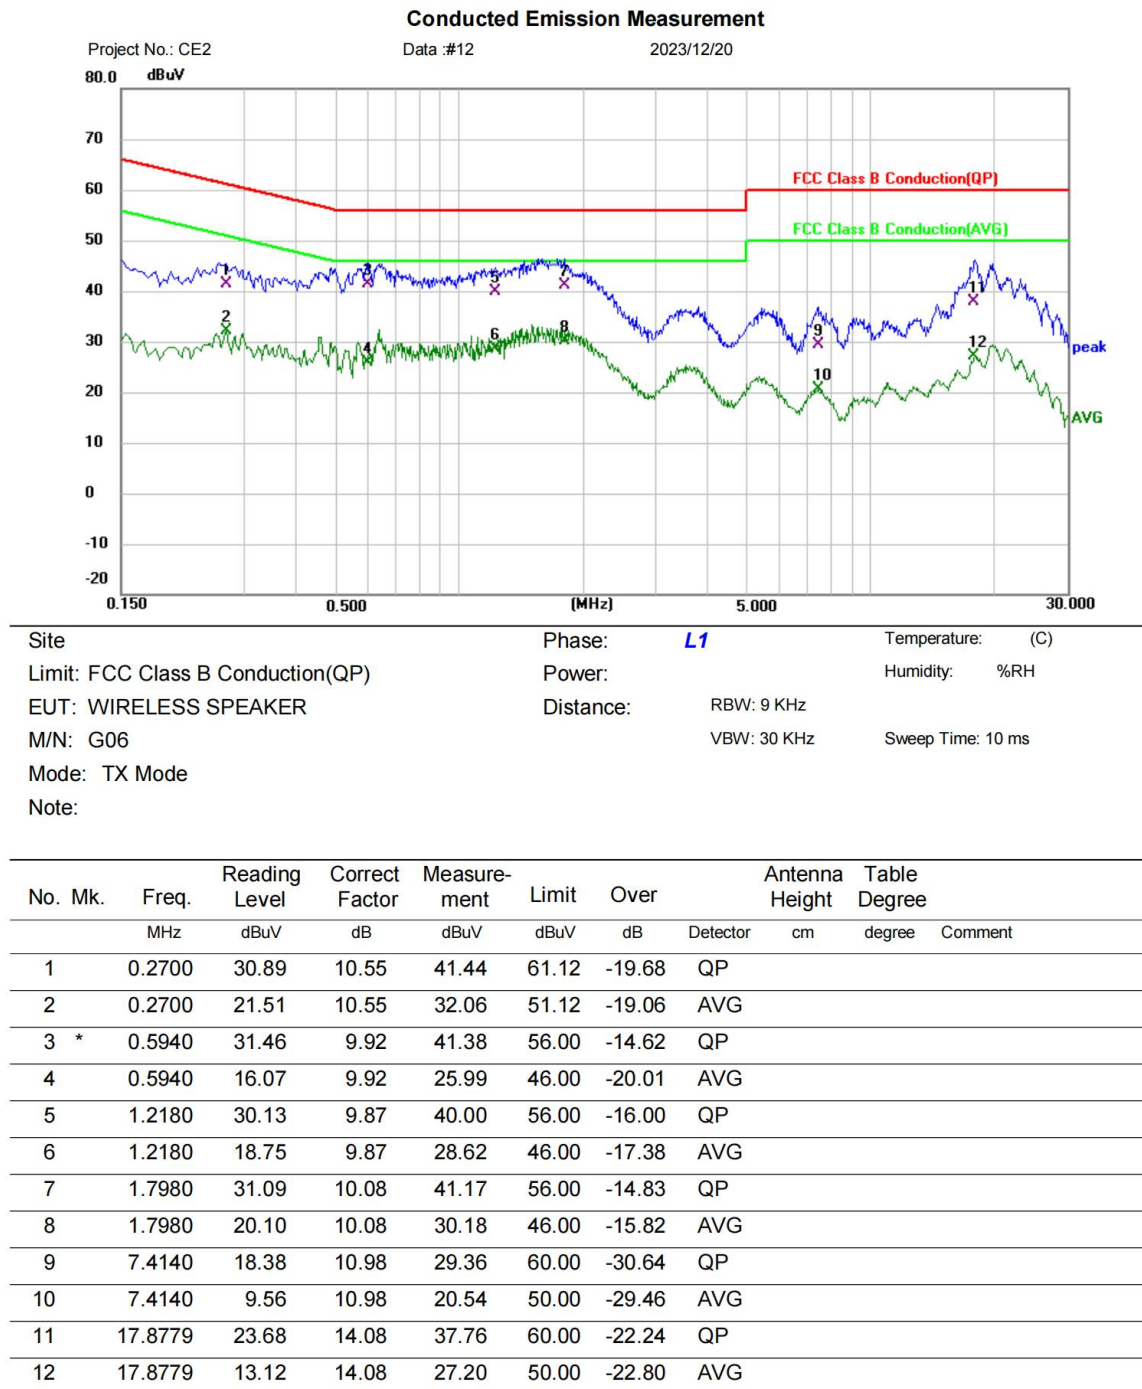

Test Result: Pass


[TestMode: TX mode]; [Line: Nutral]; [Power:120V/60Hz]

Conducted Emission Measurement

Project No.: CE2

Data #11

2023/12/20

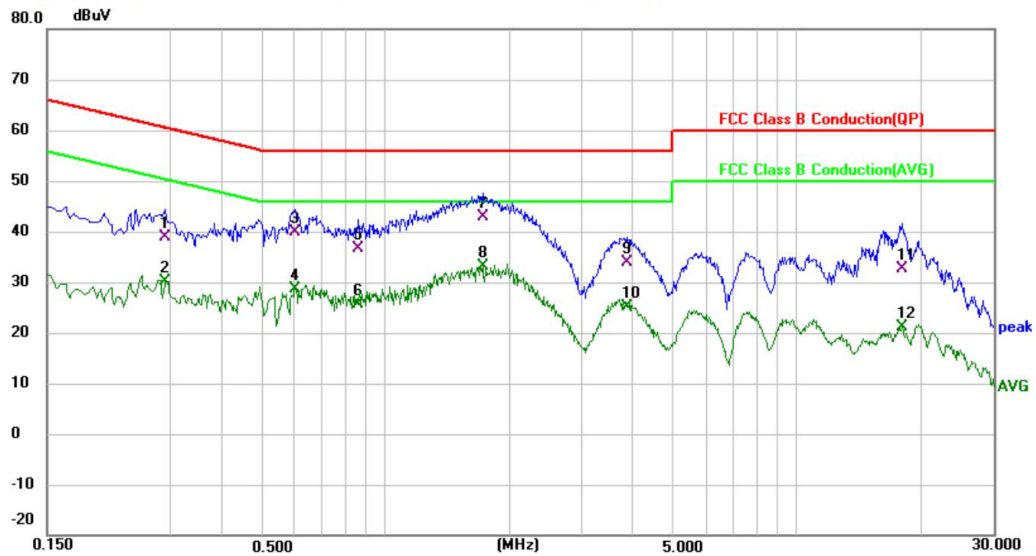

Site	Phase: N	Temperature: (C)
Limit: FCC Class B Conduction(QP)	Power:	Humidity: %RH
EUT: WIRELESS SPEAKER	Distance:	RBW: 9 KHz
M/N: G06		VBW: 30 KHz
Mode: TX Mode		Sweep Time: 10 ms
Note:		

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1	0.2900	28.84	9.93	38.77	60.52	-21.75	QP		
2	0.2900	20.08	9.93	30.01	50.52	-20.51	AVG		
3	0.6020	30.00	9.86	39.86	56.00	-16.14	QP		
4	0.6020	18.69	9.86	28.55	46.00	-17.45	AVG		
5	0.8580	26.65	9.89	36.54	56.00	-19.46	QP		
6	0.8580	15.68	9.89	25.57	46.00	-20.43	AVG		
7	1.7220	32.86	9.98	42.84	56.00	-13.16	QP		
8 *	1.7220	23.08	9.98	33.06	46.00	-12.94	AVG		
9	3.8580	23.78	10.05	33.83	56.00	-22.17	QP		
10	3.8580	15.06	10.05	25.11	46.00	-20.89	AVG		
11	17.9700	18.62	14.00	32.62	60.00	-27.38	QP		
12	17.9700	7.06	14.00	21.06	50.00	-28.94	AVG		

Test Result: Pass

16 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Niki
Temperature	24℃
Humidity	53%

16.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

16.2 BLOCK DIAGRAM OF TEST SETUP

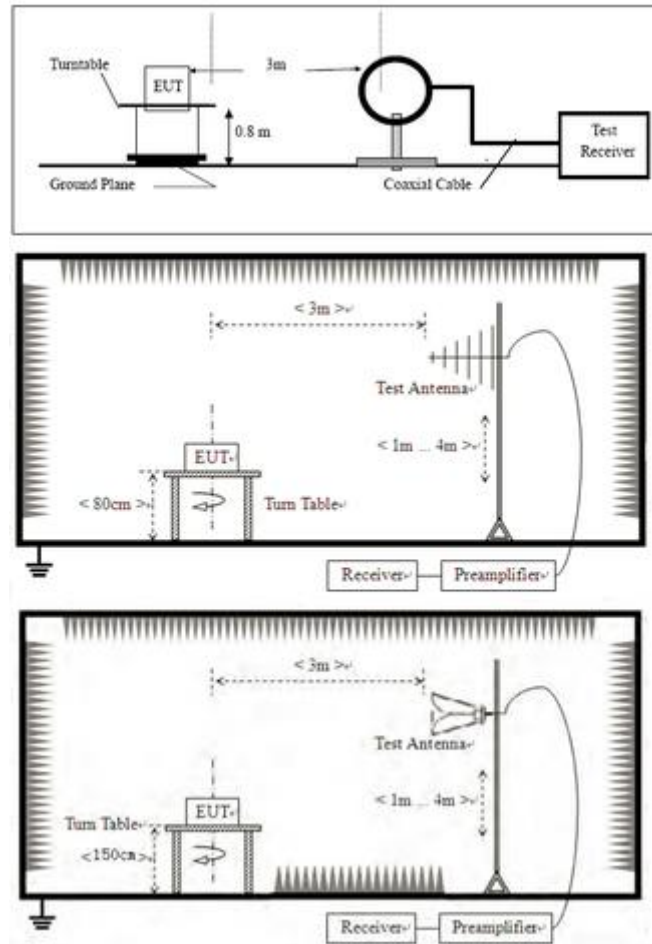

16.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

16.4 TEST DATA


Below 1GHz

[TestMode: TX mdoe]; [Polarity: Horizontal]

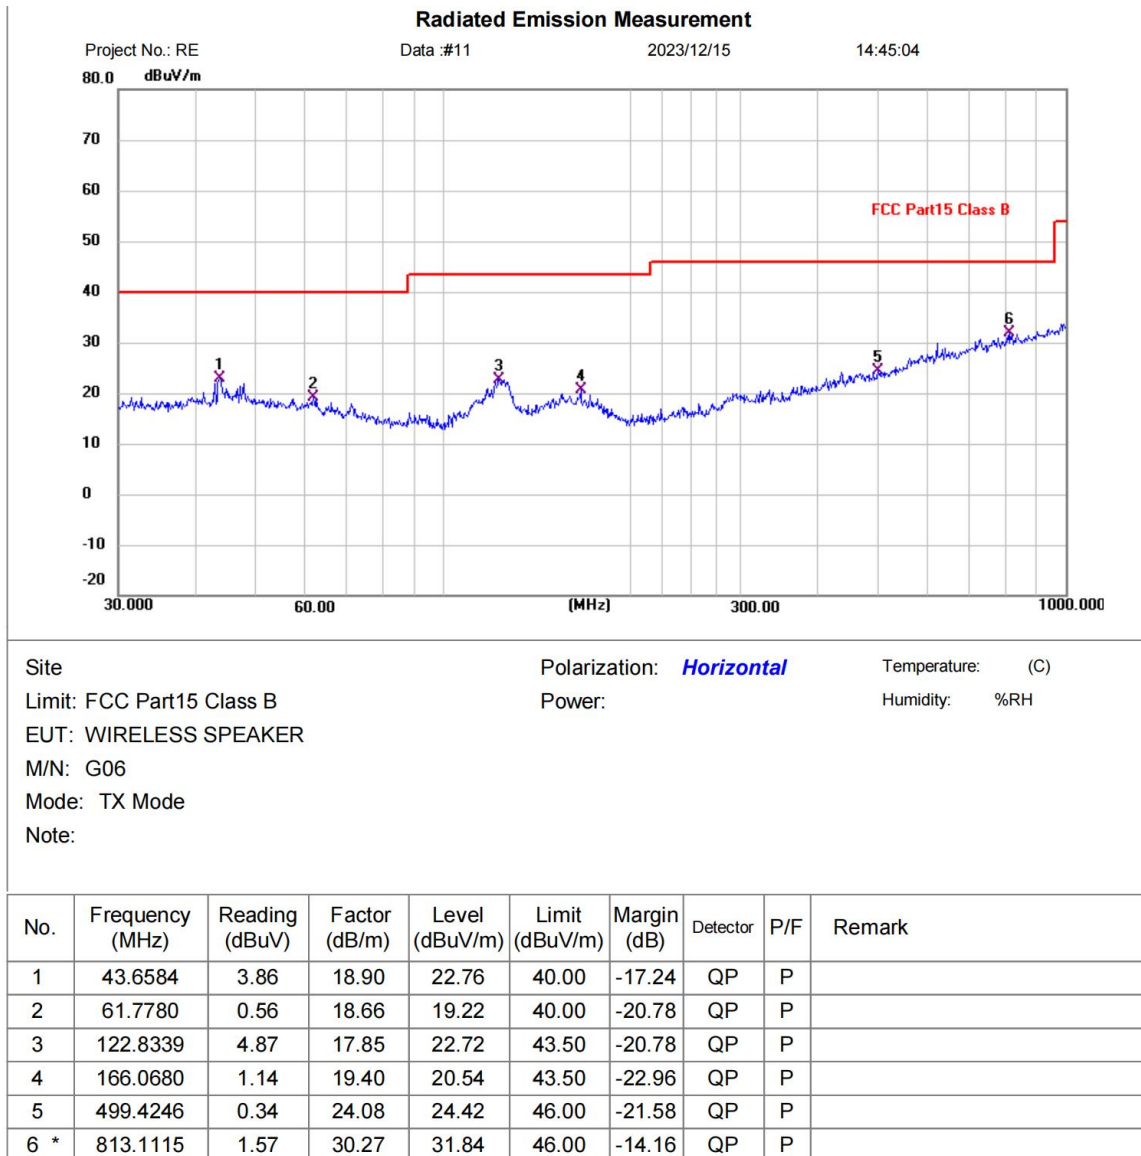

Test Result: Pass


[TestMode: TX mode]; [Polarity: Vertical]

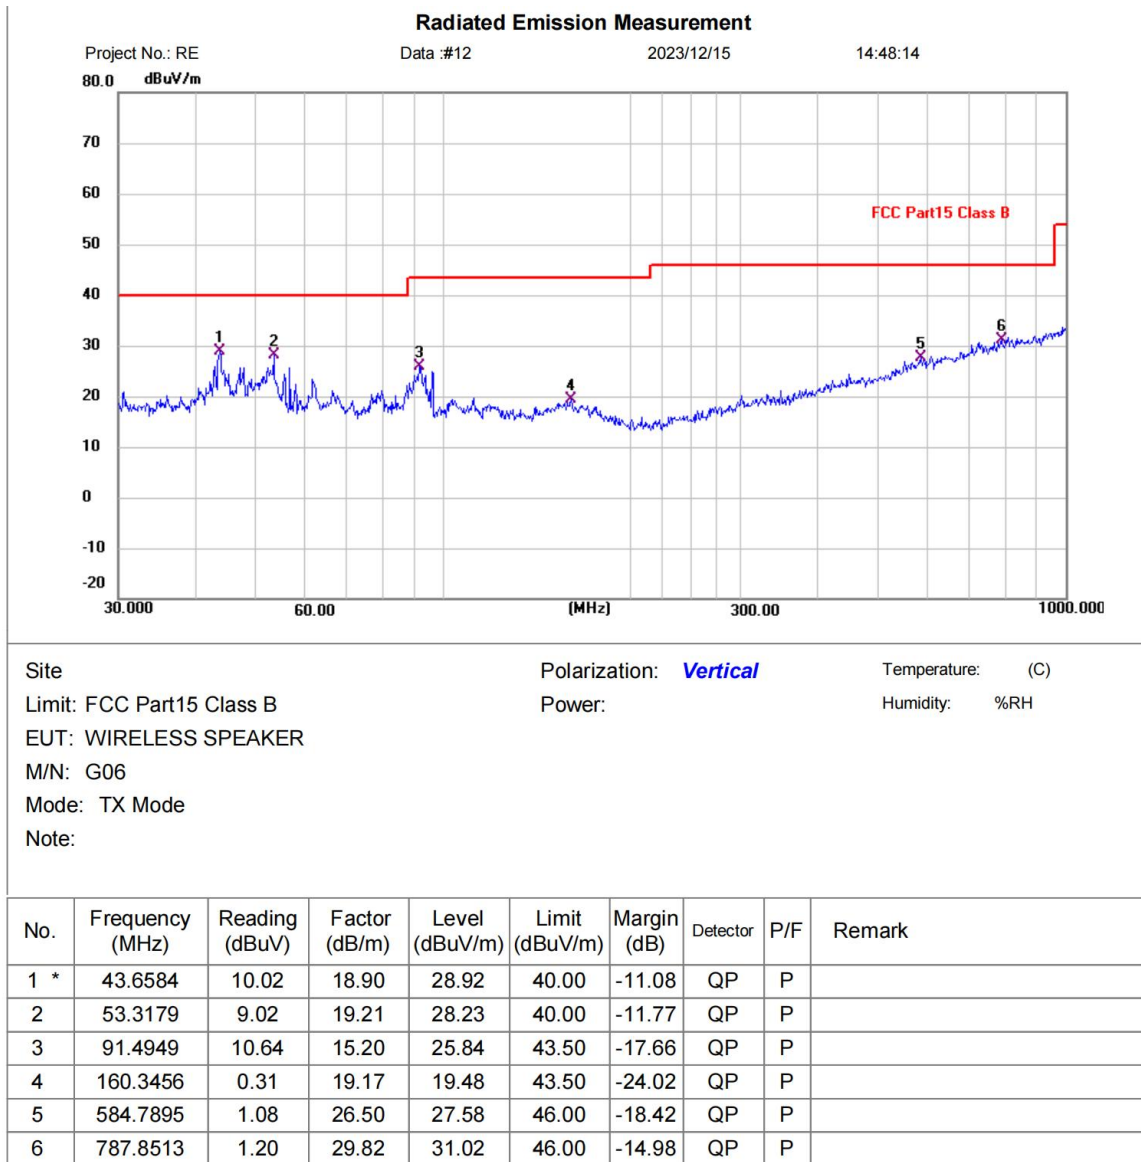

Test Result: Pass

Above 1GHz

[TestMode: TX lowest channel]; [Polarity: Horizontal]

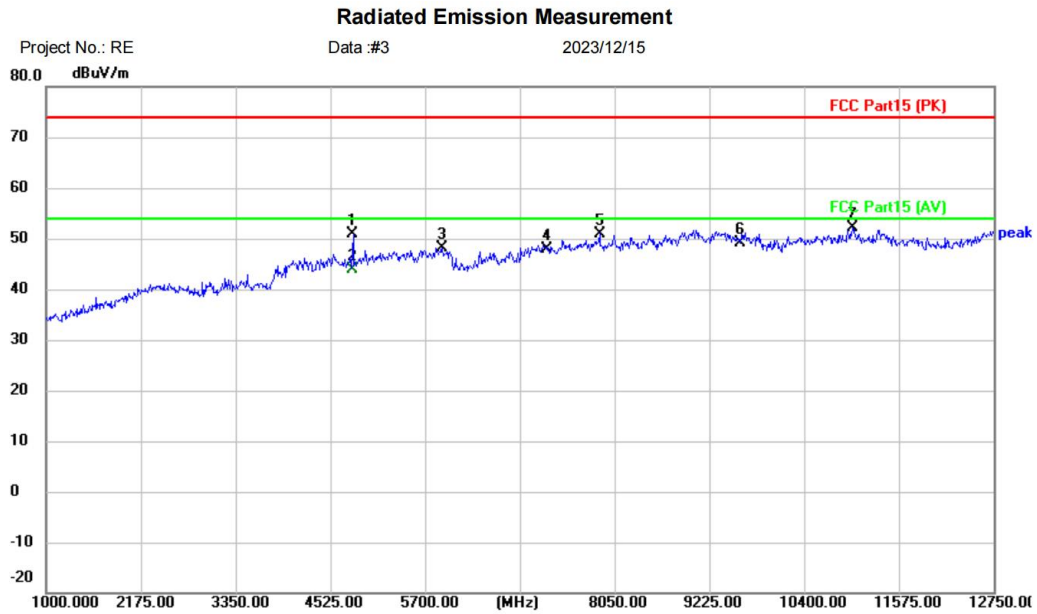

Site: Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: WIRELESS SPEAKER

M/N: G06


Mode: TX-2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4804.000	45.25	5.64	50.89	74.00	-23.11	peak
2	*	4804.000	38.19	5.64	43.83	54.00	-10.17	AVG
3		5911.500	39.49	8.68	48.17	74.00	-25.83	peak
4		7206.000	38.56	9.24	47.80	74.00	-26.20	peak
5		7862.000	41.09	9.91	51.00	74.00	-23.00	peak
6		9608.000	36.83	12.31	49.14	74.00	-24.86	peak
7		10999.25	38.55	13.48	52.03	74.00	-21.97	peak

Test Result: Pass

[TestMode:TX lowest channel]; [Polarity: Vertical]

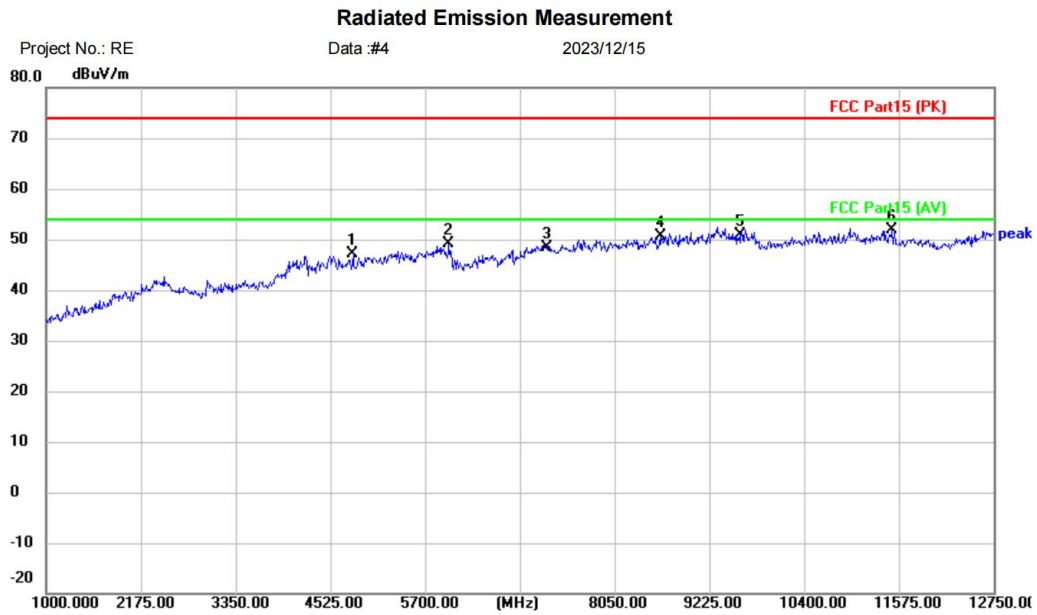


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: WIRELESS SPEAKER		
M/N: G06		
Mode: TX-2402		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	41.61	5.64	47.25	74.00	-26.75	peak	
2		5993.750	40.26	8.75	49.01	74.00	-24.99	peak	
3		7206.000	39.16	9.24	48.40	74.00	-25.60	peak	
4		8614.000	39.41	11.16	50.57	74.00	-23.43	peak	
5		9608.000	38.47	12.31	50.78	74.00	-23.22	peak	
6	*	11492.75	39.39	12.61	52.00	74.00	-22.00	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

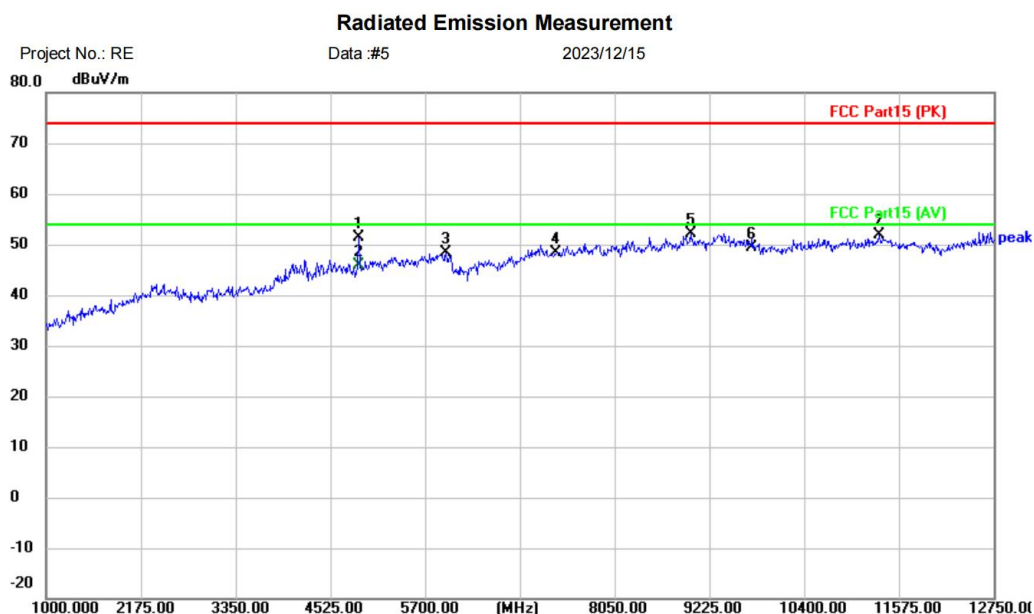


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: WIRELESS SPEAKER		
M/N: G06		
Mode: TX-2441		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4877.500	45.61	5.72	51.33	74.00	-22.67	peak	
2	*	4877.500	40.17	5.72	45.89	54.00	-8.11	AVG	
3		5958.500	39.59	8.72	48.31	74.00	-25.69	peak	
4		7323.000	38.84	9.43	48.27	74.00	-25.73	peak	
5		8990.000	39.79	12.42	52.21	74.00	-21.79	peak	
6		9764.000	37.27	12.21	49.48	74.00	-24.52	peak	
7		11328.25	39.16	12.67	51.83	74.00	-22.17	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

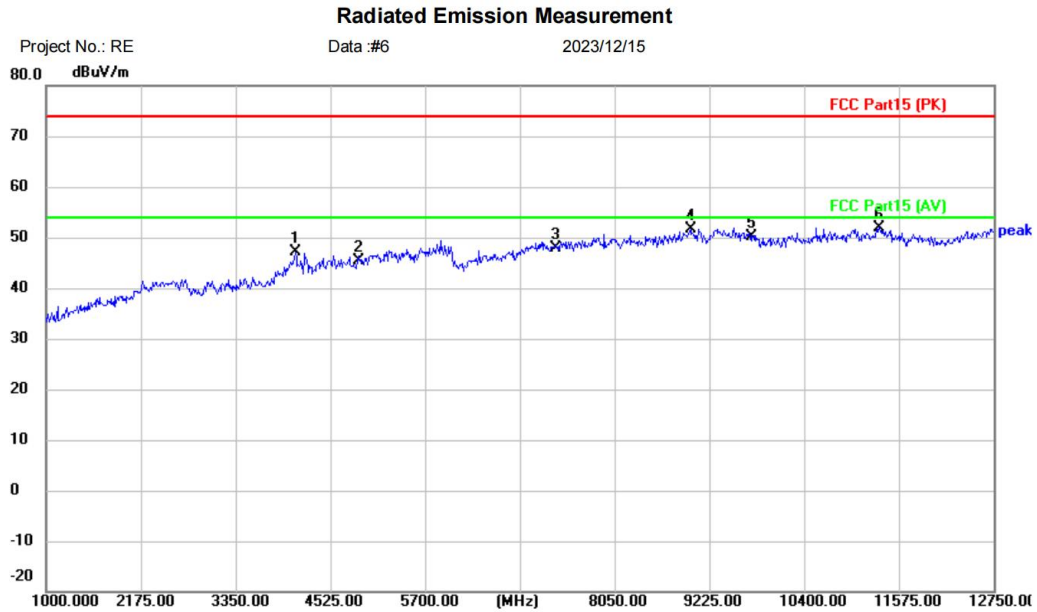


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: WIRELESS SPEAKER		
M/N: G06		
Mode: TX-2441		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4090.250	43.25	3.92	47.17	74.00	-26.83	peak	
2		4882.000	39.58	5.73	45.31	74.00	-28.69	peak	
3		7323.000	38.46	9.43	47.89	74.00	-26.11	peak	
4		8990.000	39.12	12.42	51.54	74.00	-22.46	peak	
5		9764.000	38.02	12.21	50.23	74.00	-23.77	peak	
6	*	11328.25	39.33	12.67	52.00	74.00	-22.00	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

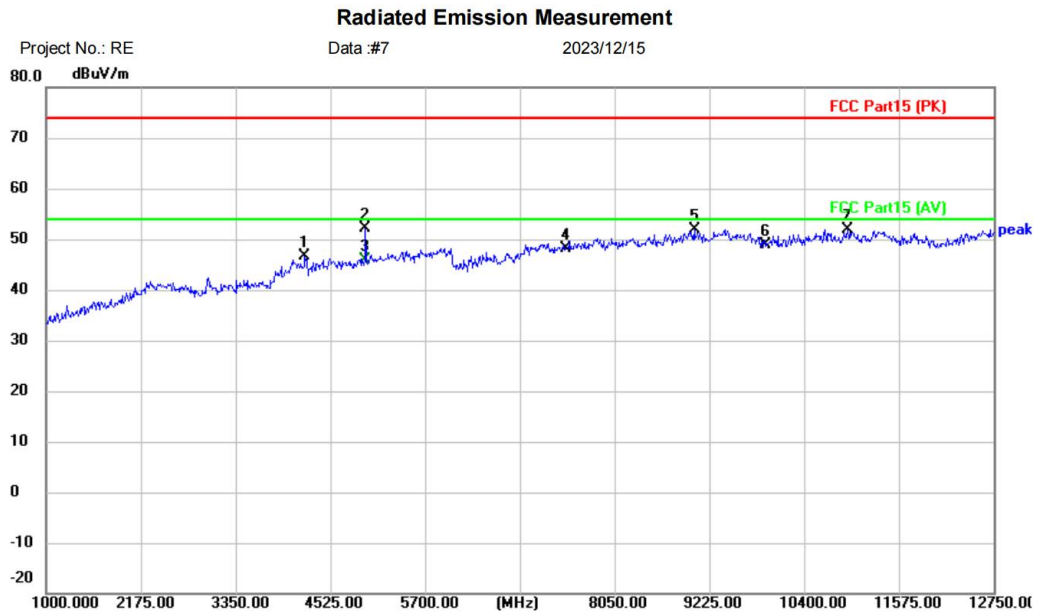


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: WIRELESS SPEAKER		
M/N: G06		
Mode: TX-2480		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4207.750	40.16	6.56	46.72	74.00	-27.28	peak	
2		4959.750	45.54	6.60	52.14	74.00	-21.86	peak	
3	*	4959.750	39.25	6.60	45.85	54.00	-8.15	AVG	
4		7440.000	38.42	9.64	48.06	74.00	-25.94	peak	
5		9037.000	39.60	12.19	51.79	74.00	-22.21	peak	
6		9920.000	36.62	12.14	48.76	74.00	-25.24	peak	
7		10940.500	38.57	13.25	51.82	74.00	-22.18	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

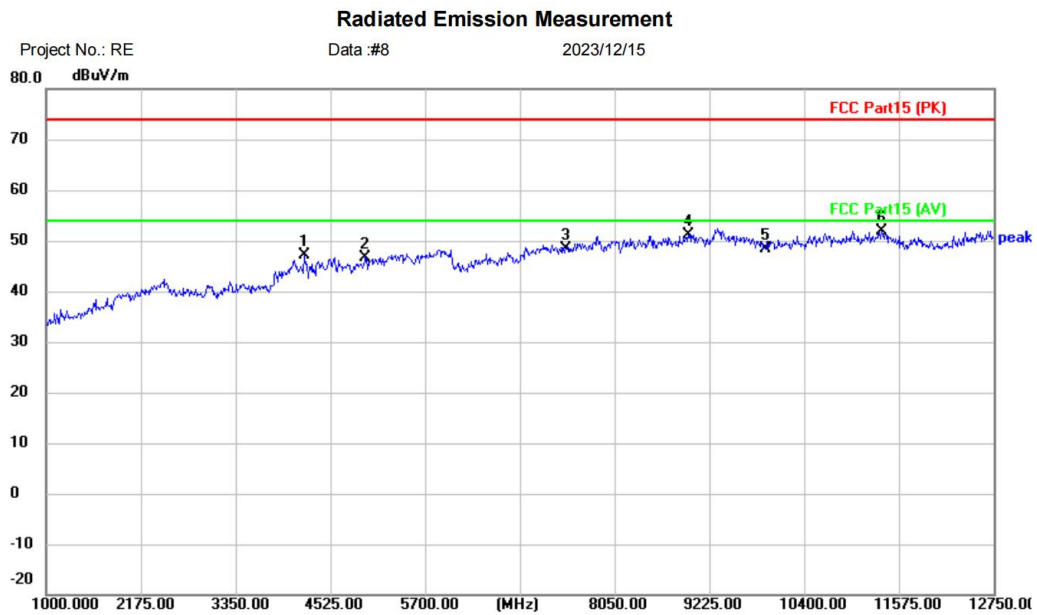

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: WIRELESS SPEAKER		
M/N: G06		
Mode: TX-2480		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4196.000	40.45	6.65	47.10	74.00	-26.90	peak	
2		4960.000	39.99	6.60	46.59	74.00	-27.41	peak	
3		7440.000	38.76	9.64	48.40	74.00	-25.60	peak	
4		8966.500	38.85	12.32	51.17	74.00	-22.83	peak	
5		9920.000	36.24	12.14	48.38	74.00	-25.62	peak	
6	*	11363.50	39.23	12.65	51.88	74.00	-22.12	peak	

Test Result: Pass

17 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Niki
Temperature	24℃
Humidity	53%

17.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

17.2 BLOCK DIAGRAM OF TEST SETUP

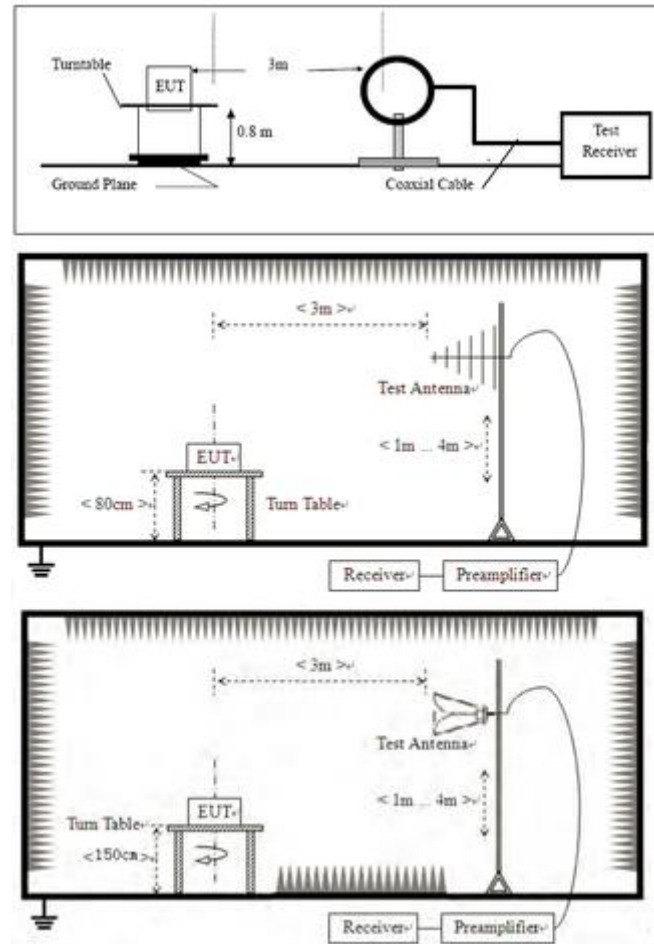

17.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


17.4 TEST DATA

[TestMode: TX lowest channel]; [Polarity: Horizontal]

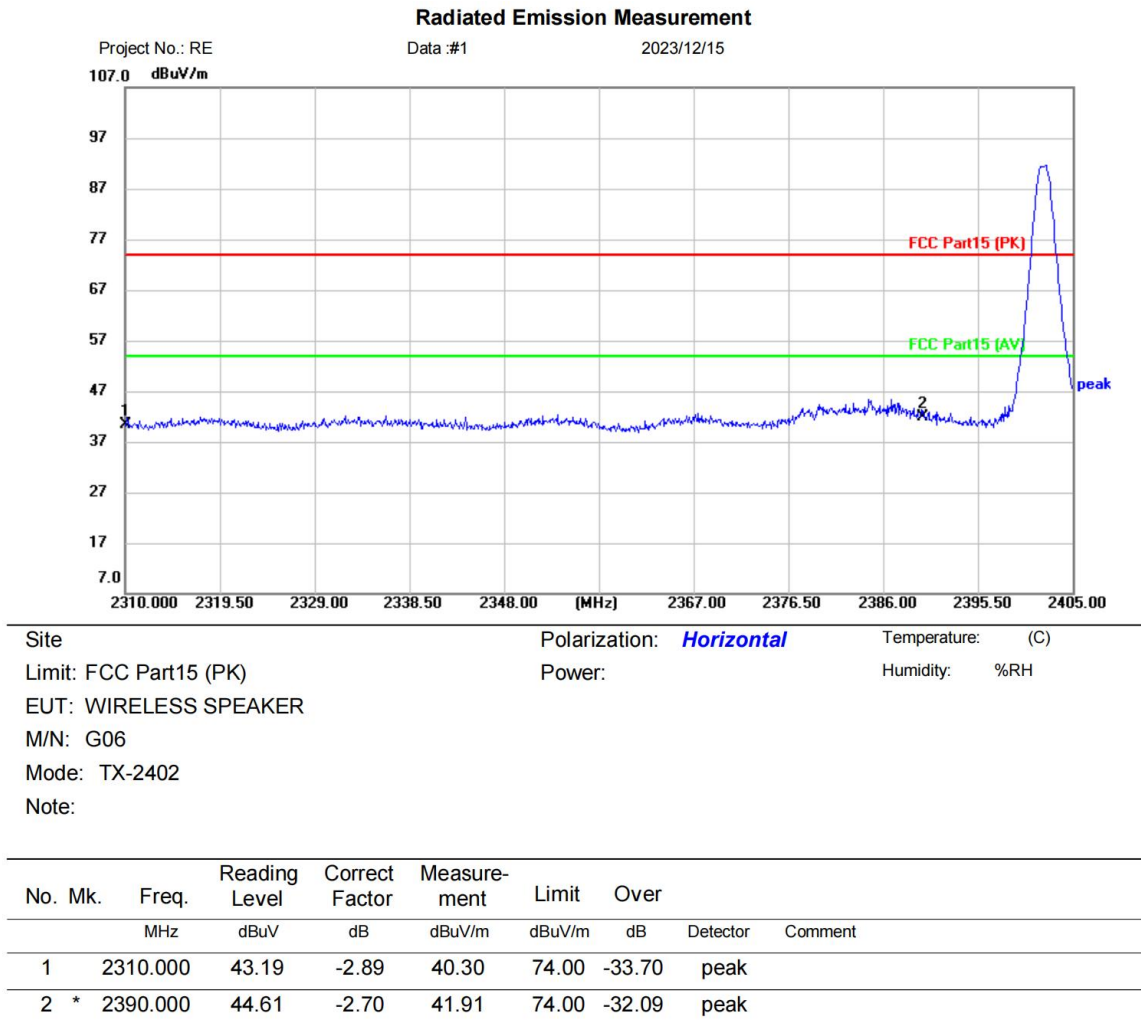


Test Result: Pass

[TestMode: TX lowest channel]; [Polarity: Vertical]

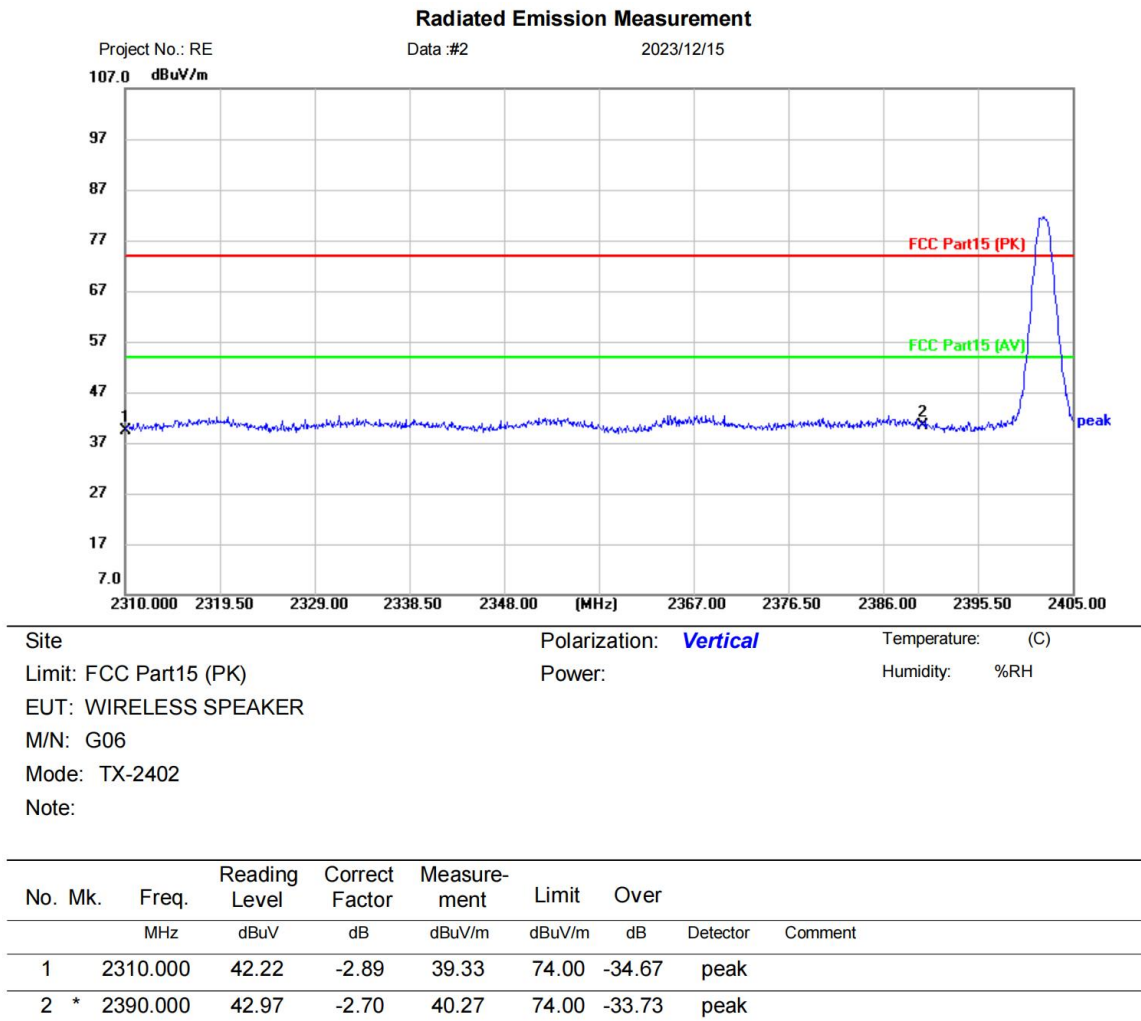

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

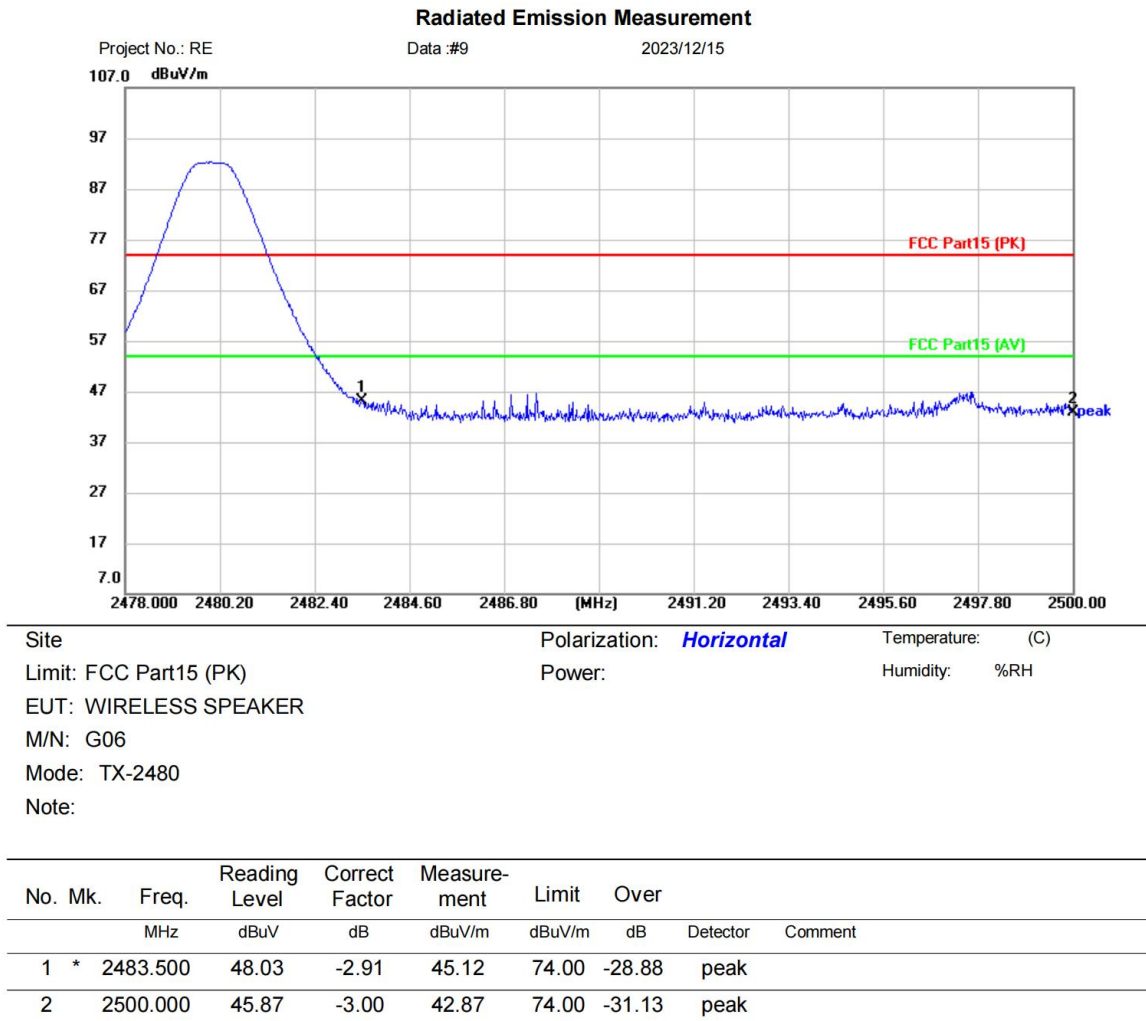

Test Result: Pass