

Page 235 of 251

5.6GHz 802.11a

Test Laboratory: AGC Lab Date: Jan. 10, 2024

802.11a CH116-Touch-Right DUT: smartphone; Type: X23

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=2.51; Frequency: 5580MHz; Medium parameters used: f = 5600 MHz; $\sigma = 5.21mho/m$; $\epsilon = 37.26$; $\rho = 1000 kg/m^3$;

Phantom section: Right Section

Ambient temperature ($^{\circ}$): 21.3, Liquid temperature ($^{\circ}$): 21.2

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4 02 35

Configuration/802.11a CH116- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH116-Touch-Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	5600MHz
Channels	CH116
Signal	Crest factor: 1.0

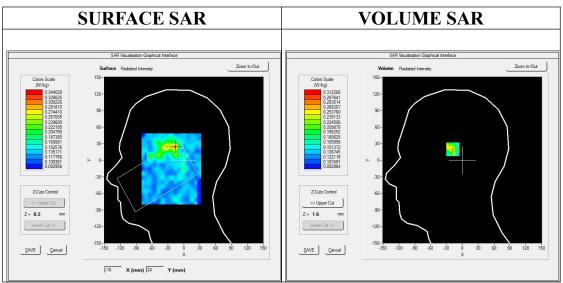


Maximum location: X=-17.00, Y=23.00 SAR Peak: 0.85 W/kg

SAR 10g (W/Kg)	0.172099				
SAR 1g (W/Kg)	0.266895				





Z (mm)	0.00	4.00	6.00	8.00		12.00	14.00		18.00		22.00	
SAR	0.891	0.312	0.141		0.126					0.152		
(W/K	0	3	5	0	9	0	3	4	7	5	1	4
g)												
		0.9-										
		0.8-	1							-		
		0.7-		100		- 2	8 1	100				
		® 0.6- ⊗ 0.5-		+ +			- 12					
		€ 0.5-	1				-					
		CC .	N									
				1								
		0.3-					2 2					
		0.2-										
				1			-		-			
		0.1-	0 2	4 6	8 1	0 12	14 16	18 2	0 22	24 26		
		6.0	0 2	7 0	0 1			10 2	U 22	24 20		
						Z (m	m)					

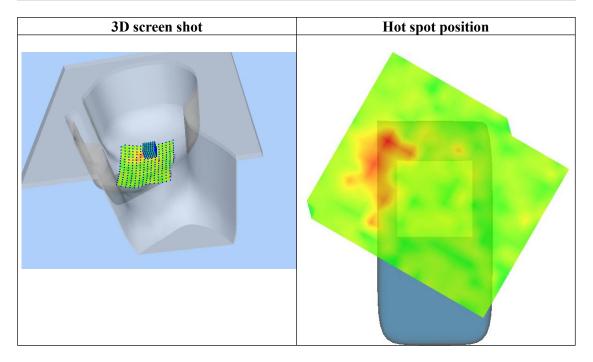



Page 237 of 251

Test Laboratory: AGC Lab

Date: Jan. 10, 2024

802.11a CH116-Body -back DUT: smartphone; Type: X23

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=2.51; Frequency: 5580MHz; Medium parameters used: f = 5600 MHz; $\sigma = 5.21mho/m$; $\epsilon = 37.26$; $\rho = 1000 kg/m^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.3, Liquid temperature ($^{\circ}$): 21.2

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/802.11a CH116- Body -back /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH116- Body -back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Body -back
Band	5600MHz
Channels	CH116
Signal	Crest factor: 1.0

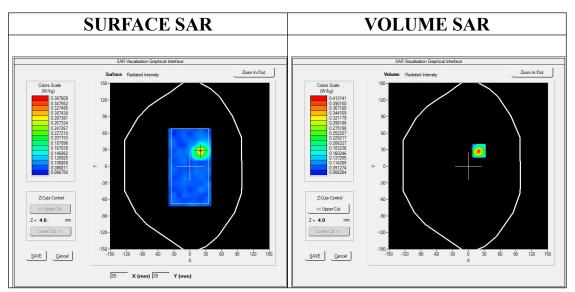


Maximum location: X=20.00, Y=28.00 SAR Peak: 1.15 W/kg

SAR 10g (W/Kg)	0.175543				
SAR 1g (W/Kg)	0.402951				





Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR	1.189	0.413	0.193	0.120	0.102	0.095	0.091	0.091	0.098	0.099	0.092	0.098
(W/K	8	1	7	0	4	3	2	1	0	1	2	2
g)		1.2- 1.0- 2AB (W/kg) 0.6- 0.4-	\									
		0.2- 0.1-	0 2	4 6	8 1	0 12 Z (m	14 16 m)	18 2	0 22	24 26		

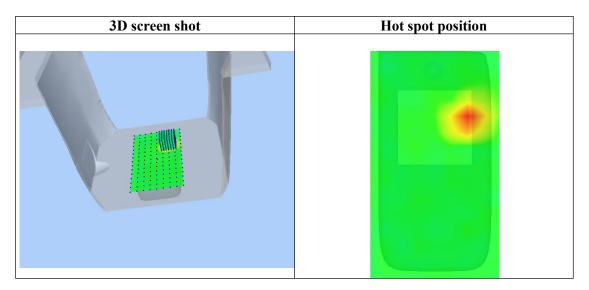



Page 239 of 251

5.8GHz 802.11a

Test Laboratory: AGC Lab Date: Jan. 12, 2024

802.11a CH157- Touch-Right DUT: smartphone; Type: X23

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.41; Frequency: 5785MHz; Medium parameters used: f = 5800 MHz; σ = 2.19mho/m; ϵ r = 37.19; ρ = 1000 kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.2, Liquid temperature ($^{\circ}$): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4 02 35

Configuration/802.11a CH157- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH157- Touch-Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	5800MHz
Channels	CH157-
Signal	Crest factor: 1.0

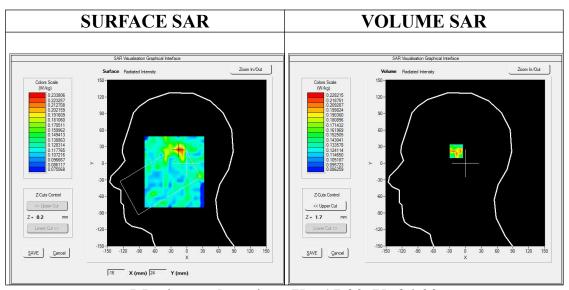

Maximum location: X=-15.00, Y=24.00


SAR Peak: 0.54 W/kg

SAR 10g (W/Kg)	0.146945				
SAR 1g (W/Kg)	0.198414				





Z (mm) SAR	0.00	4.00 0.228	6.00 0.144	8.00 0.141	10.00 0.123		14.00 0.163		18.00 0.103	20.00 0.114		24.00 0.141
(W/K	4	2	3	5	3	8	4	1	1	3	9	0.141
g)	-						-					
		0.44		8			1 1	- 3				
		0.40	-	-	-		+	_				
		0.35	- \		_		+					
		® 0.30						40 0				
		3		\								
		SAR 0.25										
		0.20		1				31 2				
		0.15		1			\wedge	80 0				
		0.10	_				1					
			0 2	4 6	8	10 12	14 16	18 2	0 22	24 26		
						Z (n	nm)					

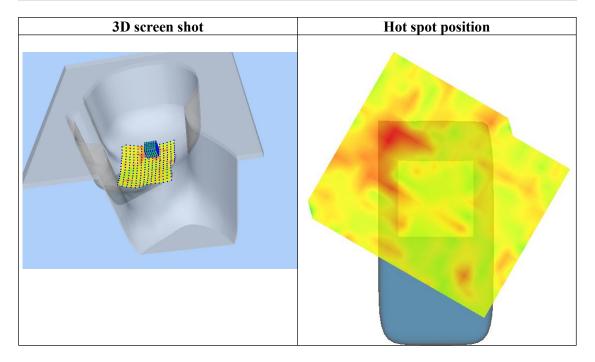



Page 241 of 251

Test Laboratory: AGC Lab

802 11a CH157-Body -back

803 11a CH157-Body -back

802.11a CH157-Body -back DUT: smartphone; Type: X23

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.41; Frequency: 5785MHz; Medium parameters used: f = 5800 MHz; $\sigma = 2.19 \text{mho/m}$; $\epsilon = 37.19$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 21.2, Liquid temperature (°C): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4 02 35


Configuration/ 802.11a CH157- Body -back /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ 802.11a CH157- Body -back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	sam_direct_droit2_surf8mm.txt				
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm				
Phantom	Validation plane				
Device Position	Body -back				
Band	5800MHz				
Channels	CH157				
Signal	Crest factor: 1.0				

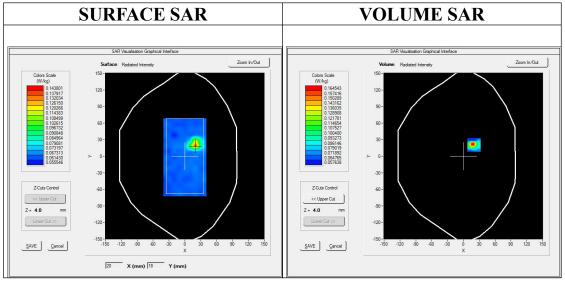


Maximum location: X=20.00, Y=20.00 SAR Peak: 0.52 W/kg

SAR 10g (W/Kg) 0.082467 SAR 1g (W/Kg) 0.161319





Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR	0.471	0.164	0.061	0.064	0.062	0.063	0.064	0.065	0.064	0.070	0.067	0.069
(W/K g)	6	5	1	0	0	1	2	7	1	0	4	9
		0.47 0.40 0.35 0.30 0.25 0.20 0.15										
		0.10 0.06		4 6	8	0 12 Z (n	14 16 nm)	18 2	0 22	24 26		

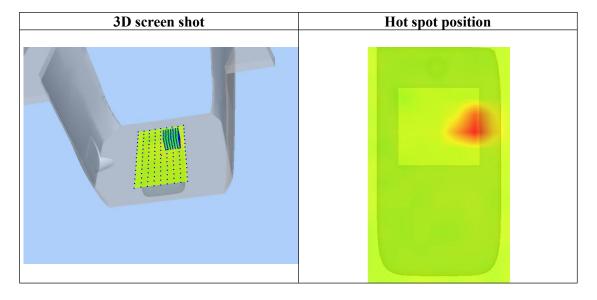





Page 243 of 251

APPENDIX C. TEST SETUP PHOTOGRAPHS

LEFT-CHEEK TOUCH

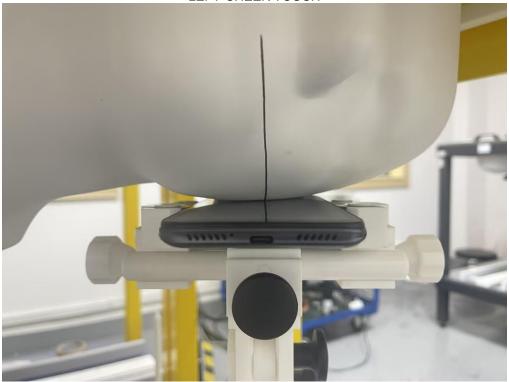

LEFT-TILT 150

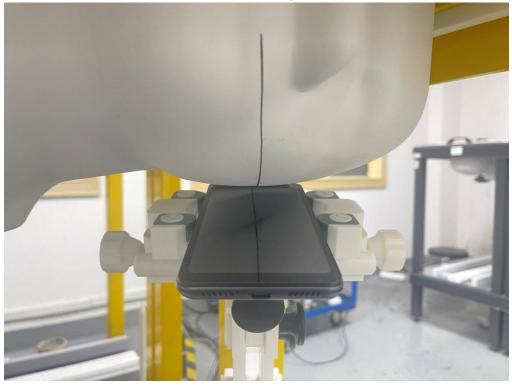








RIGHT- CHEEK TOUCH






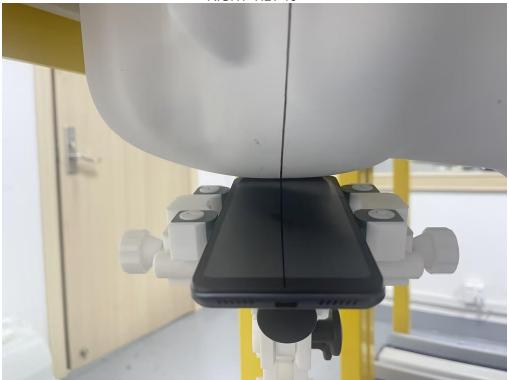










Body Front 10mm







Edge 1(Top) 10mm-Hotspot Mode



Edge 2(Right) 10mm-Hotspot Mode








Edge 3(Bottom) 10mm-Hotspot Mode



Edge 4(Left) 10mm-Hotspot Mode

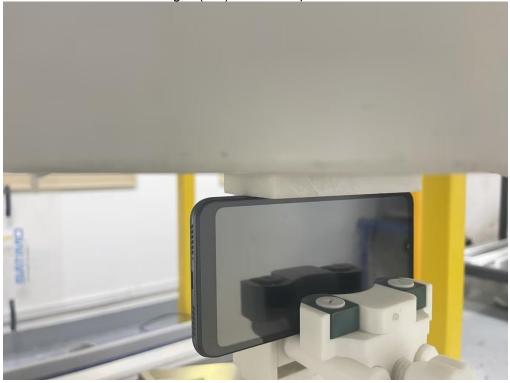





Page 248 of 251


DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN


Note: The position used in the measurement were according to IEEE 1528-2013

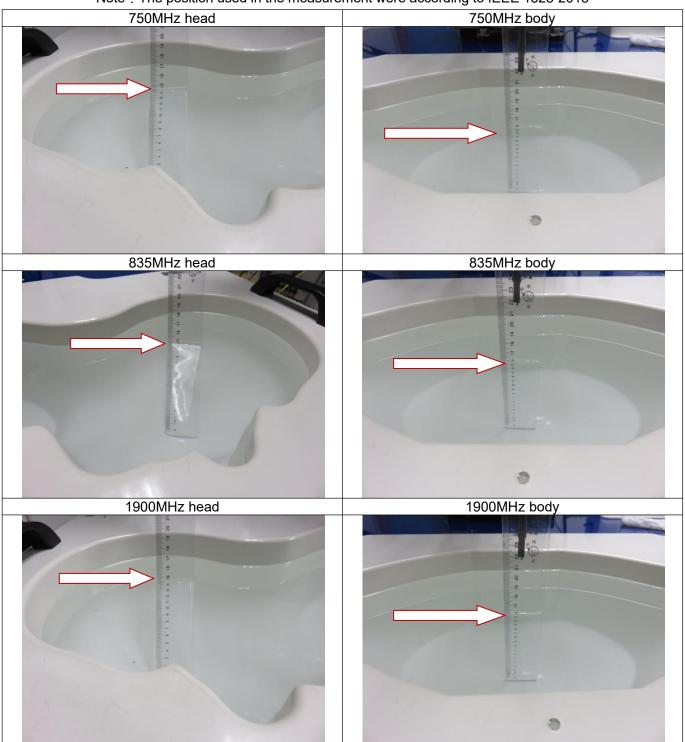






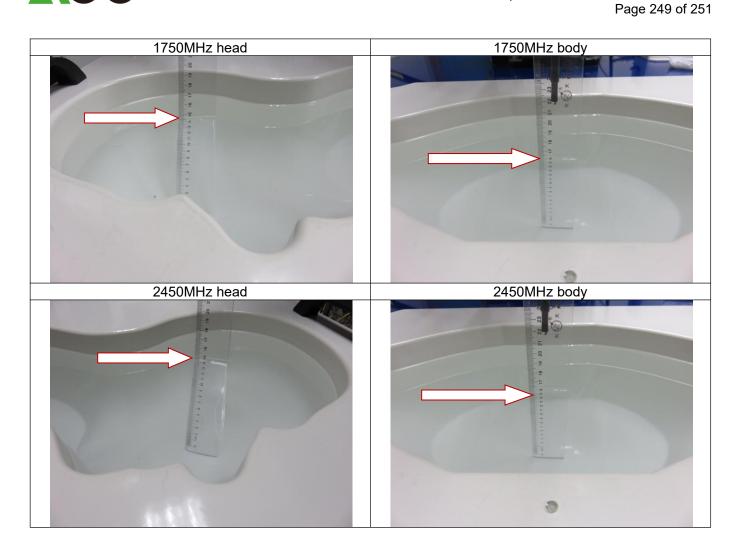





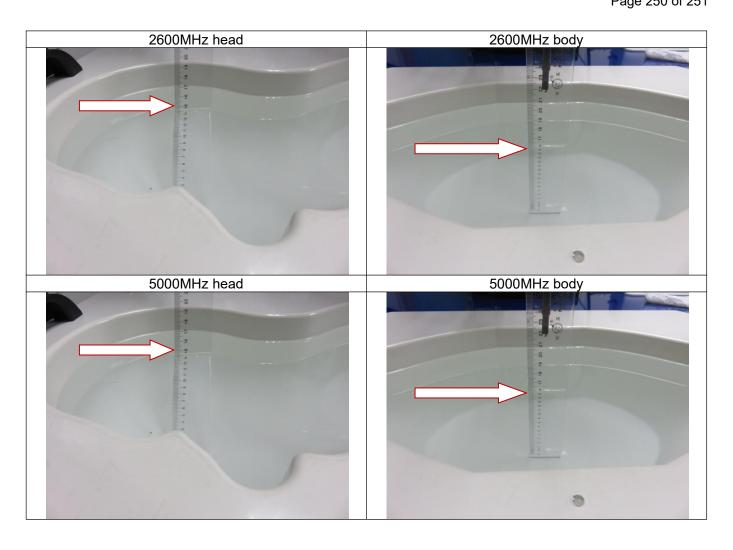



Page 251 of 251

APPENDIX D. CALIBRATION DATA

Refer to Attached files.

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.