



TEST REPORT

FCC ID: 2BD7Q-CB02

Applicant: Huizhou GROSUN Technology Co., Ltd

Address: Floor 2-3, Building 18, Eriks Science and Technology Industrial Park, No.19 Huifeng Dongyi Road, Zhong Kai High-tech Zone, Huizhou

Manufacturer: Huizhou GROSUN Technology Co., Ltd

Address: Floor 2-3, Building 18, Eriks Science and Technology Industrial Park, No.19 Huifeng Dongyi Road, Zhong Kai High-tech Zone, Huizhou

EUT: Multi-function charger

Trade Mark: RORRY

Model Number: CB02
CB01, CB03, CB04, CB05, CB06, CB07, CB08, CB09, CB10, CB11, CB12

Date of Receipt: Dec. 07, 2023

Test Date: Dec. 07, 2023 - Dec. 15, 2023

Date of Report: Dec. 15, 2023

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 Subpart C
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20231215022E

Prepared (Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	3
3. GENERAL INFORMATION	4
4. TEST INSTRUMENT USED.....	7
5. CONDUCTED EMISSION TEST.....	8
6. RADIATION EMISSION TEST.....	12
7. BANDWIDTH TEST	20
8. SETUP PHOTOGRAPHS	21
9. EUT PHOTOGRAPHS	21

**1. VERSION**

Version No.	Date	Description
00	Dec. 15, 2023	Original

2. TEST SUMMARY

EMC Emission			
Test Item	Section in CFR 47	Result	Remark
AC Power Line Conducted Emission	15.207	PASS	
Spurious Emission	15.209(a)(f)	PASS	
20dB Bandwidth	15.215	PASS	
Antenna requirement	15.203	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) Test Facility: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone,
Baolong Street, Longgang District, Shenzhen, Guangdong, China



3. GENERAL INFORMATION


3.1 Description of Device (EUT)

Product Name: Multi-function charger
Trade Mark: RORRY
Model No.: CB02
CB01, CB03, CB04, CB05, CB06, CB07, CB08, CB09, CB10, CB11, CB12
Model Difference: The product's different for model number and appearance color.
Serial No.: N/A
Hardware version: H1.0
Software version: S1.0
Operation Frequency: 115kHz ~ 205KHz
Modulation type: MSK
Antenna Type: Inductive loop coil Antenna
Antenna gain: 0dBi
AC Mode
AC Input: 100-240V/50/60Hz/0.8A
C1 Type-C Output: 5V/3A, 9V/2.22A, 12V/1.67A (20W Max)
C2 Output: 5V/2A Cable Output: 5V/2A
Power Bank Mode
C2 Type-C Input: 5V/3A, 9V/2.2A, 12V/1.5A (18W Max)
Power supply: C2 Type-C Output: 5V/3A, 9V/2.22A, 12V/1.67A (22.5W Max)
Cable Output: 5V/2.4A, 9V/2.22A (22.5W Max)
Watch wireless charging: 3.3W
Simultaneous Output of multi-ports: 5V/3A(Max)
Both Discharging and Charging Output: 5V/2A
Battery capacity: 5200mAH/3.8V
Rated capacity: 2900mAH (5V/2A)

3.2 Tested System Details

None.

3.3 Block Diagram of Test Set-up

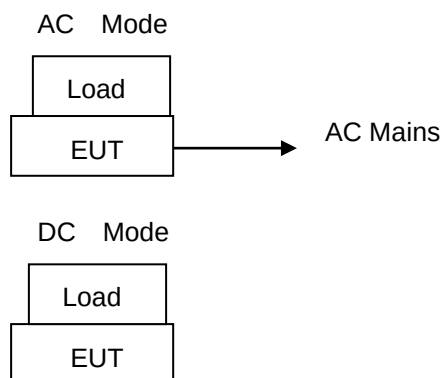



3.4 Test Mode Description

AC Mode

- Mode1. AC Input + Watch wireless charging Output Mode(Full Load, 1%/50%/99%)
- Mode2. AC Input + Watch wireless charging Output Mode(Half Load, 1%/50%/99%)
- Mode3. AC Input + Watch wireless charging Output Mode(No Load, 1%/50%/99%)
- Mode4. AC Input + C1 Type-C Output + Watch wireless charging Output Mode(Full Load, 1%/50%/99%)
- Mode5. AC Input + C1 Type-C Output + Watch wireless charging Output Mode(Half Load, 1%/50%/99%)
- Mode6. AC Input + C1 Type-C Output + Watch wireless charging Output Mode(No Load, 1%/50%/99%)
- Mode7. AC Input + C2 Output + Watch wireless charging Output Mode(Full Load, 1%/50%/99%)
- Mode8. AC Input + C2 Output + Watch wireless charging Output Mode(Half Load, 1%/50%/99%)
- Mode9. AC Input + C2 Output + Watch wireless charging Output Mode(No Load, 1%/50%/99%)
- Mode10. AC Input + Cable Output + Watch wireless charging Output Mode(Full Load, 1%/50%/99%)
- Mode11. AC Input + Cable Output + Watch wireless charging Output Mode(Half Load, 1%/50%/99%)
- Mode12. AC Input + Cable Output + Watch wireless charging Output Mode(No Load, 1%/50%/99%)
- Mode13. AC Input + C1 Type-C Output Mode(Full Load)
- Mode14. AC Input + C1 Type-C Output Mode(Half Load)
- Mode15. AC Input + C1 Type-C Output Mode(No Load)
- Mode16. AC Input + C2 Output Mode(Full Load)
- Mode17. AC Input + C2 Output Mode(Half Load)
- Mode18. AC Input + C2 Output Mode(No Load)
- Mode19. AC Input + Cable Output Mode(Full Load)
- Mode20. AC Input + Cable Output Mode(Half Load)
- Mode21. AC Input + Cable Output Mode(No Load)

Power Bank Mode

- Mode1. C2 Type-C Input + Watch wireless charging Output Mode(Full Load, 1%/50%/99%)
- Mode2. C2 Type-C Input + Watch wireless charging Output Mode(Half Load, 1%/50%/99%)
- Mode3. C2 Type-C Input + Watch wireless charging Output Mode(No Load, 1%/50%/99%)
- Mode4. C2 Type-C Output + Watch wireless charging Output Mode(Full Load, 1%/50%/99%)
- Mode5. C2 Type-C Output + Watch wireless charging Output Mode(Half Load, 1%/50%/99%)
- Mode6. C2 Type-C Output + Watch wireless charging Output Mode(No Load, 1%/50%/99%)
- Mode7. Cable Output + Watch wireless charging Output Mode(Full Load, 1%/50%/99%)
- Mode8. Cable Output + Watch wireless charging Output Mode(Half Load, 1%/50%/99%)
- Mode9. Cable Output + Watch wireless charging Output Mode(No Load, 1%/50%/99%)
- Mode10. Simultaneous Output of multi-ports Mode(Full Load)
- Mode11. Simultaneous Output of multi-ports Mode(Half Load)
- Mode12. Simultaneous Output of multi-ports Mode(No Load)
- Mode13. Both Discharging and Charging Output Mode(Full Load)
- Mode14. Both Discharging and Charging Output Mode(Half Load)
- Mode15. Both Discharging and Charging Output Mode(No Load)

Note: 1. We have evaluated 1%, 50% and 99% battery charging mode, and the worst mode (99%) is showed in this report.

2. All modes have been tested, and the report only shows the results of the worst mode10(AC Mode) and mode7(Power Bank Mode).



3.5 Test Auxiliary Equipment

Adapter (Provide by test lab):

Manufacturer: XIAOMI

Model: AD65G

I/P: AC 100-240V 50/60Hz

O/P: DC 5V/3A, DC 9V/3A, DC 10V/5A, DC 12V/3A,

DC 15V/3A, DC 20V/3.25A

Mobile phone (Provide by test lab):

Manufacturer: SAMSUNG

Model: Galaxy S21 5G

Watch (Provide by test lab):

Manufacturer: Apple

Model: Series 6

3.6 Test Uncertainty

Conducted Emission Uncertainty(150KHz-30MHz) : $\pm 2.56\text{dB}$

20dB Bandwidth : $\pm 0.5\text{kHz}$

Radiated Emission Uncertainty(9KHz-1GHz) : $\pm 3.24\text{dB}$

**4. TEST INSTRUMENT USED****For Conducted Emission Test (843 Shielded Room)**

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
843 Shielded Room	ChengYu	843 Room	843	Sep. 20, 2022	Sep. 19, 2025
EMI Receiver	R&S	ESR	101421	Nov. 04, 2023	Nov. 03, 2024
LISN	R&S	ENV216	102417	Nov. 04, 2023	Nov. 03, 2024
Clamp	COM-POWER	CLA-050	431071	Nov. 04, 2023	Nov. 03, 2024
3-Loop Antenna	DAZE	ZN30401	13021	Nov. 04, 2023	Nov. 03, 2024
ISN T8	Schwarzbeck	NTFM 8158	101135	Nov. 04, 2023	Nov. 03, 2024
ISN T5	Schwarzbeck	NTFM 8158	101136	Nov. 04, 2023	Nov. 03, 2024
843 Cable 1#	ChengYu	CE Cable	001	Nov. 04, 2023	Nov. 03, 2024
843 Cable 1#	ChengYu	CE Cable	002	Nov. 04, 2023	Nov. 03, 2024

For Radiated Emission Test (966 chamber)


Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
966 Chamber	ChengYu	966 Room	966	Sep. 20, 2022	Sep. 19, 2025
Spectrum Analyzer	Agilent	E4408B	MY50140780	Nov. 04, 2023	Nov. 03, 2024
EMI Receiver	R&S	ESRP7	101393	Nov. 04, 2023	Nov. 03, 2024
Amplifier	Schwarzbeck	BBV9743B	00153	Nov. 04, 2023	Nov. 03, 2024
Amplifier	EMEC	EM01G8GA	00270	Nov. 04, 2023	Nov. 03, 2024
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Nov. 04, 2023	Nov. 03, 2024
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Nov. 04, 2023	Nov. 03, 2024
Loop Antenna	ZHINAN	ZN30900A	/	Nov. 04, 2023	Nov. 03, 2024
966 Cable 1#	ChengYu	966	004	Nov. 04, 2023	Nov. 03, 2024
966 Cable 2#	ChengYu	966	003	Sep. 20, 2022	Sep. 19, 2025



5. CONDUCTED EMISSION TEST

5.1 Block Diagram of Test Setup

For Mains Terminals Test

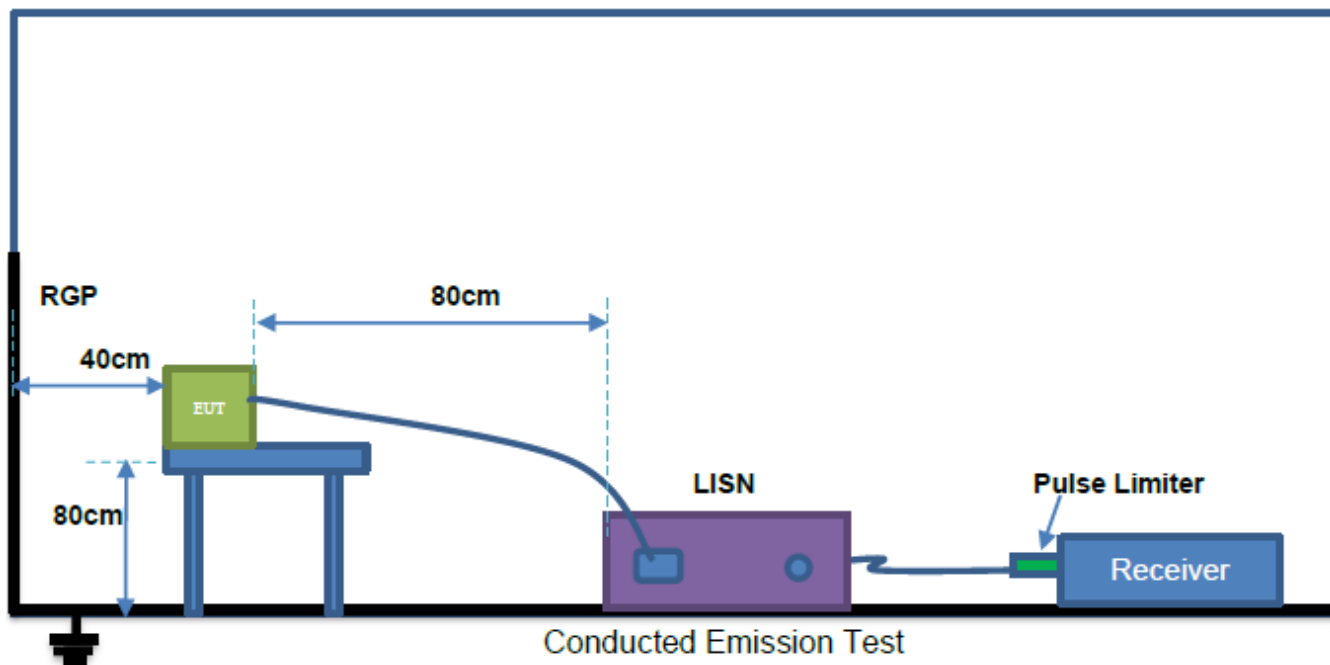

5.2 Test Standard and Limit

FCC Part 15 Subpart C

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15~0.50	66 ~ 56*	55 ~ 46*
0.50~5.00	56	46
5.00~30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

5.3 EUT Configuration on Test

The following equipment's are installed on conducted emission test to meet FCC Part 15 Subpart C requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4 Operating Condition of EUT

5.4.1 Setup the EUT and simulators as shown in Section 5.1.

5.4.2 Turn on the power of all equipments.

5.4.3 Let the EUT work in test modes and test it.



5.5 Test Procedure

The EUT is put on the table and connected to the AC mains through a Artificial Mains Network (AMN) or ISN. This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **ANSI C63.10** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 10KHz.

The frequency range from 150 KHz to 30 MHz is investigated.

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Mesurement Level = Reading level + Correct Factor

5.6 Test Result


PASS

Please refer to the following page.



Conducted Emission Test Data


Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Line
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 10(Mobile)

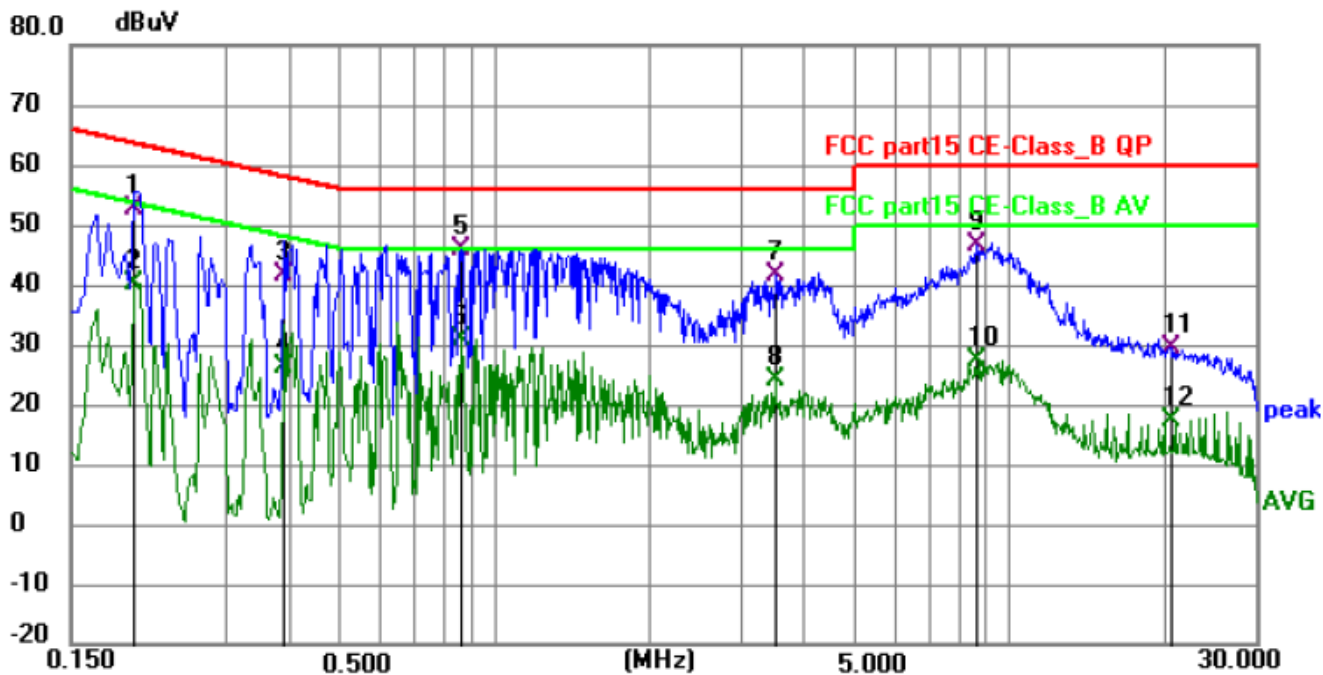

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1995	43.65	8.90	52.55	63.63	-11.08	QP	P	
2	0.1995	31.35	8.90	40.25	53.63	-13.38	AVG	P	
3	0.3885	32.37	9.27	41.64	58.10	-16.46	QP	P	
4	0.3885	17.06	9.27	26.33	48.10	-21.77	AVG	P	
5 *	0.8610	36.49	9.34	45.83	56.00	-10.17	QP	P	
6	0.8610	21.52	9.34	30.86	46.00	-15.14	AVG	P	
7	3.4935	31.65	10.01	41.66	56.00	-14.34	QP	P	
8	3.4935	14.10	10.01	24.11	46.00	-21.89	AVG	P	
9	8.6820	36.45	10.22	46.67	60.00	-13.33	QP	P	
10	8.6820	16.99	10.22	27.21	50.00	-22.79	AVG	P	
11	20.5350	19.09	10.52	29.61	60.00	-30.39	QP	P	
12	20.5350	6.76	10.52	17.28	50.00	-32.72	AVG	P	



Conducted Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Neutral
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 10(Mobile)

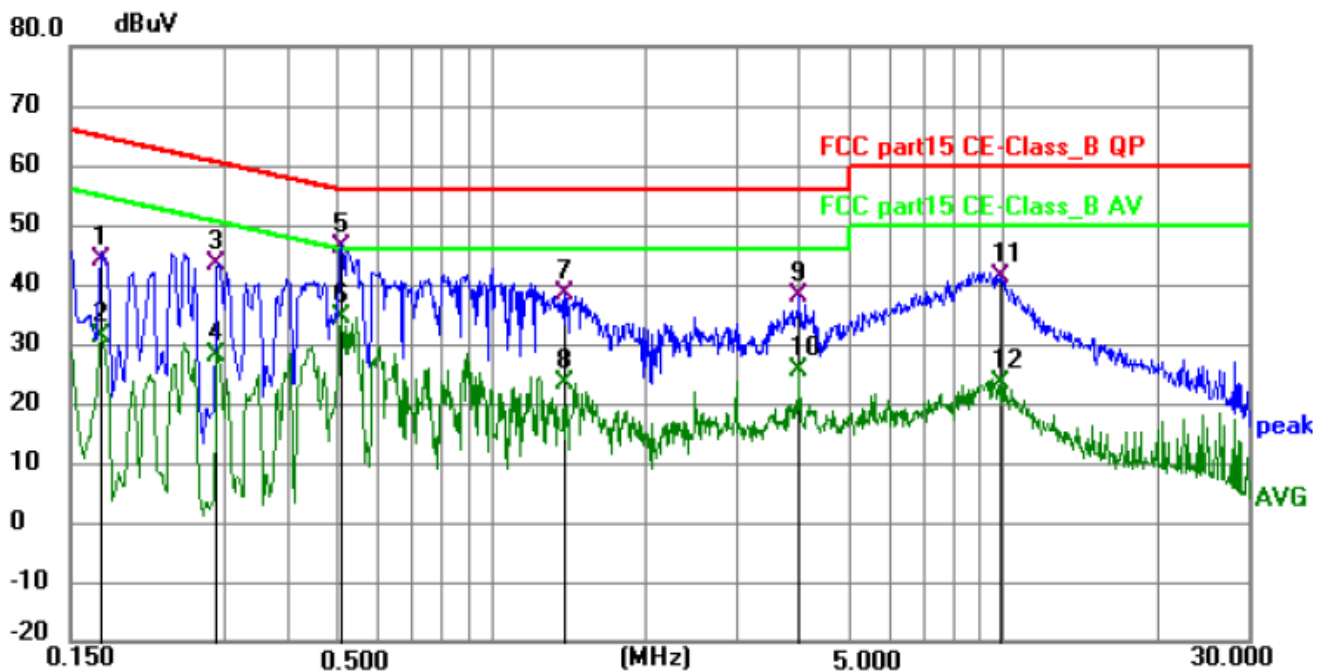


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1725	34.18	10.09	44.27	64.84	-20.57	QP	P	
2	0.1725	21.00	10.09	31.09	54.84	-23.75	AVG	P	
3	0.2895	34.31	9.10	43.41	60.54	-17.13	QP	P	
4	0.2895	18.77	9.10	27.87	50.54	-22.67	AVG	P	
5 *	0.5100	36.86	9.27	46.13	56.00	-9.87	QP	P	
6	0.5100	25.09	9.27	34.36	46.00	-11.64	AVG	P	
7	1.3875	28.92	9.57	38.49	56.00	-17.51	QP	P	
8	1.3875	13.83	9.57	23.40	46.00	-22.60	AVG	P	
9	3.9930	28.12	9.84	37.96	56.00	-18.04	QP	P	
10	3.9930	15.65	9.84	25.49	46.00	-20.51	AVG	P	
11	9.8159	31.01	10.10	41.11	60.00	-18.89	QP	P	
12	9.8610	13.43	10.10	23.53	50.00	-26.47	AVG	P	


6. RADIATION EMISSION TEST

6.1 Block Diagram of Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

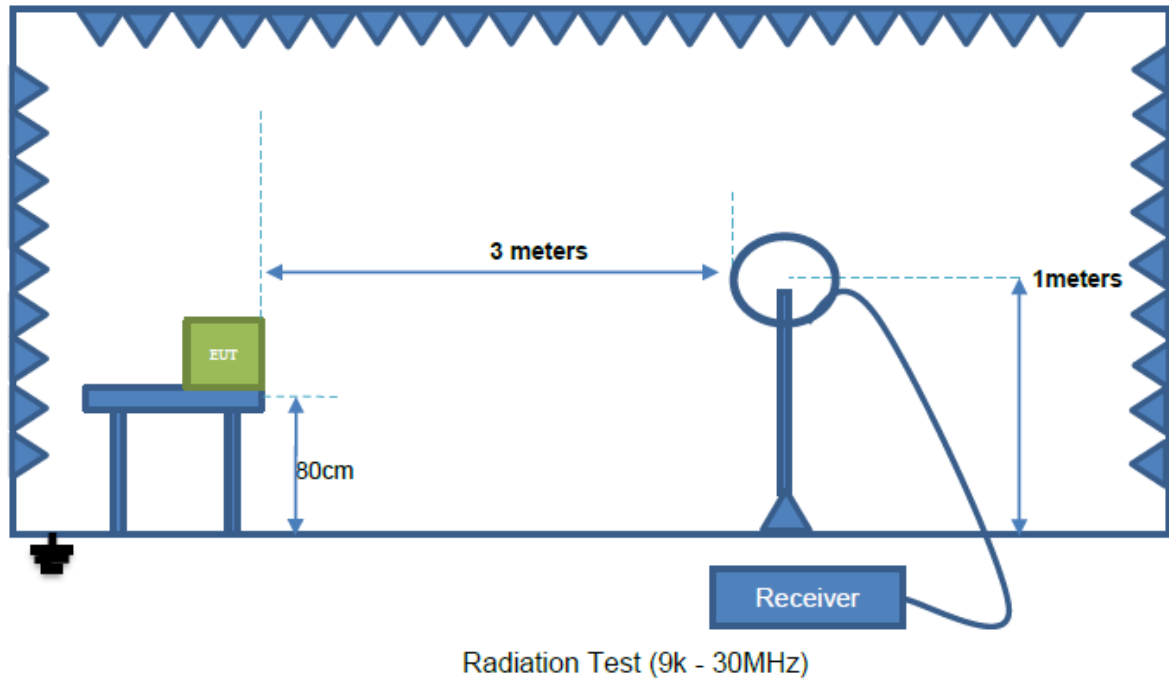

Below 1GHz

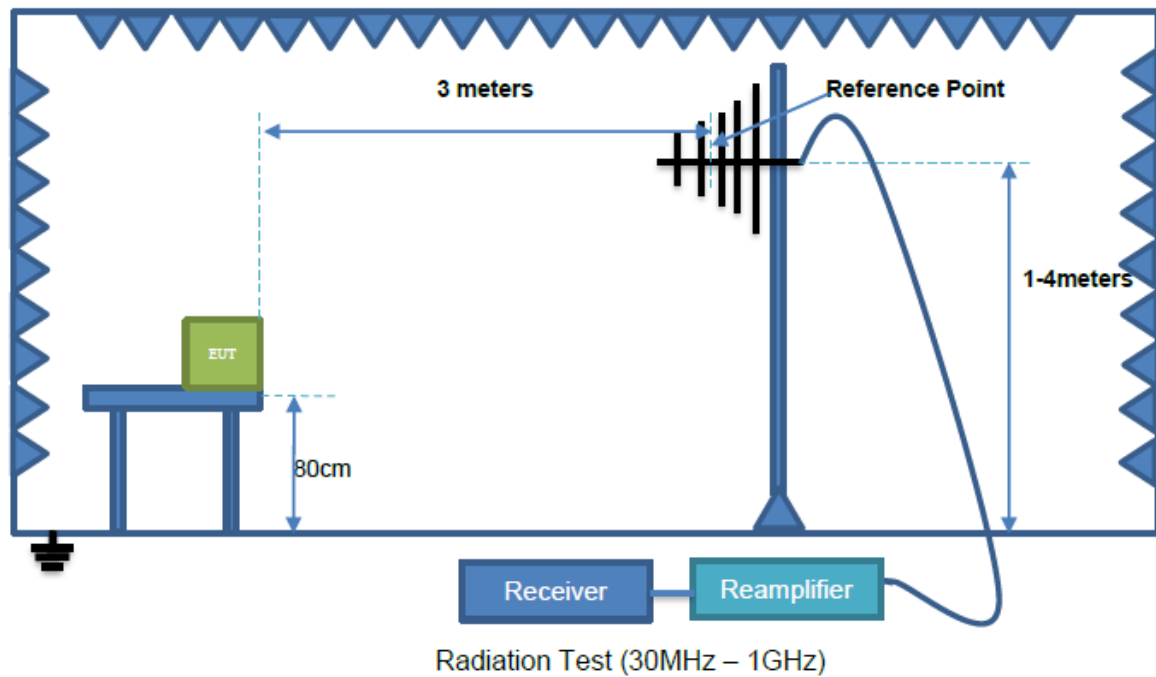

6.2 Test Standard and Limit

FCC Part 15 Subpart C



Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.090	2400/F(kHz)	300	AVERAGE
0.090-0.110	2400/F(kHz)	300	Quasi-peak Value
0.110-0.490	2400/F(kHz)	300	AVERAGE
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Above 30MHz

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dBμV/m)	Remark
30 ~ 88	3	40.0	Quasi-peak Value
88 ~ 216	3	43.5	Quasi-peak Value
216 ~ 960	3	46.0	Quasi-peak Value
960 ~ 1000	3	54.0	Quasi-peak Value
Above 1000	3	74.0	PEAK
		54.0	AVERAGE

Remark:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

6.3 EUT Configuration on Test

The FCC Part 15 Subpart C regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 5.3.

6.4 Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.4 except the test set up replaced as Section 6.2.

6.5 Test Procedure


- 1) The radiated emissions test was conducted in a semi-anechoic chamber.
- 2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
- 3) Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.
- 4) The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.
- 5) The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.
- 6) The frequency range from 30MHz to 1000MHz is checked.



6.6 Test Result

PASS, Please refer to the following page.

Radiation Emission Test Data 9 kHz~30 MHz			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	/
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 10(Mobile)

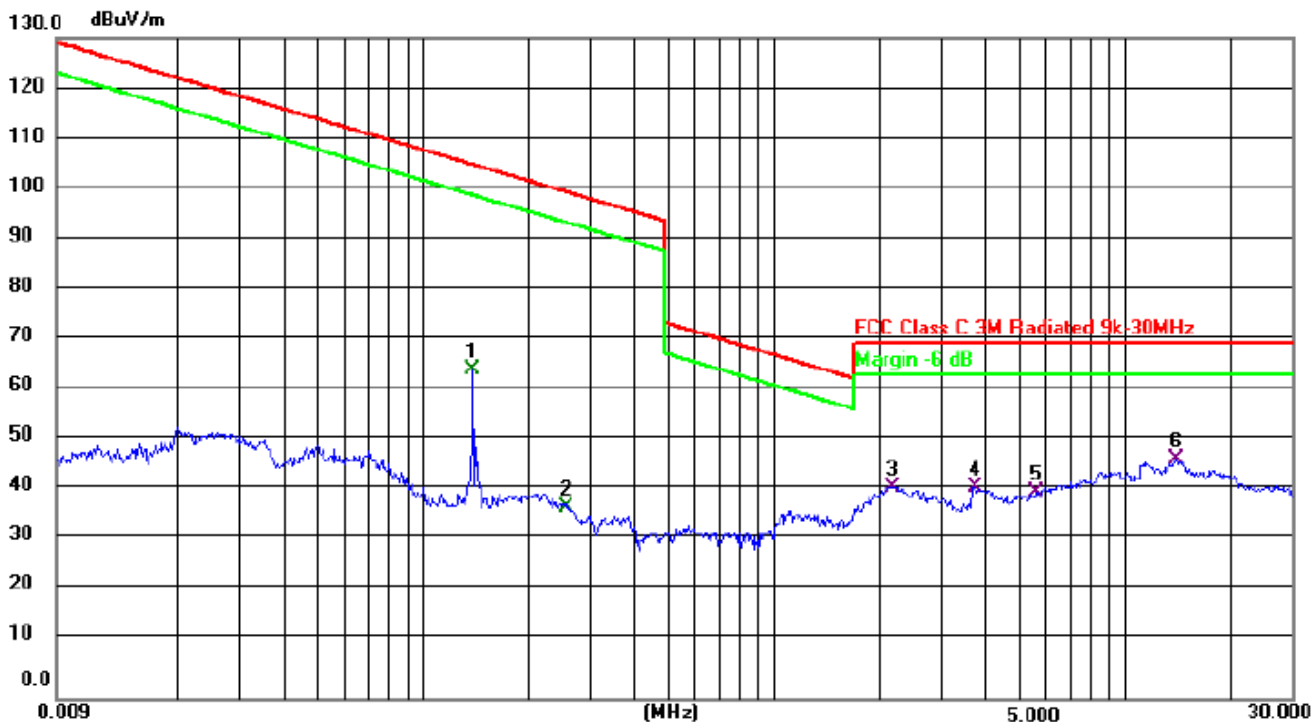

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
0.1385	64.89	10.22	75.11	105.06	-29.95	Peak
0.2584	37.94	10.47	48.41	99.6	-51.19	Peak
2.2015	40.09	10.88	50.97	70	-19.03	Peak
3.7301	39.87	10.23	50.1	70	-19.9	Peak
5.5506	38.26	10.18	48.44	70	-21.56	Peak
13.9946	44.87	10.69	55.56	70	-14.44	Peak

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level(Meter Reading+ Factor) - Limit.



Radiation Emission Test Data 9 kHz~30 MHz			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	/
Test Voltage:	DC 3.85V	Test Mode:	Mode 7(Portable)

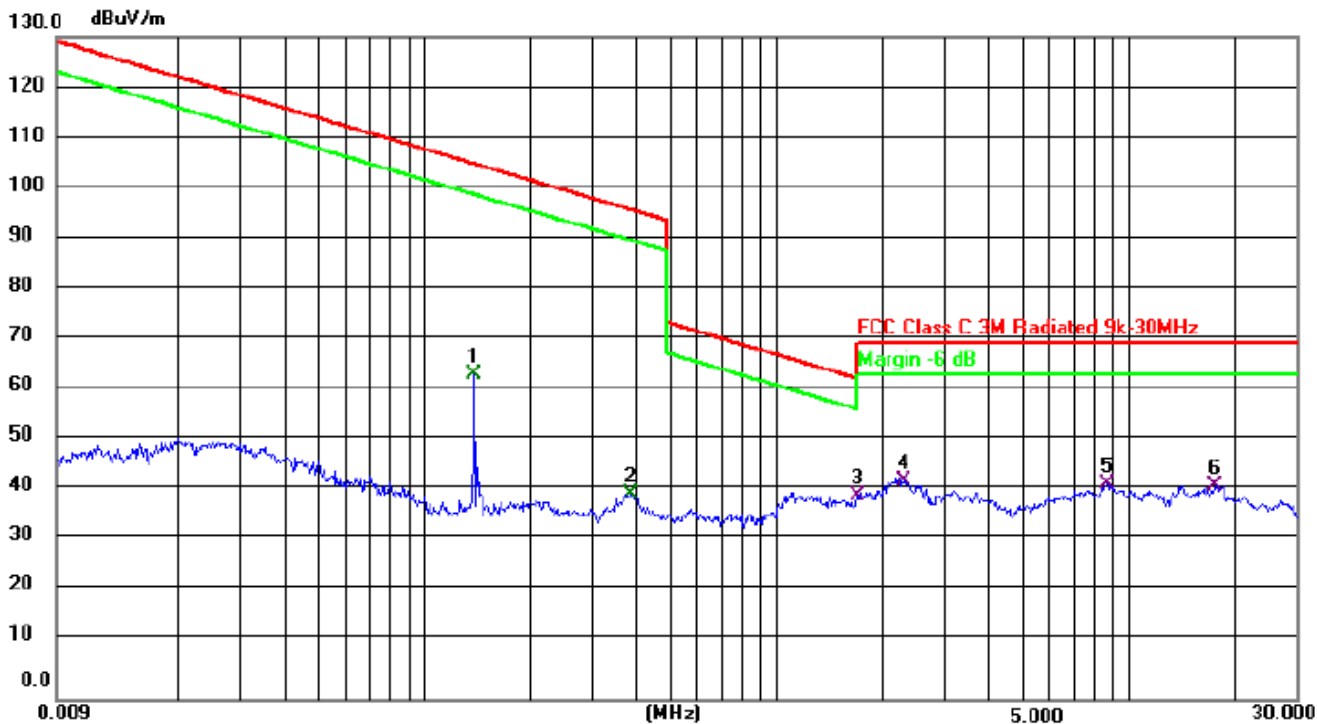

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
0.1385	63.89	10.22	74.11	105.06	-30.95	Peak
0.3845	39.58	10.47	50.05	96.12	-46.07	Peak
1.6975	38.79	10.88	49.67	63.04	-13.37	Peak
2.2928	41.36	10.23	51.59	70	-18.41	Peak
8.6720	40.28	10.18	50.46	70	-19.54	Peak
17.7056	40.19	10.69	50.88	70	-19.12	Peak

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level(Meter Reading+ Factor) - Limit.



Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 10(Mobile)

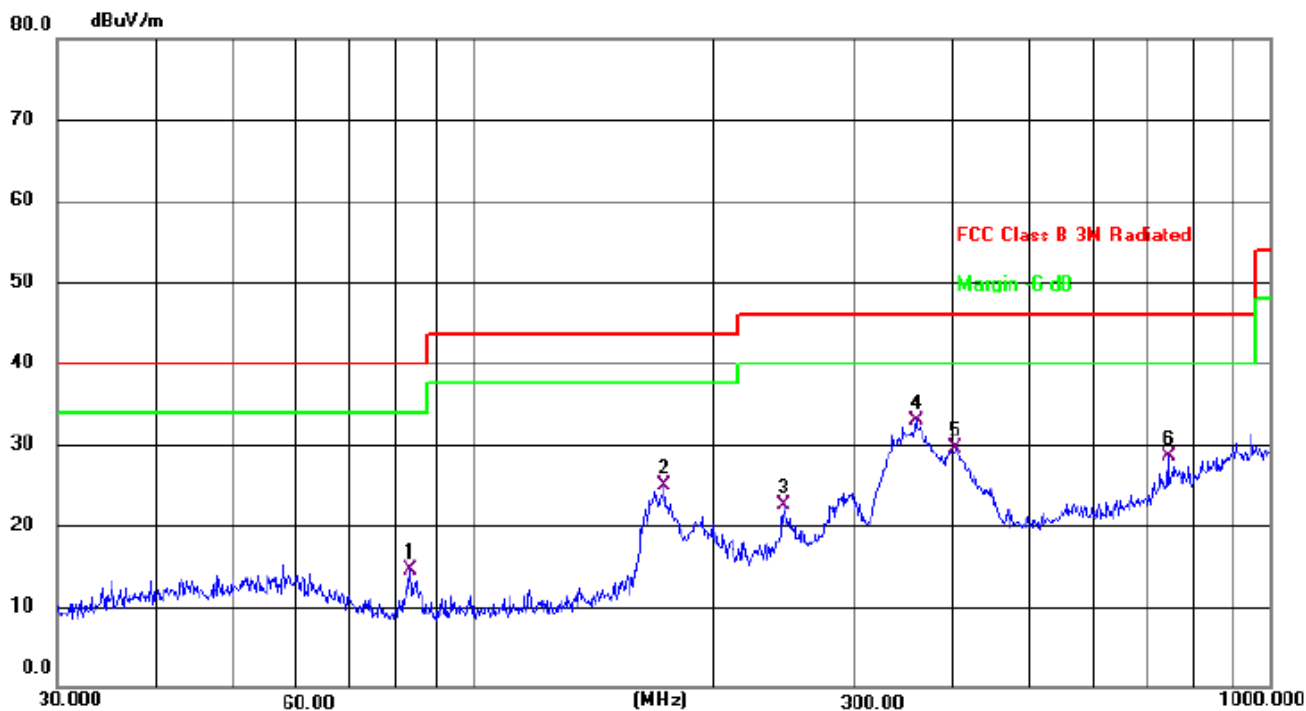

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		83.2298	31.80	-17.38	14.42	40.00	-25.58	QP
2		173.8135	41.15	-16.31	24.84	43.50	-18.66	QP
3		245.0900	35.48	-12.93	22.55	46.00	-23.45	QP
4	*	359.1860	43.34	-10.45	32.89	46.00	-13.11	QP
5		403.2500	39.22	-9.72	29.50	46.00	-16.50	QP
6		744.8661	31.68	-3.15	28.53	46.00	-17.47	QP



Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 10(Mobile)




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		41.8596	33.79	-13.72	20.07	40.00	-19.93	QP
2		56.1974	33.79	-12.89	20.90	40.00	-19.10	QP
3	*	85.5977	46.62	-17.24	29.38	40.00	-10.62	QP
4		171.3926	41.97	-16.47	25.50	43.50	-18.00	QP
5		386.6338	34.75	-10.00	24.75	46.00	-21.25	QP
6		562.6624	34.18	-6.64	27.54	46.00	-18.46	QP

Remarks:

- 1.Final Level =Receiver Read level + Correct factor (Antenna Factor + Cable Loss – Preamplifier Factor)
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.




Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	DC 3.8V	Test Mode:	Mode 7(Portable)

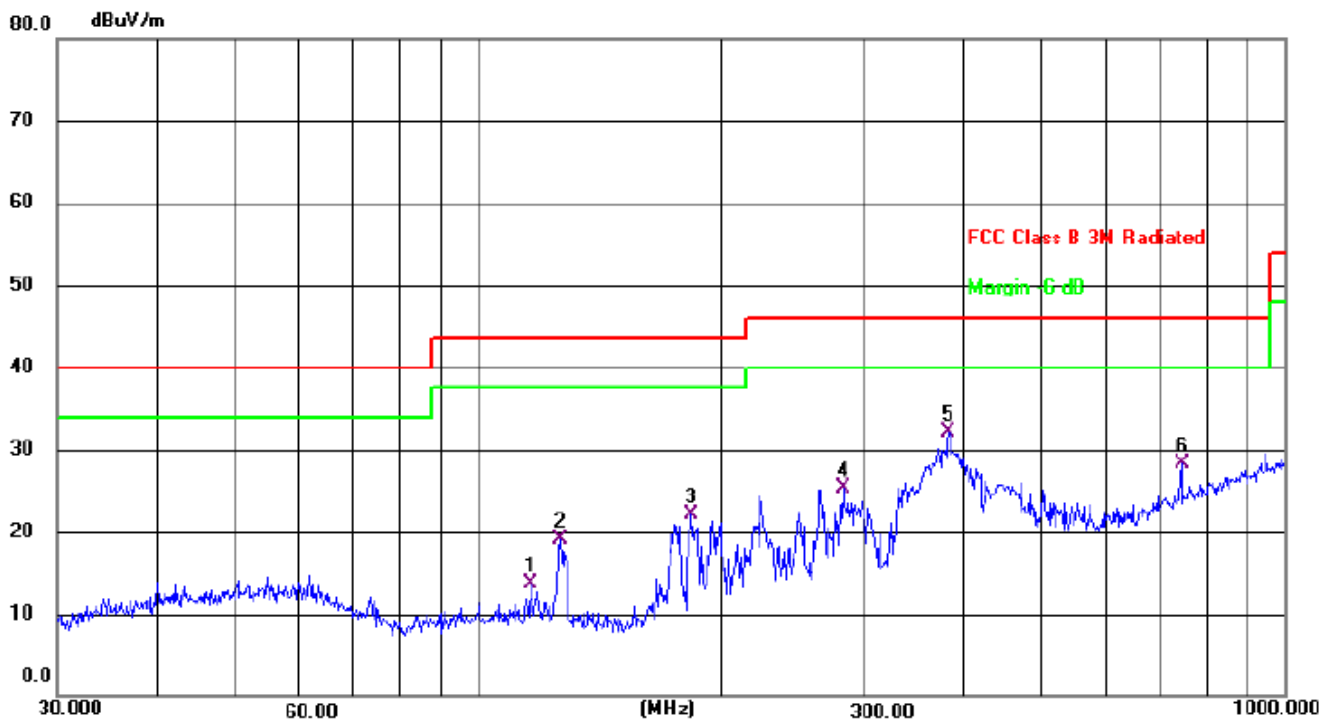

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		116.1321	30.12	-16.50	13.62	43.50	-29.88	QP
2		126.3286	35.95	-16.78	19.17	43.50	-24.33	QP
3		183.8440	37.84	-15.69	22.15	43.50	-21.35	QP
4		282.9852	37.11	-11.86	25.25	46.00	-20.75	QP
5	*	382.5879	42.21	-10.07	32.14	46.00	-13.86	QP
6		744.8661	31.36	-3.15	28.21	46.00	-17.79	QP



Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	DC 3.8V	Test Mode:	Mode 7(Portable)

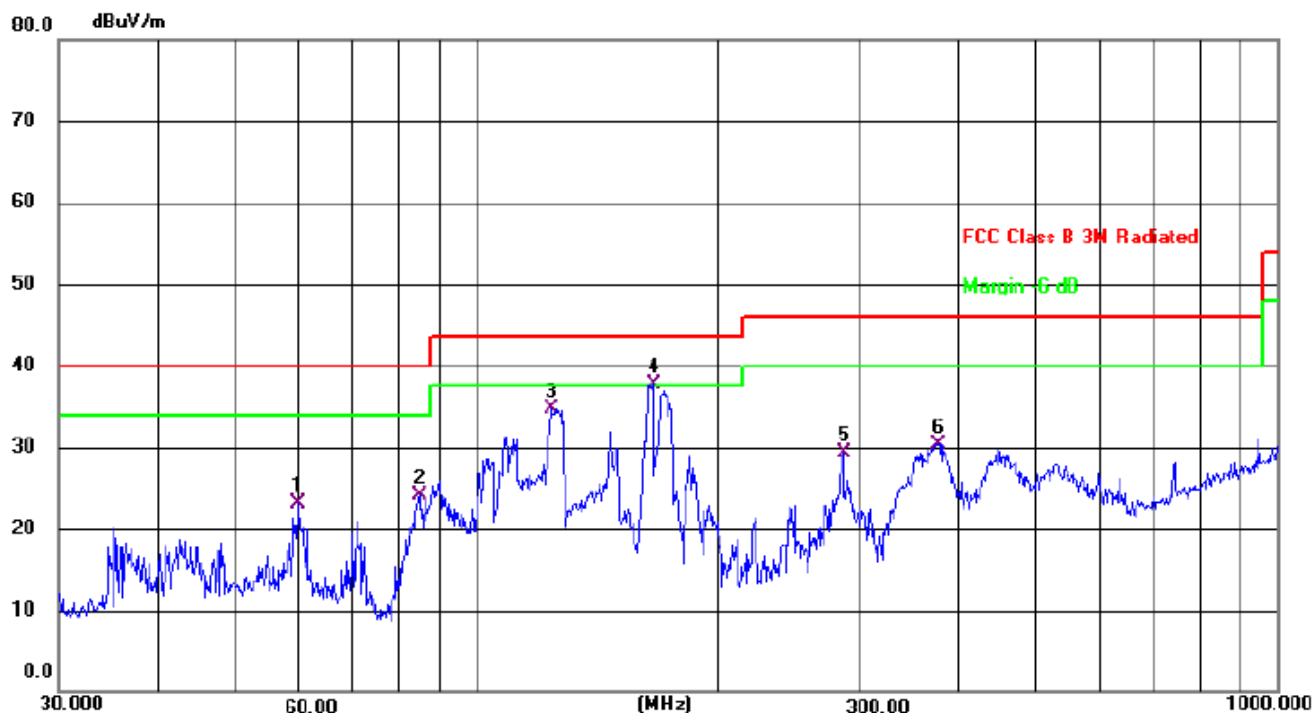

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		59.8588	35.84	-12.70	23.14	40.00	-16.86	QP
2		84.7019	41.33	-17.30	24.03	40.00	-15.97	QP
3		123.6985	51.47	-16.67	34.80	43.50	-8.70	QP
4	*	166.0680	54.50	-16.80	37.70	43.50	-5.80	QP
5		286.9823	41.13	-11.76	29.37	46.00	-16.63	QP
6		377.2591	40.51	-10.15	30.36	46.00	-15.64	QP

Remarks:

- 1.Final Level =Receiver Read level + Correct factor (Antenna Factor + Cable Loss – Preamplifier Factor)
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.




7. BANDWIDTH TEST

7.1 TEST SETUP


1. Set RBW = 3KHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

7.2 TEST SETUP

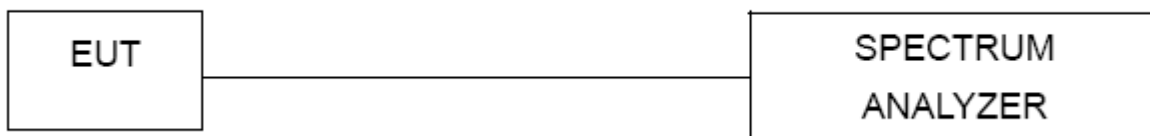

7.3 TEST Result

Frequency (KHz)	20dB bandwidth (KHz)	Result
138	8.011	Pass

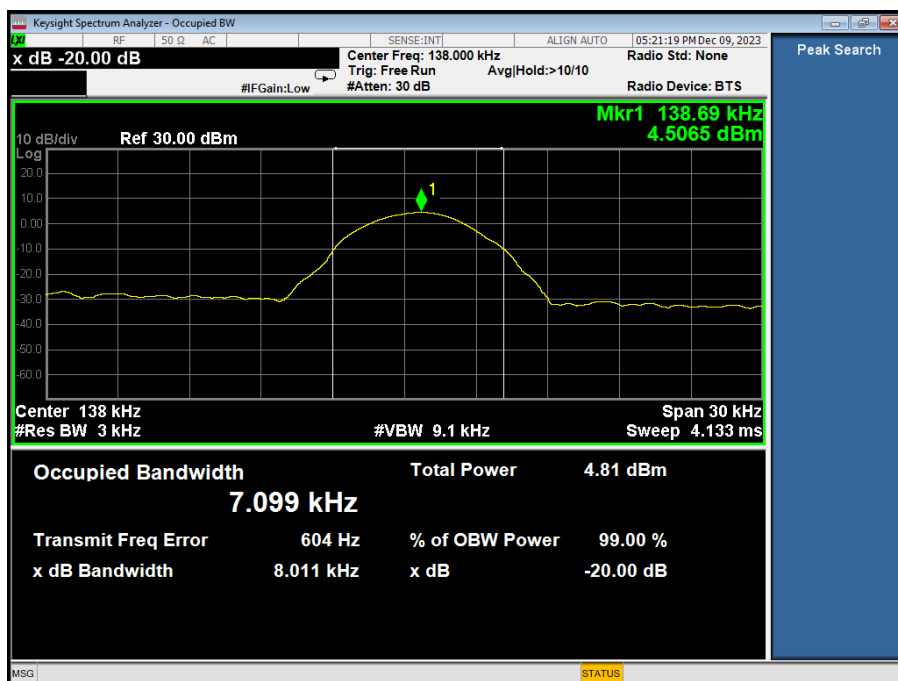



8. SETUP PHOTOGRAPHS

Reference to the setup photo for details.

9. EUT PHOTOGRAPHS

Reference to the external and internal photo for details.

******* END OF REPORT *******