

FCC Test Report

Applicant : GUANGGAN TECHNOLOGY (SHENZHEN) CO.,LTD

Address : 2307, Changhong Science and Technology Building, South 12 Road, Southern District in High-tech Zone, Nanshan District, Shenzhen, Guangdong, 518063 China

Product Name : Multimedia Projector

Report Date : Jan. 10, 2023

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	6
1.1. Client Information	6
1.2. Description of Device (EUT)	6
1.3. Auxiliary Equipment Used During Test	8
1.4. Description of Test Modes	8
1.5. Description Of Test Setup	9
1.6. Test Equipment List	10
1.7. Measurement Uncertainty	11
1.8. Description of Test Facility	11
1.9. Disclaimer	12
2. Summary of Test Results	13
3. Conducted Emission Test	14
3.1. Test Standard and Limit	14
3.2. Test Setup	14
3.3. Test Procedure	14
3.4. Test Data	14
4. Radiation Spurious Emission and Band Edge	17
4.1. Test Standard and Limit	17
4.2. Test Setup	18
4.3. Test Procedure	19
4.4. Test Data	20
5. Maximum conducted output power Test	32
5.1. Test Standard and Limit	32
5.2. Test Setup	32
5.3. Test Procedure	32
5.4. Test Data	33
6. 26dB Bandwidth & 99% Occupied Bandwidth Test	34
6.1. Test Standard	34
6.2. Test Setup	34
6.3. Test Procedure	34
6.4. Test Data	34
7. Minimum 6dB bandwidth Test	35
7.1. Test Standard	35
7.2. Test Setup	35
7.3. Test Procedure	35
7.4. Test Data	35
8. Power Spectral Density Test	36
8.1. Test Standard and Limit	36



8.2. Test Setup	36
8.3. Test Procedure	36
8.4. Test Data	37
9. Frequency Stability	38
9.1. Test Standard and Limit	38
9.2. Test Setup	38
9.3. Test Procedure	38
9.4. Test Data	38
10. Antenna Requirement	52
10.1. Test Standard and Requirement	52
10.2. Antenna Connected Construction	52
APPENDIX I -- TEST SETUP PHOTOGRAPH	53
APPENDIX II -- EXTERNAL PHOTOGRAPH	53
APPENDIX III -- INTERNAL PHOTOGRAPH	53



TEST REPORT

Applicant : GUANGGAN TECHNOLOGY (SHENZHEN) CO.,LTD
Manufacturer : GUANGGAN TECHNOLOGY (SHENZHEN) CO.,LTD
Product Name : Multimedia Projector
Test Model No. : RD-810
Reference Model No. : OSPJ-B1, OSPJ-B2, OSPJ-B3, OSPJ-B4, OSPJ-B5, OSPJ-B6, OSPJ-B7, OSPJ-B8, OSPJ-B9, OSPJ-B10, SPJ-B11, OSPJ-B12, OSPJ-B13, OSPJ-B14, SPJ-B15, OSPJ-B16, OSPJ-B17, SPJ-B18, OSPJ-B19, OSPJ-B20
Trade Mark : N/A
Rating(s) : Input: AC 100-240V, 50/60Hz 140W
Test Standard(s) : **FCC Part15 Subpart E, Paragraph 15.407**
Test Method(s) : **ANSI C63.10: 2020**
KDB 789033 D02 General UNII Test Procedures New Rules v02r01

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart E requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Nov. 21, 2023

Date of Test

Nov. 21~Dec. 06, 2023

Prepared By

Ella Liang

(Ella Liang)

Approved & Authorized Signer

Edward Pan

(Edward Pan)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Jan. 10, 2023



1. General Information

1.1. Client Information

Applicant	:	GUANGGAN TECHNOLOGY (SHENZHEN) CO.,LTD
Address	:	2307, Changhong Science and Technology Building,South 12 Road,Southern District in High-tech Zone,Nanshan District,Shenzhen,Guangdong,518063 China
Manufacturer	:	GUANGGAN TECHNOLOGY (SHENZHEN) CO.,LTD
Address	:	2307, Changhong Science and Technology Building,South 12 Road,Southern District in High-tech Zone,Nanshan District,Shenzhen,Guangdong,518063 China
Factory	:	Guangzhou Rigal Electronics Co., Ltd.
Address	:	No.3-1, Ruixiang Road,Huadu District,Guangzhou,China

1.2. Description of Device (EUT)

Product Name	:	Multimedia Projector
Test Model No.	:	RD-810
Reference Model No.	:	OSPJ-B1, OSPJ-B2, OSPJ-B3, OSPJ-B4, OSPJ-B5, OSPJ-B6, OSPJ-B7, OSPJ-B8, OSPJ-B9, OSPJ-B10, SPJ-B11, OSPJ-B12, OSPJ-B13, OSPJ-B14, SPJ-B15, OSPJ-B16, OSPJ-B17, SPJ-B18, OSPJ-B19, OSPJ-B20 (Note: All samples are the same except the model number and appearance color, so we prepare "RD-810" for test only.)
Trade Mark	:	N/A
Test Power Supply	:	AC 120V, 60Hz
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Mode	:	☒ a ☒ n(HT20) ☒ n(HT40) ☒ ac(VHT20) ☒ ac(VHT40) ☐ ac(VHT80) ☐ ac(VHT160) ☒ ax(HEW20) ☒ ax(HEW40) ☐ ax(HEW80) ☐ ax(HEW160)
Device Type	:	☐ Outdoor AP ☐ Indoor AP ☐ Point-to-point AP ☒ Client
TPC Function	:	☐ With TPC ☒ Without TPC
DFS Type	:	☒ Slave without radar detection ☐ Slave with radar detection ☐ Master
Operation Frequency	:	☒ Wi-Fi 5.2G: 5150~5250MHz ☒ Wi-Fi 5.3G: 5250~5350MHz



	☐ Wi-Fi 5.6G: 5470~5725MHz ☒ Wi-Fi 5.8G: 5725~5850MHz
Number of Channel	Wi-Fi 5.2G: ☒ 4 Channels for 20MHz bandwidth (5180-5240MHz) ☒ 2 Channels for 40MHz bandwidth (5190-5230MHz) ☒ 1 Channels for 80MHz bandwidth (5210MHz) Wi-Fi 5.3G: ☒ 4 Channels for 20MHz bandwidth (5260-5320MHz) ☒ 2 Channels for 40MHz bandwidth (5270-5310MHz) ☒ 1 Channels for 80MHz bandwidth (5290MHz) Wi-Fi 5.6G: ☐ 11 Channels for 20MHz bandwidth (5500-5700MHz) ☐ 5 Channels for 40MHz bandwidth (5510-5670MHz) ☐ 2 Channels for 80MHz bandwidth (5530~5610MHz) Wi-Fi 5.8G: ☒ 5 Channels for 20MHz bandwidth (5745MHz ~ 5825MHz) ☒ 2 Channels for 40MHz bandwidth (5755MHz ~ 5795MHz) ☒ 1 Channels for 80MHz bandwidth (5775MHz)
Modulation Type	☒ 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) ☒ 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM) ☒ 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) ☒ 802.11ax: OFDMA(BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Antenna Type	FPC antenna
Antenna Gain(Peak)	Wi-Fi 5.2G: 1.72dBi Wi-Fi 5.3G: 1.72dBi Wi-Fi 5.8G: 1.85dBi
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.	



1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
HUAWEI-1B927K49	Manufacturer: HUAWEI Model: WS7206 CMIIT ID: 2021AP8190

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

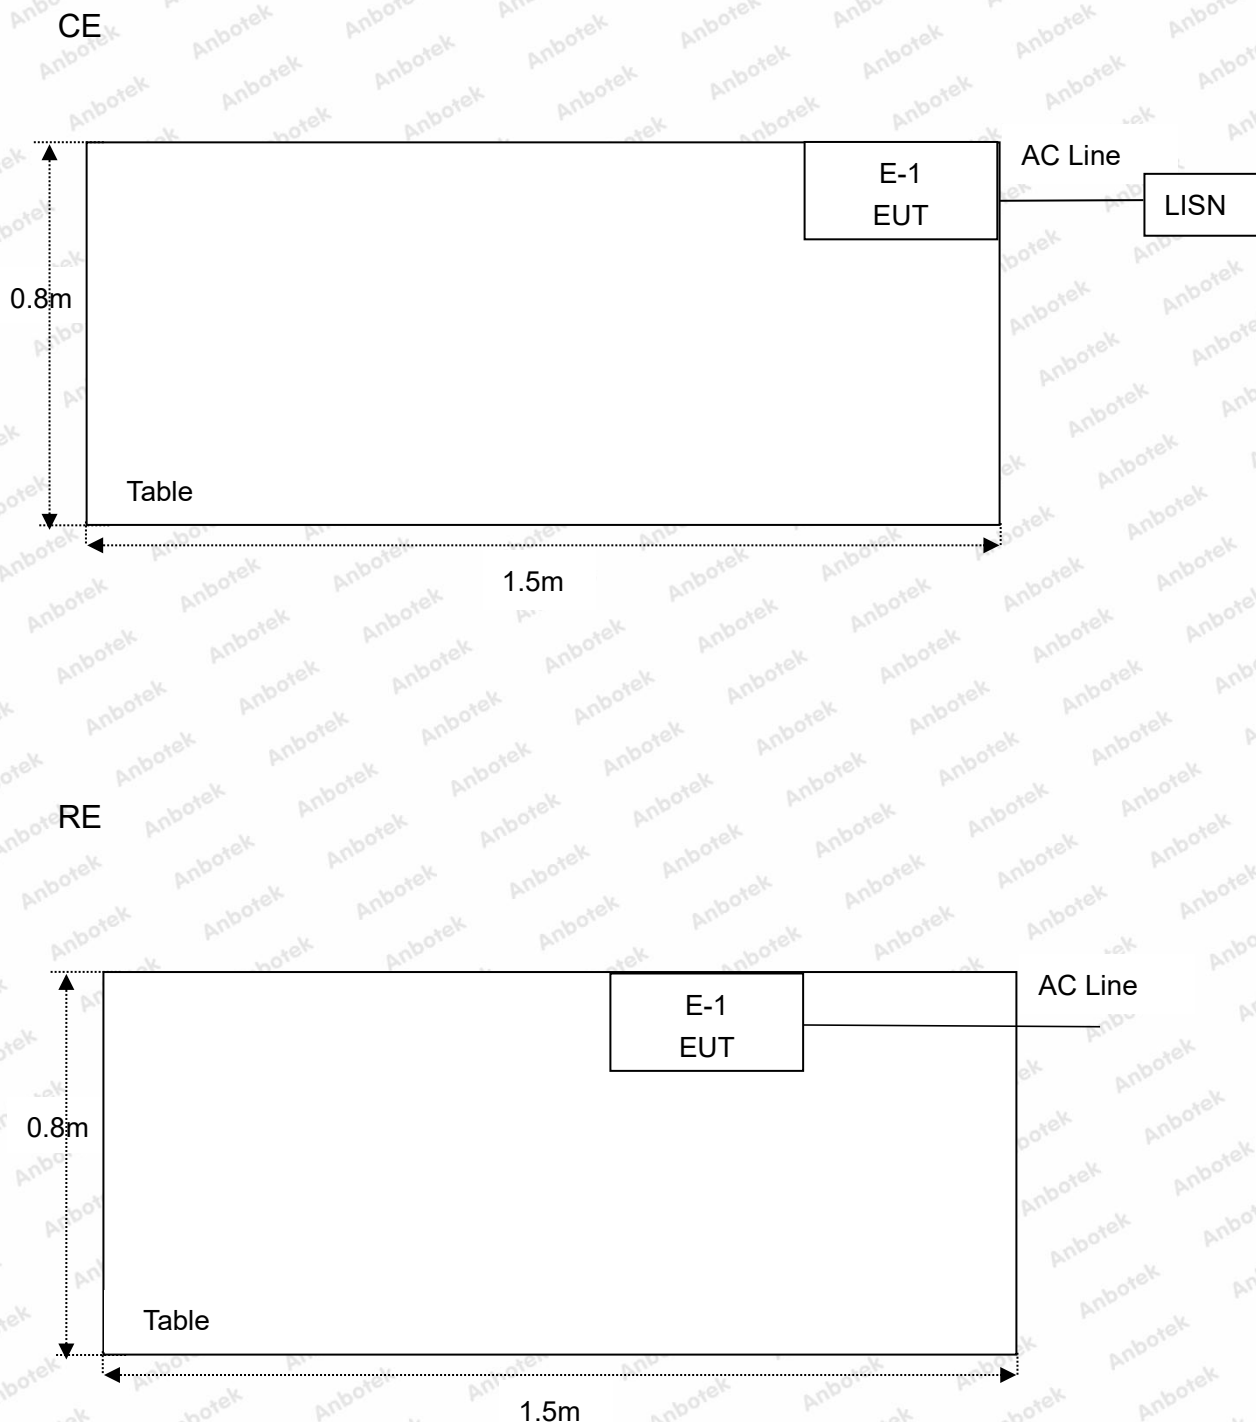
Frequency Band	Mode	Test channel	Frequency (MHz)
5.2GHz	OFDM, OFDMA 802.11a/n(HT20)/ ac(VHT20)/ ax(HEW20)	CH 36	5180MHz
		CH 40	5200MHz
		CH 48	5240MHz
	OFDM, OFDMA 802.11n(HT40)/ac(VHT40)/ ax(HEW40)	CH 38	5190MHz
		CH 46	5230MHz
5.3GHz	OFDM, OFDMA 802.11a/n(HT20)/ ac(VHT20)/ ax(HEW20)	CH 52	5260MHz
		CH 60	5300MHz
		CH 64	5320MHz
	OFDM, OFDMA 802.11n(HT40)/ac(VHT40)/ ax(HEW40)	CH 54	5270MHz
		CH 62	5310MHz
5.8GHz	OFDM, OFDMA 802.11a/n(HT20)/ ac(VHT20)/ ax(HEW20)	CH 149	5745MHz
		CH 157	5785MHz
		CH 165	5825MHz
	OFDM, OFDMA 802.11n(HT40)/ac(VHT40)/ ax(HEW40)	CH 151	5755MHz
		CH 159	5795MHz

Note:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω, Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode.



1.5. Description Of Test Setup



1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 12, 2023	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul. 05, 2023	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 12, 2023	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 12, 2023	1 Year
5.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 12, 2023	1 Year
6.	EMI Preamplifier	SKET Electronic	LNPA-0118G -45	SKET-PA-002	Oct. 12, 2023	1 Year
7.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	Oct. 23, 2022	3 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 12, 2023	1 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Oct. 12, 2023	1 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 12, 2023	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 12, 2023	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 12, 2023	1 Year
15.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 12, 2023	1 Year
16.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 20, 2023	1 Year
17.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 16, 2023	1 Year
18.	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	101792	May. 26, 2023	1 Year
19.	Power Meter	Agilent	N1914A	MY50001102	Oct. 20, 2023	1 Year



1.7. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.8dB
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Conducted Spurious Emission	1.24dB
Radiated spurious emissions (Below 30MHz)	3.53dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.92dB; Vertical: 4.52dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.78dB; 6G-18GHz: 4.88dB 18G-40GHz: 5.68dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.



1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotech and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



2. Summary of Test Results

Standard	Test Type	Result
15.207 & 15.407(b)	Conducted Emission	PASS
15.205 & 15.209	Spurious Emission	PASS
15.407(b)	Band Edge	PASS
15.407(a) & 2.1049	26dB Bandwidth & 99% Occupied Bandwidth	PASS
15.407(e)	Minimum 6dB bandwidth (5.725-5.85GHz band)	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(a)	Peak Power Spectral Density	PASS
15.407(g)	Frequency Stability	PASS
15.407(h)	Dynamic Frequency Selection (DFS)	PASS (Please Refer to DFS Report)
15.203	Antenna Requirement	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207 & 15.407(b)		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

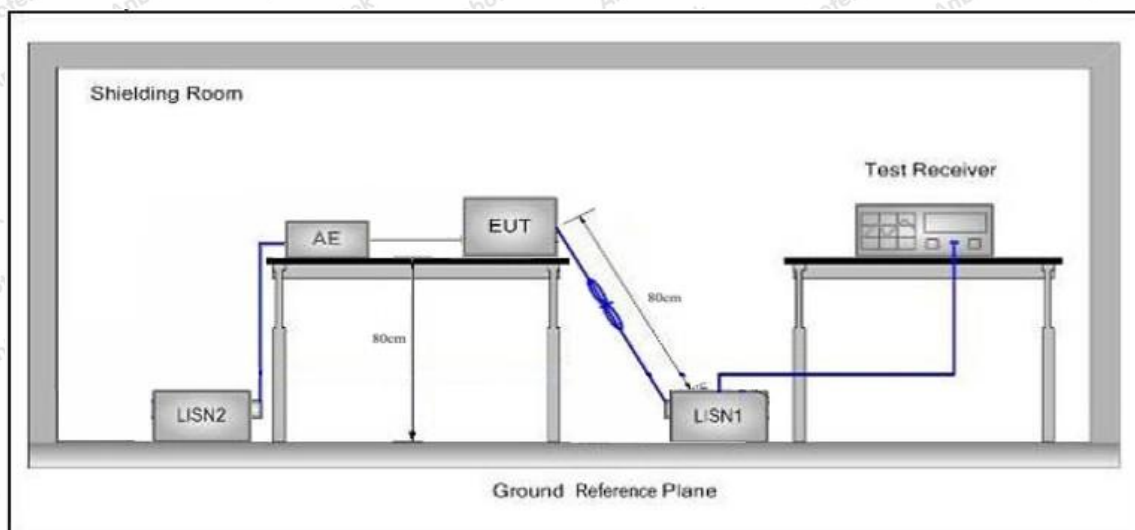3.2. Test Setup



3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

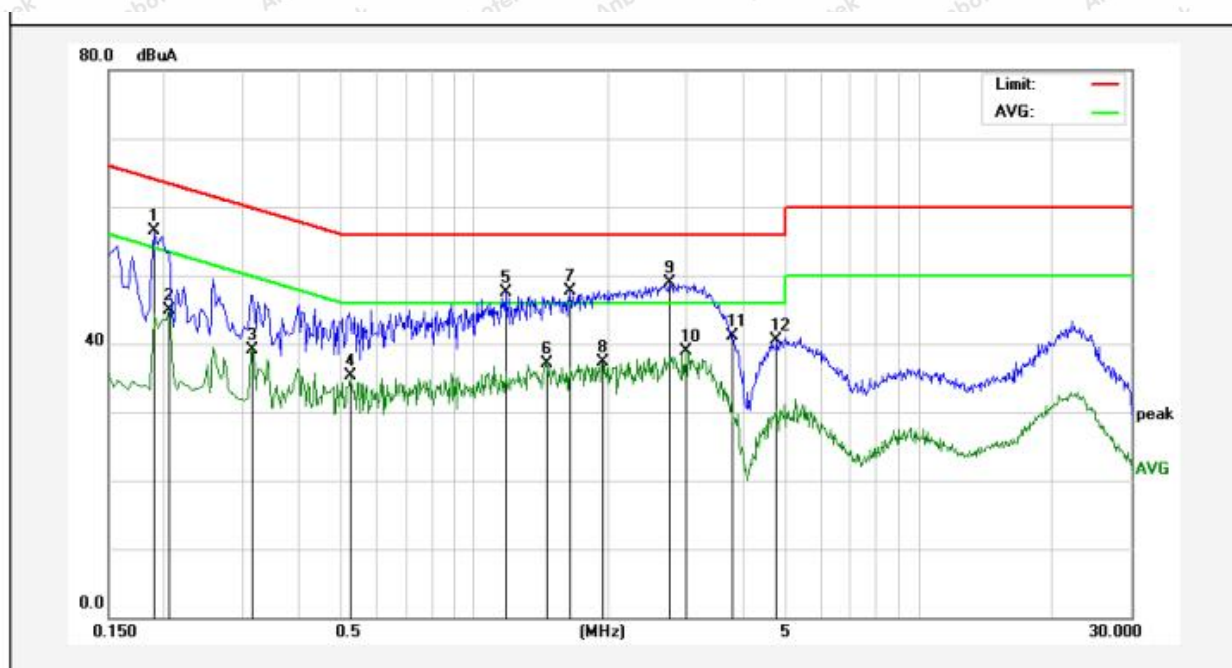
During the test, pre-scan all modes, only the worst case is recorded in the report.

AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz.



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 802.11ax(HEW20) 5825MHz
Test Specification: AC 120V, 60Hz
Comment: Live Line
Temp.(°C)/Hum.(%RH): 23.5°C/65%RH




No.	Freq. (MHz)	Reading (dBuA)	Factor (dB)	Result (dBuA)	Limit (dBuA)	Over Limit (dB)	Detector	Remark
1	0.1900	36.76	19.82	56.58	64.03	-7.45	QP	
2	0.2058	25.05	19.82	44.87	53.37	-8.50	AVG	
3	0.3180	19.28	19.84	39.12	49.76	-10.64	AVG	
4	0.5260	15.48	19.86	35.34	46.00	-10.66	AVG	
5	1.1739	27.62	19.85	47.47	56.00	-8.53	QP	
6	1.4457	17.15	19.86	37.01	46.00	-8.99	AVG	
7	1.6379	27.90	19.85	47.75	56.00	-8.25	QP	
8	1.9337	17.53	19.85	37.38	46.00	-8.62	AVG	
9	2.7459	28.99	19.85	48.84	56.00	-7.16	QP	
10	3.0059	19.11	19.85	38.96	46.00	-7.04	AVG	
11	3.8020	21.29	19.86	41.15	56.00	-14.85	QP	
12	4.7819	20.55	19.86	40.41	56.00	-15.59	QP	



Conducted Emission Test Data

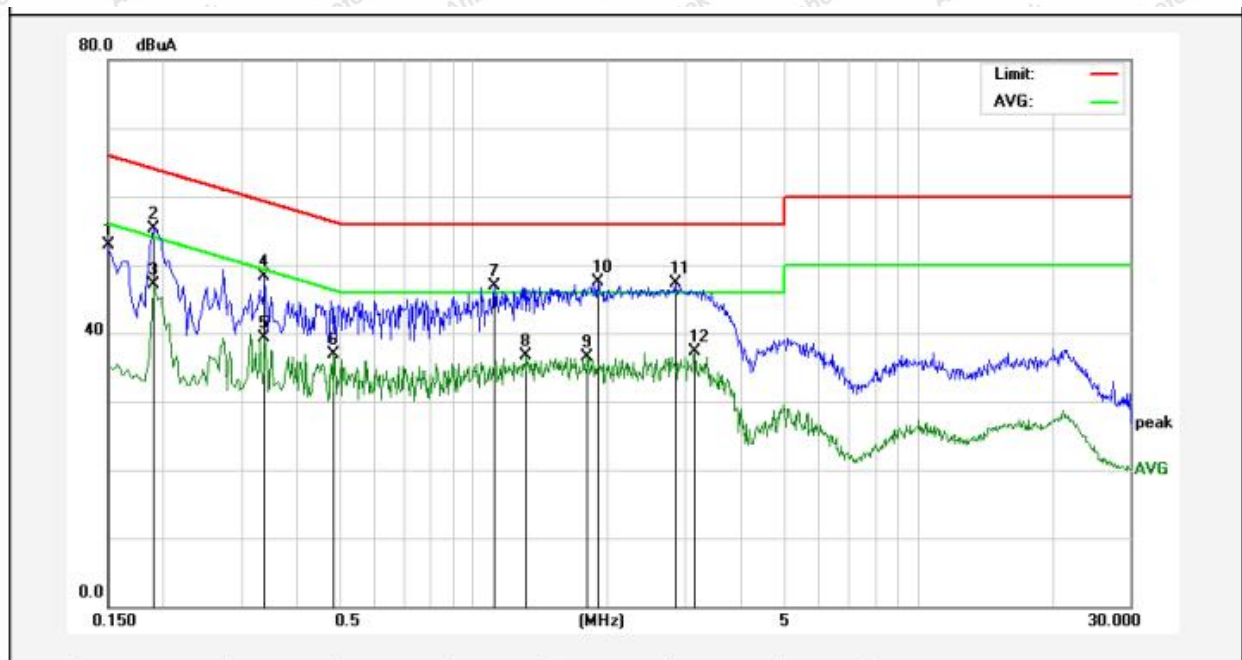Test Site: 1# Shielded Room
Operating Condition: 802.11ax(HEW20) 5825MHz
Test Specification: AC 120V, 60Hz
Comment: Neutral Line
Temp.(°C)/Hum.(%RH): 23.5°C/65%RH



No.	Freq. (MHz)	Reading (dBuA)	Factor (dB)	Result (dBuA)	Limit (dBuA)	Over Limit (dB)	Detector	Remark
1	0.1499	32.99	19.82	52.81	66.00	-13.19	QP	
2	0.1900	35.46	19.82	55.28	64.03	-8.75	QP	
3	0.1900	27.33	19.82	47.15	54.03	-6.88	AVG	
4	0.3379	28.48	19.83	48.31	59.25	-10.94	QP	
5	0.3379	19.49	19.83	39.32	49.25	-9.93	AVG	
6	0.4858	17.04	19.85	36.89	46.24	-9.35	AVG	
7	1.1140	27.12	19.86	46.98	56.00	-9.02	QP	
8	1.3099	16.93	19.86	36.79	46.00	-9.21	AVG	
9	1.8020	16.72	19.86	36.58	46.00	-9.42	AVG	
10	1.8980	27.64	19.85	47.49	56.00	-8.51	QP	
11	2.8540	27.43	19.85	47.28	56.00	-8.72	QP	
12	3.1419	17.53	19.85	37.38	46.00	-8.62	AVG	



4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Radiated Spurious Emission					
Test Standard	FCC Part15 C Section 15.205 & 15.209				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	68.2	Peak	3
Band Edge					
Test Standard	15.407(b)				
Test Limit	Operating Band	Frequency	EIRP Limit		Remark
	5150-5250MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m		Peak
	5250-5350MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m		Peak
	5470-5725MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m		Peak
	5725-5850 MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m		Peak
		1GHz-5.65GHz	-27*dBm/MHz to 10dBm/MHz (68.2* dBuV/m to 105.6dBuV/m)		Peak
		5.65GHz-5.7GHz	10*dBm/MHz to 15.6dBm/MHz (105.6*dBuV/m to 110.8dBuV/m)		Peak
		5.7GHz-5.72GHz	15.6*dBm/MHz to 27dBm/MHz (110.8dBuV/m to * 122.2dBuV/m)		Peak
		5.72GHz-5.725GHz	27dBm/MHz to 15.6*dBm/MHz (122.2dBuV/m to110.8* dBuV/m)		Peak



	5.85GHz-5.855GHz	15.6dBm/MHz to 10*dBm/MHz (110.8dBuV/m to 105.6* dBuV/m)	Peak
	5.855GHz-5.875GHz	10dBm/MHz to -27*dBm/MHz (105.6dBuV/m to 68.2* dBuV/m)	Peak
	5.875GHz-5.925GHz	-27 dBm/MHz(68.2dBuV/m)@3m	Peak

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

(3)Above 1GHz limit: $E[dBuV/m] = EIRP[dBm] + 95.2 = 68.2 \text{ dBuV/m}$, for $EIRP[dBm] = -27\text{dBm}$.


4.2. Test Setup

Figure 1. Below 30MHz

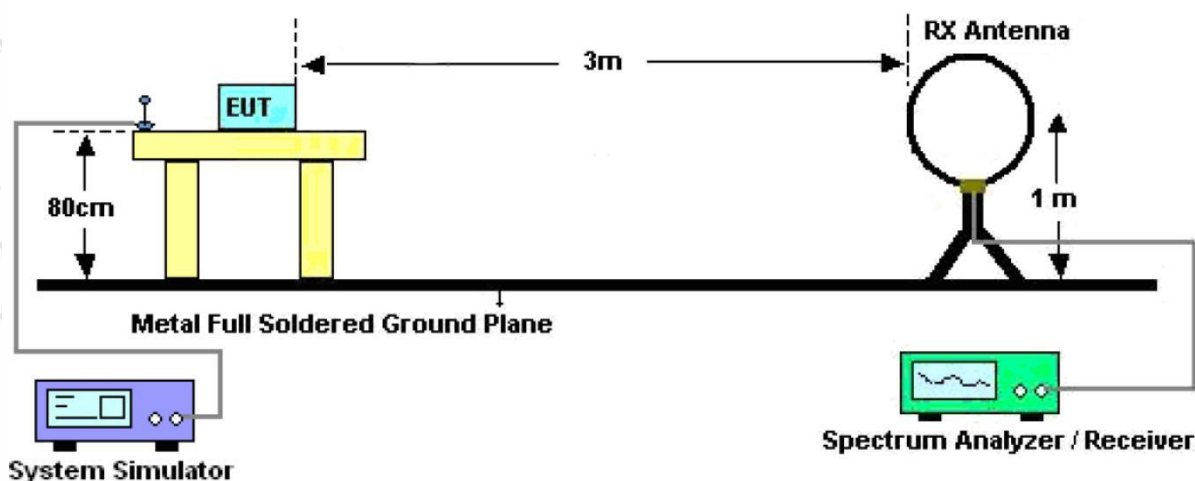

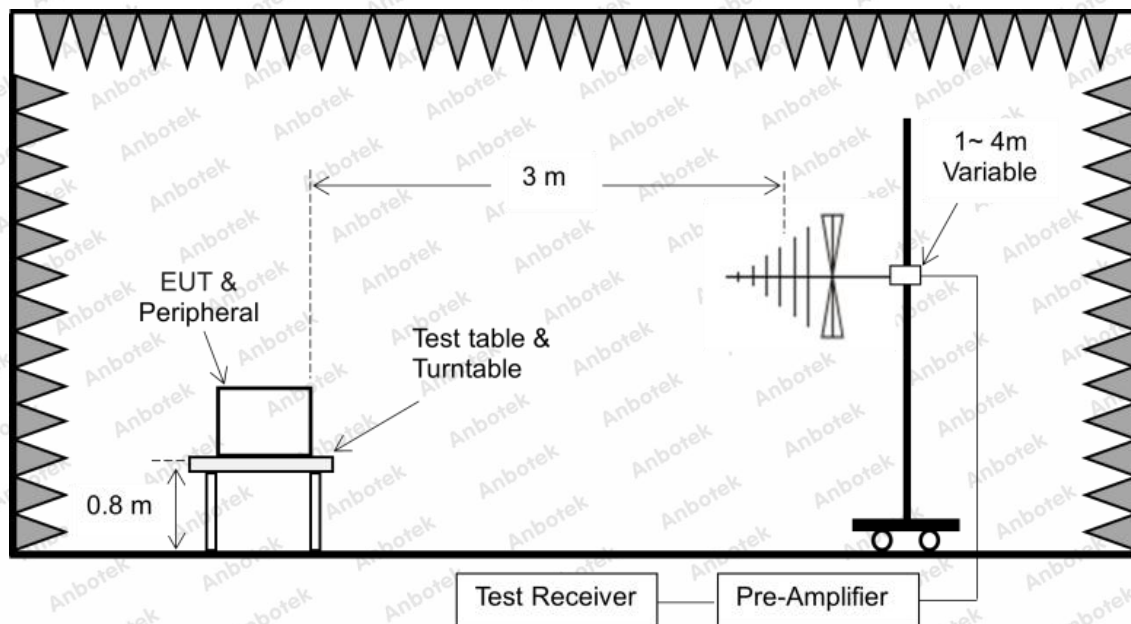


Figure 2. 30MHz to 1GHz

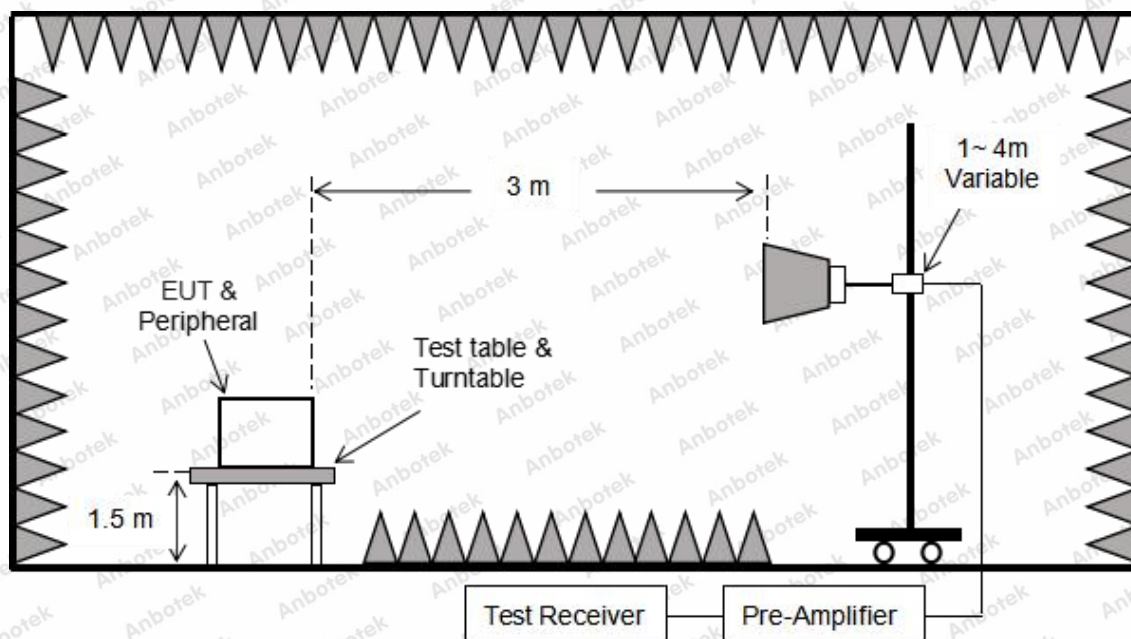


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.



For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all the modes, only the worst case is recorded in the report.



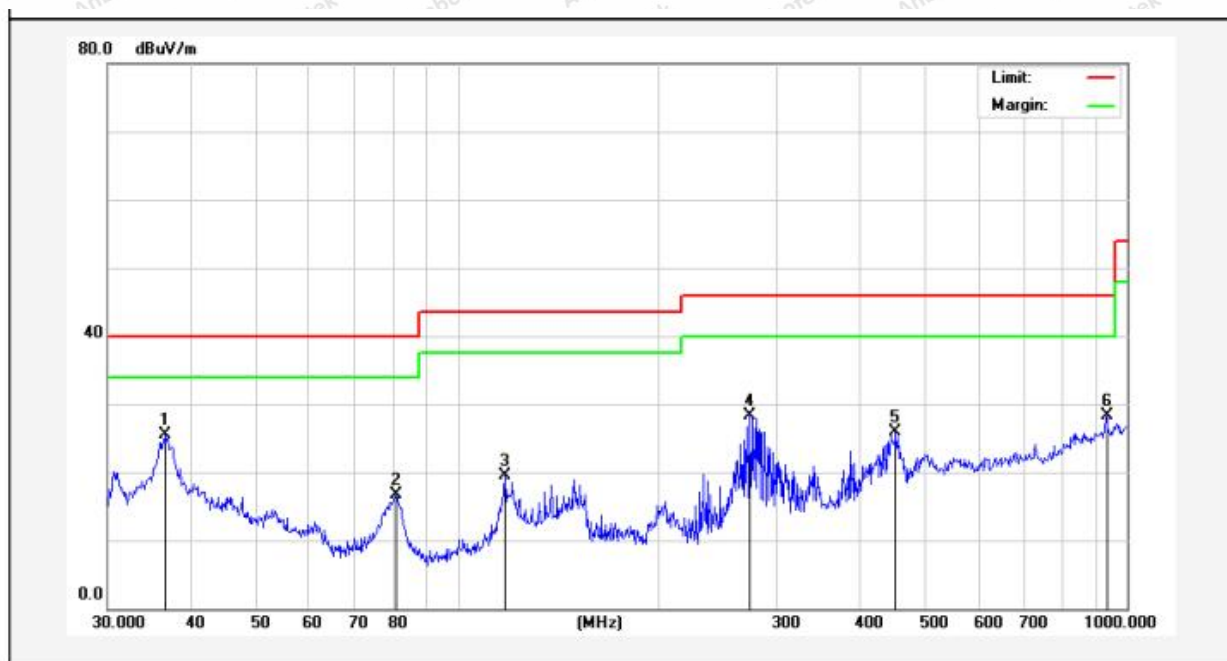
Test Results (30~1000MHz)

Test Mode: 802.11ax(HEW20) 5825MHz

Power Source: AC 120V, 60Hz

Polarization: Vertical

Temp.(°C)/Hum.(%RH): 22.5°C/50%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	36.6375	41.83	-16.30	25.53	40.00	-14.47	QP			
2	80.9274	35.96	-19.17	16.79	40.00	-23.21	QP			
3	117.7724	39.15	-19.55	19.60	43.50	-23.90	QP			
4	273.2341	45.38	-17.16	28.22	46.00	-17.78	QP			
5	451.1349	39.51	-13.65	25.86	46.00	-20.14	QP			
6	932.2714	34.08	-5.85	28.23	46.00	-17.77	QP			



Report No.: 18220WC30249104

FCC ID: 2BDPY-RD-810

Page 22 of 53

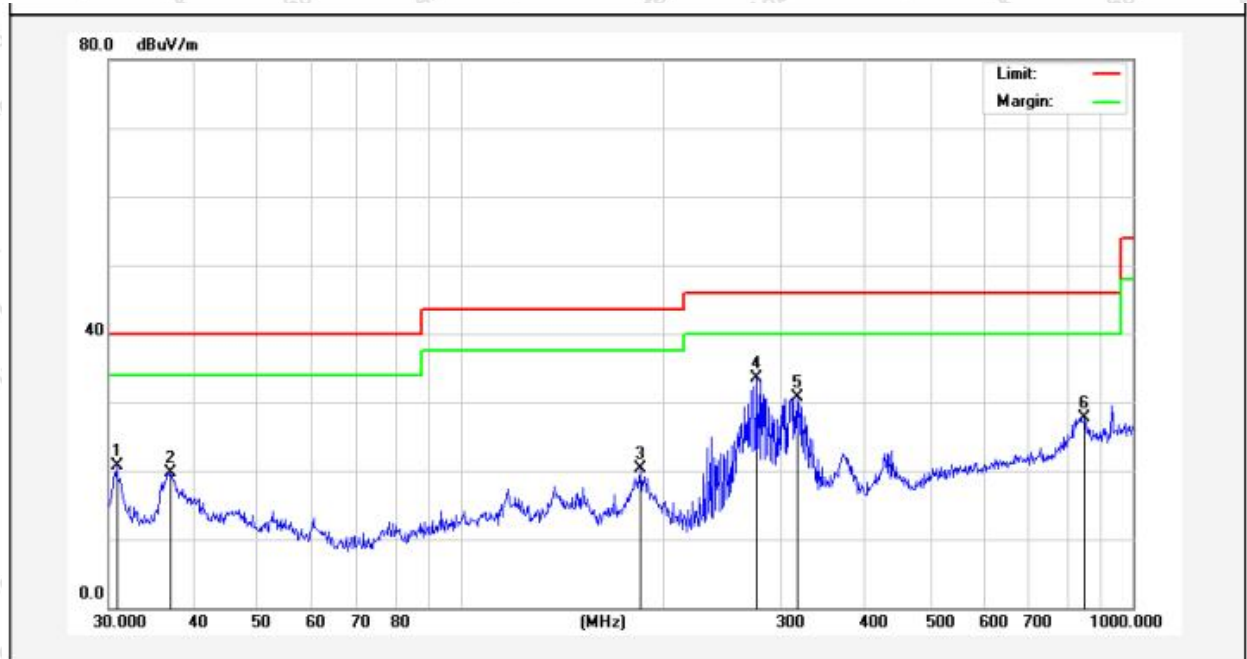
Test Results (30~1000MHz)

Test Mode: 802.11ax(HEW20) 5825MHz

Power Source: AC 120V, 60Hz

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 22.5°C/50%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.8535	40.59	-19.95	20.64	40.00	-19.36	QP			
2	37.0248	37.25	-17.47	19.78	40.00	-20.22	QP			
3	185.1379	43.30	-22.95	20.35	43.50	-23.15	QP			
4	276.1235	52.80	-19.24	33.56	46.00	-12.44	QP			
5	316.5890	47.57	-16.77	30.80	46.00	-15.20	QP			
6	848.0563	35.27	-7.52	27.75	46.00	-18.25	QP			



Test Results (Above 1000MHz)

Test Mode: IEEE 802.11ax(HEW20)

Test channel: Low CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11490.000	28.39	23.36	51.75	68.20	-16.45	V	Peak
17235.000	29.63	31.97	61.60	68.20	-6.60	V	Peak
11490.000	28.68	23.36	52.04	68.20	-16.16	H	Peak
17235.000	29.91	31.97	61.88	68.20	-6.32	H	Peak
11490.000	17.58	23.36	40.94	54.00	-13.06	V	AVG
17235.000	18.24	31.97	50.21	54.00	-3.79	V	AVG
11490.000	17.71	23.36	41.07	54.00	-12.93	H	AVG
17235.000	17.92	31.97	49.89	54.00	-4.11	H	AVG
Test channel: Middle CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11570.000	28.97	23.42	52.39	68.20	-15.81	V	Peak
17355.000	29.51	32.18	61.69	68.20	-6.51	V	Peak
11570.000	28.88	23.42	52.30	68.20	-15.90	H	Peak
17355.000	30.00	32.18	62.18	68.20	-6.02	H	Peak
11570.000	18.850	23.42	42.27	54.00	-11.73	V	AVG
17355.000	18.559	32.18	50.74	54.00	-3.26	V	AVG
11570.000	18.704	23.42	42.12	54.00	-11.88	H	AVG
17355.000	18.301	32.18	50.48	54.00	-3.52	H	AVG
Test channel: High CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11650.000	28.48	23.49	51.97	68.20	-16.23	V	Peak
17475.000	29.75	32.39	62.14	68.20	-6.06	V	Peak
11650.000	28.62	23.49	52.11	68.20	-16.09	H	Peak
17475.000	29.61	32.39	62.00	68.20	-6.20	H	Peak
11650.000	17.92	23.49	41.41	54.00	-12.59	V	AVG
17475.000	18.36	32.39	50.75	54.00	-3.25	V	AVG
11650.000	17.88	23.49	41.37	54.00	-12.63	H	AVG
17475.000	18.27	32.39	50.66	54.00	-3.34	H	AVG

Remark:

1. During the test, pre-scan all the modes, and found the 802.11ax(HEW20) mode is worse case , the report only record this mode.
2. Result =Reading + Factor



Radiated Band Edge: 5.2G&5.3G**Test Mode: IEEE 802.11a**

Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.68	15.99	52.67	68.20	-15.53	H	Peak
5150.00	38.69	15.99	54.68	68.20	-13.52	V	Peak
5150.00	26.70	15.99	42.69	54.00	-11.31	H	AVG
5150.00	28.67	15.99	44.66	54.00	-9.34	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	37.21	16.43	53.64	68.20	-14.56	H	Peak
5350.00	39.96	16.43	56.39	68.20	-11.81	V	Peak
5350.00	28.42	16.43	44.85	54.00	-9.15	H	AVG
5350.00	29.43	16.43	45.86	54.00	-8.14	V	AVG

Remark: 1. Result =Reading + Factor

Test Mode: IEEE 802.11n(HT20)

Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	35.73	15.99	51.72	68.20	-16.48	H	Peak
5150.00	37.04	15.99	53.03	68.20	-15.17	V	Peak
5150.00	26.45	15.99	42.44	54.00	-11.56	H	AVG
5150.00	27.47	15.99	43.46	54.00	-10.54	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	37.50	16.43	53.93	68.20	-14.27	H	Peak
5350.00	38.59	16.43	55.02	68.20	-13.18	V	Peak
5350.00	27.50	16.43	43.93	54.00	-10.07	H	AVG
5350.00	28.87	16.43	45.30	54.00	-8.70	V	AVG

Remark: 1. Result =Reading + Factor



Test Mode: IEEE 802.11n(HT40)**Test channel: Lowest**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.14	15.99	52.13	68.20	-16.07	H	Peak
5150.00	38.02	15.99	54.01	68.20	-14.19	V	Peak
5150.00	26.68	15.99	42.67	54.00	-11.33	H	AVG
5150.00	28.61	15.99	44.60	54.00	-9.40	V	AVG

Test channel: Highest

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	37.86	16.43	54.29	68.20	-13.91	H	Peak
5350.00	36.81	16.43	53.24	68.20	-14.96	V	Peak
5350.00	27.93	16.43	44.36	54.00	-9.64	H	AVG
5350.00	29.08	16.43	45.51	54.00	-8.49	V	AVG

Remark: 1. Result =Reading + Factor

Test Mode: IEEE 802.11ac(VHT20)**Test channel: Lowest**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.57	15.99	52.56	68.20	-15.64	H	Peak
5150.00	38.27	15.99	54.26	68.20	-13.94	V	Peak
5150.00	26.36	15.99	42.35	54.00	-11.65	H	AVG
5150.00	28.45	15.99	44.44	54.00	-9.56	V	AVG

Test channel: Highest

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	37.68	16.43	54.11	68.20	-14.09	H	Peak
5350.00	37.96	16.43	54.39	68.20	-13.81	V	Peak
5350.00	27.54	16.43	43.97	54.00	-10.03	H	AVG
5350.00	27.99	16.43	44.42	54.00	-9.58	V	AVG

Remark: 1. Result =Reading + Factor



Test Mode: IEEE 802.11ac(VHT40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	35.55	15.99	51.54	68.20	-16.66	H	Peak
5150.00	36.11	15.99	52.10	68.20	-16.10	V	Peak
5150.00	25.60	15.99	41.59	54.00	-12.41	H	AVG
5150.00	26.47	15.99	42.46	54.00	-11.54	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	37.75	16.43	54.18	68.20	-14.02	H	Peak
5350.00	36.98	16.43	53.41	68.20	-14.79	V	Peak
5350.00	27.29	16.43	43.72	54.00	-10.28	H	AVG
5350.00	27.02	16.43	43.45	54.00	-10.55	V	AVG

Remark: 1. Result = Reading + Factor

Test Mode: IEEE 802.11ax(HEW20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	35.82	15.99	51.81	68.20	-16.39	H	Peak
5150.00	36.01	15.99	52.00	68.20	-16.20	V	Peak
5150.00	26.12	15.99	42.11	54.00	-11.89	H	AVG
5150.00	26.53	15.99	42.52	54.00	-11.48	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	37.87	16.43	54.30	68.20	-13.90	H	Peak
5350.00	37.10	16.43	53.53	68.20	-14.67	V	Peak
5350.00	28.28	16.43	44.71	54.00	-9.29	H	AVG
5350.00	27.80	16.43	44.23	54.00	-9.77	V	AVG

Remark: 1. Result = Reading + Factor



Test Mode: IEEE 802.11ax(HEW40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.73	15.99	52.72	68.20	-15.48	H	Peak
5150.00	38.76	15.99	54.75	68.20	-13.45	V	Peak
5150.00	26.74	15.99	42.73	54.00	-11.27	H	AVG
5150.00	28.72	15.99	44.71	54.00	-9.29	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	37.25	16.43	53.68	68.20	-14.52	H	Peak
5350.00	40.04	16.43	56.47	68.20	-11.73	V	Peak
5350.00	28.48	16.43	44.91	54.00	-9.09	H	AVG
5350.00	29.47	16.43	45.90	54.00	-8.10	V	AVG

Remark: 1. Result =Reading + Factor



Radiated Band Edge: 5.8G**Test Mode: IEEE 802.11a**

Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	37.91	16.37	54.28	74.00	-19.72	H	Peak
5725.00	39.19	16.37	55.56	74.00	-18.44	V	Peak
5725.00	28.84	16.70	45.54	54.00	-8.46	H	AVG
5725.00	29.93	16.70	46.63	54.00	-7.37	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	38.81	17.21	56.02	68.20	-12.18	H	Peak
5850.00	39.12	17.21	56.33	68.20	-11.87	V	Peak
5850.00	28.84	17.21	46.05	54.00	-7.95	H	AVG
5850.00	28.90	17.21	46.11	54.00	-7.89	V	AVG

Remark: 1. Result = Reading + Factor

Test Mode: IEEE 802.11n(HT20)

Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	37.86	17.05	54.91	74.00	-19.09	H	Peak
5725.00	38.36	17.05	55.41	74.00	-18.59	V	Peak
5725.00	27.45	17.05	44.50	54.00	-9.50	H	AVG
5725.00	27.91	17.05	44.96	54.00	-9.04	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.05	17.21	54.26	68.20	-13.94	H	Peak
5850.00	37.73	17.21	54.94	68.20	-13.26	V	Peak
5850.00	27.24	17.21	44.45	54.00	-9.55	H	AVG
5850.00	28.17	17.21	45.38	54.00	-8.62	V	AVG

Remark: 1. Result = Reading + Factor



Test Mode: IEEE 802.11n(HT40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	37.44	17.05	54.49	74.00	-19.51	H	Peak
5725.00	38.24	17.05	55.29	74.00	-18.71	V	Peak
5725.00	26.83	17.05	43.88	54.00	-10.12	H	AVG
5725.00	28.25	17.05	45.30	54.00	-8.70	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.80	17.21	55.01	68.20	-13.19	H	Peak
5850.00	38.25	17.21	55.46	68.20	-12.74	V	Peak
5850.00	27.95	17.21	45.16	54.00	-8.84	H	AVG
5850.00	29.11	17.21	46.32	54.00	-7.68	V	AVG

Remark: 1. Result = Reading + Factor

Test Mode: IEEE 802.11ac(VHT20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	37.13	17.05	54.18	74.00	-19.82	H	Peak
5725.00	37.40	17.05	54.45	74.00	-19.55	V	Peak
5725.00	28.12	17.05	45.17	54.00	-8.83	H	AVG
5725.00	28.81	17.05	45.86	54.00	-8.14	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.87	17.21	55.08	68.20	-13.12	H	Peak
5850.00	38.80	17.21	56.01	68.20	-12.19	V	Peak
5850.00	27.79	17.21	45.00	54.00	-9.00	H	AVG
5850.00	28.77	17.21	45.98	54.00	-8.02	V	AVG

Remark: 1. Result = Reading + Factor



Test Mode: IEEE 802.11ac(VHT40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	36.10	17.05	53.15	74.00	-20.85	H	Peak
5725.00	37.69	17.05	54.74	74.00	-19.26	V	Peak
5725.00	27.40	17.05	44.45	54.00	-9.55	H	AVG
5725.00	28.11	17.05	45.16	54.00	-8.84	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.47	17.21	54.68	68.20	-13.52	H	Peak
5850.00	38.21	17.21	55.42	68.20	-12.78	V	Peak
5850.00	27.45	17.21	44.66	54.00	-9.34	H	AVG
5850.00	27.00	17.21	44.21	54.00	-9.79	V	AVG

Remark: 1. Result = Reading + Factor

Test Mode: IEEE 802.11ax(HEW20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	35.40	17.05	52.45	74.00	-21.55	H	Peak
5725.00	36.86	17.05	53.91	74.00	-20.09	V	Peak
5725.00	26.30	17.05	43.35	54.00	-10.65	H	AVG
5725.00	26.99	17.05	44.04	54.00	-9.96	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.23	17.21	54.44	68.20	-13.76	H	Peak
5850.00	37.63	17.21	54.84	68.20	-13.36	V	Peak
5850.00	27.51	17.21	44.72	54.00	-9.28	H	AVG
5850.00	28.03	17.21	45.24	54.00	-8.76	V	AVG

Remark: 1. Result = Reading + Factor



Test Mode: IEEE 802.11ax(HEW40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	37.92	16.37	54.29	74.00	-19.71	H	Peak
5725.00	39.21	16.37	55.58	74.00	-18.42	V	Peak
5725.00	28.85	16.70	45.55	54.00	-8.45	H	AVG
5725.00	29.94	16.70	46.64	54.00	-7.36	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	38.82	17.21	56.03	68.20	-12.17	H	Peak
5850.00	39.14	17.21	56.35	68.20	-11.85	V	Peak
5850.00	28.85	17.21	46.06	54.00	-7.94	H	AVG
5850.00	28.91	17.21	46.12	54.00	-7.88	V	AVG

Remark: 1. Result =Reading + Factor

Conducted Measurement:

Please refer to Appendix E of the Appendix Test Data.




5. Maximum conducted output power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407(a)	
Test Limit	5.15 - 5.25GHz	1) Outdoor AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 6\text{dBi}$, then $P_{out} = 30 - (GT_x - 6)$. e.i.r.p. at any elevation angle above 30 degrees $\leq 125\text{mW}$ (21dBm) 2) Indoor AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 6\text{dBi}$, then $P_{out} = 30 - (GT_x - 6)$. 3) Point-to-point AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 23\text{dBi}$, then $P_{out} = 30 - (GT_x - 23)$. 4) Client devices The maximum conducted output power (Pout) shall not exceed the lesser of 250W (23.98dBm). if $GT_x > 6\text{dBi}$, then $P_{out} = 24 - (GT_x - 6)$.
	5.25 - 5.35GHz	The maximum conducted output power (Pout) shall not exceed the lesser of 250mW (24dBm) or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. if $GT_x > 6\text{dBi}$, then $P_{out} = 24 - (GT_x - 6)$.
	5.47- 5.725GHz	The maximum conducted output power (Pout) shall not exceed the lesser of 250mW (23.98dBm) or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. if $GT_x > 6\text{dBi}$, then $P_{out} = 24 - (GT_x - 6)$.
	5.725 - 5.85GHz	1) Point-to-multipoint systems (P2M) The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 6\text{dBi}$, then $P_{out} = 30 - (GT_x - 6)$. 2) Point-to-point systems (P2P) The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm).

5.2. Test Setup



5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.



2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

5.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.

Additional test for duty cycle.

Please refer to Appendix B of the Appendix Test Data.




6. 26dB Bandwidth & 99% Occupied Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.407(a) & 2.1049
Test Limit	N/A

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
26 dB & 99% bandwidth
RBW = approximately 1% of the emission bandwidth;
Set the VBW > RBW;
Detector = Peak
Trace mode = Max hold.
Sweep = auto couple.
4. Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.
5. Repeat until all the rest channels are investigated.

6.4. Test Data

Pass

Please refer to Appendix A1&A2 of the Appendix Test Data.




7. Minimum 6dB bandwidth Test

7.1. Test Standard

Test Standard	FCC Part15 C Section 15.407(e)
Test Limit	≥ 500 kHz

7.2. Test Setup



7.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

4. Set the spectrum analyzer as:

6 dB bandwidth

RBW = approximately 1% of the emission bandwidth;

Set the VBW > RBW;

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.

4. Measure the maximum width of the emission that is 6dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.
5. Repeat until all the rest channels are investigated.

7.4. Test Data

Pass

Please refer to Appendix A3 of the Appendix Test Data.




8. Power Spectral Density Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407(a)	
Test Limit	5.15 - 5.25GHz	1) Outdoor AP The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if $GT_x > 6\text{dBi}$, then $PSD = 17 - (GT_x - 6)$. 2) Indoor AP The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if $GT_x > 6\text{dBi}$, then $PSD = 17 - (GT_x - 6)$. 3) Point-to-point AP The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if $GT_x > 23\text{dBi}$, then $PSD = 17 - (GT_x - 23)$. 4) Client devices The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if $GT_x > 6\text{dBi}$, then $PSD = 11 - (GT_x - 6)$.
	5.25 - 5.35GHz	The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if $GT_x > 6\text{dBi}$, then $PSD = 11 - (GT_x - 6)$.
	5.47- 5.725GHz	The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if $GT_x > 6\text{dBi}$, then $PSD = 11 - (GT_x - 6)$.
	5.725 - 5.85GHz	1) Point-to-multipoint systems (P2M) The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz. if $GT_x > 6\text{dBi}$, then $PSD = 30 - (GT_x - 6)$. 2) Point-to-point systems (P2P) The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.

8.2. Test Setup



8.3. Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =1MHz;



3. Set VBW $\geq$ 3 RBW=3MHz;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;

8.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.




9. Frequency Stability

9.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.407(g)
Test Limit	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

9.2. Test Setup



9.3. Test Procedure

The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

9.4. Test Data

Pass

Please to see the following pages.



Test Mode: 5.2G							
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit	Verdict
802.11a	SISO	5180	20	102.00	5180.12	5172 to 5188	Pass
				120.00	5180.04	5172 to 5188	Pass
				138.00	5180.10	5172 to 5188	Pass
			-30	120.00	5180.05	5172 to 5188	Pass
				120.00	5180.03	5150 to 5250	Pass
				120.00	5180.07	5150 to 5250	Pass
			-20	120.00	5180.13	5150 to 5250	Pass
				120.00	5180.01	5150 to 5250	Pass
				120.00	5180.05	5150 to 5250	Pass
			-10	120.00	5180.08	5150 to 5250	Pass
				120.00	5180.03	5172 to 5188	Pass
				120.00	5180.03	5172 to 5188	Pass
		5200	20	102.00	5200.02	5192 to 5208	Pass
				120.00	5200.06	5192 to 5208	Pass
				138.00	5200.01	5192 to 5208	Pass
			-30	120.00	5200.13	5192 to 5208	Pass
				120.00	5200.11	5150 to 5250	Pass
				120.00	5200.07	5150 to 5250	Pass
			-20	120.00	5200.00	5150 to 5250	Pass
				120.00	5200.11	5150 to 5250	Pass
				120.00	5200.11	5150 to 5250	Pass
			-10	120.00	5200.09	5150 to 5250	Pass
				120.00	5200.02	5192 to 5208	Pass
				120.00	5200.02	5192 to 5208	Pass
		5240	20	102.00	5240.00	5232 to 5248	Pass
				120.00	5240.01	5232 to 5248	Pass
				138.00	5240.01	5232 to 5248	Pass
			-30	120.00	5240.05	5232 to 5248	Pass
				120.00	5240.11	5150 to 5250	Pass
				120.00	5240.04	5150 to 5250	Pass
			-20	120.00	5240.09	5150 to 5250	Pass
				120.00	5240.01	5150 to 5250	Pass
				120.00	5240.05	5150 to 5250	Pass
			-10	120.00	5240.01	5150 to 5250	Pass
				120.00	5240.01	5150 to 5250	Pass
				120.00	5240.11	5232 to 5248	Pass
802.11n (HT20)	SISO	5180	20	102.00	5180.13	5172 to 5188	Pass
				120.00	5180.02	5172 to 5188	Pass
				138.00	5180.09	5172 to 5188	Pass
			-30	120.00	5180.11	5172 to 5188	Pass
				120.00	5180.12	5150 to 5250	Pass
				120.00	5180.11	5150 to 5250	Pass
			-20	120.00	5180.02	5150 to 5250	Pass
				120.00	5180.02	5150 to 5250	Pass
				120.00	5180.07	5150 to 5250	Pass
			-10	120.00	5180.08	5150 to 5250	Pass
				120.00	5180.01	5172 to 5188	Pass
				120.00	5180.01	5172 to 5188	Pass
		5200	20	102.00	5200.08	5192 to 5208	Pass
				120.00	5200.04	5192 to 5208	Pass
				138.00	5200.02	5192 to 5208	Pass
			-30	120.00	5200.02	5192 to 5208	Pass
				120.00	5200.10	5150 to 5250	Pass
				120.00	5200.09	5150 to 5250	Pass
			-20	120.00	5200.10	5150 to 5250	Pass
				120.00	5200.10	5150 to 5250	Pass
				120.00	5200.12	5150 to 5250	Pass
			-10	120.00	5200.05	5150 to 5250	Pass
				120.00	5200.09	5192 to 5208	Pass
				120.00	5200.09	5192 to 5208	Pass
		5240	20	102.00	5240.04	5232 to 5248	Pass



802.11n (HT40)	SISO			120.00	5240.10	5232 to 5248	Pass
				138.00	5240.06	5232 to 5248	Pass
			-30	120.00	5240.12	5232 to 5248	Pass
			-20	120.00	5240.07	5150 to 5250	Pass
			-10	120.00	5240.11	5150 to 5250	Pass
			0	120.00	5240.08	5150 to 5250	Pass
			10	120.00	5240.06	5150 to 5250	Pass
			30	120.00	5240.06	5150 to 5250	Pass
			40	120.00	5240.02	5150 to 5250	Pass
			50	120.00	5240.02	5232 to 5248	Pass
		5190	20	102.00	5190.05	5174 to 5206	Pass
				120.00	5190.08	5174 to 5206	Pass
				138.00	5190.10	5174 to 5206	Pass
			-30	120.00	5190.00	5174 to 5206	Pass
			-20	120.00	5190.13	5150 to 5250	Pass
			-10	120.00	5190.10	5150 to 5250	Pass
			0	120.00	5190.11	5150 to 5250	Pass
			10	120.00	5190.08	5150 to 5250	Pass
			30	120.00	5190.00	5150 to 5250	Pass
			40	120.00	5190.11	5150 to 5250	Pass
			50	120.00	5190.13	5174 to 5206	Pass
		5230	20	102.00	5230.10	5214 to 5246	Pass
				120.00	5230.07	5214 to 5246	Pass
				138.00	5230.08	5214 to 5246	Pass
			-30	120.00	5230.03	5214 to 5246	Pass
			-20	120.00	5230.11	5150 to 5250	Pass
			-10	120.00	5230.09	5150 to 5250	Pass
			0	120.00	5230.05	5150 to 5250	Pass
			10	120.00	5230.12	5150 to 5250	Pass
			30	120.00	5230.03	5150 to 5250	Pass
			40	120.00	5230.01	5150 to 5250	Pass
802.11ac (VHT20)	SISO	5180	20	102.00	5180.08	5172 to 5188	Pass
				120.00	5180.03	5172 to 5188	Pass
				138.00	5180.10	5172 to 5188	Pass
			-30	120.00	5180.09	5172 to 5188	Pass
			-20	120.00	5180.01	5150 to 5250	Pass
			-10	120.00	5180.04	5150 to 5250	Pass
			0	120.00	5180.09	5150 to 5250	Pass
			10	120.00	5180.09	5150 to 5250	Pass
			30	120.00	5180.05	5150 to 5250	Pass
			40	120.00	5180.11	5150 to 5250	Pass
			50	120.00	5180.01	5172 to 5188	Pass
		5200	20	102.00	5200.05	5192 to 5208	Pass
				120.00	5200.06	5192 to 5208	Pass
				138.00	5200.02	5192 to 5208	Pass
			-30	120.00	5200.12	5192 to 5208	Pass
			-20	120.00	5200.12	5150 to 5250	Pass
			-10	120.00	5200.07	5150 to 5250	Pass
			0	120.00	5200.13	5150 to 5250	Pass
			10	120.00	5200.04	5150 to 5250	Pass
			30	120.00	5200.06	5150 to 5250	Pass
			40	120.00	5200.12	5150 to 5250	Pass
			50	120.00	5200.02	5192 to 5208	Pass
		5240	20	102.00	5240.02	5232 to 5248	Pass
				120.00	5240.04	5232 to 5248	Pass
				138.00	5240.01	5232 to 5248	Pass
			-30	120.00	5240.08	5232 to 5248	Pass
			-20	120.00	5240.12	5150 to 5250	Pass



802.11ac (VHT40)	SISO	5190	-10	120.00	5240.12	5150 to 5250	Pass
			0	120.00	5240.08	5150 to 5250	Pass
			10	120.00	5240.12	5150 to 5250	Pass
			30	120.00	5240.08	5150 to 5250	Pass
			40	120.00	5240.07	5150 to 5250	Pass
			50	120.00	5240.06	5232 to 5248	Pass
		5230	20	102.00	5190.07	5174 to 5206	Pass
				120.00	5190.13	5174 to 5206	Pass
				138.00	5190.10	5174 to 5206	Pass
			-30	120.00	5190.03	5174 to 5206	Pass
			-20	120.00	5190.11	5150 to 5250	Pass
			-10	120.00	5190.09	5150 to 5250	Pass
			0	120.00	5190.03	5150 to 5250	Pass
			10	120.00	5190.07	5150 to 5250	Pass
			30	120.00	5190.09	5150 to 5250	Pass
			40	120.00	5190.02	5150 to 5250	Pass
			50	120.00	5190.04	5174 to 5206	Pass
			20	102.00	5230.02	5214 to 5246	Pass
				120.00	5230.06	5214 to 5246	Pass
				138.00	5230.10	5214 to 5246	Pass
802.11ax(HEW20)	SISO	5180	-30	120.00	5230.12	5214 to 5246	Pass
			-20	120.00	5230.07	5150 to 5250	Pass
			-10	120.00	5230.09	5150 to 5250	Pass
			0	120.00	5230.09	5150 to 5250	Pass
			10	120.00	5230.04	5150 to 5250	Pass
			30	120.00	5230.12	5150 to 5250	Pass
			40	120.00	5230.11	5150 to 5250	Pass
			50	120.00	5230.05	5214 to 5246	Pass
		5200	20	102.00	5180.04	5172 to 5188	Pass
				120.00	5180.08	5172 to 5188	Pass
				138.00	5180.06	5172 to 5188	Pass
			-30	120.00	5180.13	5172 to 5188	Pass
			-20	120.00	5180.11	5150 to 5250	Pass
			-10	120.00	5180.10	5150 to 5250	Pass
			0	120.00	5180.00	5150 to 5250	Pass
			10	120.00	5180.11	5150 to 5250	Pass
			30	120.00	5180.11	5150 to 5250	Pass
			40	120.00	5180.12	5150 to 5250	Pass
			50	120.00	5180.09	5172 to 5188	Pass
			20	102.00	5200.03	5192 to 5208	Pass
				120.00	5200.02	5192 to 5208	Pass
				138.00	5200.10	5192 to 5208	Pass
			-30	120.00	5200.01	5192 to 5208	Pass
			-20	120.00	5200.08	5150 to 5250	Pass
			-10	120.00	5200.02	5150 to 5250	Pass
			0	120.00	5200.01	5150 to 5250	Pass
			10	120.00	5200.09	5150 to 5250	Pass
			30	120.00	5200.09	5150 to 5250	Pass
			40	120.00	5200.07	5150 to 5250	Pass
			50	120.00	5200.01	5192 to 5208	Pass
		5240	20	102.00	5240.01	5232 to 5248	Pass
				120.00	5240.06	5232 to 5248	Pass
				138.00	5240.09	5232 to 5248	Pass
			-30	120.00	5240.12	5232 to 5248	Pass
			-20	120.00	5240.08	5150 to 5250	Pass
			-10	120.00	5240.05	5150 to 5250	Pass
			0	120.00	5240.12	5150 to 5250	Pass
			10	120.00	5240.04	5150 to 5250	Pass
			30	120.00	5240.03	5150 to 5250	Pass



802.11ax(HEW40)	SISO	5190	40	120.00	5240.11	5150 to 5250	Pass
			50	120.00	5240.02	5232 to 5248	Pass
			20	102.00	5190.05	5174 to 5206	Pass
				120.00	5190.09	5174 to 5206	Pass
			-30	138.00	5190.03	5174 to 5206	Pass
				102.00	5190.05	5174 to 5206	Pass
			-20	120.00	5190.09	5150 to 5250	Pass
			-10	138.00	5190.03	5150 to 5250	Pass
			0	120.00	5190.11	5150 to 5250	Pass
			10	120.00	5190.09	5150 to 5250	Pass
			30	120.00	5190.09	5150 to 5250	Pass
			40	120.00	5190.02	5150 to 5250	Pass
		5230	50	120.00	5190.04	5174 to 5206	Pass
			20	120.00	5190.04	5214 to 5246	Pass
				120.00	5190.03	5214 to 5246	Pass
			-30	120.00	5190.11	5214 to 5246	Pass
				102.00	5230.01	5214 to 5246	Pass
			-20	120.00	5230.10	5150 to 5250	Pass
			-10	138.00	5230.00	5150 to 5250	Pass
			0	120.00	5230.08	5150 to 5250	Pass
			10	120.00	5230.12	5150 to 5250	Pass
			30	120.00	5230.05	5150 to 5250	Pass
			40	120.00	5230.03	5150 to 5250	Pass
			50	120.00	5230.06	5214 to 5246	Pass



Test Mode: 5.3G							
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit	Verdict
802.11a	SISO	5260	20	102.00	5260.11	5252 to 5268	Pass
				120.00	5260.08	5252 to 5268	Pass
				138.00	5260.13	5252 to 5268	Pass
			-30	102.00	5260.12	5252 to 5268	Pass
				120.00	5260.10	5250 to 5350	Pass
				120.00	5260.01	5250 to 5350	Pass
			-20	120.00	5260.03	5250 to 5350	Pass
				120.00	5260.08	5250 to 5350	Pass
				120.00	5260.00	5250 to 5350	Pass
			-10	120.00	5260.08	5250 to 5350	Pass
				120.00	5260.09	5252 to 5268	Pass
				120.00	5260.03	5250 to 5350	Pass
		5300	20	102.00	5300.10	5292 to 5308	Pass
				120.00	5300.06	5292 to 5308	Pass
				138.00	5300.09	5292 to 5308	Pass
			-30	102.00	5300.08	5292 to 5308	Pass
				120.00	5300.10	5250 to 5350	Pass
				120.00	5300.07	5250 to 5350	Pass
			-20	120.00	5300.07	5250 to 5350	Pass
				120.00	5300.06	5250 to 5350	Pass
				120.00	5300.12	5250 to 5350	Pass
			-10	120.00	5300.00	5250 to 5350	Pass
				120.00	5300.13	5292 to 5308	Pass
				120.00	5300.07	5250 to 5350	Pass
		5320	20	102.00	5320.00	5312 to 5328	Pass
				120.00	5320.10	5312 to 5328	Pass
				138.00	5320.09	5312 to 5328	Pass
			-30	102.00	5320.04	5312 to 5328	Pass
				120.00	5320.01	5250 to 5350	Pass
				120.00	5320.01	5250 to 5350	Pass
			-20	120.00	5320.03	5250 to 5350	Pass
				120.00	5320.08	5250 to 5350	Pass
				120.00	5320.12	5250 to 5350	Pass
			-10	120.00	5320.09	5250 to 5350	Pass
				120.00	5320.09	5312 to 5328	Pass
				120.00	5320.09	5312 to 5328	Pass
802.11n (HT20)	SISO	5260	20	102.00	5260.12	5252 to 5268	Pass
				120.00	5260.01	5252 to 5268	Pass
				138.00	5260.05	5252 to 5268	Pass
			-30	102.00	5260.10	5252 to 5268	Pass
				120.00	5260.08	5250 to 5350	Pass
				120.00	5260.12	5250 to 5350	Pass
			-20	120.00	5260.01	5250 to 5350	Pass
				120.00	5260.02	5250 to 5350	Pass
				120.00	5260.08	5250 to 5350	Pass
			-10	120.00	5260.05	5250 to 5350	Pass
				120.00	5260.08	5252 to 5268	Pass
				120.00	5260.08	5252 to 5268	Pass
		5300	20	102.00	5300.03	5292 to 5308	Pass
				120.00	5300.05	5292 to 5308	Pass
				138.00	5300.07	5292 to 5308	Pass
			-30	102.00	5300.05	5292 to 5308	Pass
				120.00	5300.11	5250 to 5350	Pass
				120.00	5300.11	5250 to 5350	Pass
			-20	120.00	5300.05	5250 to 5350	Pass
				120.00	5300.03	5250 to 5350	Pass
				120.00	5300.05	5250 to 5350	Pass
			-10	120.00	5300.05	5250 to 5350	Pass
				120.00	5300.05	5250 to 5350	Pass
				120.00	5300.05	5292 to 5308	Pass



		5320	20	102.00	5320.13	5312 to 5328	Pass
				120.00	5320.03	5312 to 5328	Pass
				138.00	5320.07	5312 to 5328	Pass
			-30	102.00	5320.02	5312 to 5328	Pass
			-20	120.00	5320.05	5250 to 5350	Pass
			-10	120.00	5320.07	5250 to 5350	Pass
			0	120.00	5320.11	5250 to 5350	Pass
			10	120.00	5320.01	5250 to 5350	Pass
			30	120.00	5320.06	5250 to 5350	Pass
			40	120.00	5320.06	5250 to 5350	Pass
802.11n (HT40)	SISO	5270		102.00	5270.03	5254 to 5286	Pass
			20	120.00	5270.06	5254 to 5286	Pass
				138.00	5270.00	5254 to 5286	Pass
			-30	102.00	5270.12	5254 to 5286	Pass
			-20	120.00	5270.11	5250 to 5350	Pass
			-10	120.00	5270.06	5250 to 5350	Pass
			0	120.00	5270.06	5250 to 5350	Pass
			10	120.00	5270.11	5250 to 5350	Pass
			30	120.00	5270.01	5250 to 5350	Pass
			40	120.00	5270.03	5250 to 5350	Pass
		5310		102.00	5270.02	5254 to 5286	Pass
			20	102.00	5310.10	5294 to 5326	Pass
				120.00	5310.09	5294 to 5326	Pass
				138.00	5310.09	5294 to 5326	Pass
			-30	102.00	5310.12	5294 to 5326	Pass
			-20	120.00	5310.08	5250 to 5350	Pass
			-10	120.00	5310.07	5250 to 5350	Pass
			0	120.00	5310.03	5250 to 5350	Pass
			10	120.00	5310.04	5250 to 5350	Pass
			30	120.00	5310.09	5250 to 5350	Pass
802.11ac (VHT20)	SISO	5260		102.00	5310.04	5250 to 5350	Pass
				120.00	5310.00	5294 to 5326	Pass
			20	102.00	5260.00	5252 to 5268	Pass
				120.00	5260.12	5252 to 5268	Pass
				138.00	5260.12	5252 to 5268	Pass
			-30	102.00	5260.08	5252 to 5268	Pass
			-20	120.00	5260.08	5250 to 5350	Pass
			-10	120.00	5260.02	5250 to 5350	Pass
			0	120.00	5260.04	5250 to 5350	Pass
			10	120.00	5260.10	5250 to 5350	Pass
		5300		102.00	5260.03	5250 to 5350	Pass
				120.00	5260.10	5250 to 5350	Pass
			20	102.00	5260.00	5252 to 5268	Pass
				120.00	5300.05	5292 to 5308	Pass
				138.00	5300.08	5292 to 5308	Pass
				138.00	5300.06	5292 to 5308	Pass
			-30	102.00	5300.02	5292 to 5308	Pass
			-20	120.00	5300.04	5250 to 5350	Pass
			-10	120.00	5300.06	5250 to 5350	Pass
			0	120.00	5300.00	5250 to 5350	Pass
		5320	10	120.00	5300.05	5250 to 5350	Pass
			30	120.00	5300.05	5250 to 5350	Pass
			40	120.00	5300.01	5250 to 5350	Pass
			50	120.00	5300.04	5292 to 5308	Pass
			20	102.00	5320.10	5312 to 5328	Pass
		5320		120.00	5320.10	5312 to 5328	Pass
				138.00	5320.01	5312 to 5328	Pass
			-30	102.00	5320.08	5312 to 5328	Pass



			-20	120.00	5320.12	5250 to 5350	Pass
			-10	120.00	5320.05	5250 to 5350	Pass
			0	120.00	5320.02	5250 to 5350	Pass
			10	120.00	5320.07	5250 to 5350	Pass
			30	120.00	5320.00	5250 to 5350	Pass
			40	120.00	5320.06	5250 to 5350	Pass
			50	120.00	5320.04	5312 to 5328	Pass
802.11ac (VHT40)	SISO	5270	20	102.00	5270.12	5254 to 5286	Pass
				120.00	5270.05	5254 to 5286	Pass
				138.00	5270.09	5254 to 5286	Pass
			-30	102.00	5270.07	5254 to 5286	Pass
			-20	120.00	5270.08	5250 to 5350	Pass
			-10	120.00	5270.05	5250 to 5350	Pass
			0	120.00	5270.00	5250 to 5350	Pass
		5310	10	120.00	5270.11	5250 to 5350	Pass
			30	120.00	5270.02	5250 to 5350	Pass
			40	120.00	5270.10	5250 to 5350	Pass
			50	120.00	5270.05	5254 to 5286	Pass
			20	102.00	5310.05	5294 to 5326	Pass
				120.00	5310.02	5294 to 5326	Pass
				138.00	5310.05	5294 to 5326	Pass
			-30	102.00	5310.11	5294 to 5326	Pass
			-20	120.00	5310.01	5250 to 5350	Pass
			-10	120.00	5310.08	5250 to 5350	Pass
			0	120.00	5310.05	5250 to 5350	Pass
			10	120.00	5310.05	5250 to 5350	Pass
			30	120.00	5310.01	5250 to 5350	Pass
			40	120.00	5310.07	5250 to 5350	Pass
			50	120.00	5310.10	5294 to 5326	Pass
802.11ax(HEW20)	SISO	5260	20	102.00	5260.06	5252 to 5268	Pass
				120.00	5260.00	5252 to 5268	Pass
				138.00	5260.08	5252 to 5268	Pass
			-30	102.00	5260.11	5252 to 5268	Pass
			-20	120.00	5260.02	5250 to 5350	Pass
			-10	120.00	5260.09	5250 to 5350	Pass
			0	120.00	5260.06	5250 to 5350	Pass
			10	120.00	5260.05	5250 to 5350	Pass
			30	120.00	5260.07	5250 to 5350	Pass
			40	120.00	5260.05	5250 to 5350	Pass
		5300	50	120.00	5260.07	5252 to 5268	Pass
			20	102.00	5300.08	5292 to 5308	Pass
				120.00	5300.08	5292 to 5308	Pass
				138.00	5300.05	5292 to 5308	Pass
			-30	102.00	5300.01	5292 to 5308	Pass
			-20	120.00	5300.07	5250 to 5350	Pass
			-10	120.00	5300.01	5250 to 5350	Pass
			0	120.00	5300.02	5250 to 5350	Pass
			10	120.00	5300.00	5250 to 5350	Pass
			30	120.00	5300.13	5250 to 5350	Pass
			40	120.00	5300.09	5250 to 5350	Pass
			50	120.00	5300.09	5292 to 5308	Pass
		5320	20	102.00	5320.04	5312 to 5328	Pass
				120.00	5320.12	5312 to 5328	Pass
				138.00	5320.04	5312 to 5328	Pass
			-30	102.00	5320.01	5312 to 5328	Pass
			-20	120.00	5320.07	5250 to 5350	Pass
			-10	120.00	5320.01	5250 to 5350	Pass
			0	120.00	5320.06	5250 to 5350	Pass
			10	120.00	5320.08	5250 to 5350	Pass



802.11ax(HEW40)	SISO		30	120.00	5320.09	5250 to 5350	Pass
			40	120.00	5320.10	5250 to 5350	Pass
			50	120.00	5320.13	5312 to 5328	Pass
		5270	20	102.00	5270.08	5254 to 5286	Pass
				120.00	5270.01	5254 to 5286	Pass
				138.00	5270.08	5254 to 5286	Pass
			-30	102.00	5270.11	5254 to 5286	Pass
			-20	120.00	5270.08	5250 to 5350	Pass
			-10	120.00	5270.06	5250 to 5350	Pass
			0	120.00	5270.04	5250 to 5350	Pass
			10	120.00	5270.01	5250 to 5350	Pass
			30	120.00	5270.12	5250 to 5350	Pass
			40	120.00	5270.02	5250 to 5350	Pass
			50	120.00	5270.12	5254 to 5286	Pass
		5310	20	102.00	5310.12	5294 to 5326	Pass
				120.00	5310.03	5294 to 5326	Pass
				138.00	5310.11	5294 to 5326	Pass
			-30	102.00	5310.00	5294 to 5326	Pass
			-20	120.00	5310.11	5250 to 5350	Pass
			-10	120.00	5310.13	5250 to 5350	Pass
			0	120.00	5310.02	5250 to 5350	Pass
			10	120.00	5310.09	5250 to 5350	Pass
			30	120.00	5310.05	5250 to 5350	Pass
			40	120.00	5310.08	5250 to 5350	Pass
			50	120.00	5310.07	5294 to 5326	Pass



Test Mode: 5.8G							
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit	Verdict
802.11a	SISO	5745	20	102.00	5745.05	5737 to 5753	Pass
				120.00	5745.08	5737 to 5753	Pass
				138.00	5745.13	5737 to 5753	Pass
			-30	102.00	5745.05	5737 to 5753	Pass
				120.00	5745.11	5725 to 5850	Pass
				120.00	5745.09	5725 to 5850	Pass
			0	120.00	5745.06	5725 to 5850	Pass
				120.00	5745.09	5725 to 5850	Pass
				120.00	5745.13	5725 to 5850	Pass
			40	120.00	5745.11	5725 to 5850	Pass
				120.00	5745.06	5737 to 5753	Pass
				120.00	5745.06	5737 to 5753	Pass
		5785	20	102.00	5785.04	5777 to 5793	Pass
				120.00	5785.05	5777 to 5793	Pass
				138.00	5785.07	5777 to 5793	Pass
			-30	102.00	5785.04	5777 to 5793	Pass
				120.00	5785.03	5725 to 5850	Pass
				120.00	5785.01	5725 to 5850	Pass
			0	120.00	5785.05	5725 to 5850	Pass
				120.00	5785.01	5725 to 5850	Pass
				120.00	5785.08	5725 to 5850	Pass
			40	120.00	5785.07	5725 to 5850	Pass
				120.00	5785.04	5777 to 5793	Pass
				120.00	5785.04	5777 to 5793	Pass
		5825	20	102.00	5825.02	5817 to 5833	Pass
				120.00	5825.02	5817 to 5833	Pass
				138.00	5825.09	5817 to 5833	Pass
			-30	102.00	5825.13	5817 to 5833	Pass
				120.00	5825.04	5725 to 5850	Pass
				120.00	5825.11	5725 to 5850	Pass
			0	120.00	5825.08	5725 to 5850	Pass
				120.00	5825.13	5725 to 5850	Pass
				120.00	5825.05	5725 to 5850	Pass
			40	120.00	5825.06	5725 to 5850	Pass
				120.00	5825.11	5817 to 5833	Pass
				120.00	5825.11	5817 to 5833	Pass
802.11n (HT20)	SISO	5745	20	102.00	5745.12	5737 to 5753	Pass
				120.00	5745.11	5737 to 5753	Pass
				138.00	5745.03	5737 to 5753	Pass
			-30	102.00	5745.04	5737 to 5753	Pass
				120.00	5745.03	5725 to 5850	Pass



802.11n (HT40)	SISO		-10	120.00	5745.07	5725 to 5850	Pass
			0	120.00	5745.08	5725 to 5850	Pass
			10	120.00	5745.00	5725 to 5850	Pass
			30	120.00	5745.13	5725 to 5850	Pass
			40	120.00	5745.06	5725 to 5850	Pass
			50	120.00	5745.01	5737 to 5753	Pass
		5785	20	102.00	5785.08	5777 to 5793	Pass
				120.00	5785.04	5777 to 5793	Pass
				138.00	5785.02	5777 to 5793	Pass
			-30	102.00	5785.10	5777 to 5793	Pass
			-20	120.00	5785.01	5725 to 5850	Pass
			-10	120.00	5785.01	5725 to 5850	Pass
			0	120.00	5785.10	5725 to 5850	Pass
			10	120.00	5785.13	5725 to 5850	Pass
			30	120.00	5785.04	5725 to 5850	Pass
			40	120.00	5785.00	5725 to 5850	Pass
			50	120.00	5785.08	5777 to 5793	Pass
		5825	20	102.00	5825.09	5817 to 5833	Pass
				120.00	5825.08	5817 to 5833	Pass
				138.00	5825.09	5817 to 5833	Pass
			-30	102.00	5825.05	5817 to 5833	Pass
			-20	120.00	5825.04	5725 to 5850	Pass
			-10	120.00	5825.10	5725 to 5850	Pass
			0	120.00	5825.12	5725 to 5850	Pass
			10	120.00	5825.04	5725 to 5850	Pass
			30	120.00	5825.05	5725 to 5850	Pass
			40	120.00	5825.04	5725 to 5850	Pass
			50	120.00	5825.04	5817 to 5833	Pass
		5755	20	102.00	5755.08	5739 to 5771	Pass
				120.00	5755.11	5739 to 5771	Pass
				138.00	5755.06	5739 to 5771	Pass
			-30	102.00	5755.06	5739 to 5771	Pass
			-20	120.00	5755.04	5725 to 5850	Pass
			-10	120.00	5755.00	5725 to 5850	Pass
			0	120.00	5755.06	5725 to 5850	Pass
			10	120.00	5755.08	5725 to 5850	Pass
			30	120.00	5755.07	5725 to 5850	Pass
			40	120.00	5755.04	5725 to 5850	Pass
			50	120.00	5755.01	5739 to 5771	Pass
		5795	20	102.00	5795.05	5779 to 5811	Pass
				120.00	5795.10	5779 to 5811	Pass



802.11ac (VHT20)	SISO	5745		138.00	5795.01	5779 to 5811	Pass
			-30	102.00	5795.08	5779 to 5811	Pass
			-20	120.00	5795.02	5725 to 5850	Pass
			-10	120.00	5795.11	5725 to 5850	Pass
			0	120.00	5795.07	5725 to 5850	Pass
			10	120.00	5795.05	5725 to 5850	Pass
			30	120.00	5795.02	5725 to 5850	Pass
			40	120.00	5795.12	5725 to 5850	Pass
			50	120.00	5795.00	5779 to 5811	Pass
		5785	20	102.00	5745.03	5737 to 5753	Pass
				120.00	5745.08	5737 to 5753	Pass
				138.00	5745.04	5737 to 5753	Pass
			-30	102.00	5745.05	5737 to 5753	Pass
			-20	120.00	5745.01	5725 to 5850	Pass
			-10	120.00	5745.08	5725 to 5850	Pass
			0	120.00	5745.03	5725 to 5850	Pass
			10	120.00	5745.08	5725 to 5850	Pass
			30	120.00	5745.08	5725 to 5850	Pass
			40	120.00	5745.00	5725 to 5850	Pass
			50	120.00	5745.00	5737 to 5753	Pass
			20	102.00	5785.02	5777 to 5793	Pass
				120.00	5785.10	5777 to 5793	Pass
				138.00	5785.02	5777 to 5793	Pass
			-30	102.00	5785.12	5777 to 5793	Pass
			-20	120.00	5785.10	5725 to 5850	Pass
			-10	120.00	5785.06	5725 to 5850	Pass
			0	120.00	5785.07	5725 to 5850	Pass
			10	120.00	5785.12	5725 to 5850	Pass
			30	120.00	5785.06	5725 to 5850	Pass
			40	120.00	5785.08	5725 to 5850	Pass
			50	120.00	5785.10	5777 to 5793	Pass
		5825	20	102.00	5825.06	5817 to 5833	Pass
				120.00	5825.03	5817 to 5833	Pass
				138.00	5825.03	5817 to 5833	Pass
			-30	102.00	5825.08	5817 to 5833	Pass
			-20	120.00	5825.09	5725 to 5850	Pass
			-10	120.00	5825.06	5725 to 5850	Pass
			0	120.00	5825.04	5725 to 5850	Pass
			10	120.00	5825.10	5725 to 5850	Pass
			30	120.00	5825.08	5725 to 5850	Pass
			40	120.00	5825.02	5725 to 5850	Pass



802.11ac (VHT40)	SISO	5755	50	120.00	5825.04	5817 to 5833	Pass
			20	102.00	5755.01	5739 to 5771	Pass
				120.00	5755.12	5739 to 5771	Pass
				138.00	5755.06	5739 to 5771	Pass
			-30	102.00	5755.11	5739 to 5771	Pass
			-20	120.00	5755.12	5725 to 5850	Pass
			-10	120.00	5755.08	5725 to 5850	Pass
			0	120.00	5755.01	5725 to 5850	Pass
			10	120.00	5755.03	5725 to 5850	Pass
			30	120.00	5755.06	5725 to 5850	Pass
		5795	40	120.00	5755.10	5725 to 5850	Pass
			50	120.00	5755.12	5739 to 5771	Pass
			20	102.00	5795.05	5779 to 5811	Pass
				120.00	5795.11	5779 to 5811	Pass
				138.00	5795.12	5779 to 5811	Pass
			-30	102.00	5795.00	5779 to 5811	Pass
			-20	120.00	5795.04	5725 to 5850	Pass
			-10	120.00	5795.04	5725 to 5850	Pass
			0	120.00	5795.11	5725 to 5850	Pass
			10	120.00	5795.03	5725 to 5850	Pass
802.11ax(HEW20)	SISO	5745	30	120.00	5795.07	5725 to 5850	Pass
			40	120.00	5795.09	5725 to 5850	Pass
			50	120.00	5795.04	5779 to 5811	Pass
			20	102.00	5745.05	5737 to 5753	Pass
				120.00	5745.08	5737 to 5753	Pass
				138.00	5745.12	5737 to 5753	Pass
			-30	102.00	5745.07	5737 to 5753	Pass
			-20	120.00	5745.07	5725 to 5850	Pass
			-10	120.00	5745.07	5725 to 5850	Pass
			0	120.00	5745.03	5725 to 5850	Pass
		5785	10	120.00	5745.11	5725 to 5850	Pass
			30	120.00	5745.09	5725 to 5850	Pass
			40	120.00	5745.08	5725 to 5850	Pass
			50	120.00	5745.02	5737 to 5753	Pass
			20	102.00	5785.08	5777 to 5793	Pass
				120.00	5785.11	5777 to 5793	Pass
				138.00	5785.03	5777 to 5793	Pass
			-30	102.00	5785.02	5777 to 5793	Pass
			-20	120.00	5785.09	5725 to 5850	Pass
			-10	120.00	5785.07	5725 to 5850	Pass
			0	120.00	5785.04	5725 to 5850	Pass



			10	120.00	5785.10	5725 to 5850	Pass
			30	120.00	5785.11	5725 to 5850	Pass
			40	120.00	5785.05	5725 to 5850	Pass
			50	120.00	5785.05	5777 to 5793	Pass
		5825	20	102.00	5825.08	5817 to 5833	Pass
				120.00	5825.08	5817 to 5833	Pass
				138.00	5825.11	5817 to 5833	Pass
			-30	102.00	5825.12	5817 to 5833	Pass
			-20	120.00	5825.10	5725 to 5850	Pass
			-10	120.00	5825.13	5725 to 5850	Pass
			0	120.00	5825.11	5725 to 5850	Pass
			10	120.00	5825.08	5725 to 5850	Pass
			30	120.00	5825.02	5725 to 5850	Pass
			40	120.00	5825.13	5725 to 5850	Pass
			50	120.00	5825.13	5817 to 5833	Pass
802.11ax(HEW40)	SISO	5755	20	102.00	5755.06	5739 to 5771	Pass
				120.00	5755.10	5739 to 5771	Pass
				138.00	5755.01	5739 to 5771	Pass
			-30	102.00	5755.07	5739 to 5771	Pass
			-20	120.00	5755.05	5725 to 5850	Pass
			-10	120.00	5755.03	5725 to 5850	Pass
			0	120.00	5755.12	5725 to 5850	Pass
			10	120.00	5755.10	5725 to 5850	Pass
			30	120.00	5755.09	5725 to 5850	Pass
			40	120.00	5755.13	5725 to 5850	Pass
			50	120.00	5755.06	5739 to 5771	Pass
		5795	20	102.00	5795.04	5779 to 5811	Pass
				120.00	5795.12	5779 to 5811	Pass
				138.00	5795.03	5779 to 5811	Pass
			-30	102.00	5795.01	5779 to 5811	Pass
			-20	120.00	5795.02	5725 to 5850	Pass
			-10	120.00	5795.05	5725 to 5850	Pass
			0	120.00	5795.05	5725 to 5850	Pass
			10	120.00	5795.03	5725 to 5850	Pass
			30	120.00	5795.09	5725 to 5850	Pass
			40	120.00	5795.07	5725 to 5850	Pass
			50	120.00	5795.07	5779 to 5811	Pass



10. Antenna Requirement

10.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.407 requirement: if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. Antenna Connected Construction

The antenna is a FPC antenna which permanently attached, and the best case gain of the Wi-Fi 5.2G: 1.72dBi; Wi-Fi 5.3G: 1.72dBi; Wi-Fi 5.8G: 1.85dBi. It complies with the standard requirement.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

