

# RF Test Data for Bluetooth LE (Conducted Measurements)

| General Description of EUT                                                                                                                  |                               |
|---------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| Product Name:                                                                                                                               | Temperature & Humidity Sensor |
| Test Model:                                                                                                                                 | EDH-10i                       |
| Sample ID:                                                                                                                                  | 202310-0239-1-2#              |
| Environmental Conditions                                                                                                                    |                               |
| Temperature:                                                                                                                                | 25℃                           |
| Relative Humidity:                                                                                                                          | 55%                           |
| Test Voltage:                                                                                                                               | DC 3V                         |
| Test Engineer:                                                                                                                              | Yan zhen ming                 |
| Note: For a more detailed features description, please refer to the report TBR-C-202310-0239-1<br>The report only show the worst case data. |                               |



## Contents

|                                              |    |
|----------------------------------------------|----|
| 1. Duty Cycle.....                           | 3  |
| 2. Maximum Conducted Output Power .....      | 6  |
| 3. -6dB Bandwidth .....                      | 9  |
| 4. Occupied Channel Bandwidth .....          | 12 |
| 5. Maximum Power Spectral Density Level..... | 15 |
| 6. Band Edge .....                           | 18 |
| 7. Conducted RF Spurious Emission .....      | 21 |
| 8. Restrict Band .....                       | 25 |




## 1. Duty Cycle


| Condition | Mode      | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|-----------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | BLE 1Mbps | 2402            | Ant1    | 67.74          | 1.69                   | 2.38      |
| NVNT      | BLE 1Mbps | 2440            | Ant1    | 66.67          | 1.76                   | 2.38      |
| NVNT      | BLE 1Mbps | 2480            | Ant1    | 67.74          | 1.69                   | 2.38      |

## Test Graphs


### Duty Cycle NVNT BLE 1Mbps 2402MHz Ant1

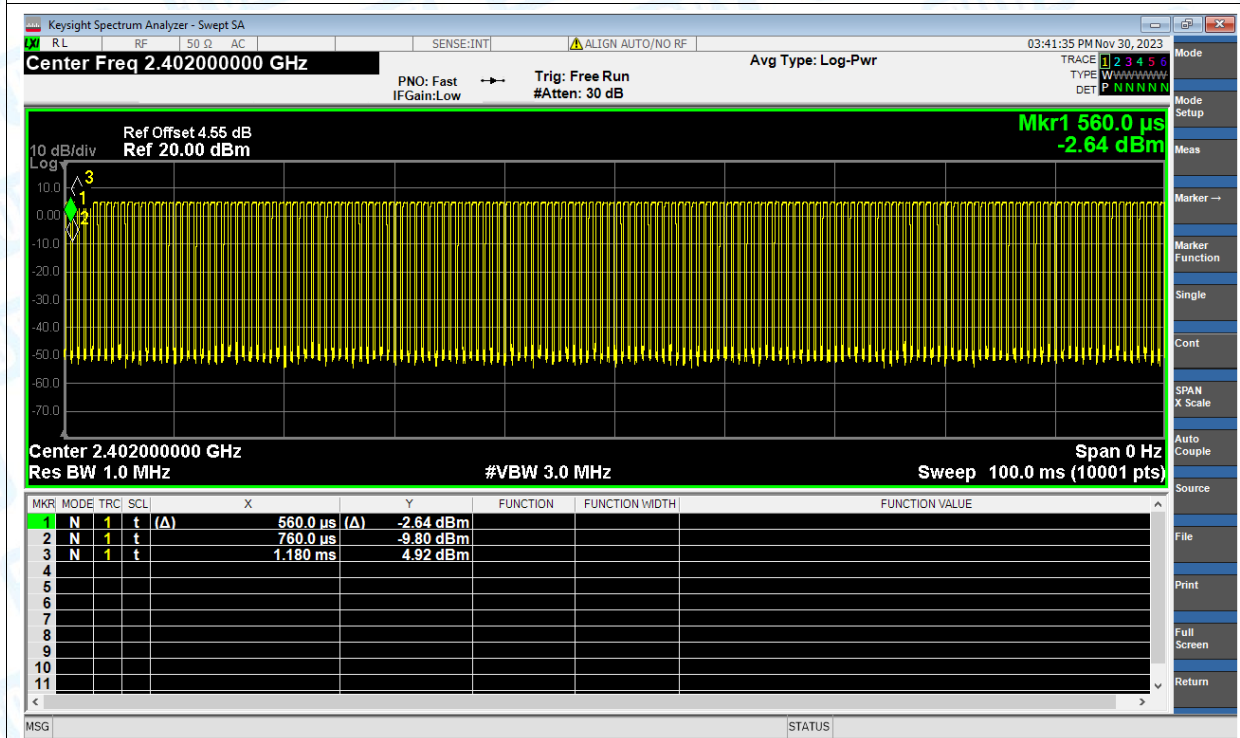

### Duty Cycle NVNT BLE 1Mbps 2440MHz Ant1

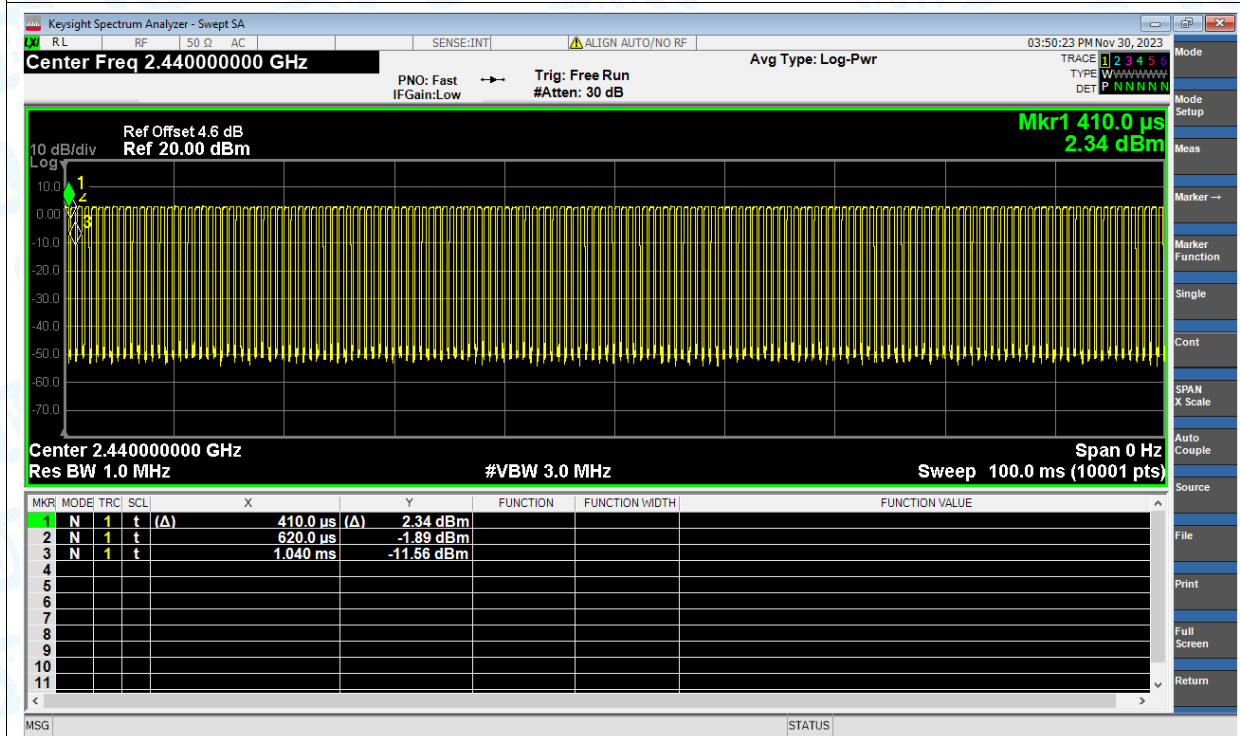



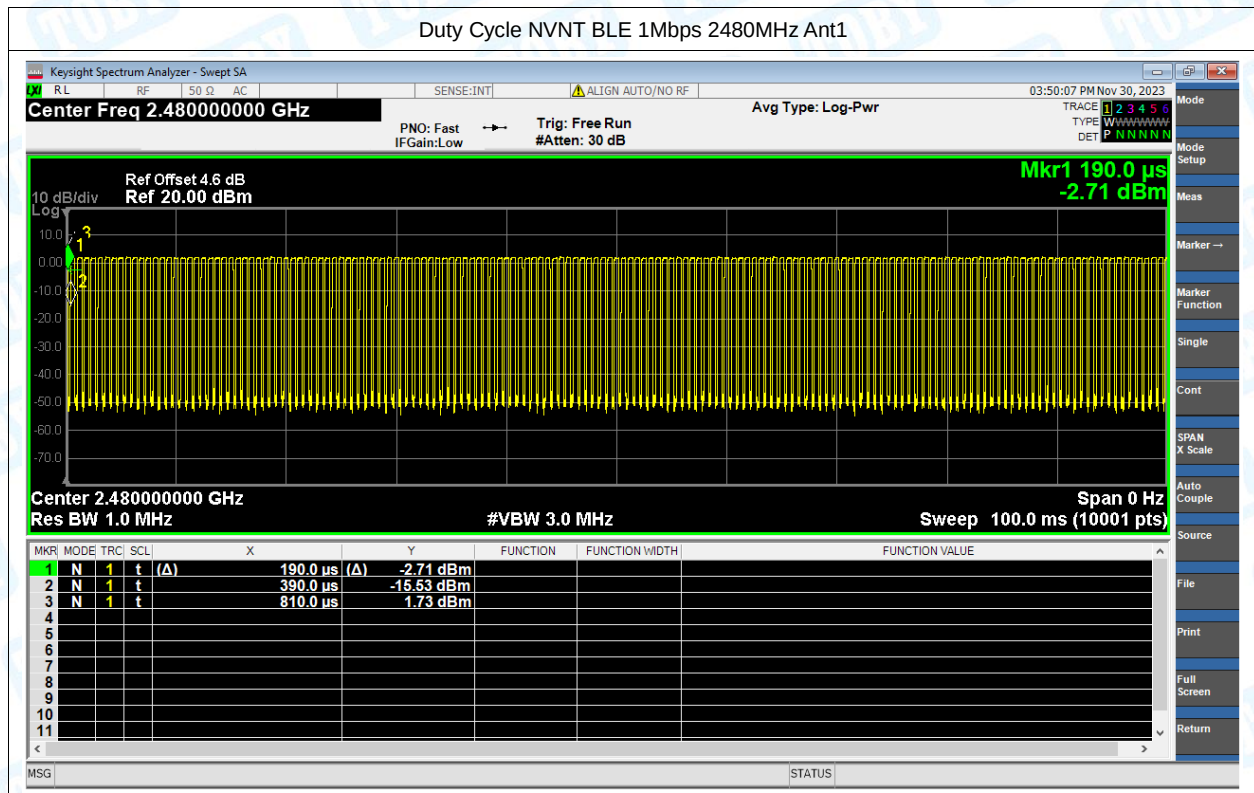


## 2. Maximum Conducted Output Power

| Condition | Mode      | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|-----------|-----------------|---------|-----------------------|-------------|---------|
| NVNT      | BLE 1Mbps | 2402            | Ant1    | 4.041                 | 30          | Pass    |
| NVNT      | BLE 1Mbps | 2440            | Ant1    | 4.098                 | 30          | Pass    |
| NVNT      | BLE 1Mbps | 2480            | Ant1    | 3.053                 | 30          | Pass    |





# Test Graphs

## Power NVNT BLE 1Mbps 2402MHz Ant1

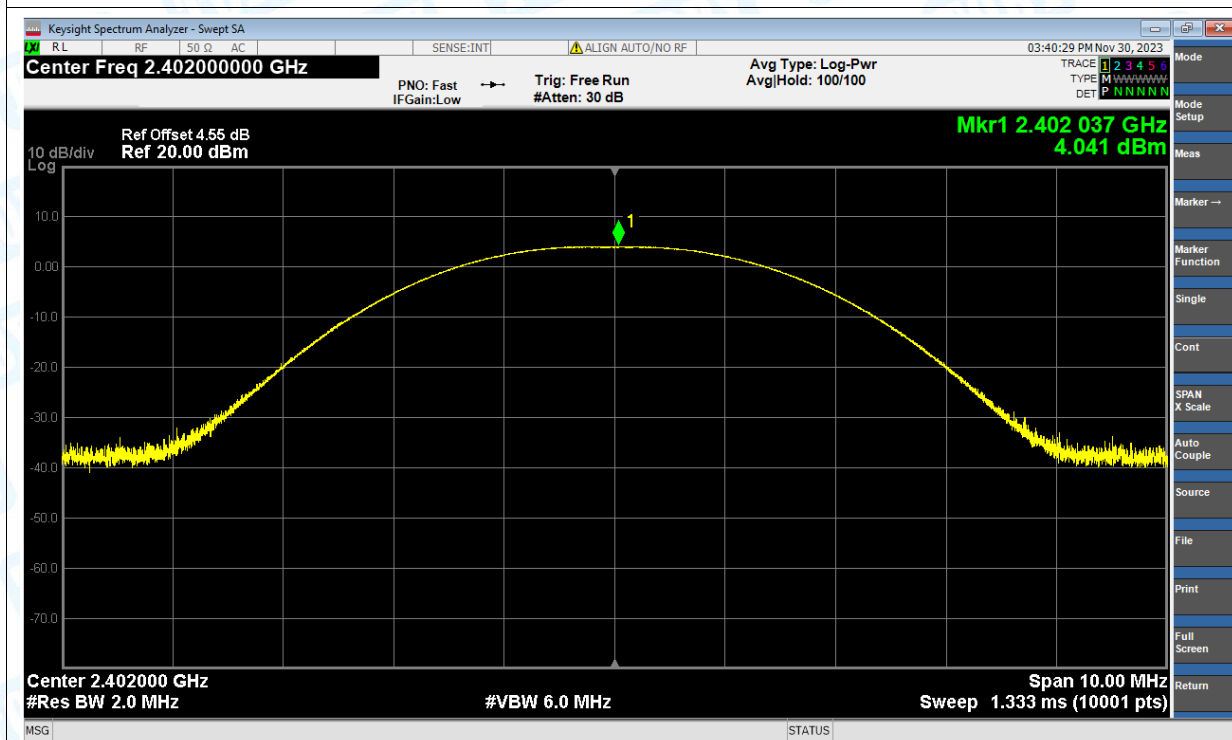

## Power NVNT BLE 1Mbps 2440MHz Ant1

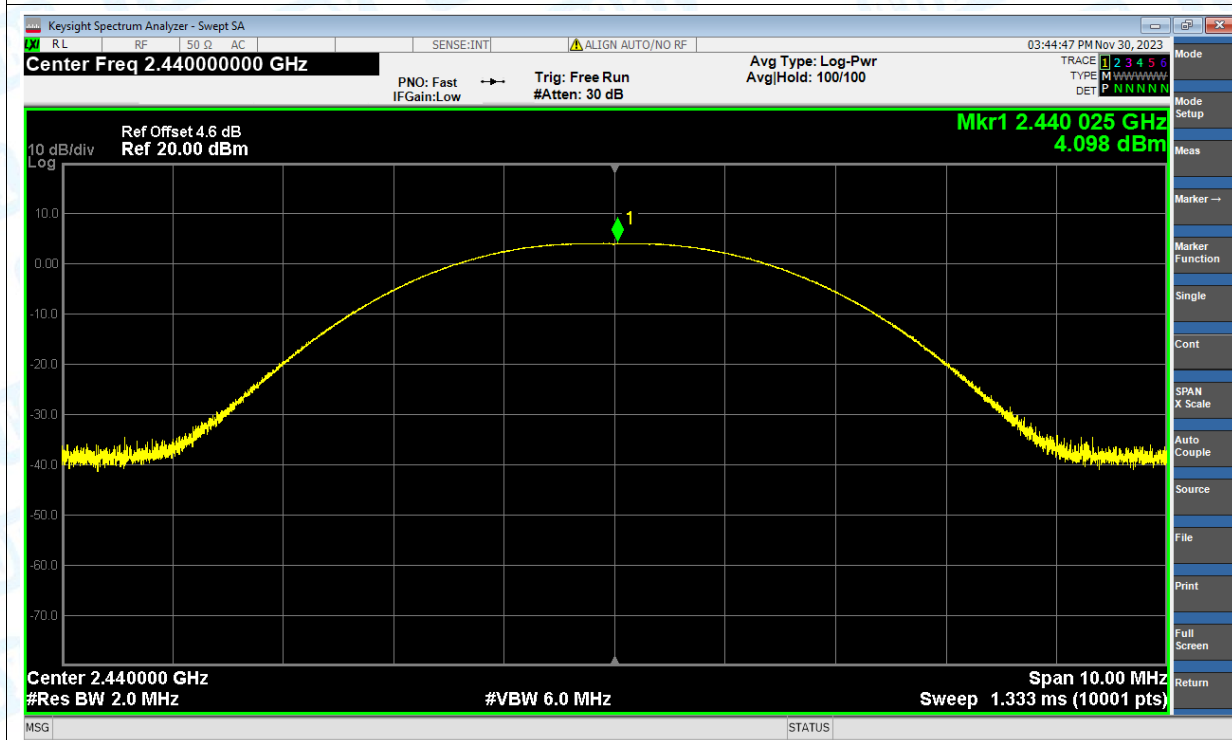

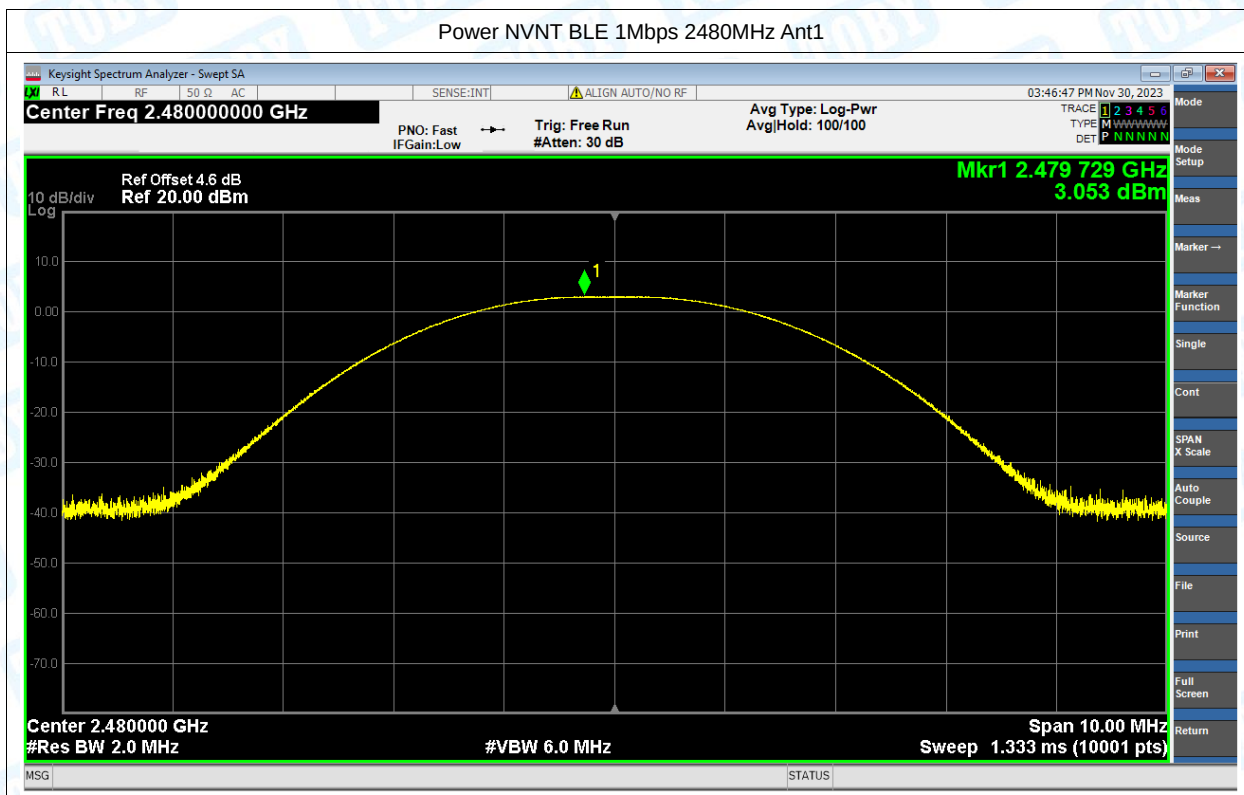




### 3. -6dB Bandwidth


| Condition | Mode      | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|-----------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | BLE 1Mbps | 2402            | Ant1    | 0.72                  | 0.5                         | Pass    |
| NVNT      | BLE 1Mbps | 2440            | Ant1    | 0.73                  | 0.5                         | Pass    |
| NVNT      | BLE 1Mbps | 2480            | Ant1    | 0.71                  | 0.5                         | Pass    |

## Test Graphs


### -6dB Bandwidth NVNT BLE 1Mbps 2402MHz Ant1

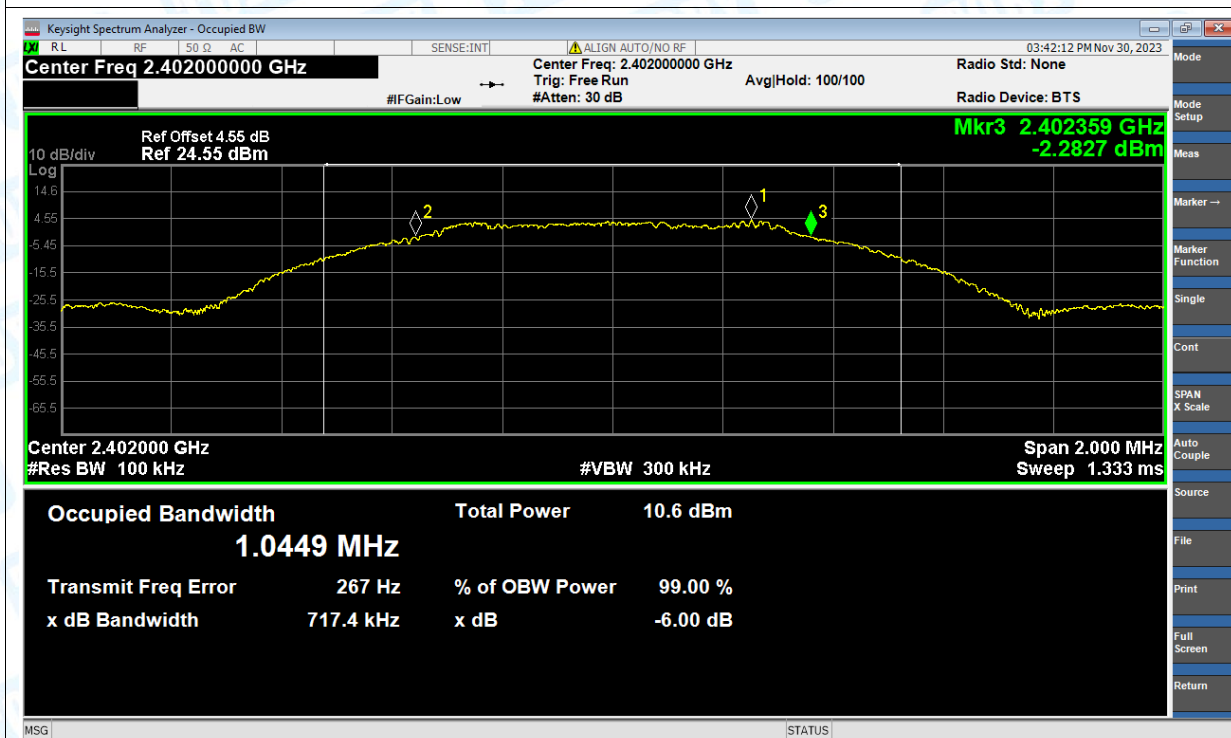

### -6dB Bandwidth NVNT BLE 1Mbps 2440MHz Ant1

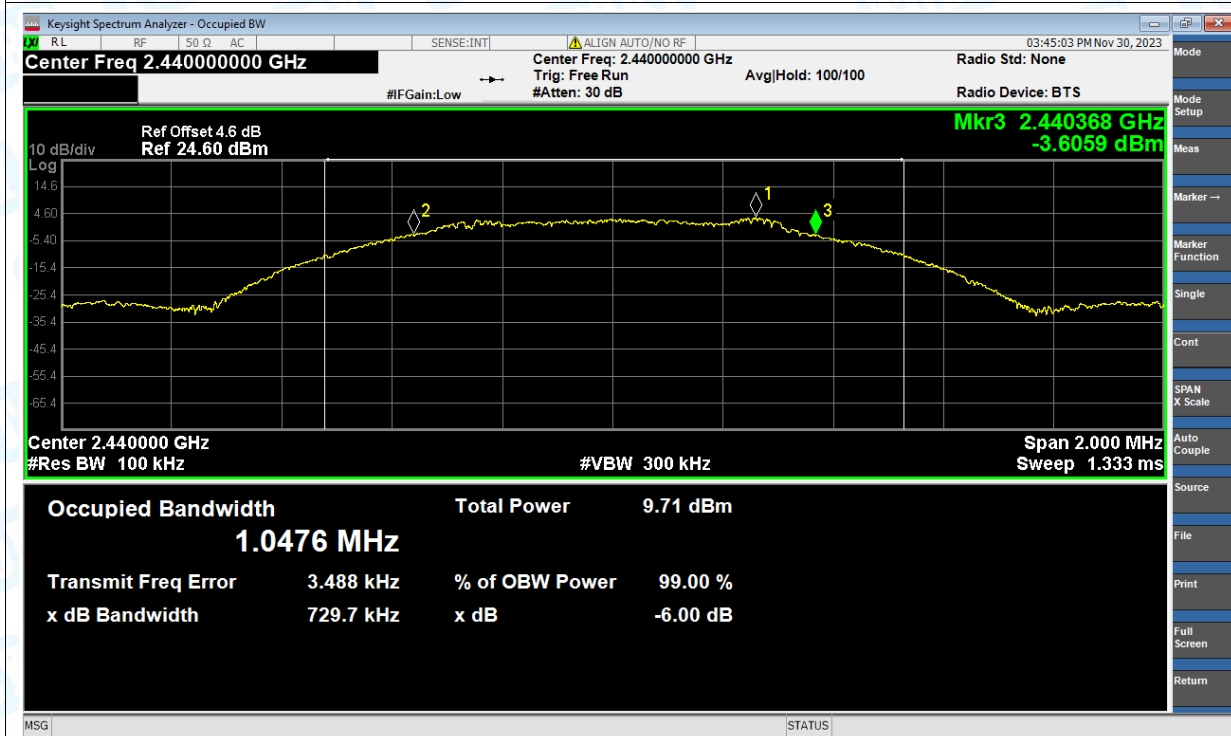



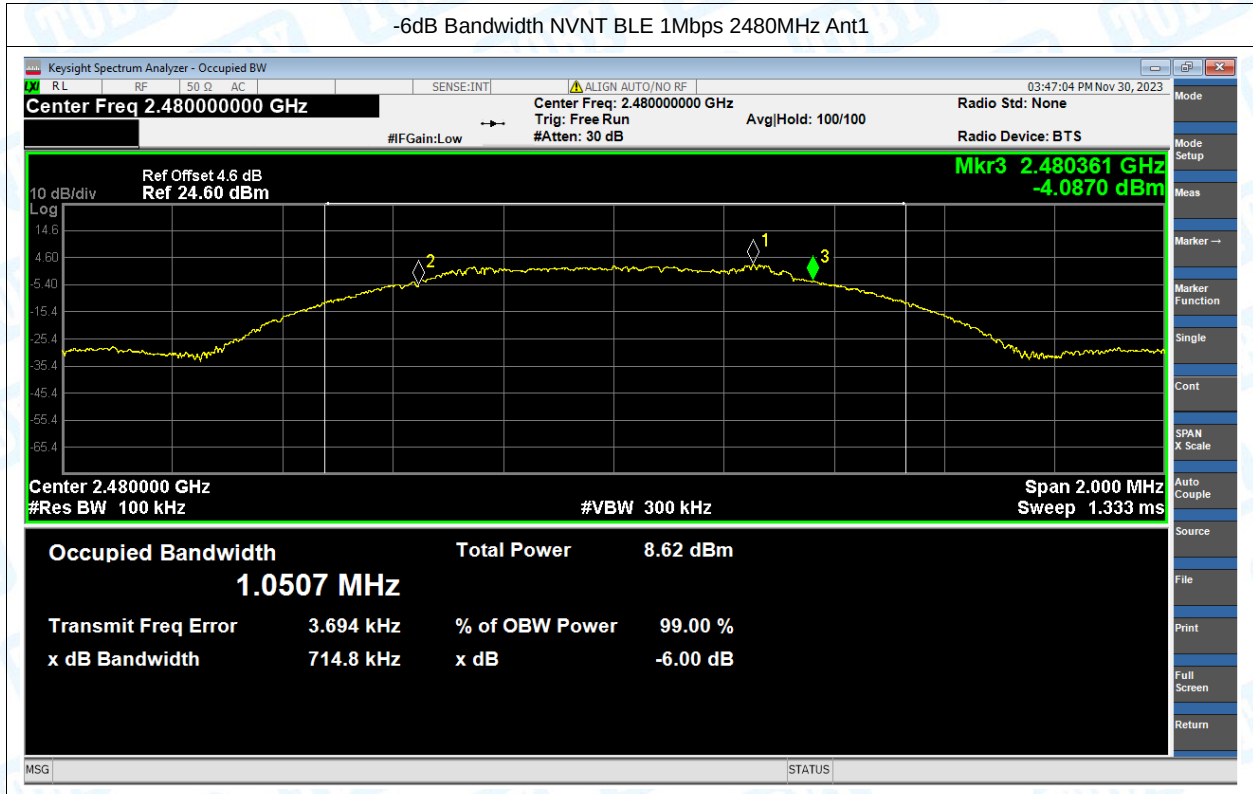


## 4. Occupied Channel Bandwidth

| Condition | Mode      | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|-----------|-----------|-----------------|---------|---------------|
| NVNT      | BLE 1Mbps | 2402            | Ant1    | 1.046         |
| NVNT      | BLE 1Mbps | 2440            | Ant1    | 1.043         |
| NVNT      | BLE 1Mbps | 2480            | Ant1    | 1.047         |





## Test Graphs

### OBW NVNT BLE 1Mbps 2402MHz Ant1

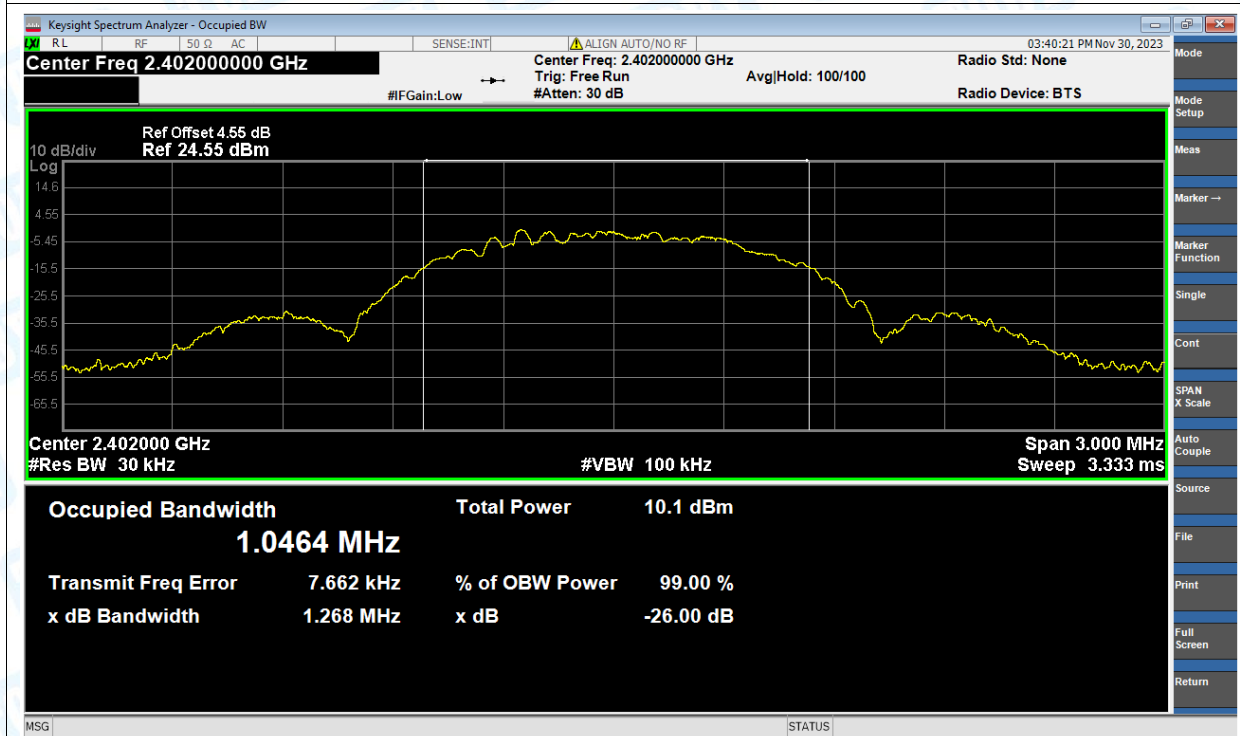

### OBW NVNT BLE 1Mbps 2440MHz Ant1

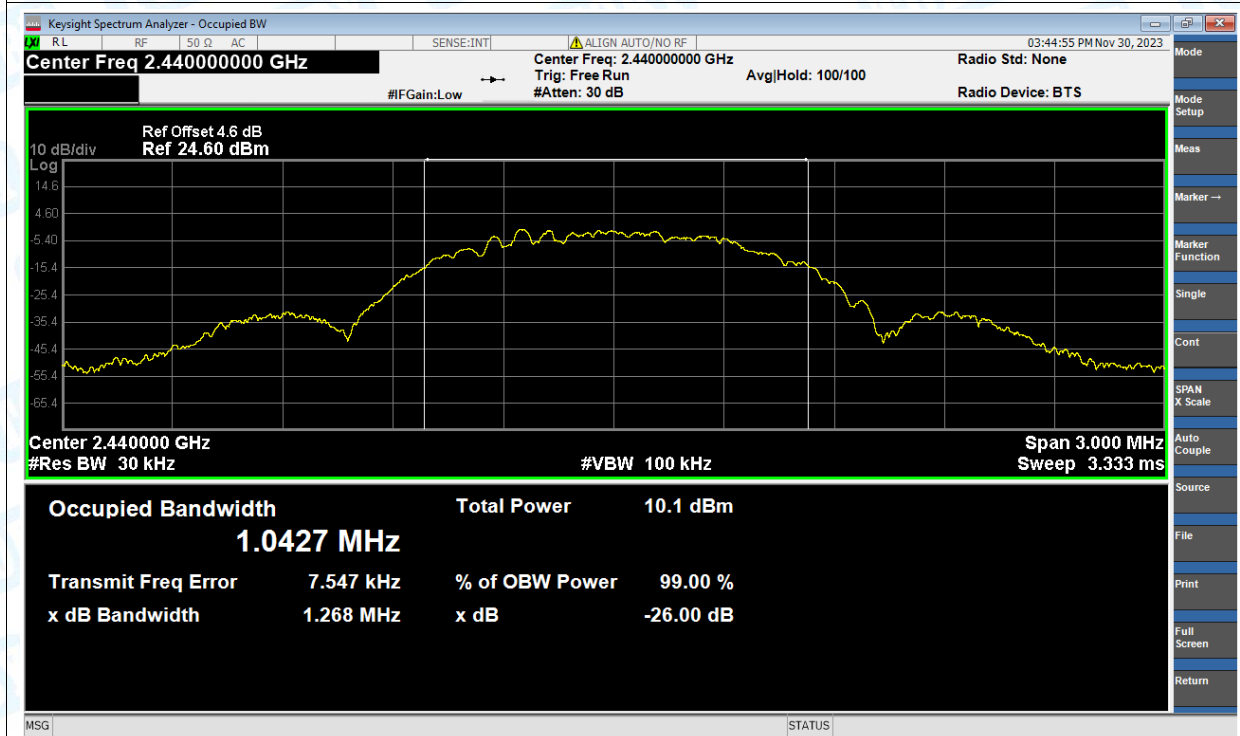

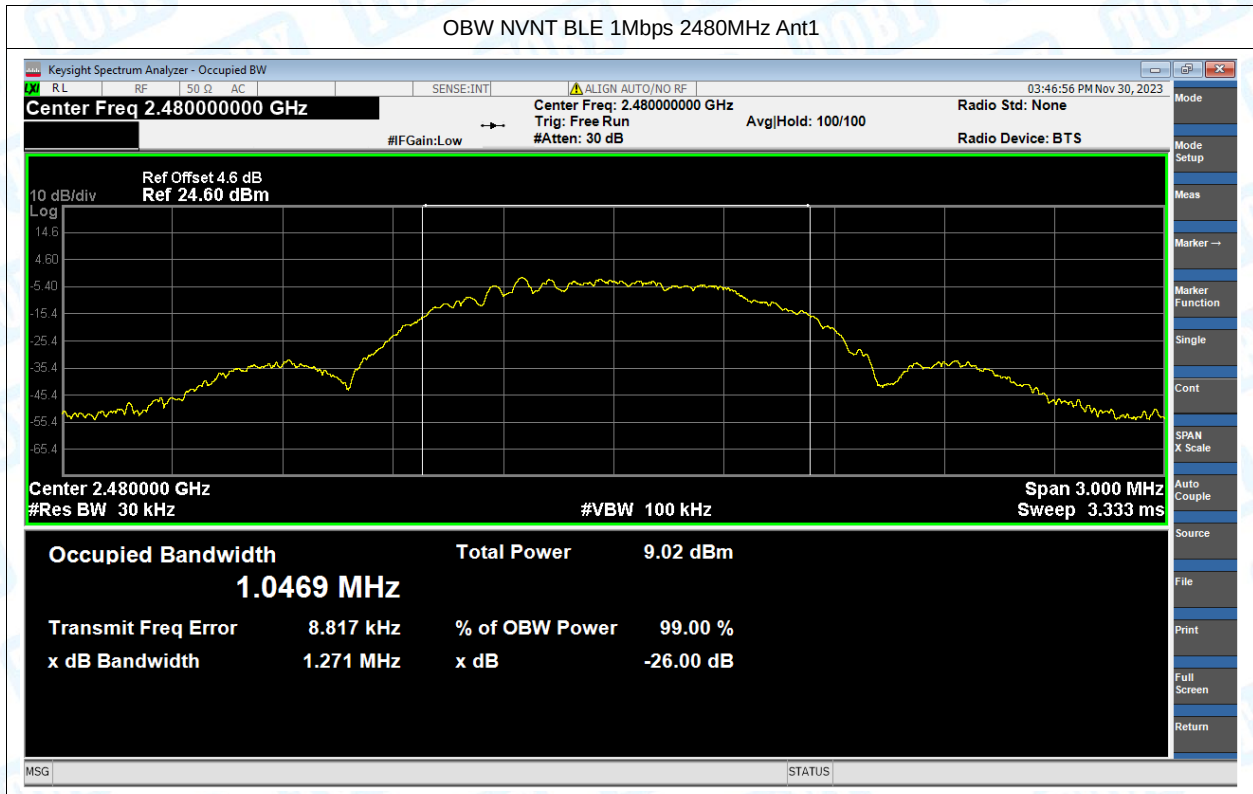




## 5. Maximum Power Spectral Density Level


| Condition | Mode      | Frequency (MHz) | Antenna | Max PSD (dBm) | Limit (dBm) | Verdict |
|-----------|-----------|-----------------|---------|---------------|-------------|---------|
| NVNT      | BLE 1Mbps | 2402            | Ant1    | -11.438       | 8           | Pass    |
| NVNT      | BLE 1Mbps | 2440            | Ant1    | -11.649       | 8           | Pass    |
| NVNT      | BLE 1Mbps | 2480            | Ant1    | -12.668       | 8           | Pass    |

### Test Graphs


PSD NVNT BLE 1Mbps 2402MHz Ant1

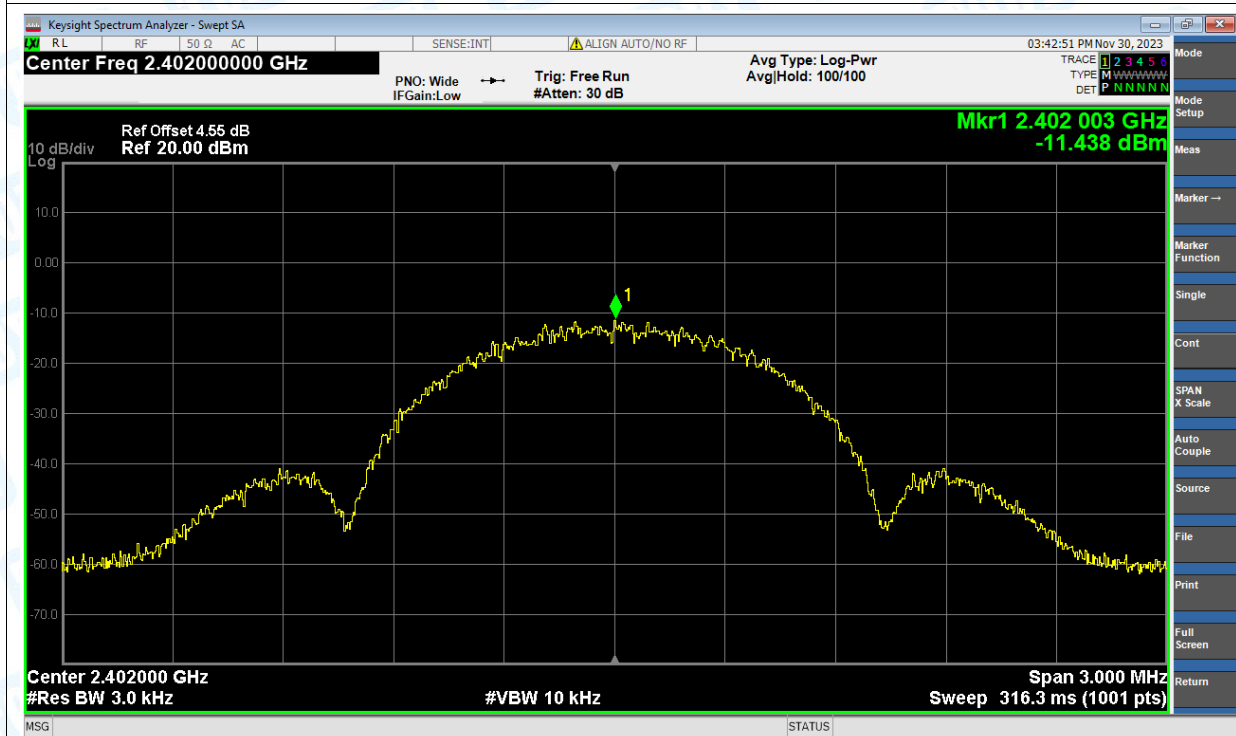

PSD NVNT BLE 1Mbps 2440MHz Ant1

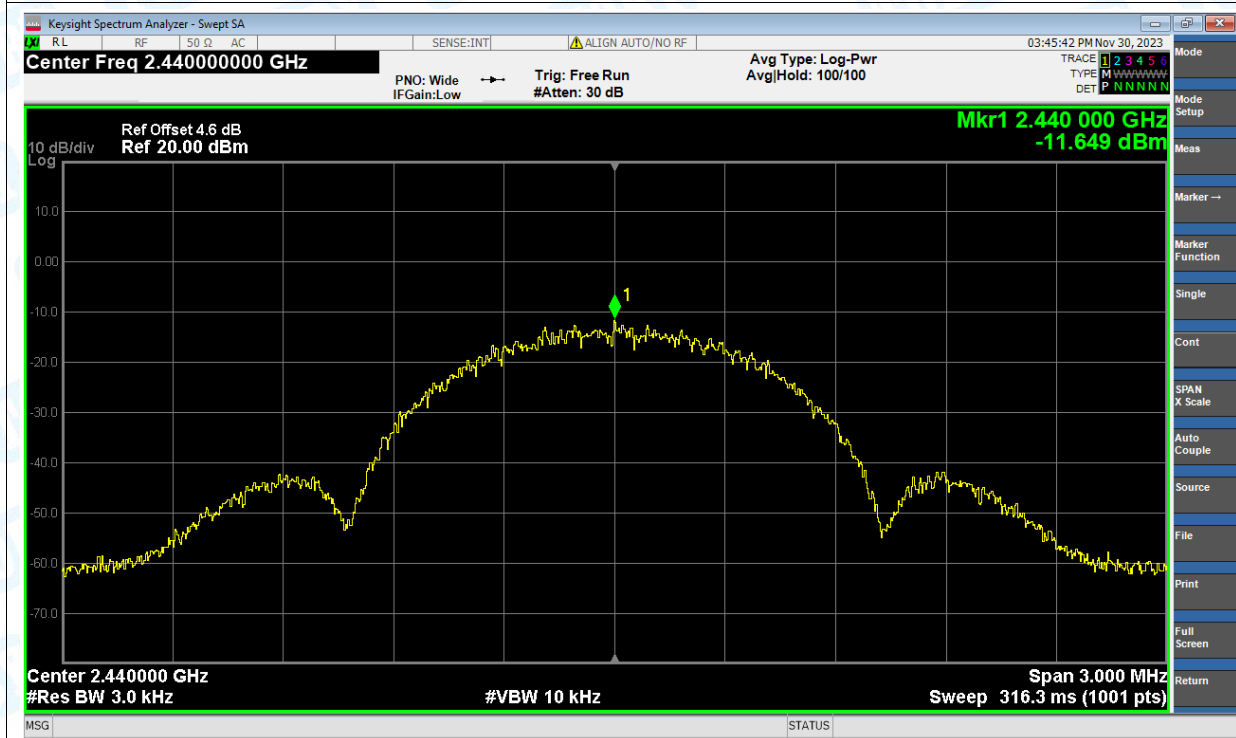



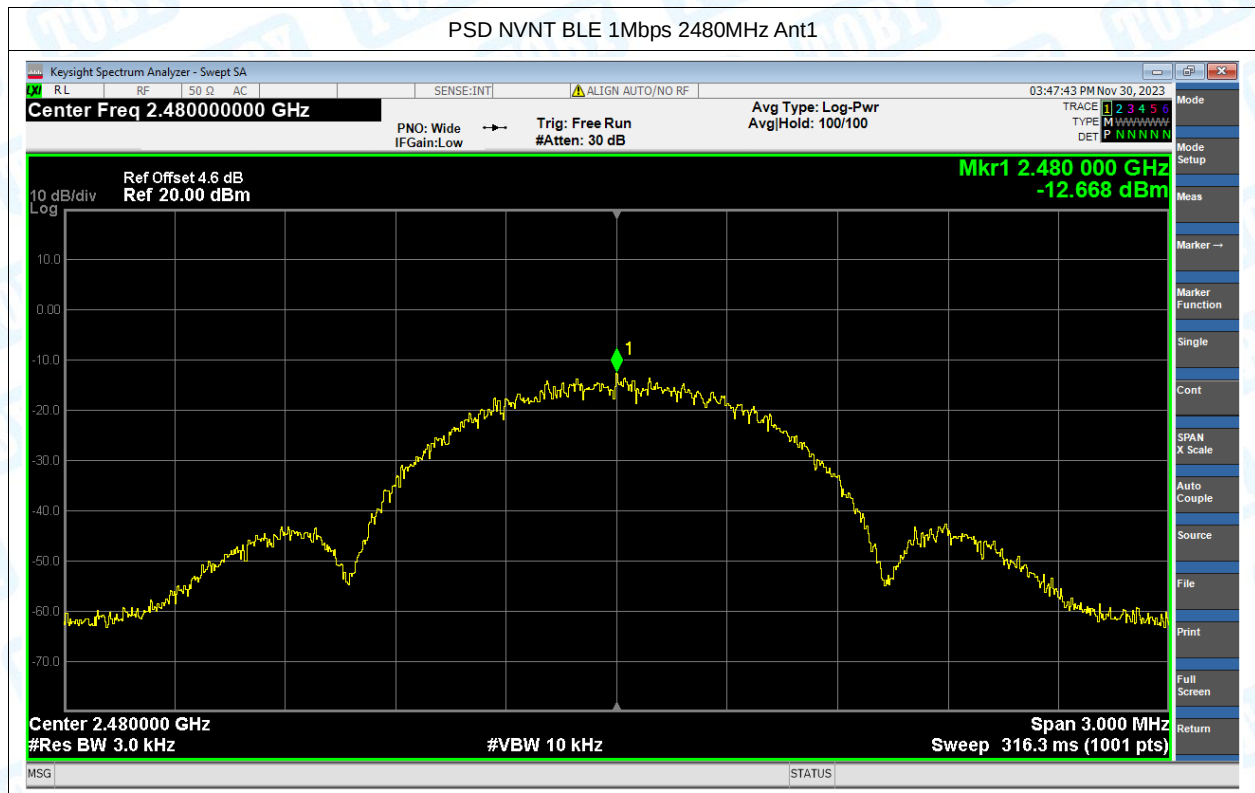


## 6. Band Edge

| Condition | Mode      | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|-----------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | BLE 1Mbps | 2402            | Ant1    | -54.75          | -20         | Pass    |
| NVNT      | BLE 1Mbps | 2480            | Ant1    | -49.97          | -20         | Pass    |




# Test Graphs


## Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Ref

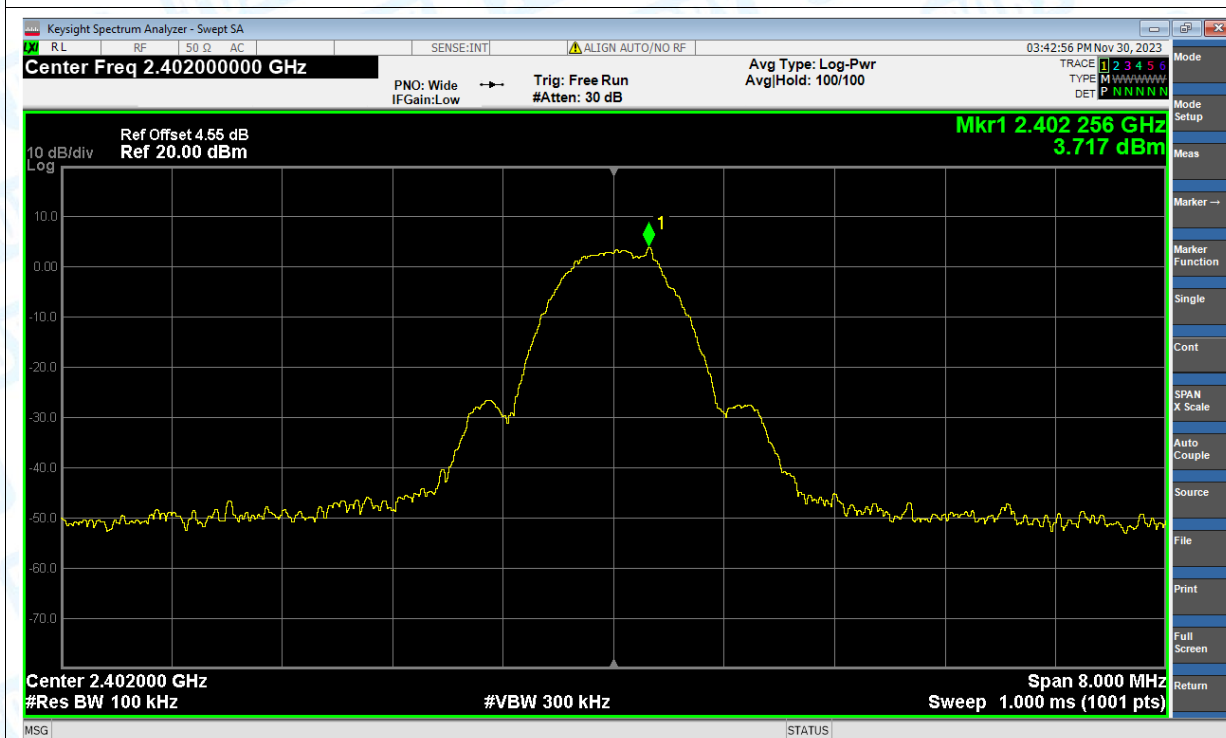


## Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Emission

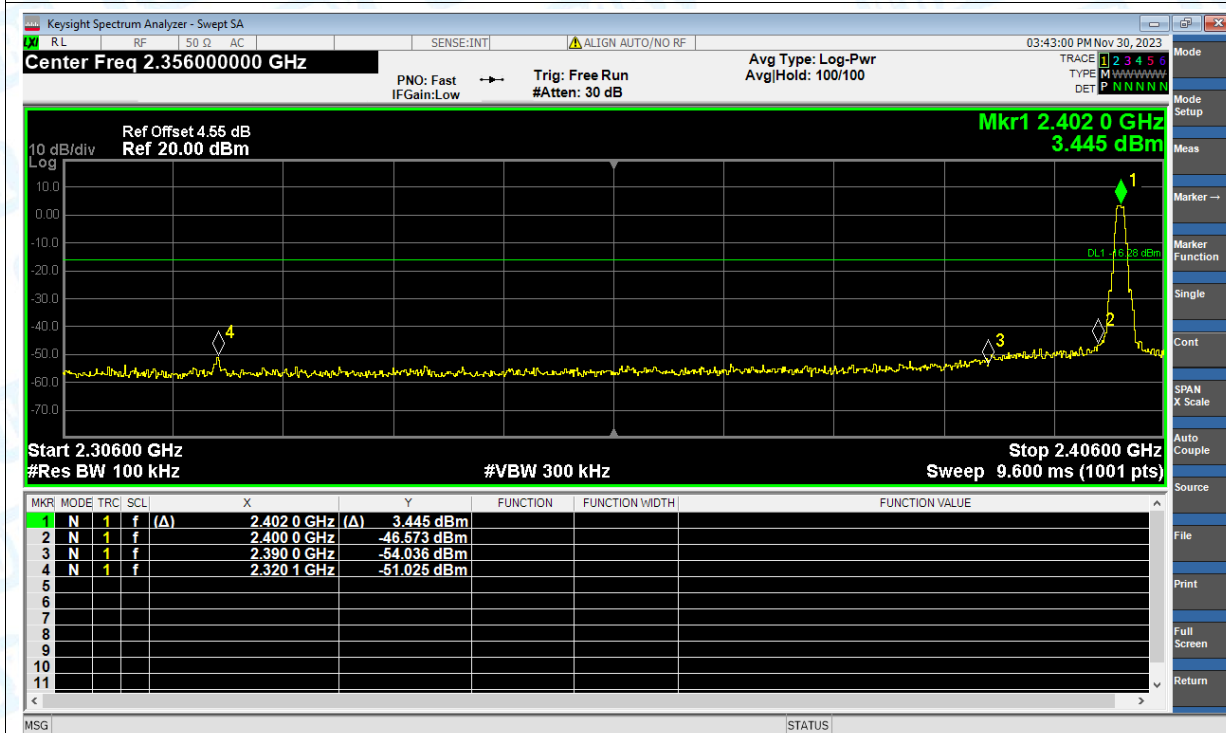

### Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Ref

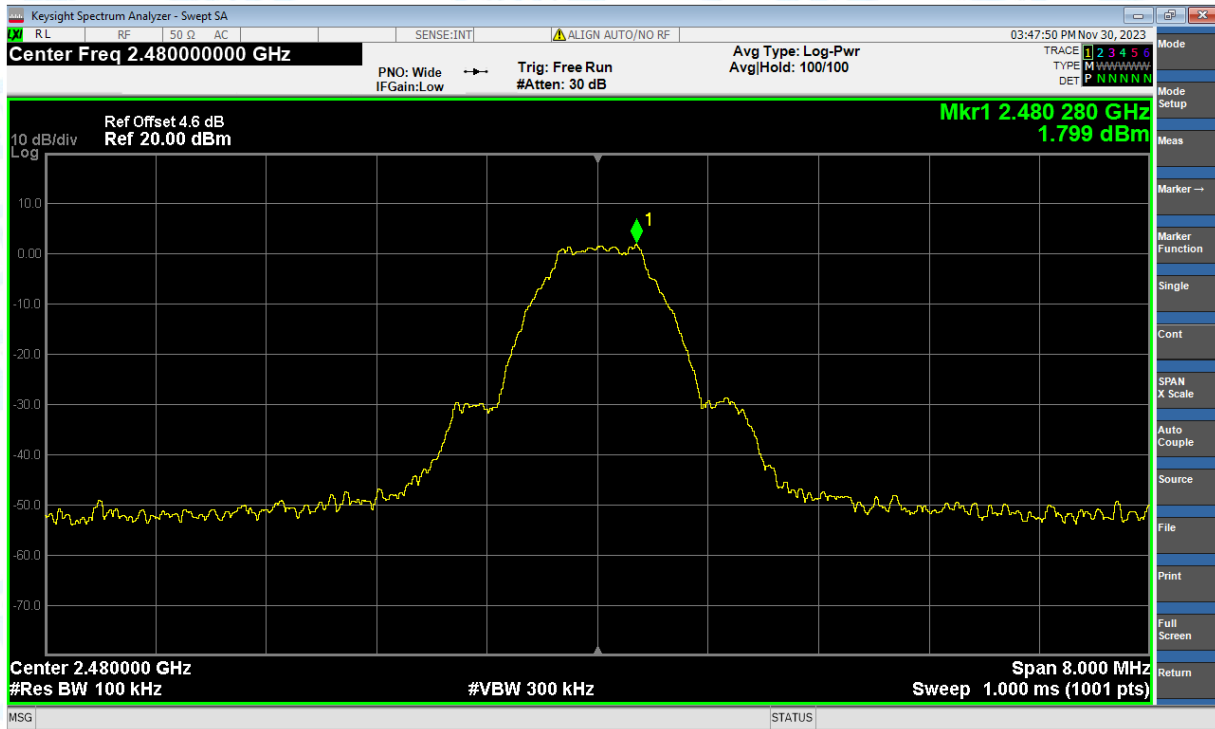

### Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Emission

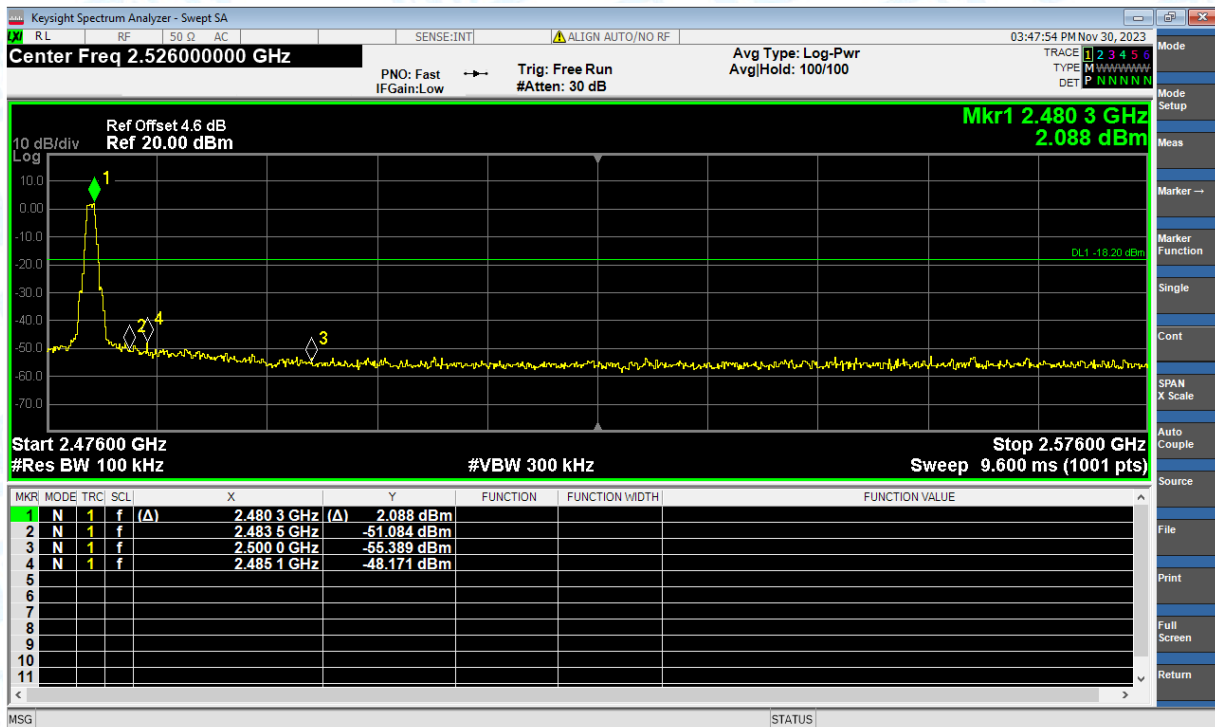



## 7. Conducted RF Spurious Emission


| Condition | Mode      | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|-----------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | BLE 1Mbps | 2402            | Ant1    | -42.74          | -20         | Pass    |
| NVNT      | BLE 1Mbps | 2440            | Ant1    | -43.01          | -20         | Pass    |
| NVNT      | BLE 1Mbps | 2480            | Ant1    | -41.81          | -20         | Pass    |

### Test Graphs

#### Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Ref




#### Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Emission

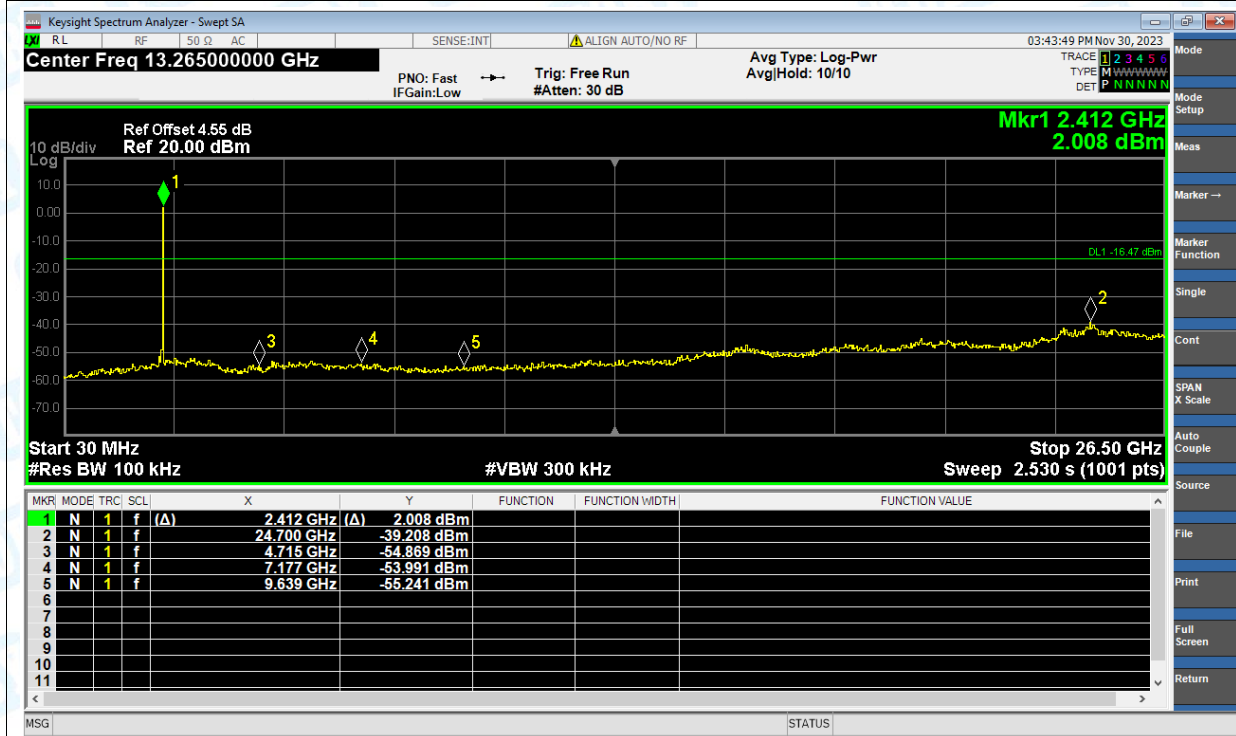





Tx. Spurious NVNT BLE 1Mbps 2440MHz Ant1 Ref

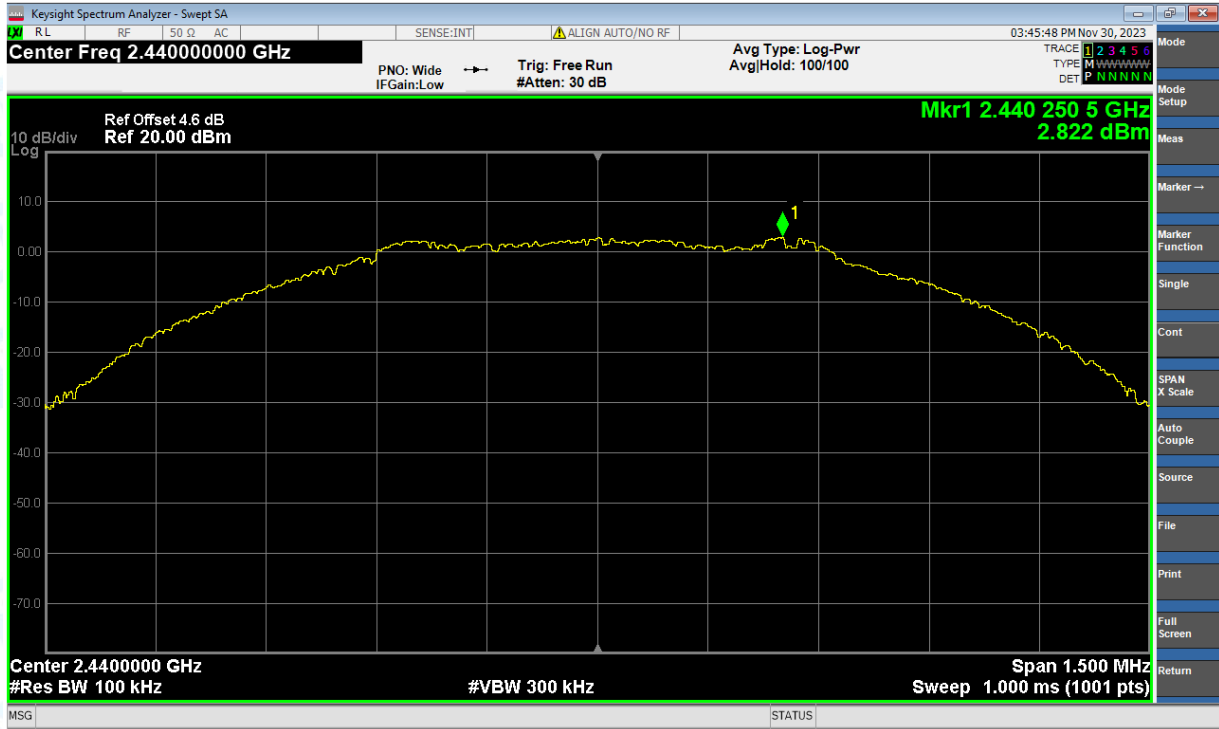


Tx. Spurious NVNT BLE 1Mbps 2440MHz Ant1 Emission

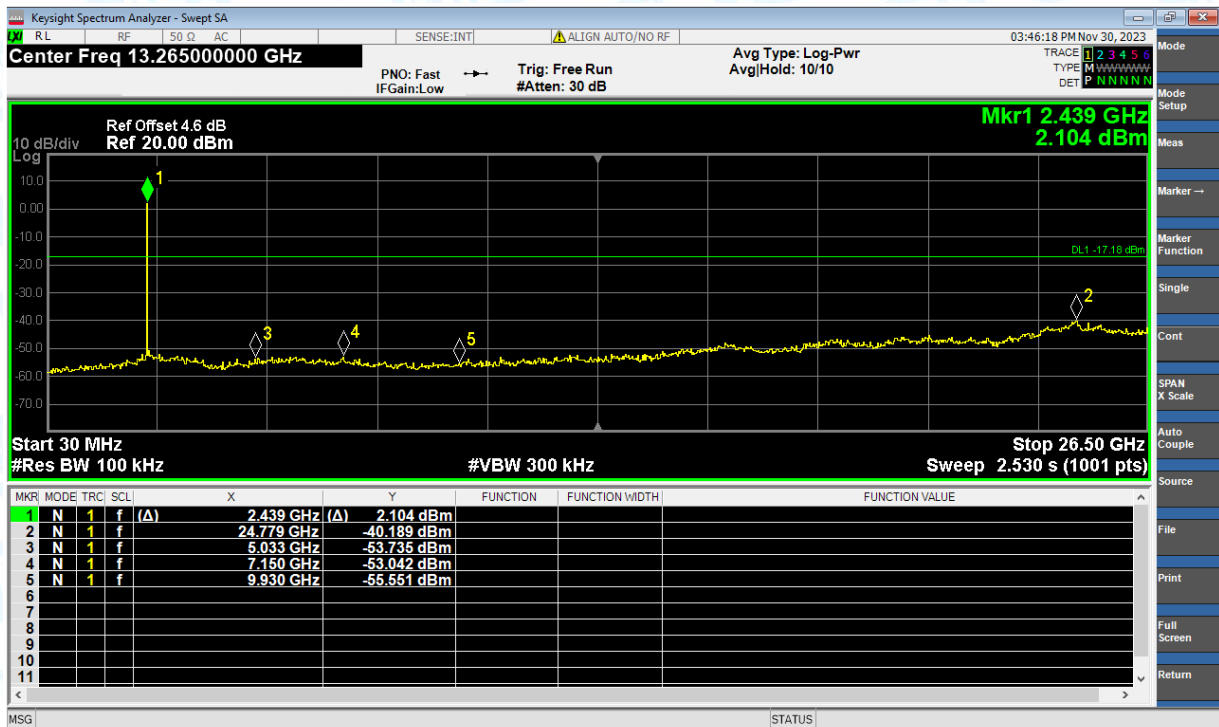

Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Ref

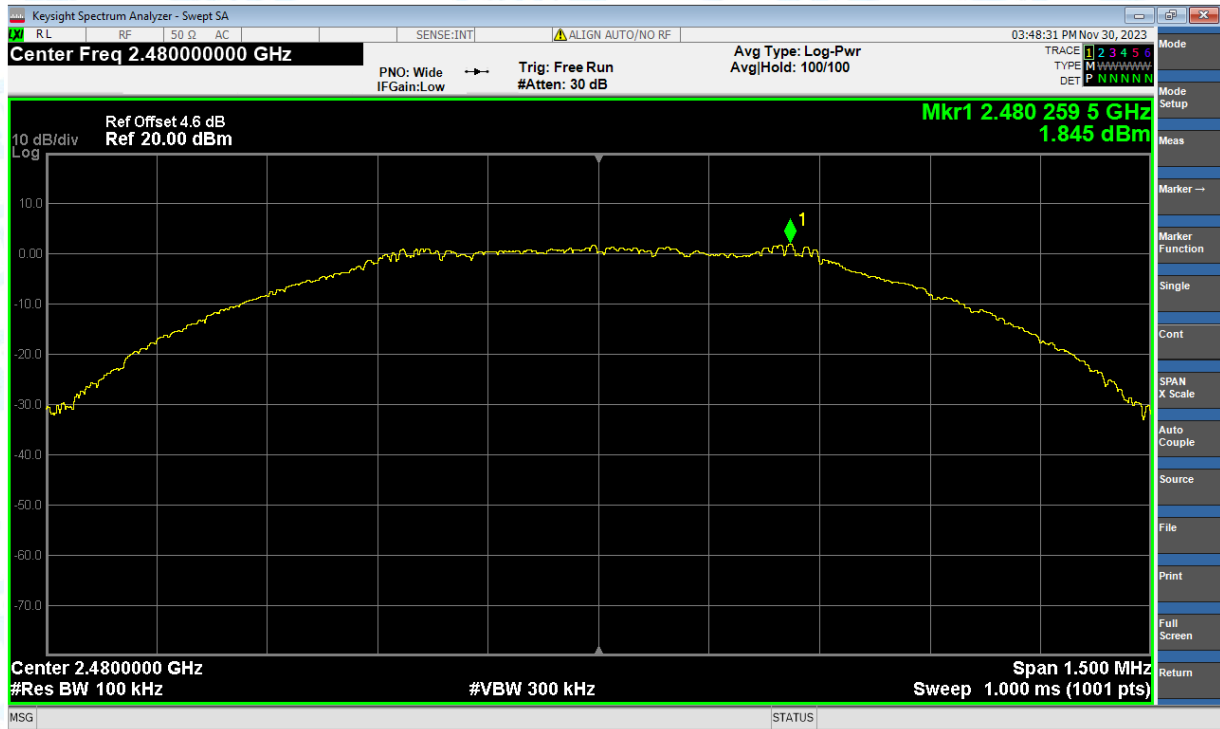

Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Emission

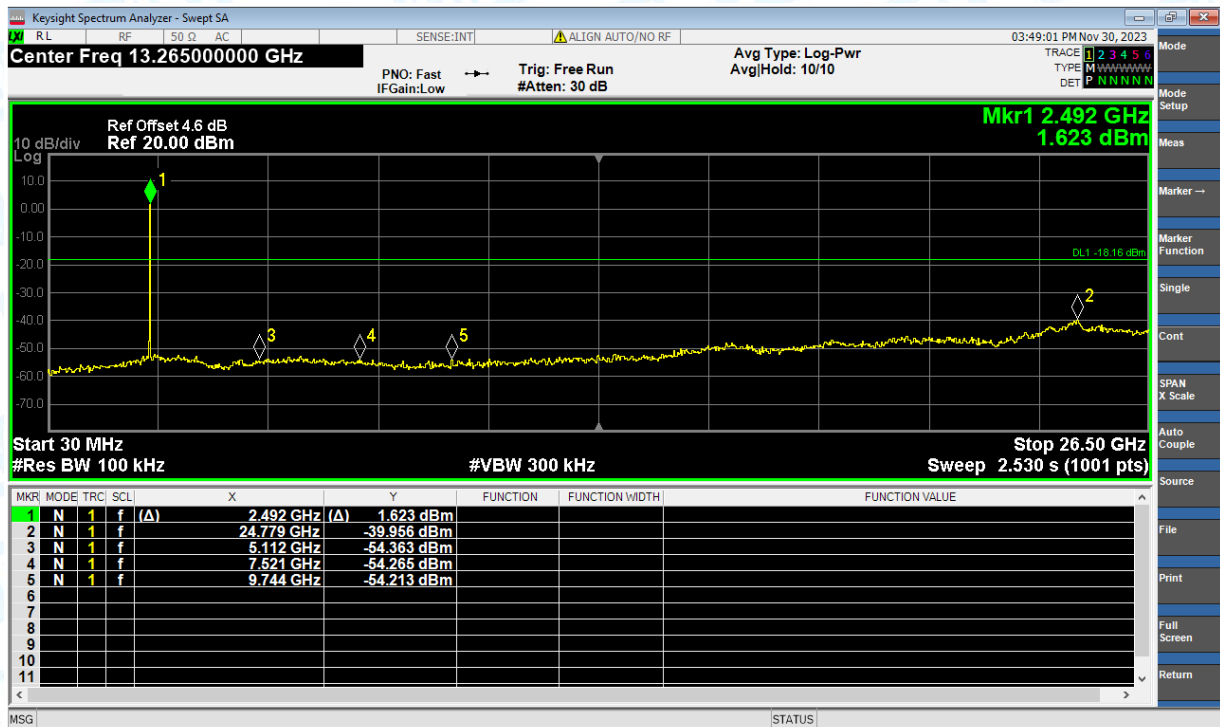




## 8. Restrict Band


| Condition | Mode      | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|-----------|-----------------|---------|-----------------|-------------|------------|------------|----------|----------------|---------|
| NVNT      | BLE 1Mbps | 2402            | Ant1    | 2310            | -46.27      | 2          | 50.99      | Peak     | 74             | Pass    |
| NVNT      | BLE 1Mbps | 2402            | Ant1    | 2310            | -55.38      | 2          | 41.88      | Average  | 54             | Pass    |
| NVNT      | BLE 1Mbps | 2402            | Ant1    | 2388.24         | -40.59      | 2          | 56.67      | Peak     | 74             | Pass    |
| NVNT      | BLE 1Mbps | 2402            | Ant1    | 2389.68         | -50.2       | 2          | 47.06      | Average  | 54             | Pass    |
| NVNT      | BLE 1Mbps | 2402            | Ant1    | 2390            | -42.2       | 2          | 55.06      | Peak     | 74             | Pass    |
| NVNT      | BLE 1Mbps | 2402            | Ant1    | 2390            | -50.3       | 2          | 46.96      | Average  | 54             | Pass    |
| NVNT      | BLE 1Mbps | 2480            | Ant1    | 2483.5          | -40.74      | 2          | 56.52      | Peak     | 74             | Pass    |
| NVNT      | BLE 1Mbps | 2480            | Ant1    | 2483.5          | -49.78      | 2          | 47.48      | Average  | 54             | Pass    |
| NVNT      | BLE 1Mbps | 2480            | Ant1    | 2484.64         | -36.91      | 2          | 60.35      | Peak     | 74             | Pass    |
| NVNT      | BLE 1Mbps | 2480            | Ant1    | 2483.512        | -49.78      | 2          | 47.48      | Average  | 54             | Pass    |
| NVNT      | BLE 1Mbps | 2480            | Ant1    | 2500            | -45.55      | 2          | 51.71      | Peak     | 74             | Pass    |
| NVNT      | BLE 1Mbps | 2480            | Ant1    | 2500            | -54.51      | 2          | 42.75      | Average  | 54             | Pass    |

# Test Graphs

## Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Peak

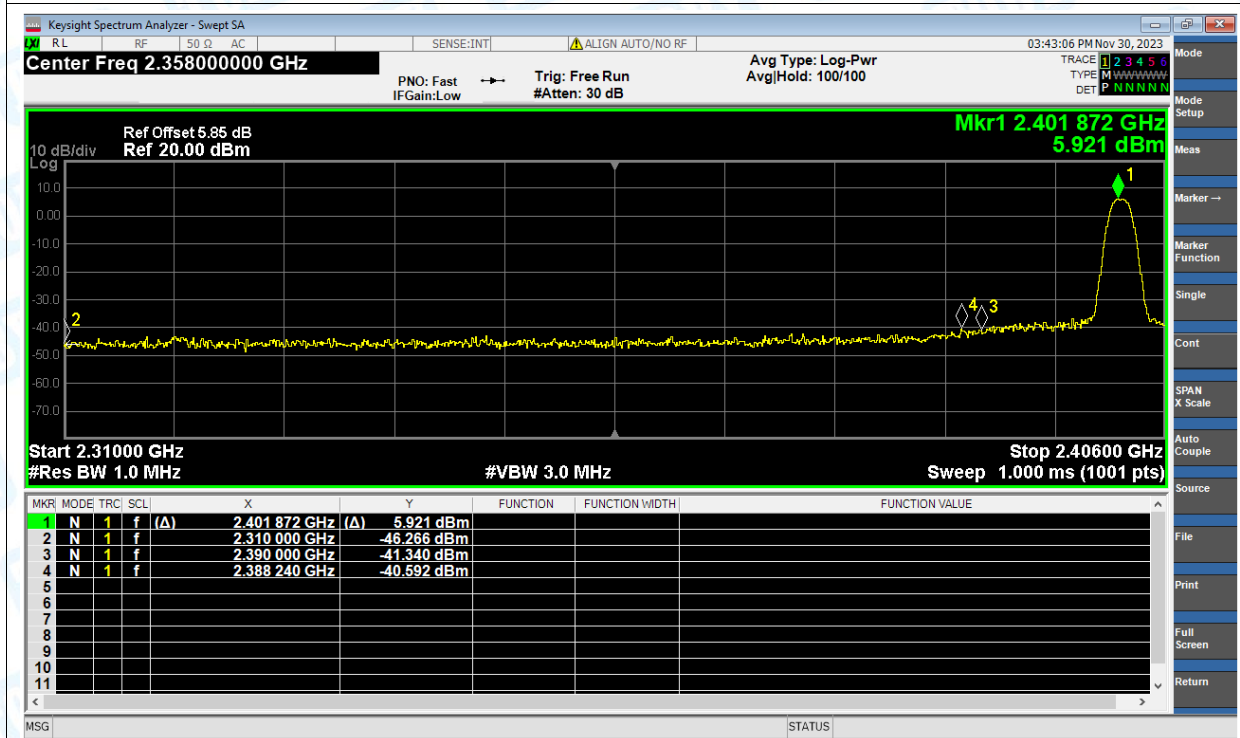


## Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Average

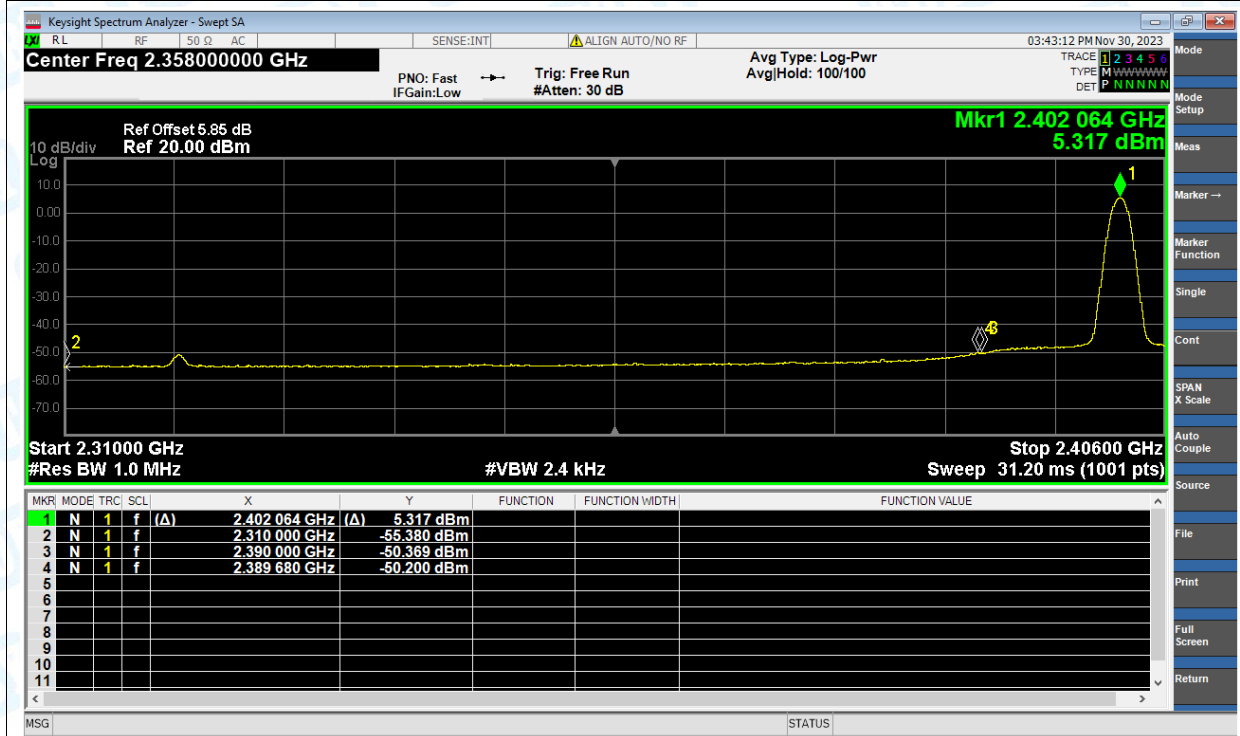



### Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Peak

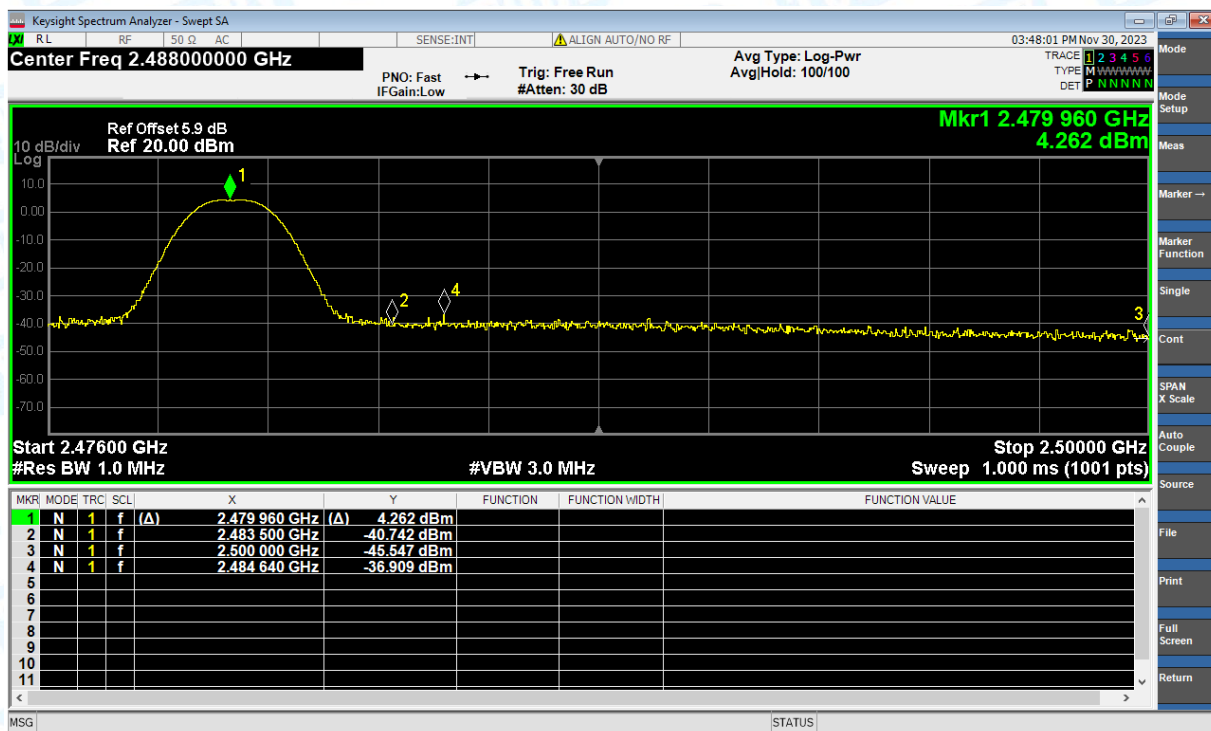

### Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Average



-----END OF THE REPORT-----