




Test Report No.:
FCCSZ2023-0022-RF1

RF Test Report

FCC ID : 2BEA6AP6275
IC : 31870-AP6275
EUT : Module
MODEL : VT-MOB-6275-AX
BRAND NAME : N/A
APPLICANT : Vantron Technology, Inc.
Classification of Test : N/A

CVC Testing Technology (Shenzhen) Co., Ltd.



Applicant		Name: Vantron Technology, Inc. Address: 48434 Milmont Drive Fremont, CA 94538-7324, USA			
Manufacturer		Name: Vantron Technology, Inc. Address: 48434 Milmont Drive Fremont, CA 94538-7324, USA			
Equipment Under Test		Product Name:Module Model/Type: VT-MOB-6275-AX Brand Name: N/A Serial NO.: N/A Sample NO.:3-1			
Date of Receipt.	2023.12.07	Date of Testing	2023.12.07~2024.03.28		
Test Specification		Test Result			
FCC Part 15, Subpart C, Section 15.247 Canada RSS-247 Issue 3 (2023-08) Canada RSS-Gen Issue 5+A1+A2 (2021-02)		PASS			
Evaluation of Test Result		The equipment under test was found to comply with the requirements of the standards applied. Seal of CVC Issue Date: 2024.03.29			
Tested by:  <u>Liang Jiatong</u> Name Signature		Tested by:  <u>Huang Meng</u> Name Signature		Approved by:  <u>Dong Sanbi</u> Name Signature	
Other Aspects: NONE.					
Abbreviations:OK, Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested					

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST LOCATION	7
2 GENERAL INFORMATION	8
2.1 GENERAL PRODUCT INFORMATION	8
2.2 OTHER INFORMATION	9
2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	10
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
2.5 DESCRIPTION OF SUPPORT UNITS	13
3 TEST TYPES AND RESULTS	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	17
3.3 6DB BANDWIDTH MEASUREMENT	40
3.4 CONDUCTED OUTPUT POWER	41
3.5 POWER SPECTRAL DENSITY MEASUREMENT	42
3.6 OUT OF BAND EMISSION MEASUREMENT	43
3.7 OCCUPIED BANDWIDTH MEASUREMENT	44
3.8 ANTENNA REQUIREMENT	45
4 PHOTOGRAPHS OF TEST SETUP	46
5 PHOTOGRAPHS OF THE EUT	47

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCCSZ2023-0022-RF1	Original release	2023.03.29



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C, Canada RSS-247, Canada RSS-Gen			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
FCC 15.207 RSS-Gen 8.8	AC Power Conducted Emission	PASS	See section 3.1
FCC 15.247(d), 15.209,15.205 RSS-Gen8.10 Table 7 RSS-Gen 8.9 Table 5	Radiated Emissions	PASS	See section 3.2
FCC 15.247(d) RSS-247 5.5	Out of band Emission Measurement	PASS	Appendix E&F&G of FCCSZ2023-0022-RF1-A1&A2
FCC 15.247(a)(2) RSS-247 5.2(a)	6dB bandwidth	PASS	Appendix A of FCCSZ2023-0022-RF1-A1&A2
RSS-Gen 6.7	Occupied Bandwidth Measurement	PASS	Appendix B of FCCSZ2023-0022-RF1-A1&A2
FCC 15.247(b) RSS-247 5.4(d)	Conducted Output power	PASS	Appendix C of FCCSZ2023-0022-RF1-A1&A2
FCC 15.247(e) RSS-247 5.2(b)	Power Spectral Density	PASS	Appendix D of FCCSZ2023-0022-RF1-A1&A2
FCC 15.203 FCC 15.247(b) RSS-Gen 6.8	Antenna Requirement	PASS	See section 3.8



1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
WIFI & Bluetooth Test System					/
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 30	104408	1 year	2024.5.21
#3Shielding room	MORI	443	N/A	3 year	2026.5.16
Wideband radio communication tester	Rohde&Schwarz	CMW 500	168778	1 year	2024.5.25
Analog signal Generator (100kHz ~ 40GHz)	Rohde&Schwarz	SMB 100A	181934	1 year	2024.5.21
Vector signal Generator (9kHz ~ 6GHz)	Keysight	N5182B	MY57301451	1 year	2024.4.25
Vector signal Generator (9kHz ~ 6GHz)	Rohde&Schwarz	SGT 100A	111724	1 year	2024.5.21
RF control unit(BT/WiFi)	Tonscend	JS0806-2-8CH	20E8060261	1 year	2024.5.21
Radiation Spurious(Above 1GHz)					/
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 40	101898	1 year	2024.5.21
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2024.5.25
Antenna(30MHz~1001MHz)	SCHWARZBECK	VULB 9168	1133	1 year	2024.2.21
Horn antenna(1GHz-18GHz)	ETS	3117	227611	1 year	2024.3.25
Horn antenna(18GHz-40GHz)	QMS	QMS-00880	22051	1 year	2024.3.25
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
Filter group(RSE-BT/WiFi)	Rohde&Schwarz	WiFi /BT Variant 1	100820	1 year	2024.5.21
Filter group(RSE-Cellular)	Rohde&Schwarz	Cellular Variant 1	100768	1 year	2024.5.21
Preamplifier(10kHz-1GHz)	Rohde&Schwarz	SCU-01F	100299	1 year	2024.5.21
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100799	1 year	2024.5.21
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100801	1 year	2024.5.21
Preamplifier(18Gz-40GHz)	Rohde&Schwarz	SCU-40A	101209	1 year	2024.5.21
#2 control room	MORI	433	CS0300028	3 year	2024.5.21
Temperature and humidity meter	/	C193561517	C193561517	1 year	2024.5.21
Radiation Spurious(Below 1GHz)					/
EMI Test Receiver	Rohde&Schwarz	ESR 26	101718	1 year	2024.5.25
Loop antenna (8.3k~30MHz)	Rohde&Schwarz	HFH2-Z2E	100951	1 year	2024.5.26
Antenna(30MHz~1000MHz)	SCHWARZBECK	VULB 9168	1132	1 year	2024.2.14
3m anechoic chamber	MORI	966	CS0200019	3 year	2026.5.18
Attenuator	/	SJ-5dB	607684	1 year	2024.2.21
#1 control room	MORI	433	CS0300028	3 year	2026.5.16
Temperature and humidity meter	/	C193561473	CS0200071	1 year	2024.5.21
Conducted emission					/
EMI Test Receiver	Rohde&Schwarz	ESR3	102694	1 year	2024.5.25
limiter (10 dB)	Rohde&Schwarz	ESH3-Z2	102824	1 year	2024.5.16
Voltage probe	Rohde&Schwarz	CVP9222C	28	1 year	2024.5.16
Current probe	Rohde&Schwarz	EZ-17	101442	1 year	2024.5.21
ISN network	Rohde&Schwarz	ENV 81	100401	1 year	2024.5.16
ISN network	Rohde&Schwarz	ENV 81 Cat6	101896	1 year	2024.5.16
LISN (single-phase)	Rohde&Schwarz	ENV216	102569	1 year	2024.4.11
#1Shielding room	MORI	854	N/A	3 year	2026.5.16



1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	Item	Measurement Uncertainty
1	Conducted emission test	+/-2.7 dB
2	Radiated emission 9kHz-30MHz	+/-5.6 dB
3	Radiated emission 30MHz-1GHz	+/-4.6 dB
4	Radiated emission 1GHz-18GHz	+/-4.4 dB
5	Radiated emission 18GHz-40GHz	+/-5.1 dB
6	RF power	+/-0.9 dB
7	Power Spectral Density	+/-0.8 dB
8	Conducted spurious emissions	+/-2.7 dB
9	Transmission Time	+/-0.27%
10	Occupied Bandwidth	+/-1.86%
Remark: 95% Confidence Levels, k=2.		

1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab of CVC Testing Technology (Shenzhen) Co., Ltd.

Lab Address: No. 1301, Guanguang Road, Xinlan Community, Guanlan Street, Longhua District, Shenzhen City, Guangdong Province 518110 P.R.China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

FCC(Test firm designation number: CN1363)

IC(Test firm CAB identifier number: CN0137)

CNAS(Test firm designation number: L16091)



2 GENERAL INFORMATION

2.1 GENERAL PRODUCT INFORMATION

PRODUCT	Module
BRAND	N/A
TEST MODEL	VT-MOB-6275-AX
ADDITIONAL MODEL	N/A
POWER SUPPLY	DC 3.3V
MODULATIONTECHNOLOGY	DSSS, OFDM, DTS
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM, 256QAM, 16QAM, QPSK, BPSK for OFDMA GFSK for BT-LE
OPERATING FREQUENCY	2412MHz ~ 2462MHz for 11b/g/n(HT20)/ax(HE20) 2402MHz ~ 2480MHz for BT-LE
NUMBER OF CHANNEL	802.11b/g/n(HT20)/ax(HE20): 11 BT-LE:40
PEAK OUTPUT POWER	23.04dBm for WiFi(Maximum) 10.74dBm for BT-LE(Maximum)
PEAK EIRP POWER	23.94dBm for WiFi(Maximum) 11.64dBm for BT-LE(Maximum)
ANTENNA TYPE(Note 4)	ANT1:PCB antenna with gain 0.9dBi ANT2:PCB antenna with gain 0.9dBi
HVIN	VT-MOB-6275-AX
FIX FREQUENCY SOFTWARE	SSH
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

Note:

1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

3. EUT photo refer to report (Report NO.: FCCSZ2023-0022-EUT).

4. Since the above data and/or information is provided by the client, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

5. EUT provides 2 complete transmitter and 2 receiver.

MODULATION MODE	TX FUNCTION	Beamforming mode
802.11b	2TX(NSS1)	Not support
802. 11g	2TX(NSS1)	Not support
802.11n	2TX(NSS1/NSS2)	support
802.11ax	2TX(NSS1/NSS2)	support
BT-LE	1TX(NSS1)	Not support



2.2 OTHER INFORMATION

Operating frequency of each channel

2.4G WIFI							
802.11b/g/n(HT20)/ax(HE20)							
CHANNEL		FREQ. (MHz)		CHANNEL		FREQ. (MHz)	
1		2412		5		2432	
2		2417		6		2437	
3		2422		7		2442	
4		2427		8		2447	
BT-LE(1 Mbps+2Mbps)							
CHANNEL		FREQ. (MHz)		CHANNEL		FREQ. (MHz)	
0		2402		10		2422	
1		2404		11		2424	
2		2406		12		2426	
3		2408		13		2428	
4		2410		14		2430	
5		2412		15		2432	
6		2414		16		2434	
7		2416		17		2436	
8		2418		18		2438	
9		2420		19		2440	

1. The channels which were indicated in bold type of the above channel list were selected as representative test channel. Therefore only the data of the test channels were recorded in this report.
2. By means of test software which provided by manufacture, the power levels during the tests were set

2.4G							
802.11b		802.11g		802.11n&802.11ax		BT-LE	
FREQUENCY (MHZ)	POWER SETTING	FREQUENCY (MHZ)	POWER SETTING	FREQUENCY (MHZ)	POWER SETTING	FREQUENCY (MHZ)	POWER SETTING
2412	13	2412	13	2412	13	2402	default
2437	13	2437	13	2437	13	2440	default
2462	13	2462	13	2462	13	2480	default



2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports

EUT CONFIGURE MODE	APPLICABLE TEST ITEMS				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	2.4G WIFI Function
B	√	√	√	√	BT Function

Where RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

The worst case Antenna mode for each of the following tests for Wi-Fi:

TEST CASES	ANTENNA 1	ANTENNA 2	MIMO/CDD	BEAMFORMING	PARTIAL RU
AC Power Conducted Emission	/	/	O	/	/
Radiated Emissions	/	/	O	/	O
Out of band Emission Measurement	O	O	O	/	/
6dB bandwidth	O	O	/	/	/
Occupied Bandwidth Measurement	O	O	/	/	/
Conducted Output power	O	O	O	O	/
Power Spectral Density	O	O	O	/	O
RU Configure (OFDMA)	802.11 ax20			/	
26 Tone RU Index 0	O			/	
26 Tone RU Index 8	O			/	
52 Tone RU Index 37	O			/	
52 Tone RU Index 40	O			/	
106 Tone RU Index 53	O			/	
106 Tone RU Index 54	O			/	
Full RU	O				
Note1:“O” mean test					
Note2: Partial RU PSD < Full RU PSD,perform additional testing on Partial RU modes for band edge and spurious emissions					
Note3: All the RU mode have been tested, only worst case are recorded					



RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MIMO/SISO	DATA RATE (Mbps)
A	802.11b	1 to 11	1	DSSS	SISO	1.0

For the test results, only the worst case was shown in test report.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
-	WIFI (2.4G) + BT-LE Link



RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MIMO/SISO	DATA RATE PARAMETER
A	802.11b	1 to 11	1, 6, 11	DSSS	SISO	1.0 Mbps
A	802.11g	1 to 11	1, 6, 11	OFDM	MIMO	6.0 Mbps
A	802.11n(HT20)	1 to 11	1, 6, 11	OFDM	MIMO	MCS0
A	802.11ax(HE20)	1 to 11	1, 6, 11	OFDMA	MIMO	MCS0
B	BT-LE	0 to 39	0,19, 39	DTS	SISO	1.0 Mbps
B	BT-LE	0 to 39	0,19, 39	DTS	SISO	2.0 Mbps

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE PARAMETER
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0 Mbps
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0 Mbps
A	802.11n(HT20)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
A	802.11ax(HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
B	BT-LE	0 to 39	0,19, 39	DTS	GFSK	1.0 Mbps
B	BT-LE	0 to 39	0,19, 39	DTS	GFSK	2.0 Mbps

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	24deg. C, 55%RH	DC 3.3V	Li Jialing
RE≥1G	24deg. C, 55%RH	DC 3.3V	Li Jialing
PLC	24deg. C, 55%RH	DC 3.3V	Li Jialing
APCM	25deg. C, 58%RH	DC 3.3V	Li Jialing

2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

FCC PART 15, SUBPART C. SECTION 15.247
KDB 558074 D01 15.247 MEAS GUIDANCE V05R02
KDB 662911 D01 MULTIPLE TRANSMITTER OUTPUT V02R01
CANADA RSS-247 ISSUE 3 (2023-08)
CANADA RSS-GEN ISSUE 5+A1+A2 (2021-02)
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment							
NO	Description	Brand		Model No.	Serial Number		Supplied by
1	Laptop	Lenovo		K4e-ARE120	MP20kshe		Lab
Support Cable							
NO	Description	Quantity (Number)	Length (cm)	Detachable (Yes/ No)	Shielded (Yes/ No)	Cores (Number)	Supplied by

3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 Limit


Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
NOTE: 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


3.1.2 Measurement procedure


- The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the Test photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The equipment under test shall be placed on a support of non-metallic material, the height of which shall be 1.5m above the ground,
- The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

3.1.3 Test setup

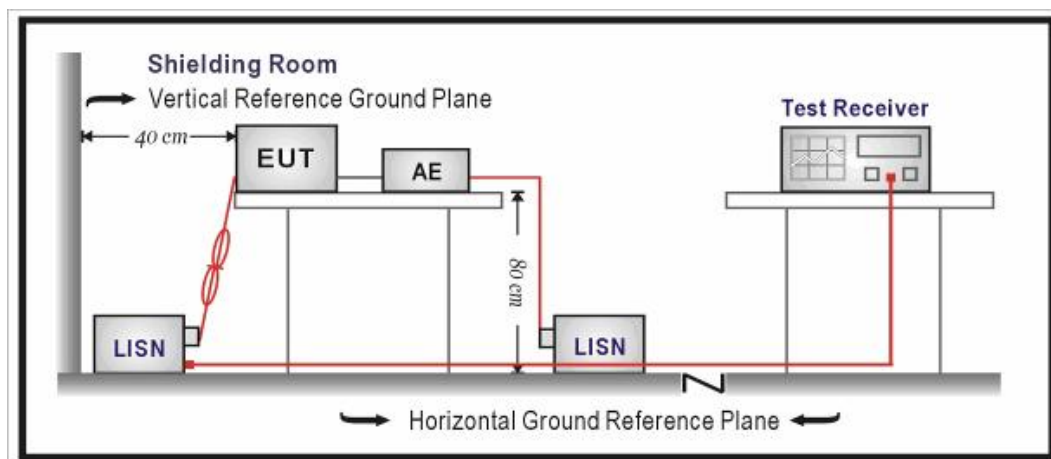

3.1.4 Test results

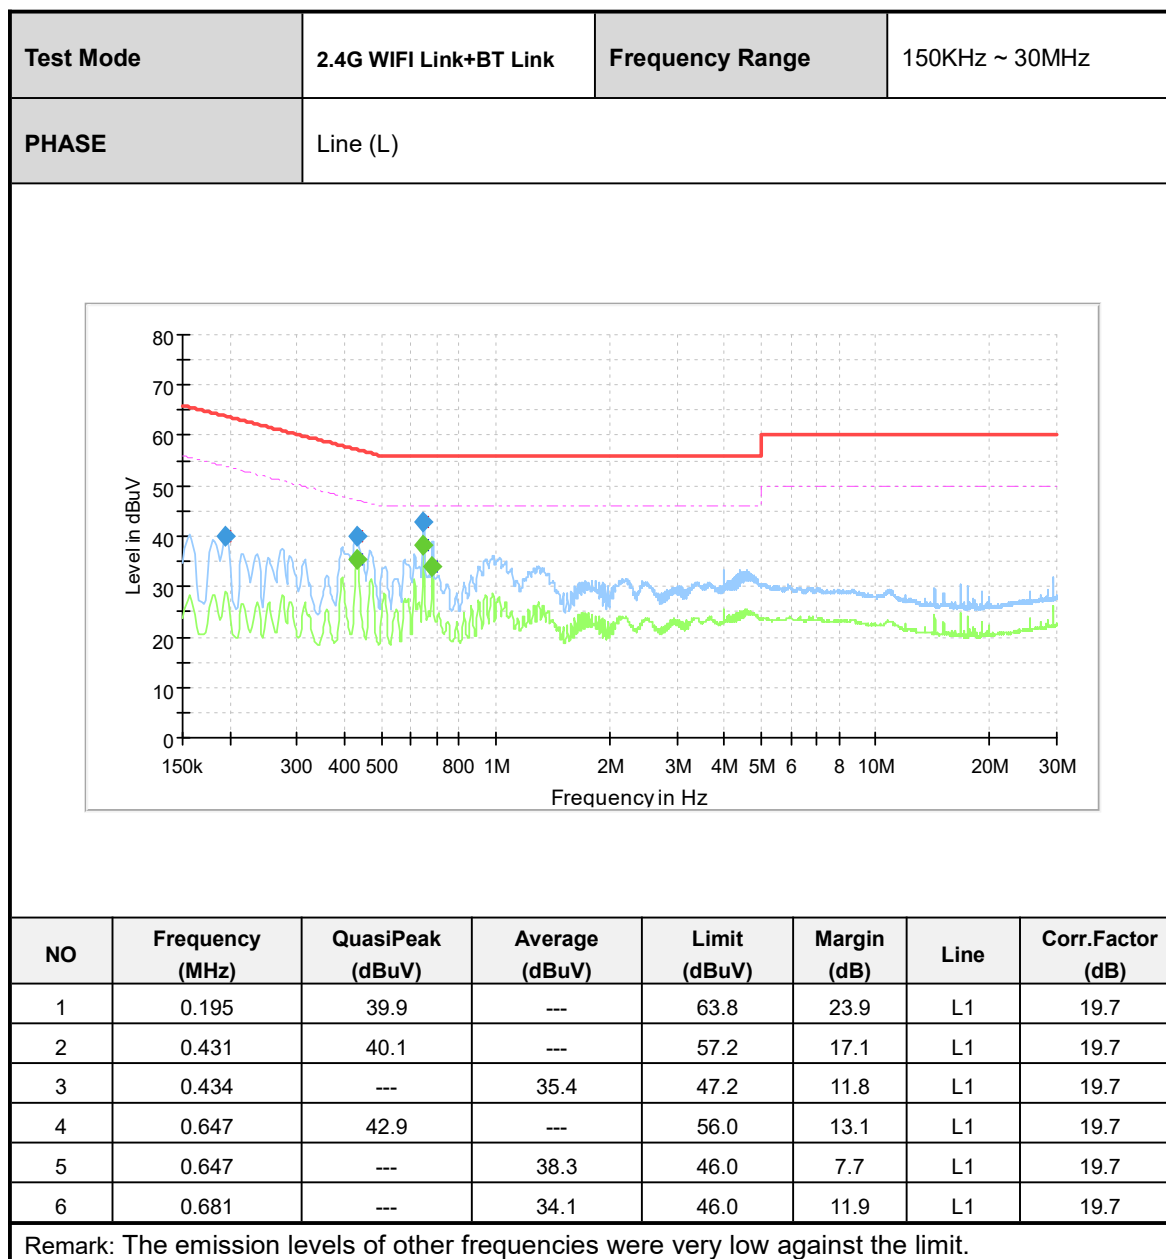

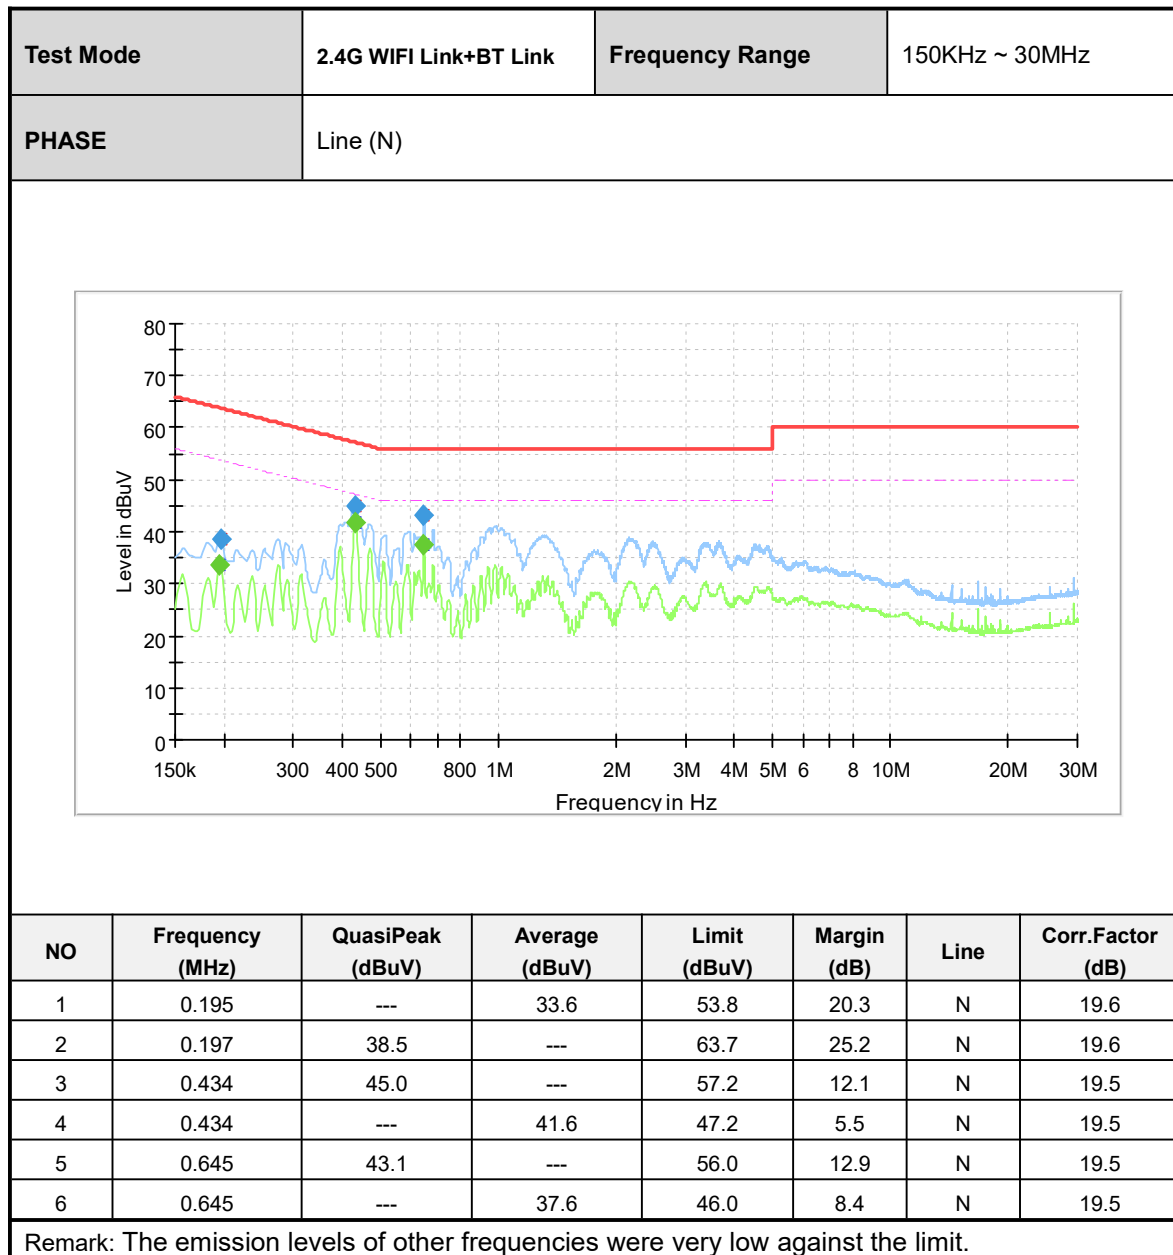

3.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.2.1 Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.
NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Radiated emissions which fall in the restricted bands, as defined in RSS-Gen Section 8.10, must also comply with the radiated emission limits specified in RSS-Gen Section 8.9. as following:

Table 5 – General field strength limits at frequencies above 30 MHz		
FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Table 6 – General field strength limits at frequencies below 30 MHz		
FREQUENCIES (MHz)	Magnetic field strength (H-Field) (μA/m)	MEASUREMENT DISTANCE (meters)
9 - 490 kHz	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

NOTE: 1.The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.
NOTE: 2.The lower limit shall apply at the transition frequencies.
NOTE: 3.Emission level (dBuV/m) = 20 log Emission level (uV/m).
NOTE: 4.dBuV/m=dBuA/m+51.5



3.2.2 Measurement procedure


- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be performed using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

3.2.3 Test setup


Below 30MHz Test Setup:

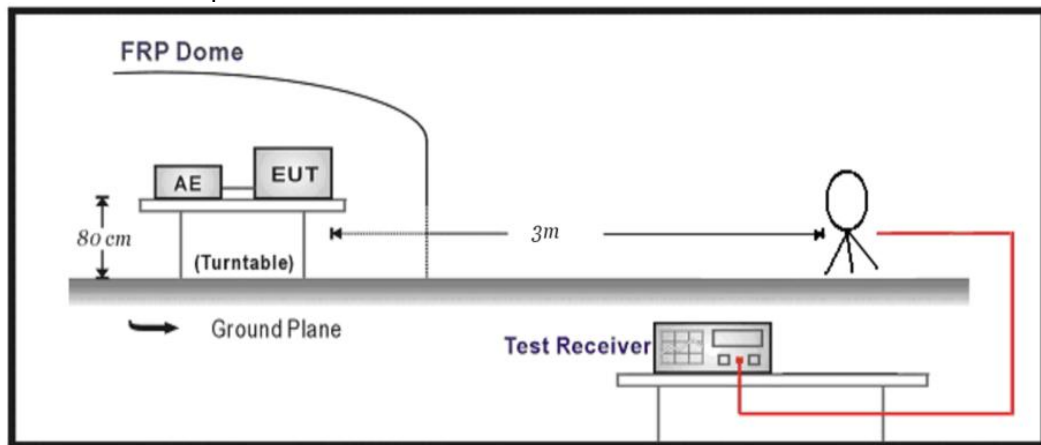

Below 1GHz Test Setup:

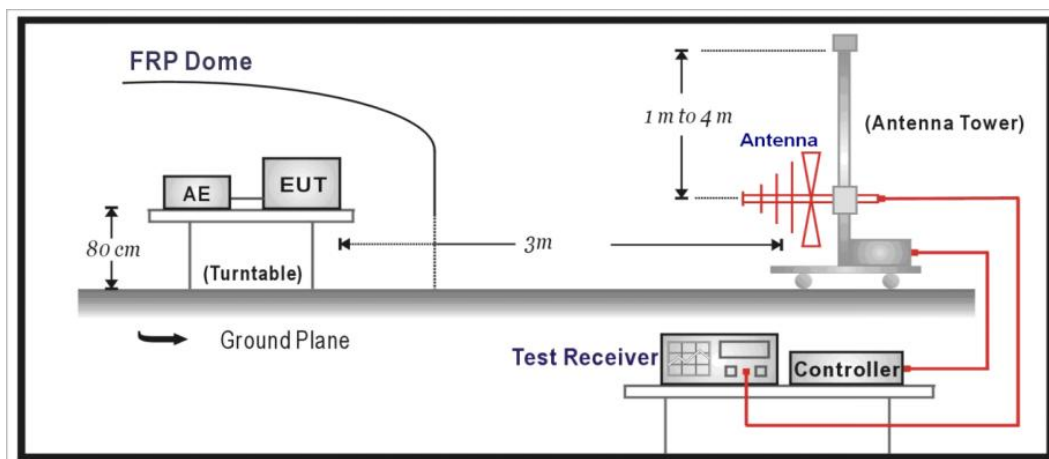



Above 1GHz Test Setup:

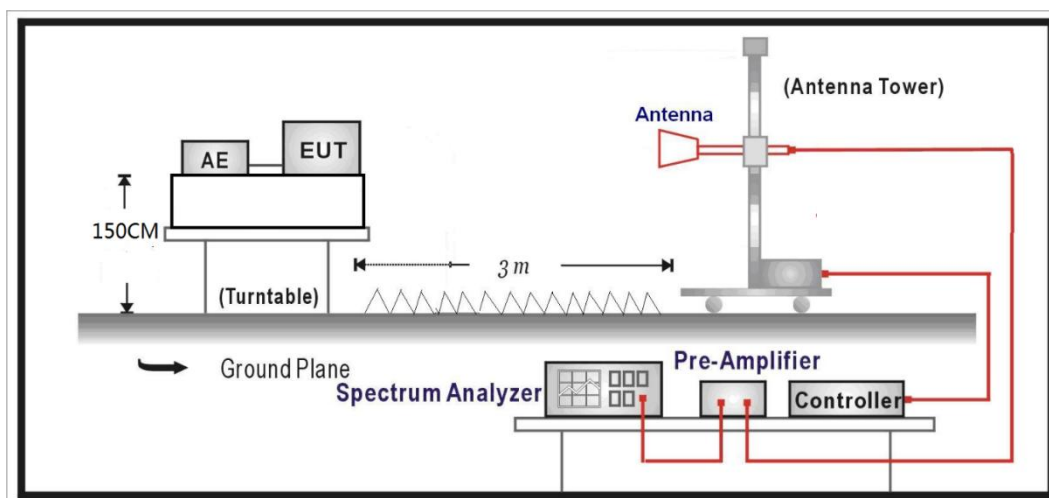

3.2.4 Test results

BELOW 1GHz WORST-CASE DATA:

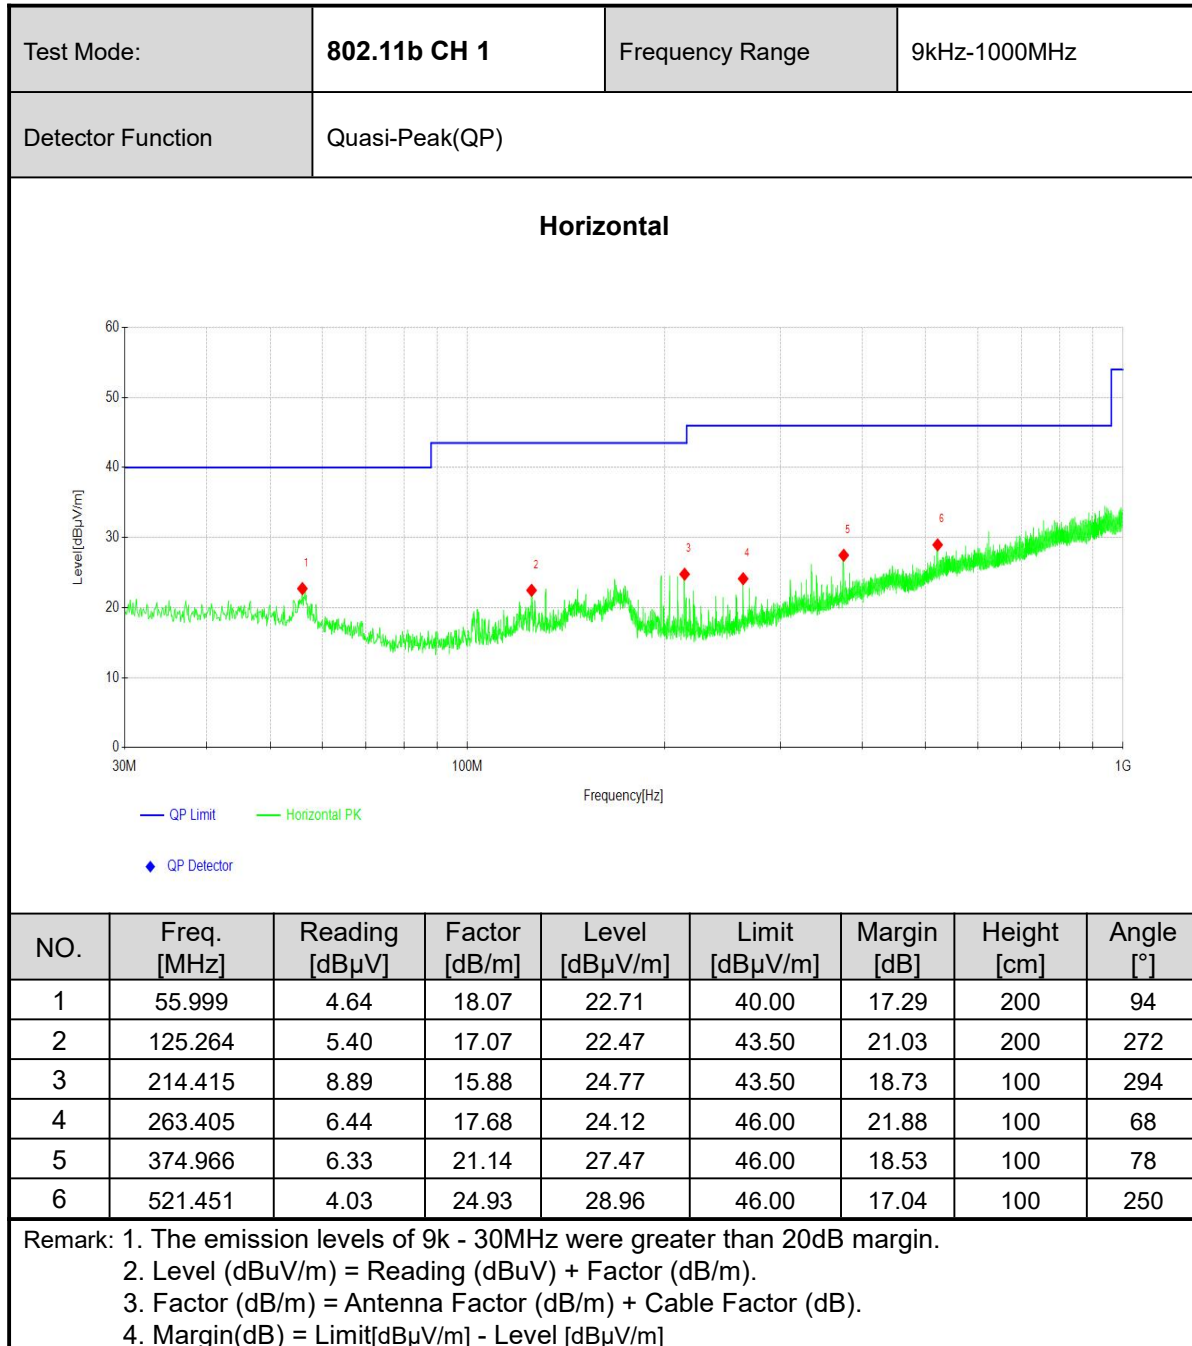

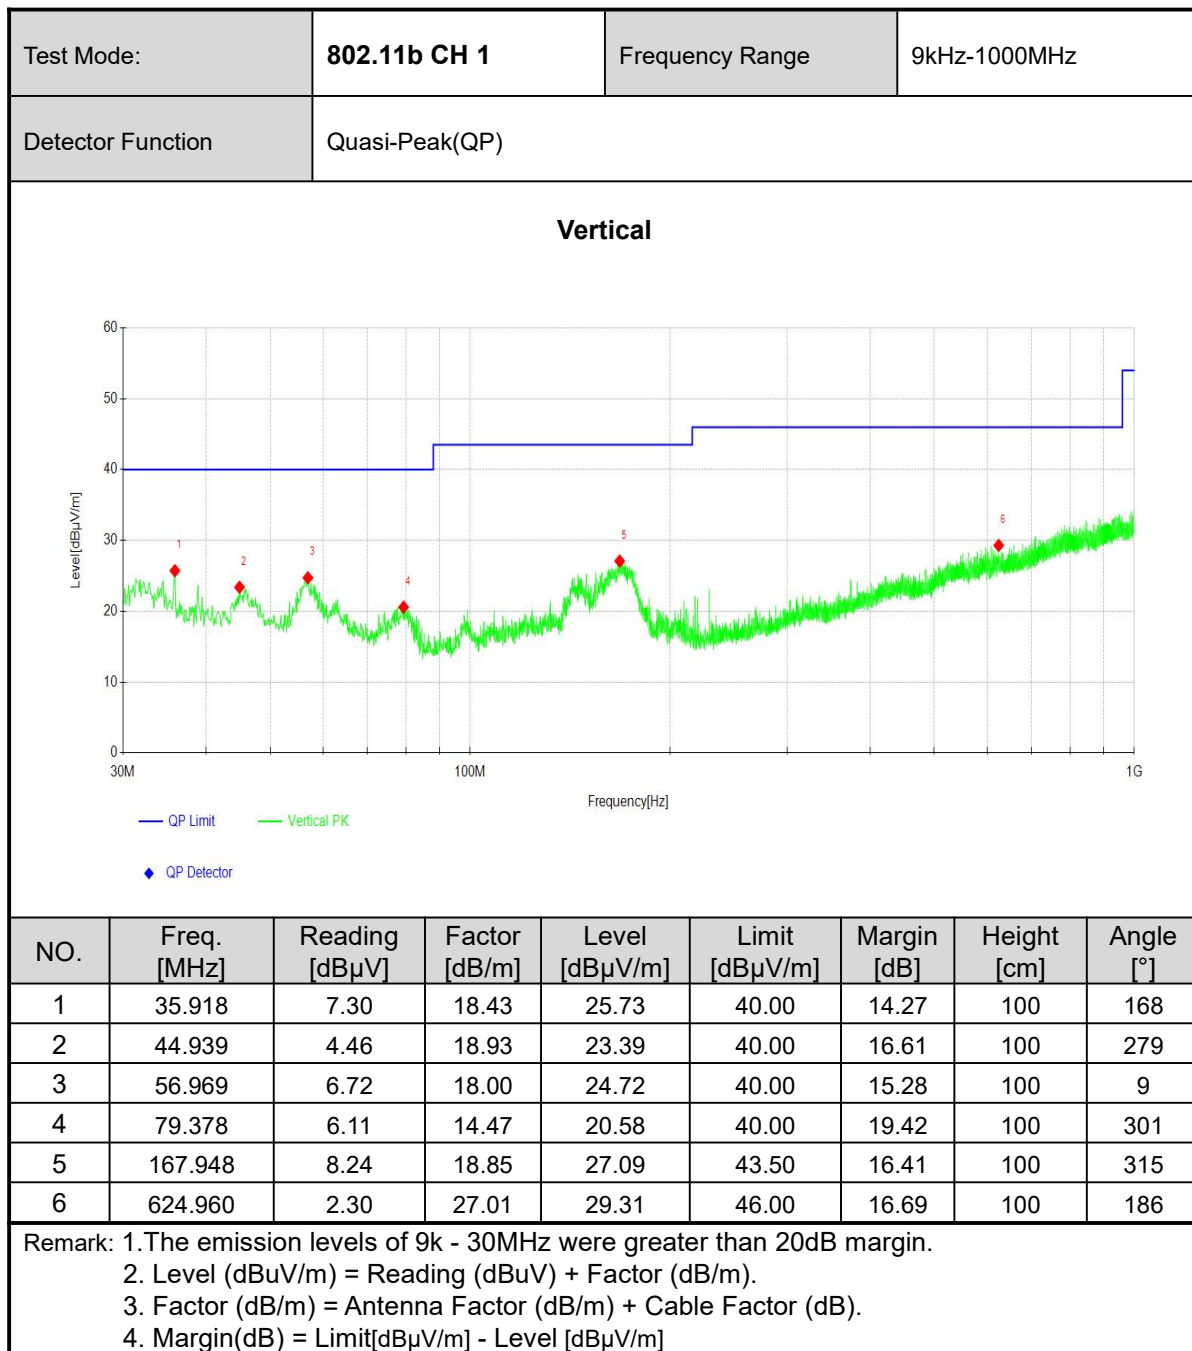

ABOVE 1GHz DATA

Channel	802.11b CH 1	Frequency	2412MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2378.37	66.77	-0.28	66.49	74.00	7.51	PK	Horizontal
2	2378.37	43.88	-0.28	43.60	54.00	10.40	AV	Horizontal
3	2390.00	42.53	-0.15	42.38	54.00	11.62	AV	Horizontal
4	2390.00	50.67	-0.15	50.52	74.00	23.48	PK	Horizontal
5	2411.31	107.01	0.15	107.16			AV	Horizontal
6	2412.83	109.04	0.16	109.20			PK	Horizontal
7	2369.84	43.58	-0.25	43.33	54.00	10.67	AV	Vertical
8	2373.42	65.22	-0.27	64.95	74.00	9.05	PK	Vertical
9	2390.00	49.85	-0.15	49.70	74.00	24.30	PK	Vertical
10	2390.00	41.97	-0.15	41.82	54.00	12.18	AV	Vertical
11	2411.04	104.28	0.14	104.42			PK	Vertical
12	2411.32	102.12	0.15	102.27			AV	Vertical
13	4824.00	37.51	9.68	47.19	54.00	6.81	AV	4824.00
14	4824.00	45.36	9.68	55.04	74.00	18.96	PK	4824.00
15	7236.00	29.22	12.39	41.61	74.00	32.39	PK	7236.00
16	7236.00	22.39	12.39	34.78	54.00	19.22	AV	7236.00
17	9648.00	19.32	13.13	32.45	54.00	21.55	AV	9648.00
18	9648.00	27.50	13.13	40.63	74.00	33.37	PK	9648.00
19	4824.00	44.61	9.68	54.29	74.00	19.71	PK	Vertical
20	4824.00	39.34	9.68	49.02	54.00	4.98	AV	Vertical
21	7236.00	24.78	12.39	37.17	54.00	16.83	AV	Vertical
22	7236.00	31.31	12.39	43.70	74.00	30.30	PK	Vertical
23	9648.00	26.99	13.13	40.12	74.00	33.88	PK	Vertical
24	9648.00	19.23	13.13	32.36	54.00	21.64	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11b CH 6	Frequency	2437MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4874.00	42.27	9.71	51.98	74.00	22.02	PK	Horizontal
2	4874.00	34.51	9.71	44.22	54.00	9.78	AV	Horizontal
3	7311.00	27.92	11.03	38.95	74.00	35.05	PK	Horizontal
4	7311.00	20.60	11.03	31.63	54.00	22.37	AV	Horizontal
5	9748.00	19.07	13.24	32.31	54.00	21.69	AV	Horizontal
6	9748.00	26.49	13.24	39.73	74.00	34.27	PK	Horizontal
7	4874.00	42.81	9.71	52.52	74.00	21.48	PK	Vertical
8	4874.00	34.92	9.71	44.63	54.00	9.37	AV	Vertical
9	7311.00	27.52	11.03	38.55	74.00	35.45	PK	Vertical
10	7311.00	20.02	11.03	31.05	54.00	22.95	AV	Vertical
11	9748.00	26.86	13.24	40.10	74.00	33.90	PK	Vertical
12	9748.00	18.59	13.24	31.83	54.00	22.17	AV	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11b CH 11	Frequency	2462MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2461.87	107.63	0.62	108.25			PK	Horizontal
2	2462.89	105.37	0.64	106.01			AV	Horizontal
3	2483.50	45.22	0.45	45.67	54.00	8.33	AV	Horizontal
4	2483.50	51.04	0.45	51.49	74.00	22.51	PK	Horizontal
5	2484.93	51.58	0.52	52.10	54.00	1.90	AV	Horizontal
6	2484.93	67.74	0.52	68.26	74.00	5.74	PK	Horizontal
7	2460.97	106.20	0.59	106.79			PK	Vertical
8	2461.00	103.82	0.59	104.41			AV	Vertical
9	2483.50	57.68	0.45	58.13	74.00	15.87	PK	Vertical
10	2483.50	44.50	0.45	44.95	54.00	9.05	AV	Vertical
11	2489.77	51.33	0.71	52.04	54.00	1.96	AV	Vertical
12	2494.04	70.59	0.63	71.22	74.00	2.78	PK	Vertical
13	4926.00	42.42	10.07	52.49	74.00	21.51	PK	Horizontal
14	4926.00	34.39	10.07	44.46	54.00	9.54	AV	Horizontal
15	7386.00	20.57	9.80	30.37	54.00	23.63	AV	Horizontal
16	7386.00	28.32	9.80	38.12	74.00	35.88	PK	Horizontal
17	9848.00	26.25	13.24	39.49	74.00	34.51	PK	Horizontal
18	9848.00	18.66	13.24	31.90	54.00	22.10	AV	Horizontal
19	4926.00	41.07	10.07	51.14	74.00	22.86	PK	Vertical
20	4926.00	33.74	10.07	43.81	54.00	10.19	AV	Vertical
21	7386.00	27.76	9.80	37.56	74.00	36.44	PK	Vertical
22	7386.00	20.69	9.80	30.49	54.00	23.51	AV	Vertical
23	9848.00	26.97	13.24	40.21	74.00	33.79	PK	Vertical
24	9848.00	18.58	13.24	31.82	54.00	22.18	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11g CH 1	Frequency	2412MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.83	66.86	-0.17	66.69	74.00	7.31	PK	Horizontal
2	2389.19	51.55	-0.16	51.39	54.00	2.61	AV	Horizontal
3	2390.00	52.24	-0.15	52.09	54.00	1.91	AV	Horizontal
4	2390.00	66.12	-0.15	65.97	74.00	8.03	PK	Horizontal
5	2412.10	93.26	0.16	93.42			AV	Horizontal
6	2412.20	101.01	0.16	101.17			PK	Horizontal
7	2388.60	51.93	-0.17	51.76	54.00	2.24	AV	Vertical
8	2389.14	66.36	-0.16	66.20	74.00	7.80	PK	Vertical
9	2390.00	64.60	-0.15	64.45	74.00	9.55	PK	Vertical
10	2390.00	52.91	-0.15	52.76	54.00	1.24	AV	Vertical
11	2411.53	94.08	0.15	94.23			AV	Vertical
12	2411.89	102.68	0.15	102.83			PK	Vertical
13	4824.00	43.07	9.68	52.75	74.00	21.25	PK	Horizontal
14	4824.00	35.16	9.68	44.84	54.00	9.16	AV	Horizontal
15	7236.00	19.87	12.39	32.26	54.00	21.74	AV	Horizontal
16	7236.00	28.05	12.39	40.44	74.00	33.56	PK	Horizontal
17	9648.00	26.59	13.13	39.72	74.00	34.28	PK	Horizontal
18	9648.00	19.04	13.13	32.17	54.00	21.83	AV	Horizontal
19	4824.00	42.15	9.68	51.83	74.00	22.17	PK	Vertical
20	4824.00	34.65	9.68	44.33	54.00	9.67	AV	Vertical
21	7236.00	27.03	12.39	39.42	74.00	34.58	PK	Vertical
22	7236.00	19.90	12.39	32.29	54.00	21.71	AV	Vertical
23	9648.00	27.00	13.13	40.13	74.00	33.87	PK	Vertical
24	9648.00	19.55	13.13	32.68	54.00	21.32	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11g CH 6	Frequency	2437MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4874.00	34.54	9.71	44.25	54.00	9.75	AV	Horizontal
2	4874.00	42.86	9.71	52.57	74.00	21.43	PK	Horizontal
3	7311.00	28.40	11.03	39.43	74.00	34.57	PK	Horizontal
4	7311.00	20.41	11.03	31.44	54.00	22.56	AV	Horizontal
5	9748.00	19.00	13.24	32.24	54.00	21.76	AV	Horizontal
6	9748.00	27.49	13.24	40.73	74.00	33.27	PK	Horizontal
7	4874.00	34.62	9.71	44.33	54.00	9.67	AV	Vertical
8	4874.00	42.91	9.71	52.62	74.00	21.38	PK	Vertical
9	7311.00	20.68	11.03	31.71	54.00	22.29	AV	Vertical
10	7311.00	27.85	11.03	38.88	74.00	35.12	PK	Vertical
11	9748.00	19.22	13.24	32.46	54.00	21.54	AV	Vertical
12	9748.00	26.82	13.24	40.06	74.00	33.94	PK	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11g CH 11	Frequency	2462MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2461.86	95.06	0.62	95.68			AV	Horizontal
2	2461.95	103.18	0.62	103.80			PK	Horizontal
3	2483.50	62.37	0.45	62.82	74.00	11.18	PK	Horizontal
4	2483.50	52.12	0.45	52.57	54.00	1.43	AV	Horizontal
5	2483.90	65.44	0.47	65.91	74.00	8.09	PK	Horizontal
6	2484.27	51.94	0.48	52.42	54.00	1.58	AV	Horizontal
7	2461.62	101.90	0.61	102.51			PK	Vertical
8	2462.79	93.03	0.64	93.67			AV	Vertical
9	2483.50	59.01	0.45	59.46	74.00	14.54	PK	Vertical
10	2483.50	50.89	0.45	51.34	54.00	2.66	AV	Vertical
11	2483.85	63.86	0.47	64.33	74.00	9.67	PK	Vertical
12	2484.14	51.26	0.48	51.74	54.00	2.26	AV	Vertical
13	4824.00	41.99	9.68	51.67	74.00	22.33	PK	Horizontal
14	4824.00	35.25	9.68	44.93	54.00	9.07	AV	Horizontal
15	7236.00	19.99	12.39	32.38	54.00	21.62	AV	Horizontal
16	7236.00	27.89	12.39	40.28	74.00	33.72	PK	Horizontal
17	9648.00	27.29	13.13	40.42	74.00	33.58	PK	Horizontal
18	9648.00	20.08	13.13	33.21	54.00	20.79	AV	Horizontal
19	4926.00	43.37	10.07	53.44	74.00	20.56	PK	Vertical
20	4926.00	34.41	10.07	44.48	54.00	9.52	AV	Vertical
21	7386.00	24.74	9.80	34.54	54.00	19.46	AV	Vertical
22	7386.00	32.77	9.80	42.57	74.00	31.43	PK	Vertical
23	9848.00	31.32	13.24	44.56	74.00	29.44	PK	Vertical
24	9848.00	23.71	13.24	36.95	54.00	17.05	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11n20 CH 1	Frequency	2412MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.94	57.43	-0.16	57.27	74.00	16.73	PK	Horizontal
2	2389.18	43.89	-0.16	43.73	54.00	10.27	AV	Horizontal
3	2390.00	41.88	-0.15	41.73	54.00	12.27	AV	Horizontal
4	2390.00	52.70	-0.15	52.55	74.00	21.45	PK	Horizontal
5	2410.75	98.31	0.14	98.45			AV	Horizontal
6	2411.04	104.77	0.14	104.91			PK	Horizontal
7	2389.04	54.58	-0.16	54.42	74.00	19.58	PK	Vertical
8	2389.51	43.75	-0.16	43.59	54.00	10.41	AV	Vertical
9	2390.00	40.51	-0.15	40.36	54.00	13.64	AV	Vertical
10	2390.00	51.99	-0.15	51.84	74.00	22.16	PK	Vertical
11	2410.57	93.88	0.14	94.02			AV	Vertical
12	2411.27	101.10	0.15	101.25			PK	Vertical
13	4824.00	34.00	9.68	43.68	54.00	10.32	AV	Horizontal
14	4824.00	42.05	9.68	51.73	74.00	22.27	PK	Horizontal
15	7236.00	28.34	12.39	40.73	74.00	33.27	PK	Horizontal
16	7236.00	19.91	12.39	32.30	54.00	21.70	AV	Horizontal
17	9648.00	19.24	13.13	32.37	54.00	21.63	AV	Horizontal
18	9648.00	26.28	13.13	39.41	74.00	34.59	PK	Horizontal
19	4824.00	34.43	9.68	44.11	54.00	9.89	AV	Vertical
20	4824.00	43.20	9.68	52.88	74.00	21.12	PK	Vertical
21	7236.00	27.87	12.39	40.26	74.00	33.74	PK	Vertical
22	7236.00	19.74	12.39	32.13	54.00	21.87	AV	Vertical
23	9648.00	19.53	13.13	32.66	54.00	21.34	AV	Vertical
24	9648.00	27.48	13.13	40.61	74.00	33.39	PK	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11n20 CH 6	Frequency	2437MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4874.00	42.75	9.71	52.46	74.00	21.54	PK	Horizontal
2	4874.00	34.24	9.71	43.95	54.00	10.05	AV	Horizontal
3	7311.00	20.25	11.03	31.28	54.00	22.72	AV	Horizontal
4	7311.00	27.75	11.03	38.78	74.00	35.22	PK	Horizontal
5	9748.00	26.35	13.24	39.59	74.00	34.41	PK	Horizontal
6	9748.00	18.41	13.24	31.65	54.00	22.35	AV	Horizontal
7	4874.00	34.49	9.71	44.20	54.00	9.80	AV	Vertical
8	4874.00	42.00	9.71	51.71	74.00	22.29	PK	Vertical
9	7311.00	20.23	11.03	31.26	54.00	22.74	AV	Vertical
10	7311.00	28.14	11.03	39.17	74.00	34.83	PK	Vertical
11	9748.00	18.91	13.24	32.15	54.00	21.85	AV	Vertical
12	9748.00	25.90	13.24	39.14	74.00	34.86	PK	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dBμV/m) = Reading (dBμV) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11n20 CH 11	Frequency	2462MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2460.16	105.75	0.57	106.32			PK	Horizontal
2	2462.94	99.07	0.64	99.71			AV	Horizontal
3	2483.50	45.89	0.45	46.34	54.00	7.66	AV	Horizontal
4	2483.50	53.45	0.45	53.90	74.00	20.10	PK	Horizontal
5	2483.90	59.61	0.47	60.08	74.00	13.92	PK	Horizontal
6	2484.41	46.94	0.49	47.43	54.00	6.57	AV	Horizontal
7	2460.62	105.09	0.58	105.67			PK	Vertical
8	2461.21	98.06	0.60	98.66			AV	Vertical
9	2483.50	44.22	0.45	44.67	54.00	9.33	AV	Vertical
10	2483.50	55.57	0.45	56.02	74.00	17.98	PK	Vertical
11	2483.76	61.61	0.47	62.08	74.00	11.92	PK	Vertical
12	2484.28	46.74	0.48	47.22	54.00	6.78	AV	Vertical
13	4926.00	34.66	10.07	44.73	54.00	9.27	AV	Horizontal
14	4926.00	42.60	10.07	52.67	74.00	21.33	PK	Horizontal
15	7386.00	28.08	9.80	37.88	74.00	36.12	PK	Horizontal
16	7386.00	20.11	9.80	29.91	54.00	24.09	AV	Horizontal
17	9848.00	18.45	13.24	31.69	54.00	22.31	AV	Horizontal
18	9848.00	26.55	13.24	39.79	74.00	34.21	PK	Horizontal
19	4926.00	41.09	10.07	51.16	74.00	22.84	PK	Vertical
20	4926.00	34.76	10.07	44.83	54.00	9.17	AV	Vertical
21	7386.00	20.41	9.80	30.21	54.00	23.79	AV	Vertical
22	7386.00	27.18	9.80	36.98	74.00	37.02	PK	Vertical
23	9848.00	26.35	13.24	39.59	74.00	34.41	PK	Vertical
24	9848.00	18.24	13.24	31.48	54.00	22.52	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



802.11ax20 ABOVE 1GHz DATA(Note: All the modes have been tested, found worst case at 802.11ax20 full RU, recorded the worst case results in this report.)

Channel	802.11ax20 CH 1	Frequency	2412MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.65	53.09	-0.18	52.91	74.00	21.09	PK	Horizontal
2	2387.93	42.04	-0.18	41.86	54.00	12.14	AV	Horizontal
3	2390.00	41.41	-0.15	41.26	54.00	12.74	AV	Horizontal
4	2390.00	51.58	-0.15	51.43	74.00	22.57	PK	Horizontal
5	2411.32	99.84	0.15	99.99			PK	Horizontal
6	2411.52	88.80	0.15	88.95			AV	Horizontal
7	2386.48	43.20	-0.20	43.00	54.00	11.00	AV	Vertical
8	2388.35	55.37	-0.17	55.20	74.00	18.80	PK	Vertical
9	2390.00	42.89	-0.15	42.74	54.00	11.26	AV	Vertical
10	2390.00	52.42	-0.15	52.27	74.00	21.73	PK	Vertical
11	2410.71	104.67	0.14	104.81			PK	Vertical
12	2412.97	93.29	0.17	93.46			AV	Vertical
13	4824.00	35.04	9.68	44.72	54.00	9.28	AV	Horizontal
14	4824.00	42.54	9.68	52.22	74.00	21.78	PK	Horizontal
15	7236.00	27.65	12.39	40.04	74.00	33.96	PK	Horizontal
16	7236.00	20.03	12.39	32.42	54.00	21.58	AV	Horizontal
17	9648.00	19.89	13.13	33.02	54.00	20.98	AV	Horizontal
18	9648.00	28.11	13.13	41.24	74.00	32.76	PK	Horizontal
19	4824.00	34.90	9.68	44.58	54.00	9.42	AV	Vertical
20	4824.00	42.90	9.68	52.58	74.00	21.42	PK	Vertical
21	7236.00	28.85	12.39	41.24	74.00	32.76	PK	Vertical
22	7236.00	20.47	12.39	32.86	54.00	21.14	AV	Vertical
23	9648.00	19.28	13.13	32.41	54.00	21.59	AV	Vertical
24	9648.00	26.86	13.13	39.99	74.00	34.01	PK	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11ax20 CH 6	Frequency	2437MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4874.00	43.13	9.71	52.84	74.00	21.16	PK	Horizontal
2	4874.00	34.76	9.71	44.47	54.00	9.53	AV	Horizontal
3	7311.00	29.22	11.03	40.25	74.00	33.75	PK	Horizontal
4	7311.00	20.76	11.03	31.79	54.00	22.21	AV	Horizontal
5	9748.00	26.49	13.24	39.73	74.00	34.27	PK	Horizontal
6	9748.00	19.12	13.24	32.36	54.00	21.64	AV	Horizontal
7	4874.00	44.30	9.71	54.01	74.00	19.99	PK	Vertical
8	4874.00	34.76	9.71	44.47	54.00	9.53	AV	Vertical
9	7311.00	20.59	11.03	31.62	54.00	22.38	AV	Vertical
10	7311.00	28.14	11.03	39.17	74.00	34.83	PK	Vertical
11	9748.00	27.12	13.24	40.36	74.00	33.64	PK	Vertical
12	9748.00	19.39	13.24	32.63	54.00	21.37	AV	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11ax20 CH 11	Frequency	2462MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2463.14	99.45	0.65	100.10			AV	Horizontal
2	2463.61	108.18	0.67	108.85			PK	Horizontal
3	2483.50	56.23	0.45	56.68	74.00	17.32	PK	Horizontal
4	2483.50	46.68	0.45	47.13	54.00	6.87	AV	Horizontal
5	2485.24	62.38	0.53	62.91	74.00	11.09	PK	Horizontal
6	2485.24	48.39	0.53	48.92	54.00	5.08	AV	Horizontal
7	2461.19	98.24	0.60	98.84			AV	Vertical
8	2463.48	107.71	0.66	108.37			PK	Vertical
9	2483.50	45.00	0.45	45.45	54.00	8.55	AV	Vertical
10	2483.50	57.96	0.45	58.41	74.00	15.59	PK	Vertical
11	2484.30	46.91	0.48	47.39	54.00	6.61	AV	Vertical
12	2485.91	59.76	0.55	60.31	74.00	13.69	PK	Vertical
13	4926.00	34.11	10.07	44.18	54.00	9.82	AV	Horizontal
14	4926.00	42.24	10.07	52.31	74.00	21.69	PK	Horizontal
15	7386.00	27.73	9.80	37.53	74.00	36.47	PK	Horizontal
16	7386.00	20.05	9.80	29.85	54.00	24.15	AV	Horizontal
17	9848.00	18.25	13.24	31.49	54.00	22.51	AV	Horizontal
18	9848.00	26.41	13.24	39.65	74.00	34.35	PK	Horizontal
19	4874.00	34.54	9.71	44.25	54.00	9.75	AV	Vertical
20	4874.00	42.79	9.71	52.50	74.00	21.50	PK	Vertical
21	7311.00	28.49	11.03	39.52	74.00	34.48	PK	Vertical
22	7311.00	20.40	11.03	31.43	54.00	22.57	AV	Vertical
23	9748.00	18.60	13.24	31.84	54.00	22.16	AV	Vertical
24	9748.00	26.67	13.24	39.91	74.00	34.09	PK	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	BT-LE 1Mbps CH 0	Frequency	2402MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2378.98	51.10	-0.29	50.81	74.00	23.19	PK	Horizontal
2	2381.62	40.77	-0.27	40.50	54.00	13.50	AV	Horizontal
3	2390.00	49.56	-0.15	49.41	74.00	24.59	PK	Horizontal
4	2390.00	39.17	-0.15	39.02	54.00	14.98	AV	Horizontal
5	2401.85	95.19	-0.04	95.15			PK	Horizontal
6	2401.93	94.30	-0.04	94.26			AV	Horizontal
7	2359.91	51.34	0.07	51.41	74.00	22.59	PK	Vertical
8	2372.77	40.90	-0.27	40.63	54.00	13.37	AV	Vertical
9	2390.00	39.81	-0.15	39.66	54.00	14.34	AV	Vertical
10	2390.00	49.90	-0.15	49.75	74.00	24.25	PK	Vertical
11	2401.88	97.73	-0.04	97.69			PK	Vertical
12	2401.93	96.86	-0.04	96.82			AV	Vertical
13	4804.00	43.43	9.29	52.72	74.00	21.28	PK	Horizontal
14	4804.00	35.08	9.29	44.37	54.00	9.63	AV	Horizontal
15	7206.00	20.06	12.81	32.87	54.00	21.13	AV	Horizontal
16	7206.00	28.38	12.81	41.19	74.00	32.81	PK	Horizontal
17	9608.00	27.55	13.32	40.87	74.00	33.13	PK	Horizontal
18	9608.00	19.50	13.32	32.82	54.00	21.18	AV	Horizontal
19	4804.00	43.09	9.29	52.38	74.00	21.62	PK	Vertical
20	4804.00	36.15	9.29	45.44	54.00	8.56	AV	Vertical
21	7206.00	20.23	12.81	33.04	54.00	20.96	AV	Vertical
22	7206.00	28.73	12.81	41.54	74.00	32.46	PK	Vertical
23	9608.00	28.72	13.32	42.04	74.00	31.96	PK	Vertical
24	9608.00	19.80	13.32	33.12	54.00	20.88	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	BT-LE 1Mbps CH 19	Frequency	2440MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4880.00	41.92	9.79	51.71	74.00	22.29	PK	Horizontal
2	4880.00	34.41	9.79	44.20	54.00	9.80	AV	Horizontal
3	7320.00	28.88	11.02	39.90	74.00	34.10	PK	Horizontal
4	7320.00	20.12	11.02	31.14	54.00	22.86	AV	Horizontal
5	9760.00	26.88	13.25	40.13	74.00	33.87	PK	Horizontal
6	9760.00	18.95	13.25	32.20	54.00	21.80	AV	Horizontal
7	4880.00	43.34	9.79	53.13	74.00	20.87	PK	Vertical
8	4880.00	35.41	9.79	45.20	54.00	8.80	AV	Vertical
9	7320.00	20.78	11.02	31.80	54.00	22.20	AV	Vertical
10	7320.00	28.60	11.02	39.62	74.00	34.38	PK	Vertical
11	9760.00	26.63	13.25	39.88	74.00	34.12	PK	Vertical
12	9760.00	19.27	13.25	32.52	54.00	21.48	AV	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dBμV/m) = Reading (dBμV) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	BT-LE 1Mbps CH 39	Frequency	2480MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2479.72	104.97	0.32	105.29			PK	Horizontal
2	2479.75	103.96	0.32	104.28			AV	Horizontal
3	2483.22	39.82	0.44	40.26	54.00	13.74	AV	Horizontal
4	2483.50	45.57	0.45	46.02	74.00	27.98	PK	Horizontal
5	2484.23	39.18	0.48	39.66	54.00	14.34	AV	Horizontal
6	2486.13	47.69	0.56	48.25	74.00	25.75	PK	Horizontal
7	2479.83	101.67	0.32	101.99			PK	Vertical
8	2479.94	100.79	0.31	101.10			AV	Vertical
9	2483.50	37.54	0.45	37.99	54.00	16.01	AV	Vertical
10	2483.50	46.15	0.45	46.60	74.00	27.40	PK	Vertical
11	2486.16	38.46	0.56	39.02	54.00	14.98	AV	Vertical
12	2486.79	47.53	0.59	48.12	74.00	25.88	PK	Vertical
13	4960.00	42.51	10.70	53.21	74.00	20.79	PK	Horizontal
14	4960.00	34.55	10.70	45.25	54.00	8.75	AV	Horizontal
15	7440.00	20.74	9.75	30.49	54.00	23.51	AV	Horizontal
16	7440.00	29.65	9.75	39.40	74.00	34.60	PK	Horizontal
17	9920.00	27.88	13.83	41.71	74.00	32.29	PK	Horizontal
18	9920.00	19.07	13.83	32.90	54.00	21.10	AV	Horizontal
19	4960.00	35.48	10.70	46.18	54.00	7.82	AV	Vertical
20	4960.00	44.42	10.70	55.12	74.00	18.88	PK	Vertical
21	7440.00	29.82	9.75	39.57	74.00	34.43	PK	Vertical
22	7440.00	21.89	9.75	31.64	54.00	22.36	AV	Vertical
23	9920.00	27.87	13.83	41.70	74.00	32.30	PK	Vertical
24	9920.00	19.93	13.83	33.76	54.00	20.24	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	BT-LE 2Mbps CH 0	Frequency	2402MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2369.85	51.12	-0.26	50.86	74.00	23.14	PK	Horizontal
2	2384.98	40.55	-0.22	40.33	54.00	13.67	AV	Horizontal
3	2390.00	49.40	-0.15	49.25	74.00	24.75	PK	Horizontal
4	2390.00	39.33	-0.15	39.18	54.00	14.82	AV	Horizontal
5	2401.47	104.01	-0.04	103.97			PK	Horizontal
6	2401.78	101.59	-0.04	101.55			AV	Horizontal
7	2369.89	51.43	-0.26	51.17	74.00	22.83	PK	Vertical
8	2372.14	40.89	-0.27	40.62	54.00	13.38	AV	Vertical
9	2390.00	49.48	-0.15	49.33	74.00	24.67	PK	Vertical
10	2390.00	39.58	-0.15	39.43	54.00	14.57	AV	Vertical
11	2401.55	100.12	-0.04	100.08			PK	Vertical
12	2401.85	97.36	-0.04	97.32			AV	Vertical
13	4804.00	43.36	9.29	52.65	74.00	21.35	PK	Horizontal
14	4804.00	34.64	9.29	43.93	54.00	10.07	AV	Horizontal
15	7206.00	21.15	12.81	33.96	54.00	20.04	AV	Horizontal
16	7206.00	28.23	12.81	41.04	74.00	32.96	PK	Horizontal
17	9608.00	26.67	13.32	39.99	74.00	34.01	PK	Horizontal
18	9608.00	19.39	13.32	32.71	54.00	21.29	AV	Horizontal
19	4804.00	43.70	9.29	52.99	74.00	21.01	PK	Vertical
20	4804.00	35.54	9.29	44.83	54.00	9.17	AV	Vertical
21	7206.00	28.73	12.81	41.54	74.00	32.46	PK	Vertical
22	7206.00	20.48	12.81	33.29	54.00	20.71	AV	Vertical
23	9608.00	28.16	13.32	41.48	74.00	32.52	PK	Vertical
24	9608.00	19.44	13.32	32.76	54.00	21.24	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	BT-LE 2Mbps CH 19	Frequency	2440MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4880.00	43.22	9.79	53.01	74.00	20.99	PK	Horizontal
2	4880.00	34.71	9.79	44.50	54.00	9.50	AV	Horizontal
3	7320.00	20.88	11.02	31.90	54.00	22.10	AV	Horizontal
4	7320.00	27.98	11.02	39.00	74.00	35.00	PK	Horizontal
5	9760.00	26.58	13.25	39.83	74.00	34.17	PK	Horizontal
6	9760.00	18.88	13.25	32.13	54.00	21.87	AV	Horizontal
7	4880.00	42.98	9.79	52.77	74.00	21.23	PK	Vertical
8	4880.00	34.97	9.79	44.76	54.00	9.24	AV	Vertical
9	7320.00	20.79	11.02	31.81	54.00	22.19	AV	Vertical
10	7320.00	29.36	11.02	40.38	74.00	33.62	PK	Vertical
11	9760.00	27.03	13.25	40.28	74.00	33.72	PK	Vertical
12	9760.00	19.11	13.25	32.36	54.00	21.64	AV	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dBμV/m) = Reading (dBμV) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	BT-LE 2Mbps CH 39	Frequency	2480MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2479.49	92.64	0.34	92.98			PK	Horizontal
2	2479.90	90.71	0.32	91.03			AV	Horizontal
3	2483.50	44.60	0.45	45.05	74.00	28.95	PK	Horizontal
4	2483.50	36.57	0.45	37.02	54.00	16.98	AV	Horizontal
5	2488.99	38.07	0.69	38.76	54.00	15.24	AV	Horizontal
6	2489.47	47.42	0.70	48.12	74.00	25.88	PK	Horizontal
7	2479.47	96.25	0.34	96.59			PK	Vertical
8	2479.86	94.41	0.32	94.73			AV	Vertical
9	2483.50	36.78	0.45	37.23	54.00	16.77	AV	Vertical
10	2483.50	46.12	0.45	46.57	74.00	27.43	PK	Vertical
11	2492.98	37.95	0.65	38.60	54.00	15.40	AV	Vertical
12	2493.00	46.85	0.65	47.50	74.00	26.50	PK	Vertical
13	4960.00	43.09	10.70	53.79	74.00	20.21	PK	Horizontal
14	4960.00	35.24	10.70	45.94	54.00	8.06	AV	Horizontal
15	7440.00	24.85	9.75	34.60	54.00	19.40	AV	Horizontal
16	7440.00	34.40	9.75	44.15	74.00	29.85	PK	Horizontal
17	9920.00	31.48	13.83	45.31	74.00	28.69	PK	Horizontal
18	9920.00	23.18	13.83	37.01	54.00	16.99	AV	Horizontal
19	4960.00	42.40	10.70	53.10	74.00	20.90	PK	Vertical
20	4960.00	35.42	10.70	46.12	54.00	7.88	AV	Vertical
21	7440.00	22.68	9.75	32.43	54.00	21.57	AV	Vertical
22	7440.00	30.70	9.75	40.45	74.00	33.55	PK	Vertical
23	9920.00	27.27	13.83	41.10	74.00	32.90	PK	Vertical
24	9920.00	19.57	13.83	33.40	54.00	20.60	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]

3.3 6DB BANDWIDTH MEASUREMENT


3.3.1 Limits

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 Measurement procedure

- Set resolution bandwidth (RBW) = 100KHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3.3 Test setup

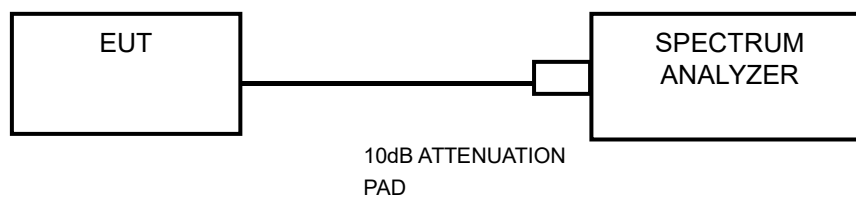

3.4 CONDUCTED OUTPUT POWER

3.4.1 Limits

For DTS employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W,

3.4.2 Measurement procedure

WiFi measurement procedure


1. A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.
2. An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

BT measurement procedure


1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.1 instrument with a resolution bandwidth that is greater than the DTS bandwidth.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.4.3 Test setup

WiFi test setup

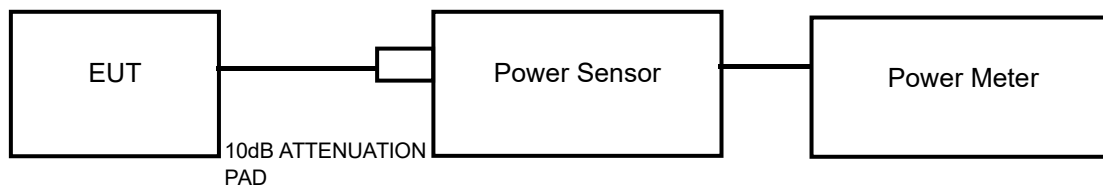

BT test setup

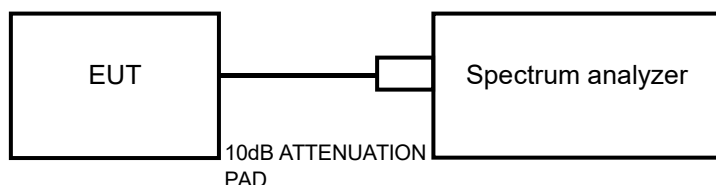

3.5 POWER SPECTRAL DENSITY MEASUREMENT


3.5.1 Limits

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 Measurement procedure

- Set instrument center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set RBW to: 3KHz
- Set VBW $\geq 3 \times$ RBW.
- Detector = peak
- Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- Sweep time = auto couple.
- Use the peak marker function to determine the maximum amplitude level.

3.5.3 Test setup

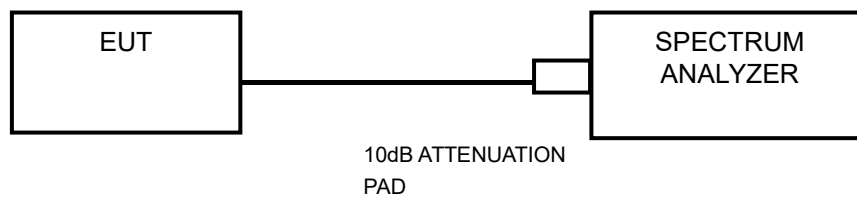

3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 Limits

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 Measurement procedure


Measurement Procedure -Reference Level

- Set the RBW = 100 kHz.
- Set the VBW $\geq$ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHzband segment within the fundamental EBW.

Measurement Procedure –Unwanted Emission Level

- Set RBW = 100 kHz.
- Set VBW $\geq$ 300 kHz.
- Set span to encompass the spectrum to be examined
- Detector = peak.
- Trace Mode = max hold.
- Sweep = auto couple.

3.6.3 Test setup

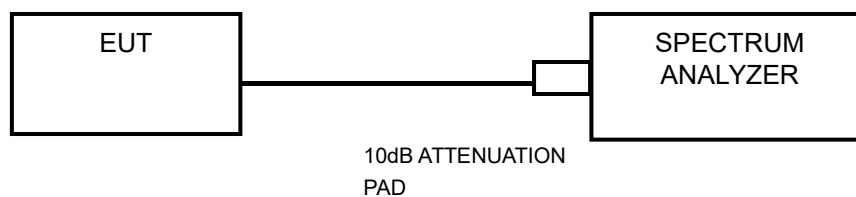


3.7 OCCUPIED BANDWIDTH MEASUREMENT

3.7.1 Measurement procedure

The transmitter antenna output was connected to the spectrum analyzer through an attenuator. The resolution bandwidth shall be set to the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.
below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

3.7.2 TEST SETUP





3.8 ANTENNA REQUIREMENT

3.8.1 LIMITS OFFREQUENCY STABILITY

According to FCC 47 CFR Section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b) , if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to RSS-GEN 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

3.8.2 ANTENNA ANTI-REPLACEMENT CONSTRUCTION

The antenna used for this product is PCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device

3.8.3 ANTENNA GAIN

No Beamforming mode

Operation Band	Chain 1 Antenna Gain(dBi)	Chain 2 Antenna Gain(dBi)	DG For Power (dBi)	Power Limit Reduction
2.4G WIFI	0.9	0.9	3.9	0

Beamforming mode

Operation Band	Chain 1 Antenna Gain(dBi)	Chain 2 Antenna Gain(dBi)	DG For Power (dBi)	Power Limit Reduction
2.4G WIFI	0.9	0.9	3.9	0

Refer to KDB662911 D01 Multiple Transmitter Output v02r01.

d) *Unequal antenna gains, with equal transmit powers.* For antenna gains given by $G_1, G_2, \dots, G_N$ dBi

(i) If transmit signals are *correlated*, then

Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi [Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

(ii) If all transmit signals are *completely uncorrelated*, then

Directional gain = $10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}]$ dBi

4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Setup Photo).

,



5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos report and Internal Photos).

----- End of the Report -----



Important

- (1) The test report is valid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

The test data and test results given in this test report should only be used for purposes of scientific research, teaching and internal quality control when the CMA symbol is not presented.

Address: No. 1301, Guanguang Road, Xinlan Community, Guanlan Street,
Longhua District, Shenzhen, Guangdong, 518110, P. R. China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>