

FCC/ISED - TEST REPORT

Report Number	: 68.930.23.0048.01	Date of Issue:	2024-04-29
Model/HVIN	: GS1		
Product Type	: Continuous Glucose Monitoring System		
Applicant	: Shenzhen SiSensing Co., Ltd.		
Address	: Room 901, Building No.3, Tinwe Business Park, No.6 Liufang Road, Xingdong Community, Xinan Street, Baoan District, 518101 Shenzhen, Guangdong, PEOPLE'S REPUBLIC OF CHINA		
Manufacturer	: Shenzhen SiSensing Co., Ltd.		
Address	: Room 901, Building No.3, Tinwe Business Park, No.6 Liufang Road, Xingdong Community, Xinan Street, Baoan District, 518101		
Factory	: Shenzhen SiSensing Co., Ltd.		
Address	: Floor 5, Building 2, Yinxingzhijie III, Yinxing Science Park, No.1301-86 Guanguang Road, Longhua District, 518110 Shenzhen, Guangdong, PEOPLE'S REPUBLIC OF CHINA.		
Test Result	: ☒ Positive ☐ Negative		
Total pages including Appendices	: 53		

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.

1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards	5
5	Summary of Test Results.....	6
6	General Remarks.....	7
7	Test Setups	8
8	Systems Test Configuration	9
9	Technical Requirement.....	10
9.1	Conducted Peak Output Power & EIRP	10
9.2	Power Spectral Density	14
9.3	6 dB Bandwidth and 99% Occupied Bandwidth.....	17
9.4	Spurious RF Conducted Emissions	22
9.5	Band Edge	29
9.6	Spurious Radiated Emissions for Transmitter.....	32
10	Test Equipment List.....	50
11	System Measurement Uncertainty	51

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Guankou Erlu,
Nantou, Nanshan District,
Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

IC Registration No.: 10320A

ISED CAB identifier CN0077

3 Description of the Equipment Under Test

Product:	Continuous Glucose Monitoring System
Model no.:	GS1
Hardware Version Identification No. (HVIN)	GS1
Product Marketing Name (PMN)	Continuous Glucose Monitoring System
Brand name:	Sibionics
FCC ID:	2BEC2-GS1
IC:	31959-GS1
Options and accessories:	N/A
Rating:	DC 3.0V (1*CR1616)
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	40
Modulation:	GFSK
Antenna Type:	PCB
Antenna Gain	-3.58dBi
Description of the EUT:	The Equipment Under Test (EUT) is a Continuous Glucose Monitoring System which support Low Energy Bluetooth(1M&2M).

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2023 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5 April 2018 + Amendment 1 March 2019 + Amendment 2 February 2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 3 August 2023	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2013.

5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C/ RSS-247 Issue 3/RSS-Gen Issue 5						
Test Condition		Test Site	Test Result			Test Environment
			Pass	Fail	N/A	
§15.207 & RSS-GEN 8.8	Conducted emission AC power port	Site 1	☐	☐	☒	T: 23.1°C H: 51.2%
§15.247 (b) (3) & RSS-247 5.4(d)	Conducted peak output power	Site 1	☒	☐	☐	T: 23.4°C H: 52.7%
RSS-247 5.4(d)	Equivalent Isotropic Radiated Power	Site 1	☒	☐	☐	T: 23.4°C H: 52.7%
§15.247(a)(2) & RSS-247 5.2(a) & RSS-GEN 6.7	6dB bandwidth and 99% Occupied Bandwidth	Site 1	☒	☐	☐	T: 23.4°C H: 52.7%
§15.247(e) & RSS-247 5.2(b)	Power spectral density	Site 1	☒	☐	☐	T: 23.7°C H: 52.7%
§15.247(d) & RSS-247 5.5	Spurious RF conducted emissions	Site 1	☒	☐	☐	T: 23.8°C H: 52.7%
§15.247(d) & RSS-247 5.5	Band edge	Site 1	☒	☐	☐	T: 23.1°C H: 58.0%
§15.247(d) & §15.209 & §15.205 & RSS-247 5.5 & RSS-Gen 6.13	Spurious radiated emissions for transmitter	Site 1	☒	☐	☐	T: 23.2°C H: 58.1%
§15.203 & RSS-Gen 6.8	Antenna requirement	See note 2	☒	☐	☐	--

Note 1: N/A=Not Applicable.

Note 2: The EUT uses a PCB antenna, which gain is -3.58dBi. In accordance to §15.203 & RSS-Gen 6.8, it is considered sufficiently to comply with the provisions of this section.

Note 3: T :Temperature, H: Humidity.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2BEC2-GS1, IC: 31959-GS1, complies with Section 15.205, 15.209, 15.247 of the FCC Part 15, Subpart C rules and RSS-247, RSS-GEN.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2023-10-30

Testing Start Date: 2023-10-31

Testing End Date: 2023-12-12

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -

Reviewed by:

Prepared by:

Tested by:



John Zhi
EMC Project Manager



Grace Gao
Project Engineer




Carry Cai
Test Engineer


7 Test Setups

7.1 Radiated test setups


9KHz - 30MHz

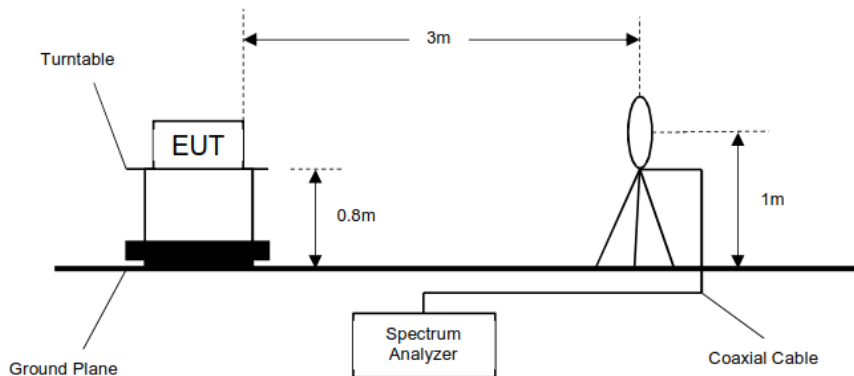


30MHz - 1GHz

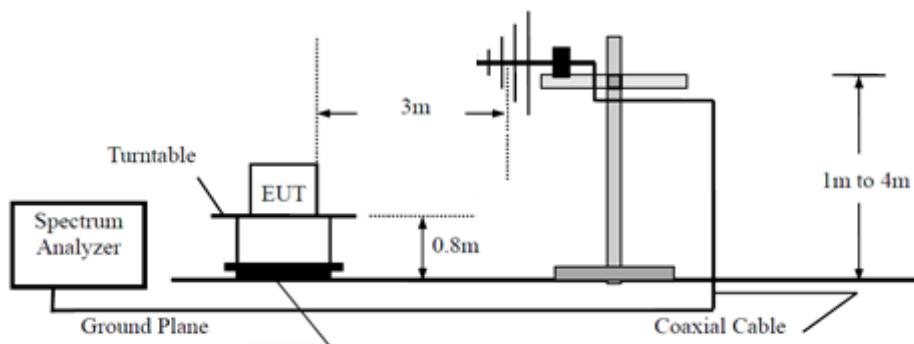

Above 1GHz

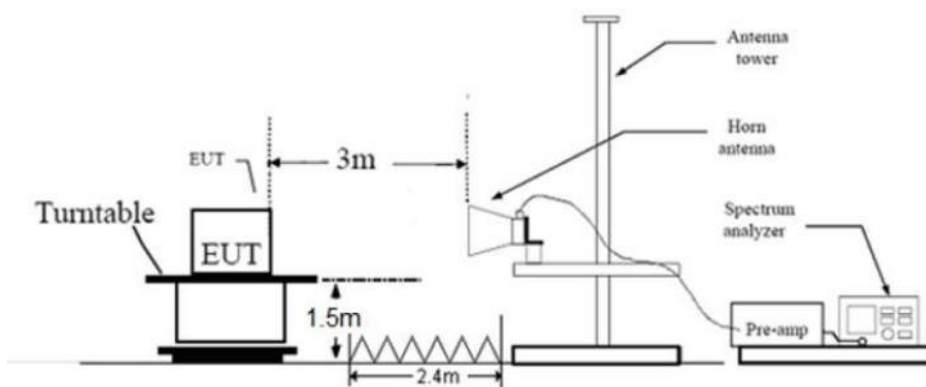

7.2 Conducted RF test setups



8 Systems Test Configuration

Auxiliary Equipment Used during Test:

Description	Manufacturer	Model NO.	S/N
Notebook	LENOVO	X220	---
Serial port board	---	---	---

Cables Used During Test:

Cable	Length	Shielded/unshielded	With / without ferrite
---	---	---	---

Test software information:

Test Software Version	Direct Test Mode	
Modulation	Setting TX Power	Packet Type
GFSK	Default	RBS9

The system was configured to non-hopping mode, testing channel 0, 19, 39.

9 Technical Requirement

9.1 Conducted Peak Output Power & EIRP

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following test receiver settings:
Span = approximately 5 times the 6dB bandwidth, centered on a channel need to test,
RBW > the 6dB bandwidth of the emission being measured, VBW $\geq$ 3RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power and record the results in the test report.
5. Repeat above procedures until all frequencies measured were complete.

Limits

According to §15.247 (b) (3) & RSS-247 5.4(d), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30


According to & RSS-247 5.4(d), EIRP limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 4	≤ 36


Conducted Peak Output Power & EIRP

Frequency MHz	Mode	Conducted Peak Output Power dBm	Antenna Gain dBi	EIRP dBm	Result
Bottom channel 2402MHz	LE 1Mbps	-1.06	-3.58	-4.64	Pass
Middle channel 2440MHz	LE 1Mbps	-1.16	-3.58	-4.74	Pass
Top channel 2480MHz	LE 1Mbps	-1.34	-3.58	-4.92	Pass
Bottom channel 2402MHz	LE 2Mbps	-1.03	-3.58	-4.61	Pass
Middle channel 2440MHz	LE 2Mbps	-1.12	-3.58	-4.70	Pass
Top channel 2480MHz	LE 2Mbps	-1.31	-3.58	-4.89	Pass


BLE_1M_BT4.0_Ant1_2402

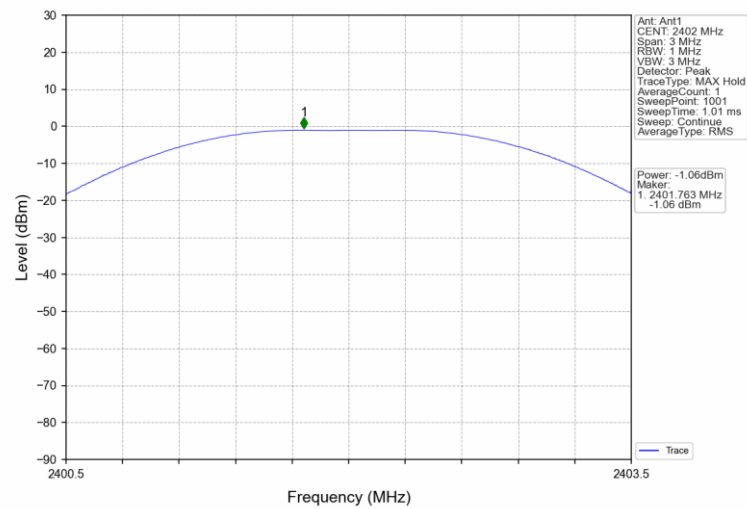


BLE_1M_BT4.0_Ant1_2440

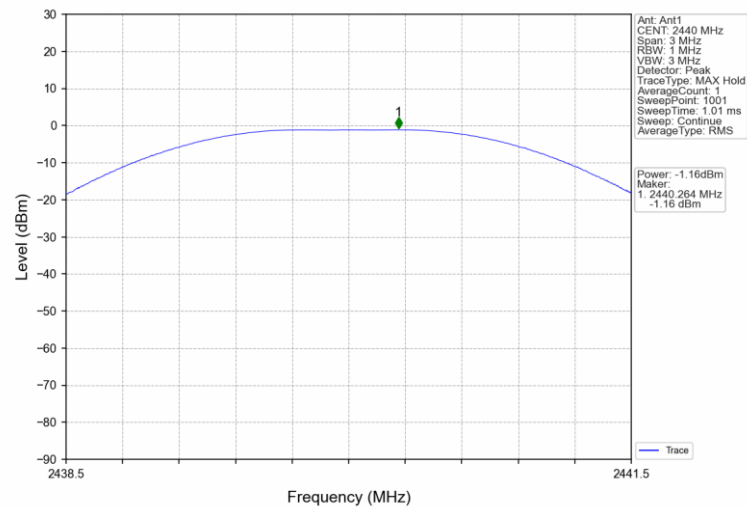


BLE_1M_BT4.0_Ant1_2480

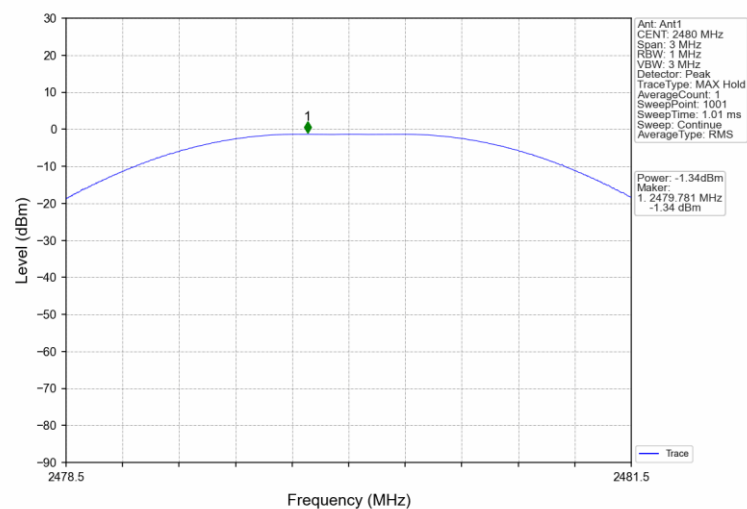


BLE 2M BT5.0 Ant1 2402

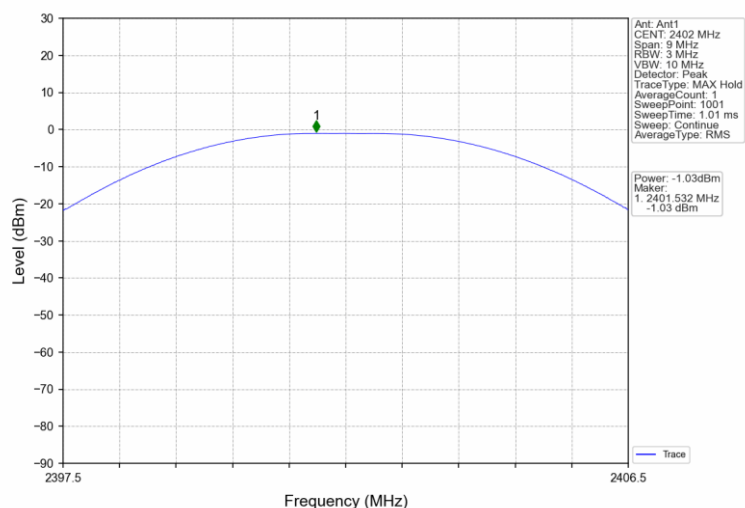

BLE 2M BT5.0 Ant1 2440

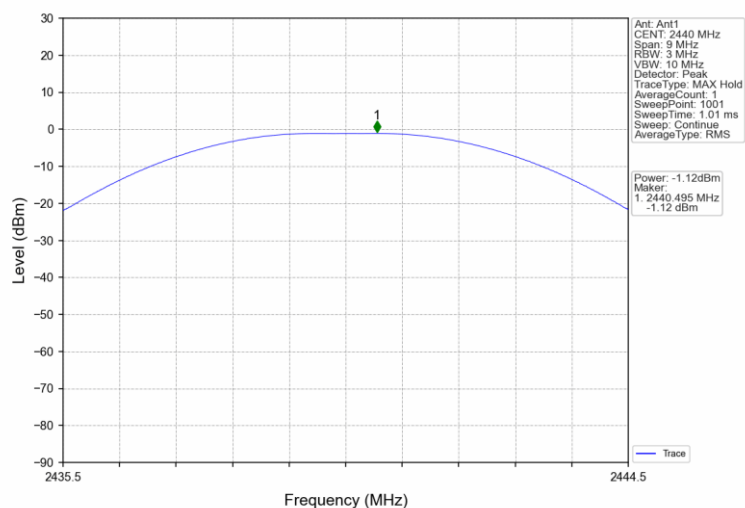

BLE 2M BT5.0 Ant1 2480

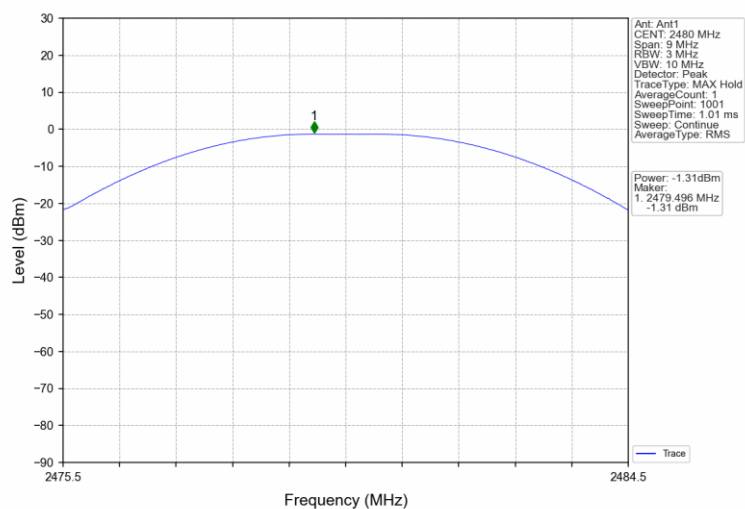

9.2 Power Spectral Density

Test Method

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW $\geq$ 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

Limit


Limit [dBm/3KHz]

≤ 8


Test result

Frequency MHz	Mode	Power spectral density dBm/3KHz	Result
Bottom channel 2402MHz	LE 1Mbps	-16.64	Pass
Middle channel 2440MHz	LE 1Mbps	-16.74	Pass
Top channel 2480MHz	LE 1Mbps	-16.91	Pass
Bottom channel 2402MHz	LE 2Mbps	-19.11	Pass
Middle channel 2440MHz	LE 2Mbps	-19.21	Pass
Top channel 2480MHz	LE 2Mbps	-19.40	Pass


BLE_1M_BT4.0_Ant1_2402

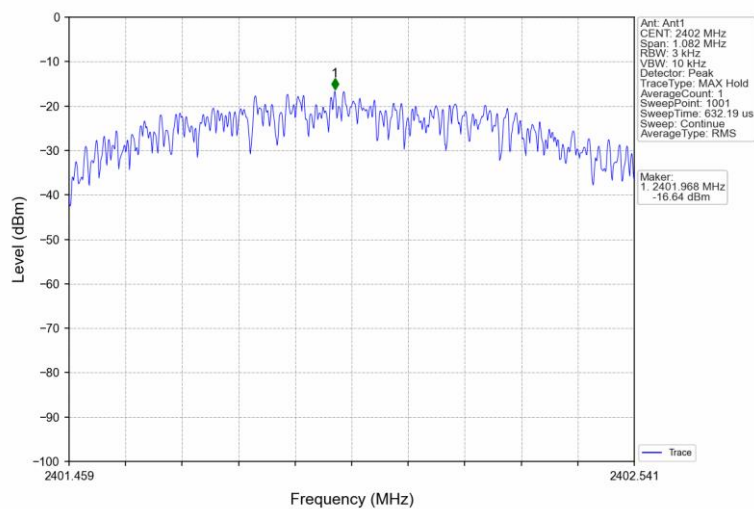


BLE_1M_BT4.0_Ant1_2440

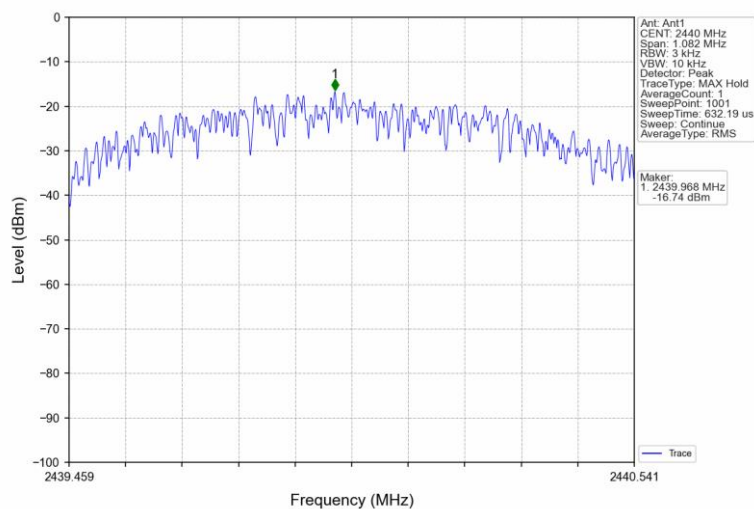


BLE_1M_BT4.0_Ant1_2480

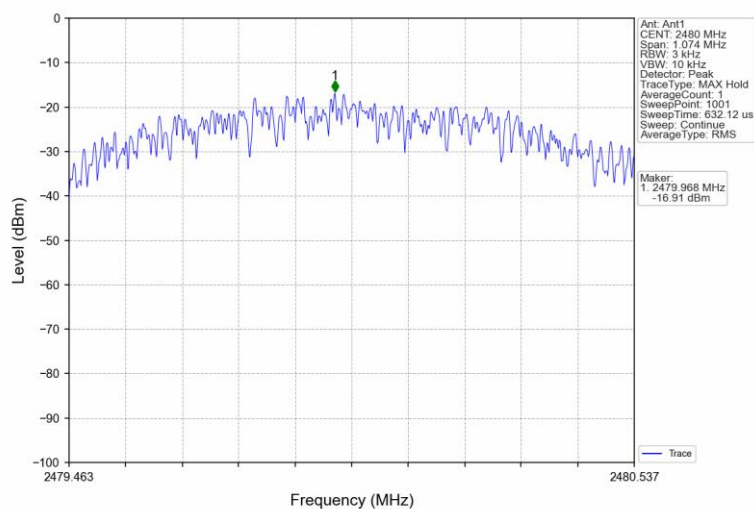


BLE 2M_BT5.0_Ant1_2402

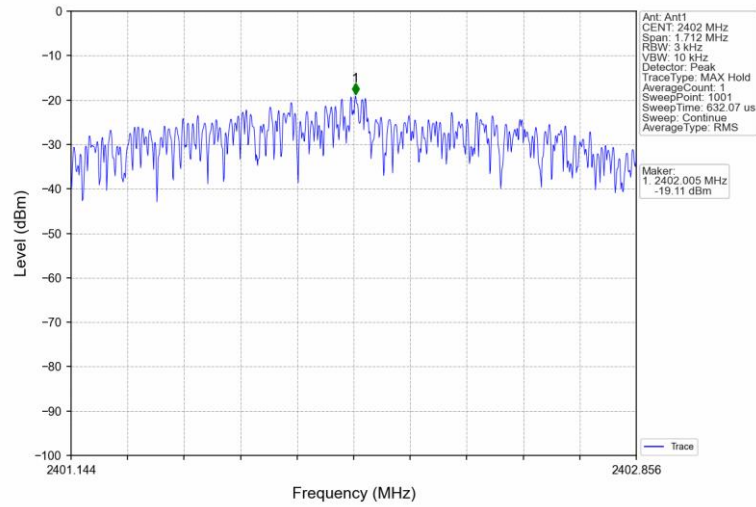

BLE 2M_BT5.0_Ant1_2440

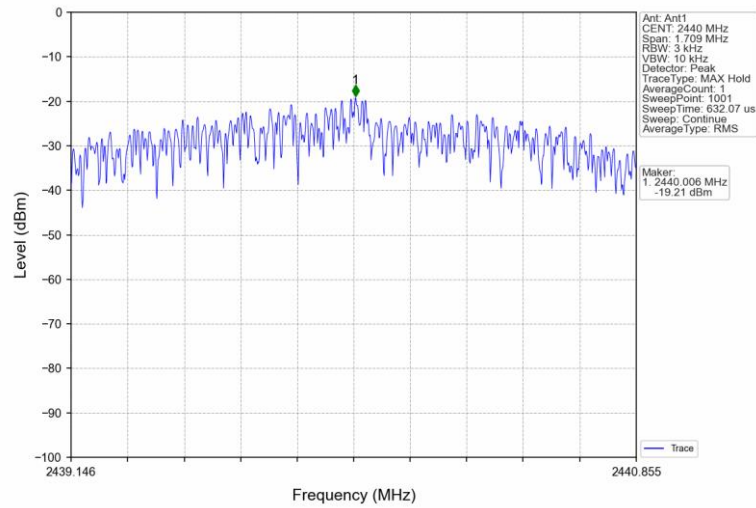

BLE 2M_BT5.0_Ant1_2480

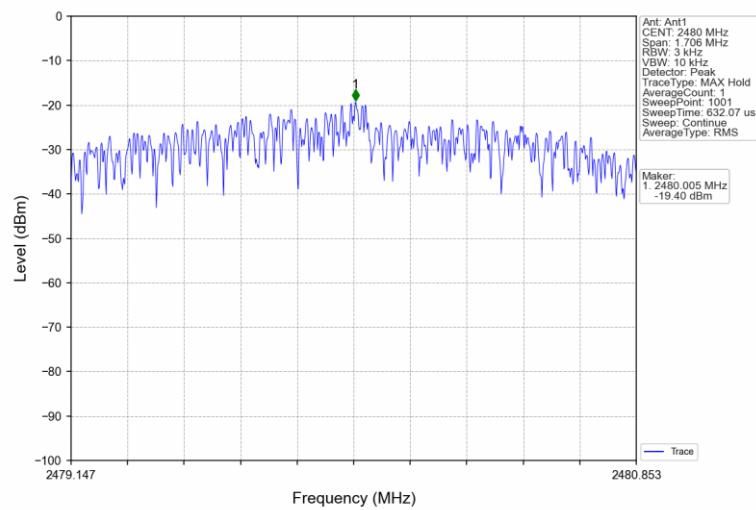

9.3 6 dB Bandwidth and 99% Occupied Bandwidth

Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW=100KHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Limit

Limit [kHz]

≥ 500

Test Method for 99 % Bandwidth

1. Set center frequency to the nominal EUT channel center frequency
2. Set span = 1.5 times to 5.0 times the OBW. Set RBW = 1 % to 5 % of the OBW
Set VBW $\geq$ 3 RBW Trace mode = max hold. Sweep = auto couple.
Allow the trace to stabilize.
3. Use the 99 % power bandwidth function of the instrument.
4. Record the results in the test report.

Limit


Limit [kHz]

Test result


Frequency MHz	Mode	6dB bandwidth MHz	99% bandwidth MHz	Result
Bottom channel 2402MHz	LE 1Mbps	0.721	1.045	Pass
Middle channel 2440MHz	LE 1Mbps	0.721	1.045	Pass
Top channel 2480MHz	LE 1Mbps	0.716	1.047	Pass
Bottom channel 2402MHz	LE 2Mbps	1.141	2.077	Pass
Middle channel 2440MHz	LE 2Mbps	1.139	2.078	Pass
Top channel 2480MHz	LE 2Mbps	1.137	2.081	Pass

6 dB Bandwidth


BLE 1M BT4.0 Ant1 2402

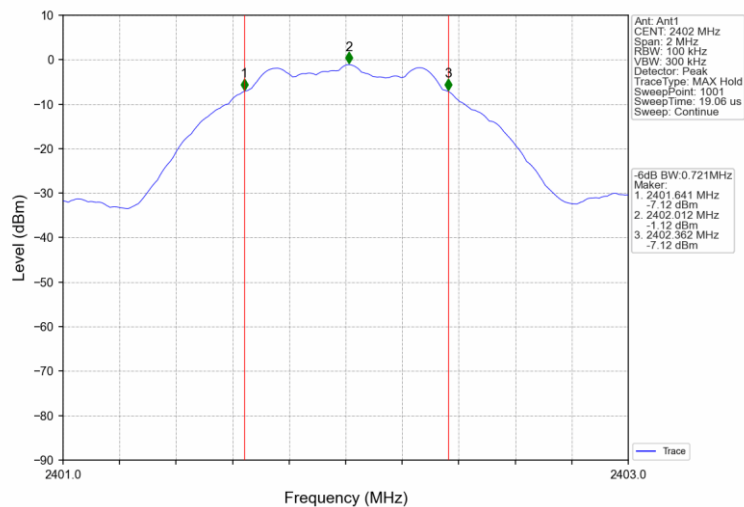


BLE 1M BT4.0 Ant1 2440

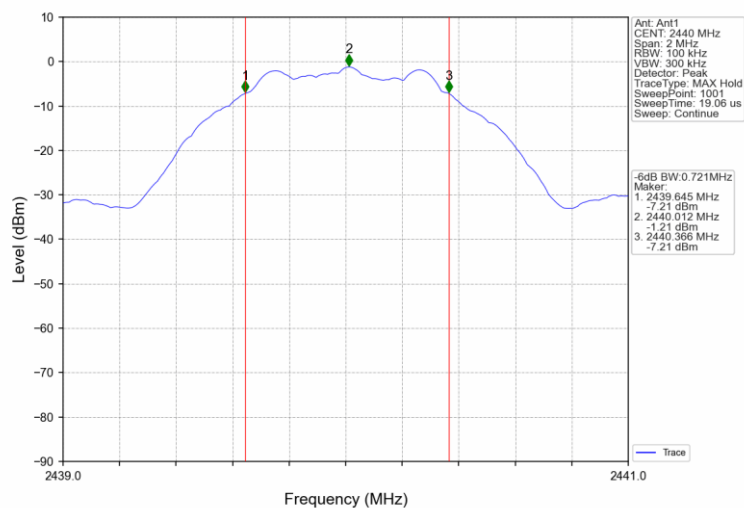


BLE 1M BT4.0 Ant1 2480

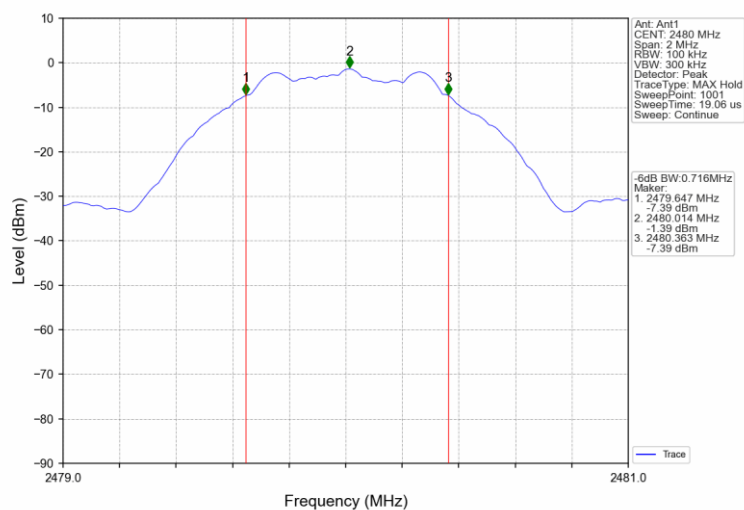


BLE 2M_BT5.0_Ant1_2402



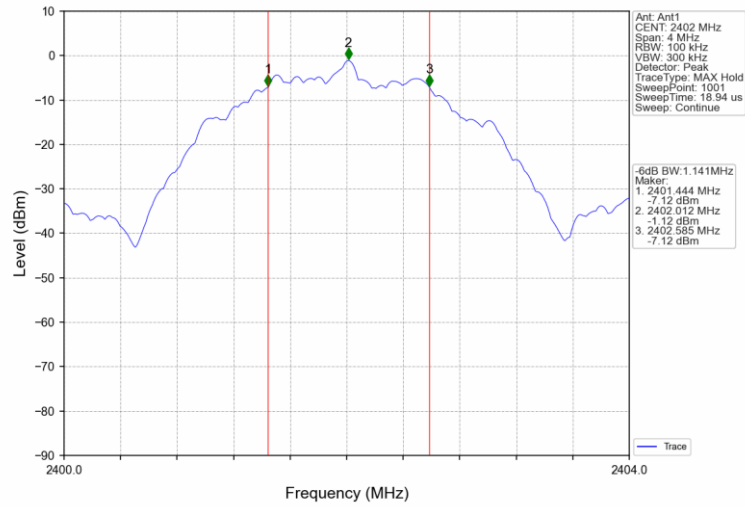


BLE 2M_BT5.0_Ant1_2440

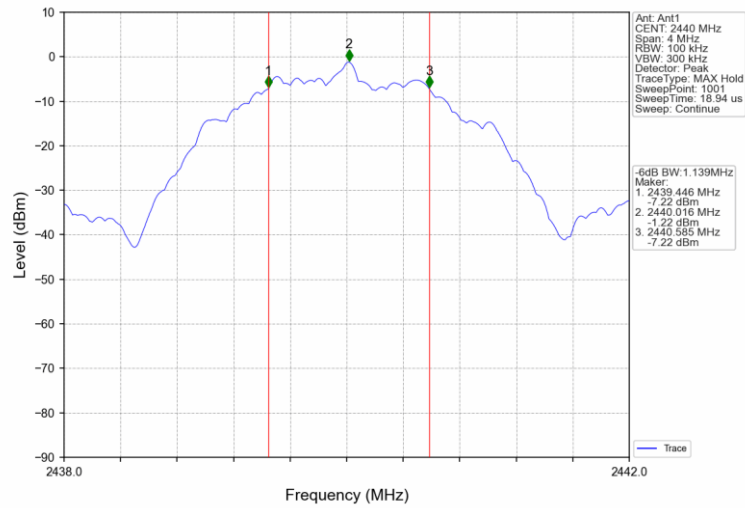


BLE 2M_BT5.0_Ant1_2480

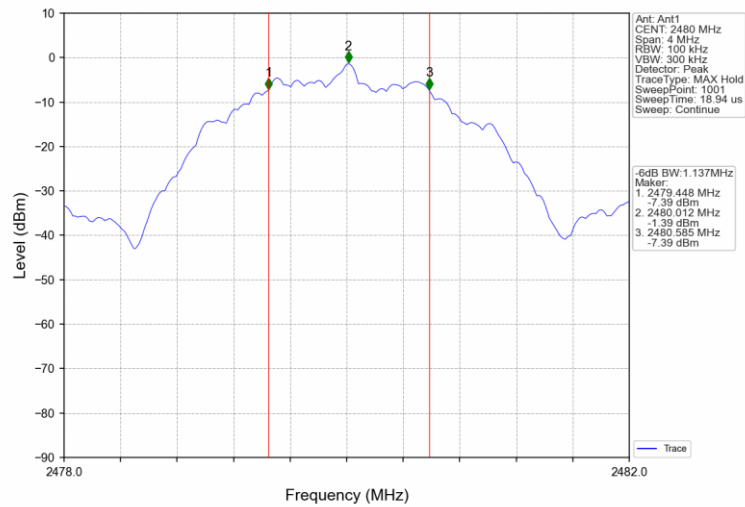


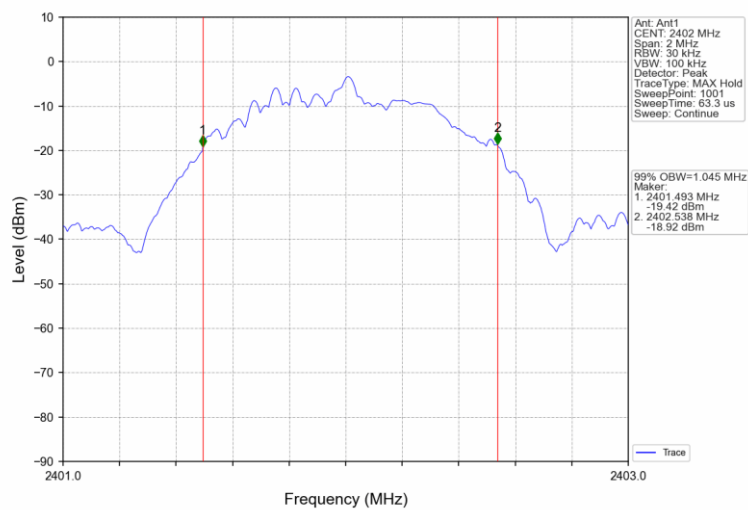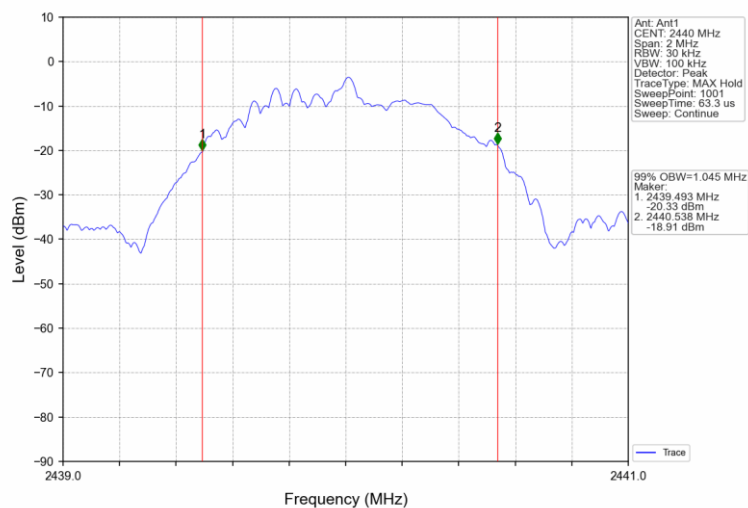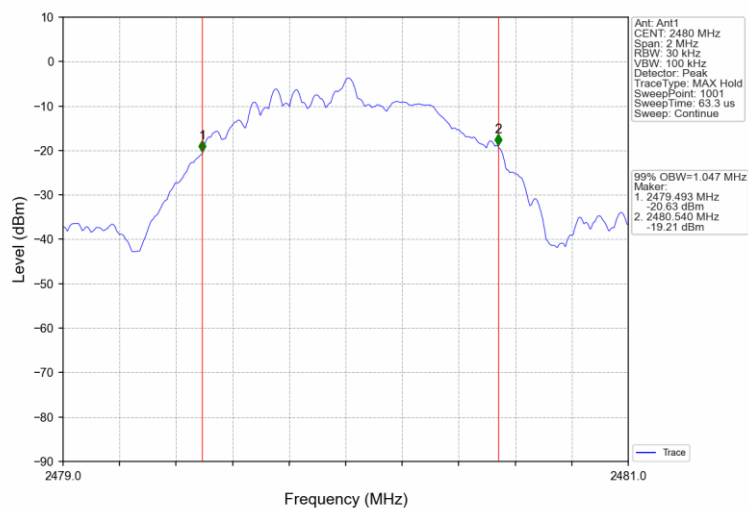99% Bandwidth**BLE 1M BT4.0 Ant1 2402****BLE 1M BT4.0 Ant1 2440****BLE 1M BT4.0 Ant1 2480**


BLE_2M_BT5.0_Ant1_2402

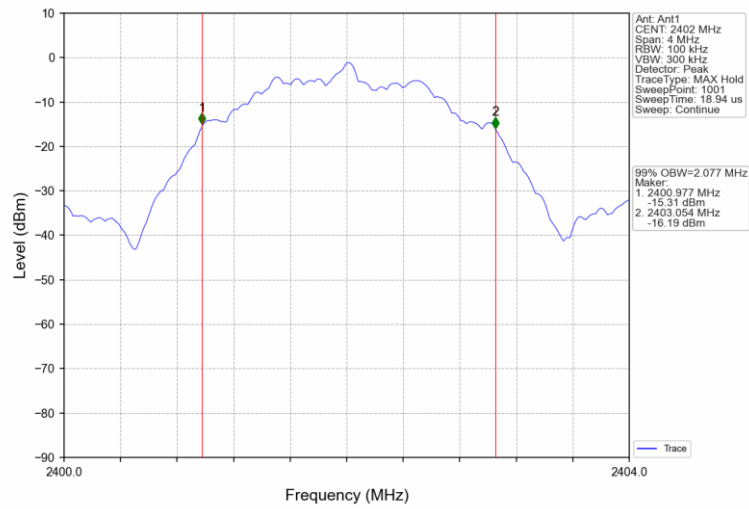

BLE_2M_BT5.0_Ant1_2440

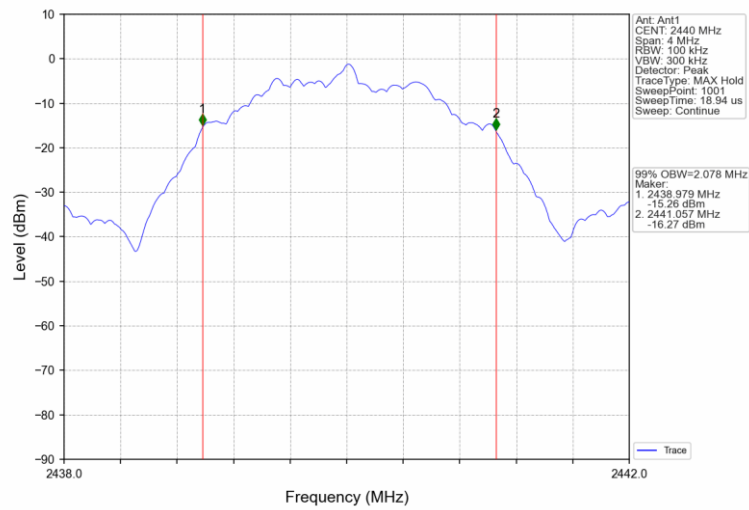

BLE_2M_BT5.0_Ant1_2480

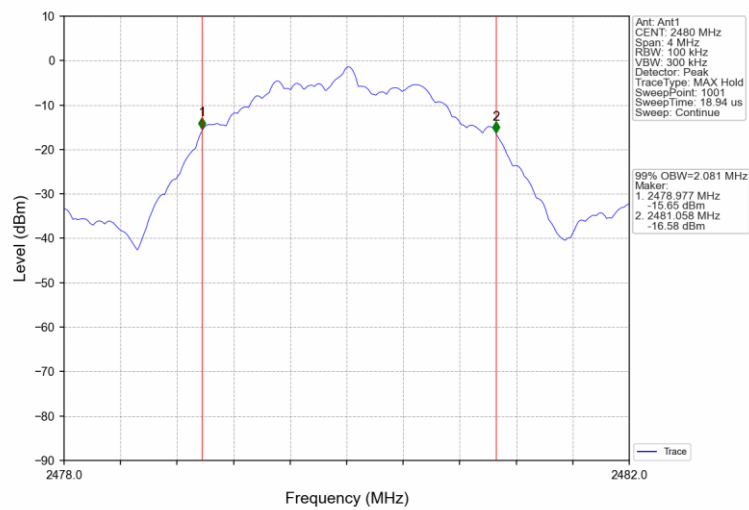

9.4 Spurious RF Conducted Emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20


Spurious RF conducted emissions

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-1.11	-21.11	Pass
		2440	1	-1.11	-21.11	Pass
		2480	1	-1.11	-21.11	Pass
2M	SISO	2402	1	-1.12	-21.12	Pass
		2440	1	-1.12	-21.12	Pass
		2480	1	-1.12	-21.12	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.



1M_LCH_2402MHz_Ant1_NTNV

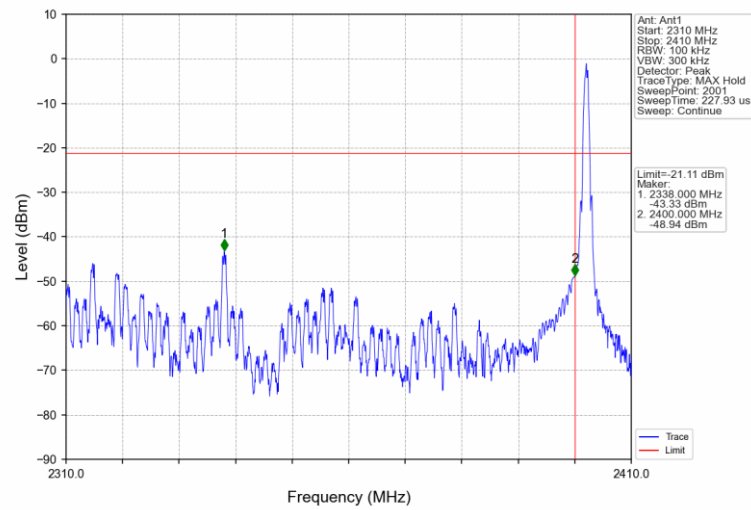


1M_LCH_2402MHz_Ant1_NTNV

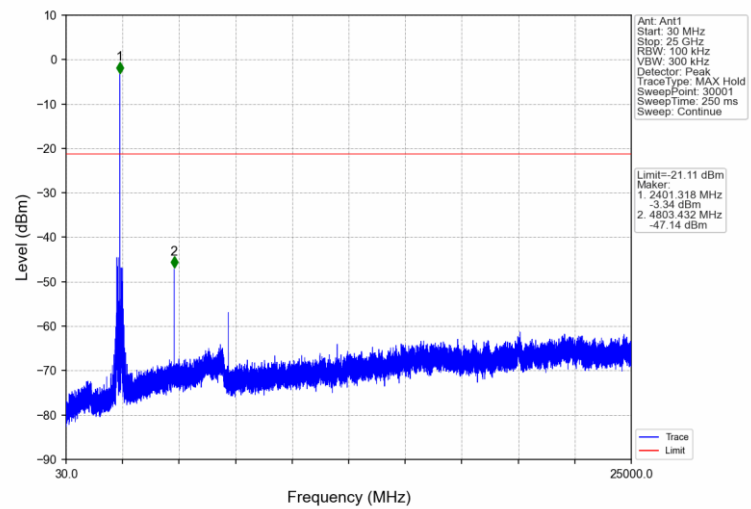




1M_MCH_2440MHz_Ant1_NTNV

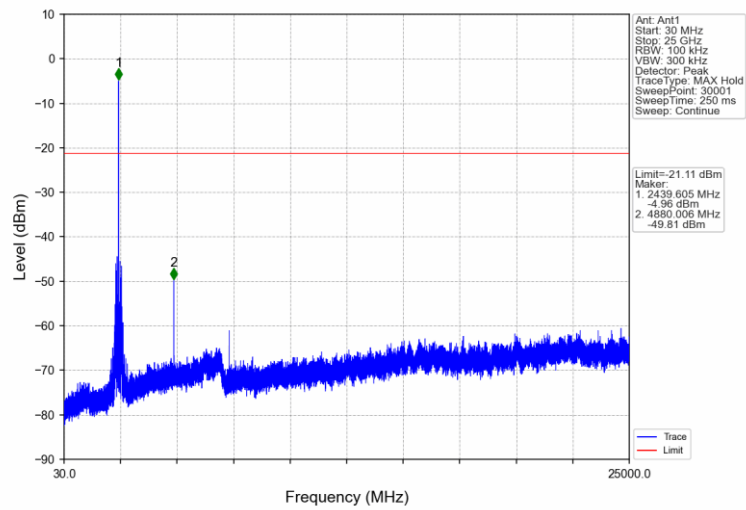


1M_HCH_2480MHz_Ant1_NTNV

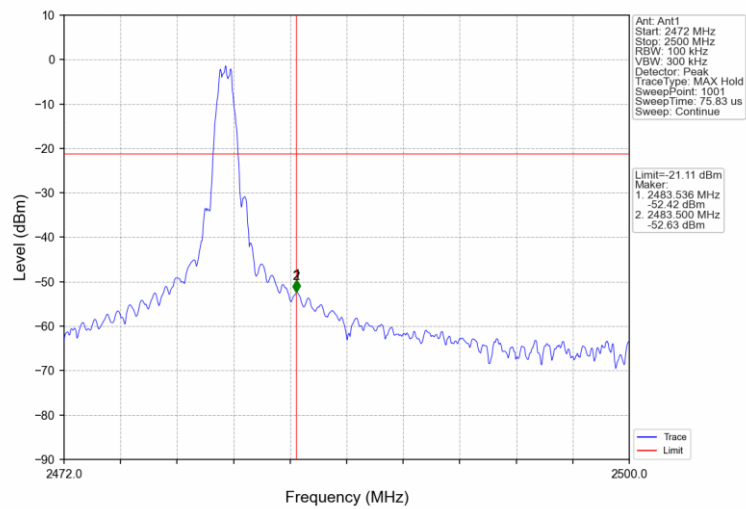




1M_HCH_2480MHz_Ant1_NTNV

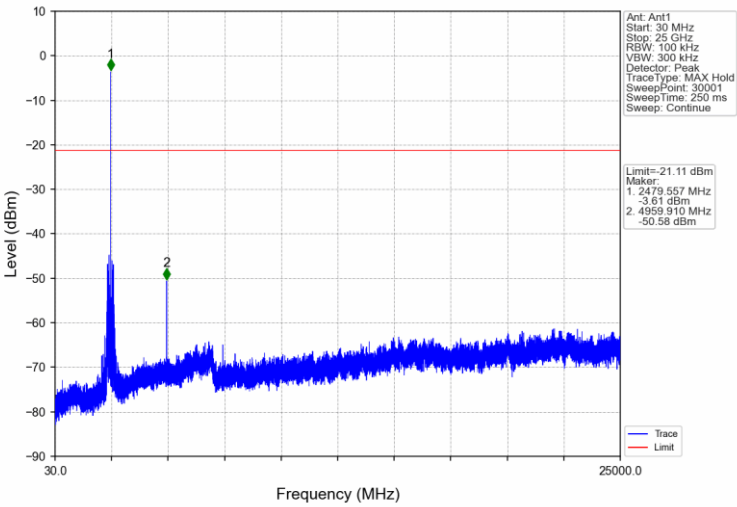


2M_LCH_2402MHz_Ant1_NTNV

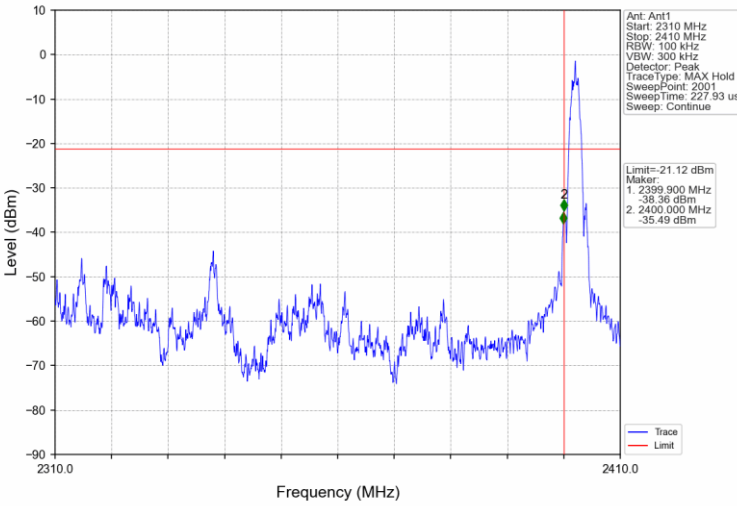




2M_LCH_2402MHz_Ant1_NTNV

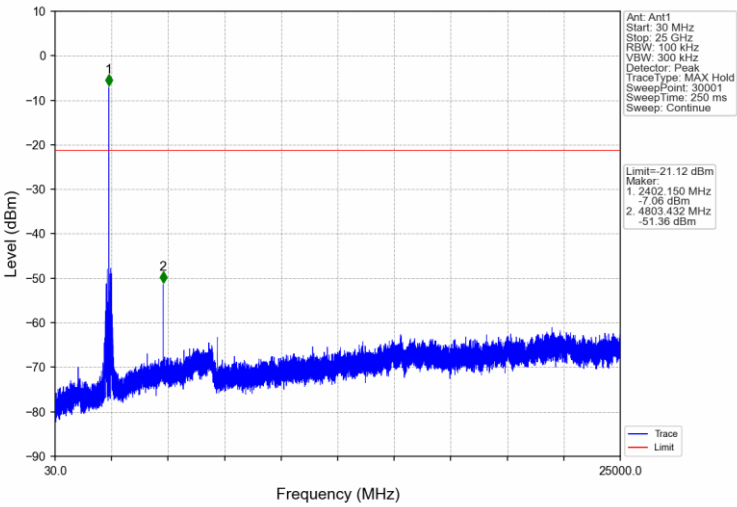


2M_MCH_2440MHz_Ant1_NTNV

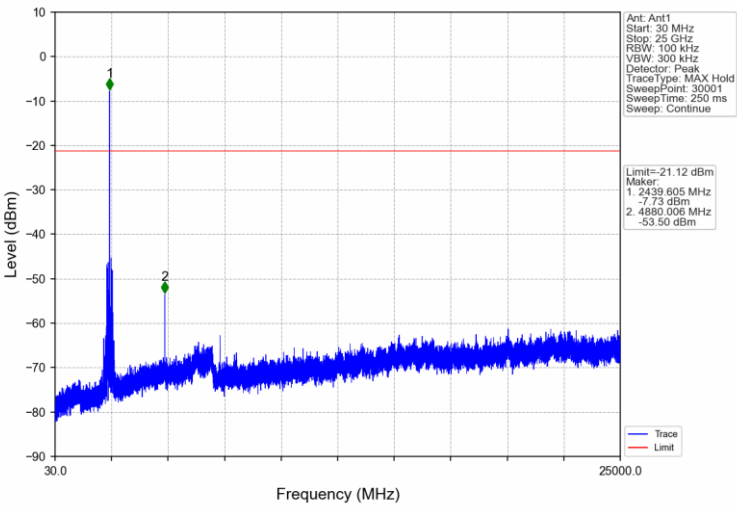




2M_HCH_2480MHz_Ant1_NTNV

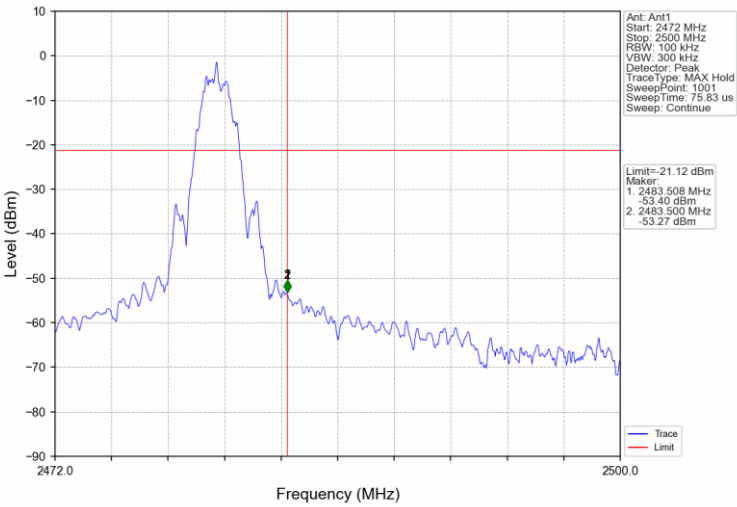

2M_HCH_2480MHz_Ant1_NTNV

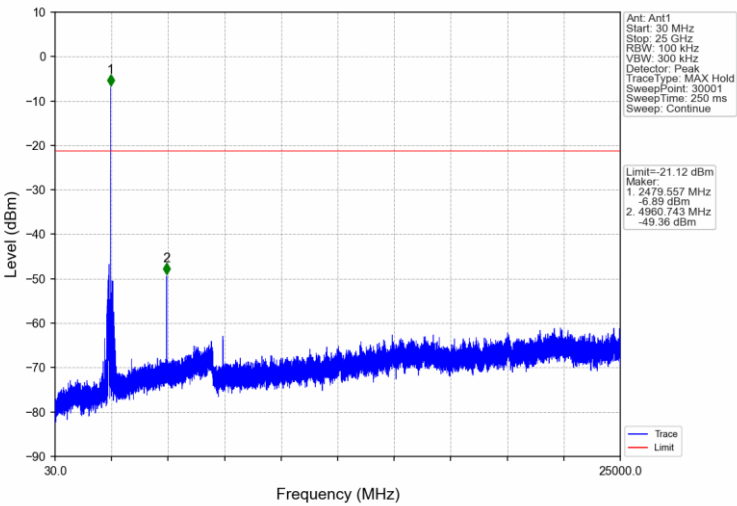

9.5 Band Edge

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS-247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB.


Frequency Range	Limit (dBc)
MHz	
30-25000	-20

Band edge testing


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-1.11
		2480	1	-1.11
2M	SISO	2402	1	-1.12
		2480	1	-1.12

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


1M_LCH_2402MHz_Ant1_NTNV

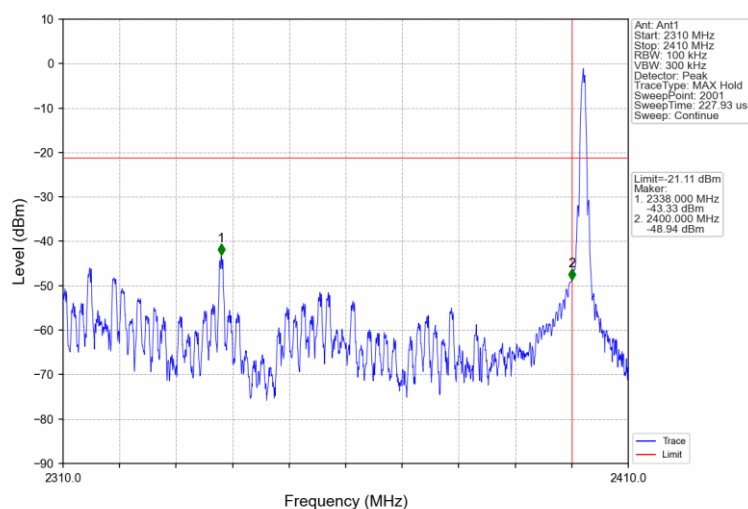


1M_HCH_2480MHz_Ant1_NTNV

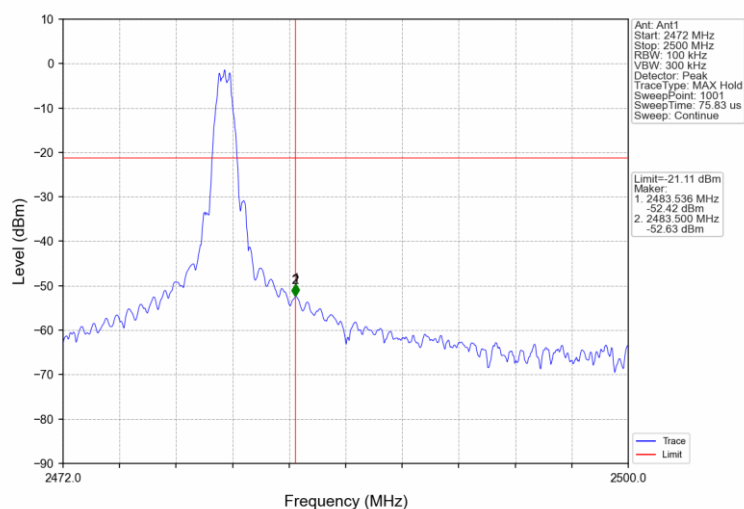

2M_LCH_2402MHz_Ant1_NTNV

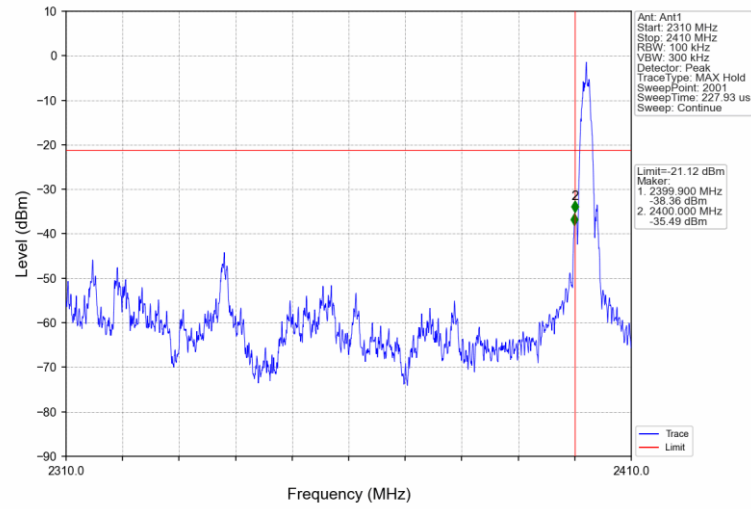

2M_HCH_2480MHz_Ant1_NTNV

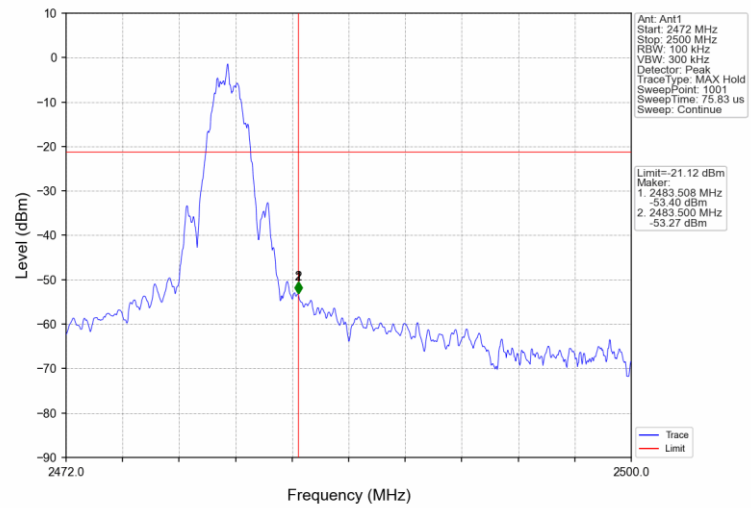

9.6 Spurious Radiated Emissions for Transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following test receiver settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1MHz.

b) VBW = $[3 \times \text{RBW}]$.

c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$.

Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty

cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission (AV) at frequency above 1GHz.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS 247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a) and RSS-Gen section 8.9, must also comply with the radiated emission limits specified in § 15.209(a) and RSS-Gen section 8.10.

Frequency MHz	Field Strength $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit 3m(dB $\mu\text{V/m}$)=Limit 300m(dB $\mu\text{V/m}$)+40Log(300m/3m) (Below 30MHz)


Note 2: Limit 3m(dB $\mu\text{V/m}$)=Limit 30m(dB $\mu\text{V/m}$)+40Log(30m/3m) (Below 30MHz)

Spurious radiated emissions for transmitter


According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Transmitting spurious emission test result as below:

Test data_30MHz to 1000MHz

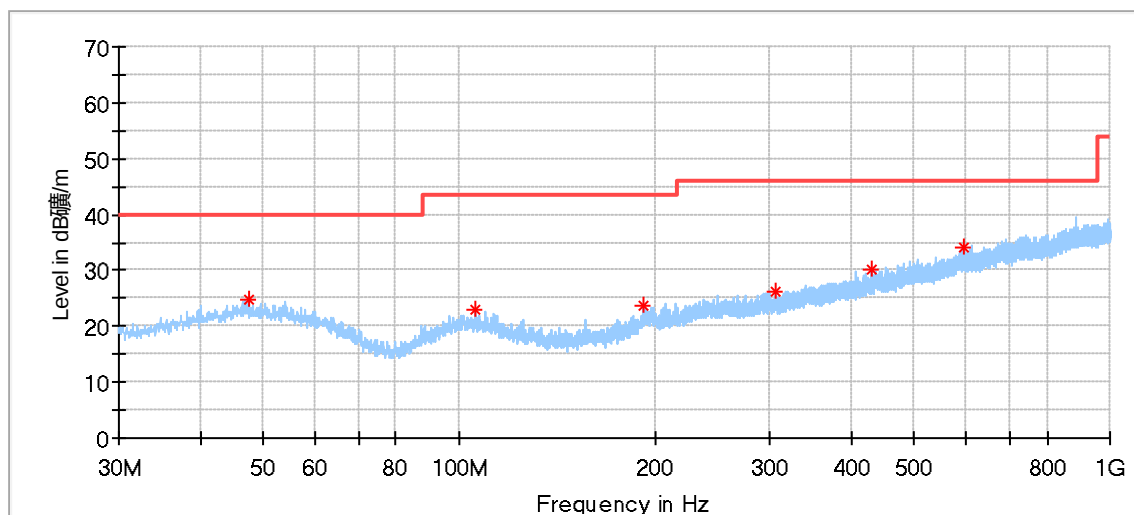


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
47.460000	24.78	40.00	15.22	100.0	H	289.0	18.40	---
105.875556	23.14	43.50	20.36	100.0	H	257.0	16.00	---
192.421111	23.58	43.50	19.92	100.0	H	1.0	15.85	---
306.988889	26.28	46.00	19.72	100.0	H	82.0	18.63	---
431.041111	30.12	46.00	15.88	200.0	H	238.0	21.81	---
597.935000	34.07	46.00	11.93	100.0	H	205.0	25.07	---

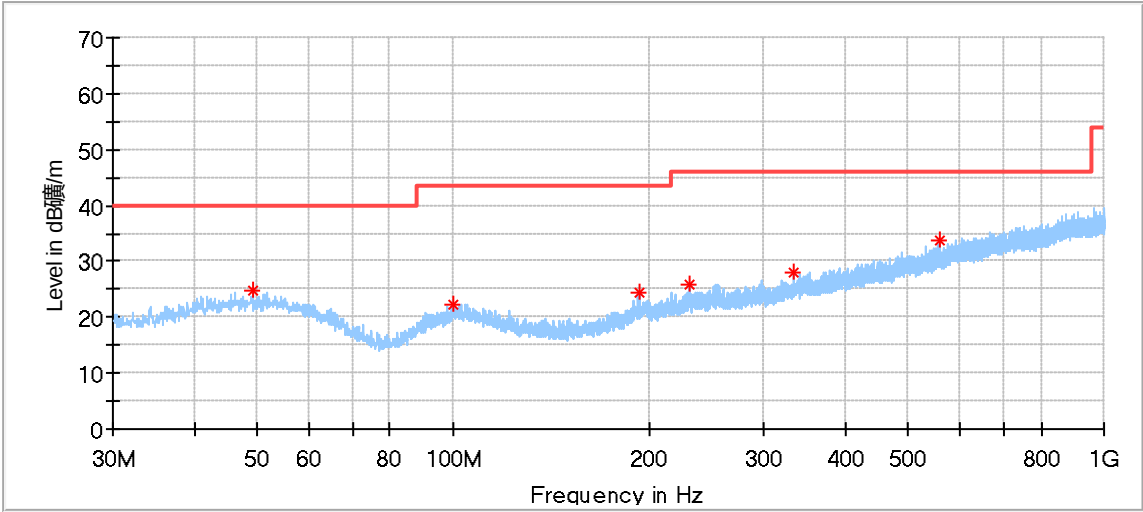


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
49.184444	24.79	40.00	15.21	100.0	V	40.0	18.29	---
100.001667	22.20	43.50	21.30	200.0	V	125.0	15.97	---
193.229444	24.32	43.50	19.18	100.0	V	175.0	16.07	---
231.113333	25.84	46.00	20.16	100.0	V	289.0	16.78	---
332.532222*	27.99	46.00	18.01	100.0	V	50.0	19.48	---
559.943333	33.80	46.00	12.20	100.0	V	0.0	24.06	---

Test data 1GHz to 18GHz:
BLE_1Mbps_Low Channel:

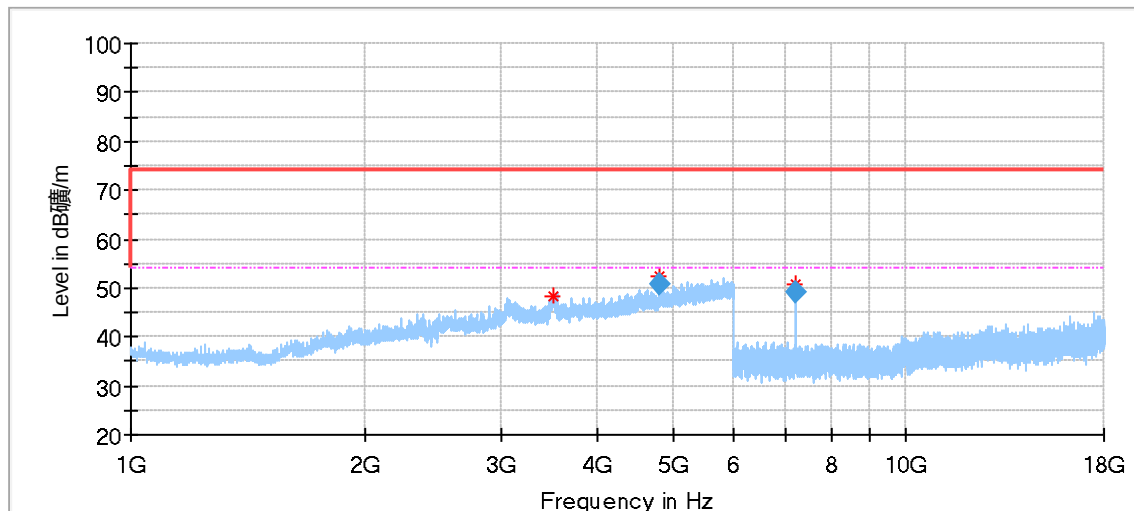


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3500.000000	48.39	74.00	25.61	150.0	H	36.0	4.48
4804.000000*	52.50	74.00	21.50	150.0	H	156.0	4.93
7206.000000	50.57	74.00	23.43	150.0	H	327.0	6.36
Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000*	50.86	54.00	3.14	150.0	H	156.0	4.93
7206.000000	49.14	54.00	4.86	150.0	H	327.0	6.36

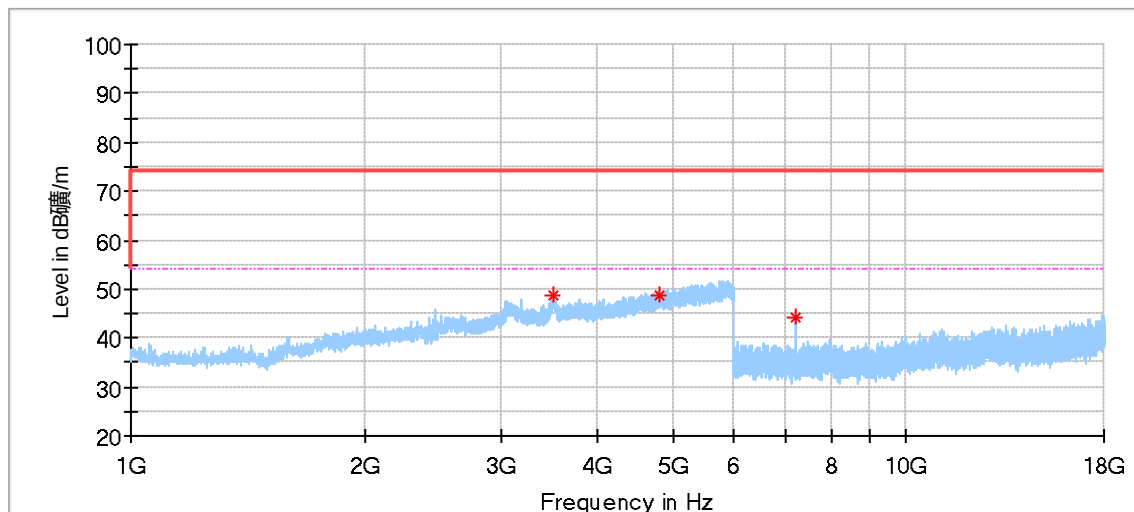


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3502.500000	48.90	74.00	25.10	150.0	V	195.0	4.36
4804.500000*	48.72	74.00	25.28	150.0	V	220.0	4.94
7206.000000	44.06	74.00	29.95	150.0	V	205.0	6.36

BLE_1Mbps_Middle Channel:

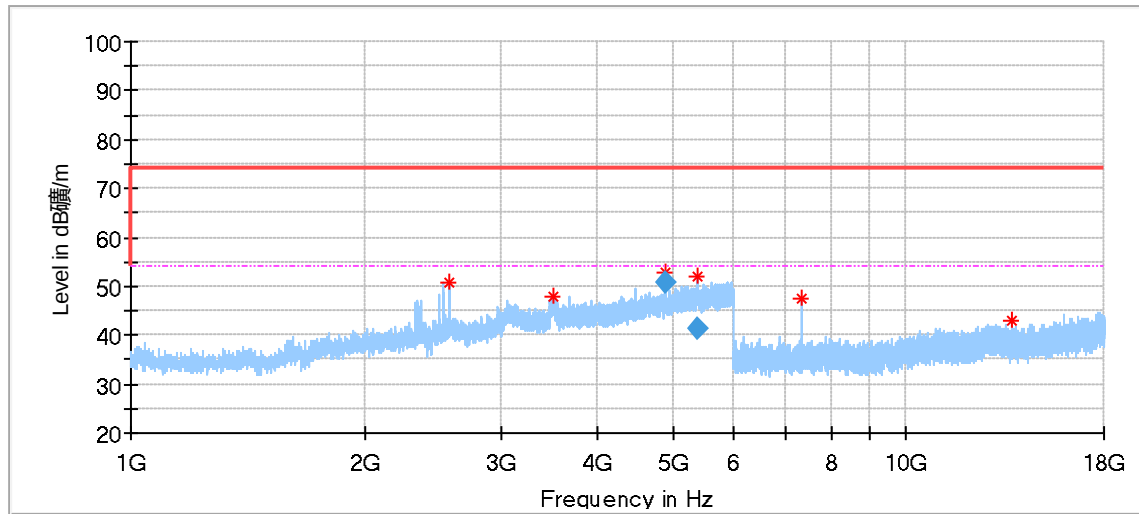


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
2568.500000	50.97	74.00	23.03	150.0	H	292.0	-1.23	---
3501.000000	47.98	74.00	26.02	150.0	H	115.0	4.43	---
4880.000000*	52.77	74.00	21.23	150.0	H	265.0	5.09	---
5391.000000*	51.98	74.00	22.02	150.0	H	312.0	6.79	---
7319.500000*	47.46	74.00	26.54	150.0	H	281.0	6.69	---
13678.000000	42.91	74.00	31.09	150.0	H	260.0	12.58	---
Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
4880.000000*	50.62	54.00	3.38	150.0	H	265.0	5.09	---
5391.000000*	41.30	54.00	12.70	150.0	H	312.0	6.79	---

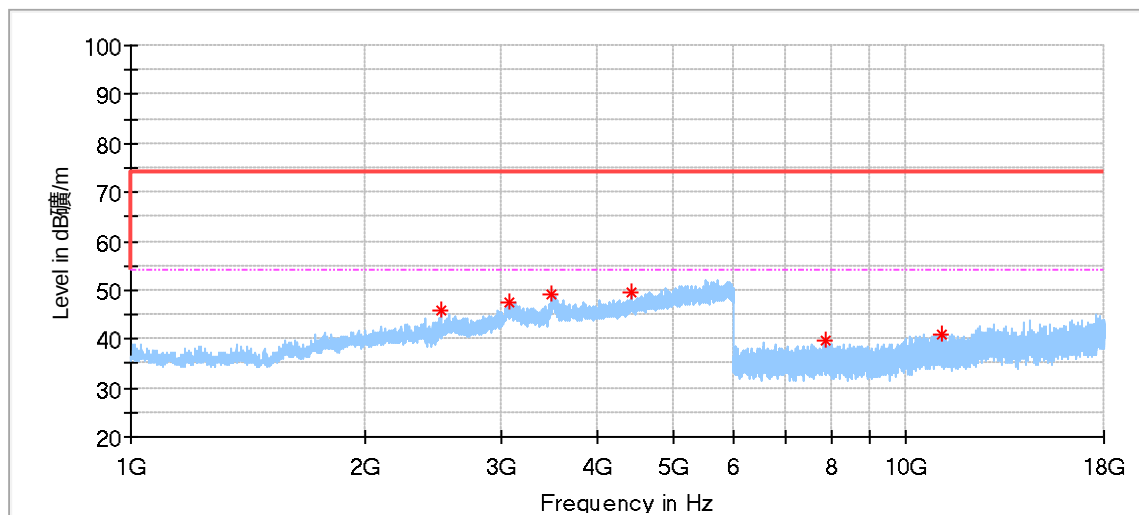


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
2516.000000	45.90	74.00	28.10	150.0	V	265.0	-1.74	---
3071.500000	47.31	74.00	26.69	150.0	V	214.0	1.55	---
3487.000000	49.31	74.00	24.69	150.0	V	214.0	3.49	---
4422.500000	49.41	74.00	24.59	150.0	V	275.0	3.56	---
7879.000000	39.60	74.00	34.40	150.0	V	359.0	7.24	---
11130.000000*	40.86	74.00	33.14	150.0	V	345.0	11.01	---

BLE_1Mbps_High Channel:

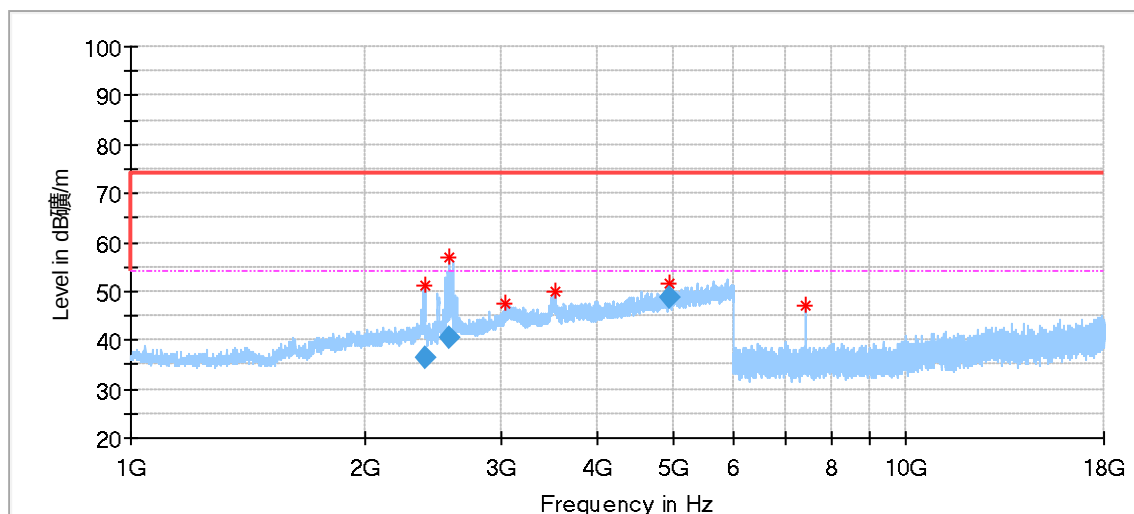


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2392.000000	51.08	74.00	22.92	150.0	H	234.0	-2.43
2568.000000	56.78	74.00	17.22	150.0	H	265.0	-1.23
3044.500000	47.56	74.00	26.44	150.0	H	285.0	1.50
3526.000000	49.92	74.00	24.08	150.0	H	306.0	3.17
4960.000000*	51.65	74.00	22.35	150.0	H	19.0	5.28
7440.000000*	47.21	74.00	26.79	150.0	H	51.0	6.62
Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2392.000000	36.57	54.00	17.43	150.0	H	234.0	-2.43
2568.000000	40.31	54.00	13.69	150.0	H	265.0	-1.23
4960.000000*	48.88	54.00	5.12	150.0	H	19.0	5.28

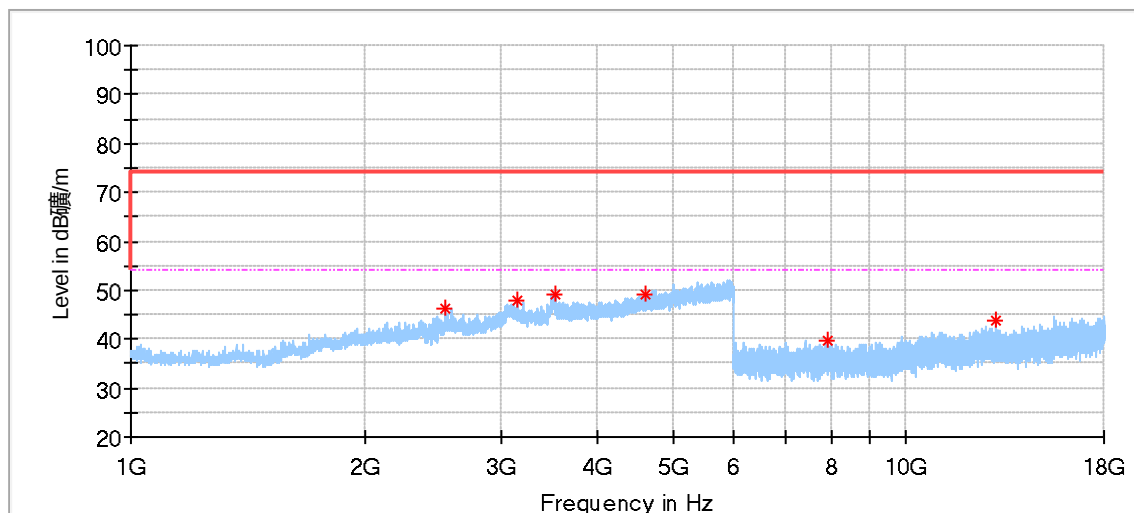


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2543.500000	46.18	74.00	27.82	150.0	V	183.0	-1.43
3156.500000	47.84	74.00	26.16	150.0	V	3.0	0.90
3523.000000	49.27	74.00	24.73	150.0	V	19.0	3.32
4622.500000*	49.14	74.00	24.86	150.0	V	234.0	4.42
7935.500000	39.78	74.00	34.22	150.0	V	347.0	7.26
13023.500000	43.78	74.00	30.22	150.0	V	264.0	13.07

BLE_2Mbps_Low Channel:

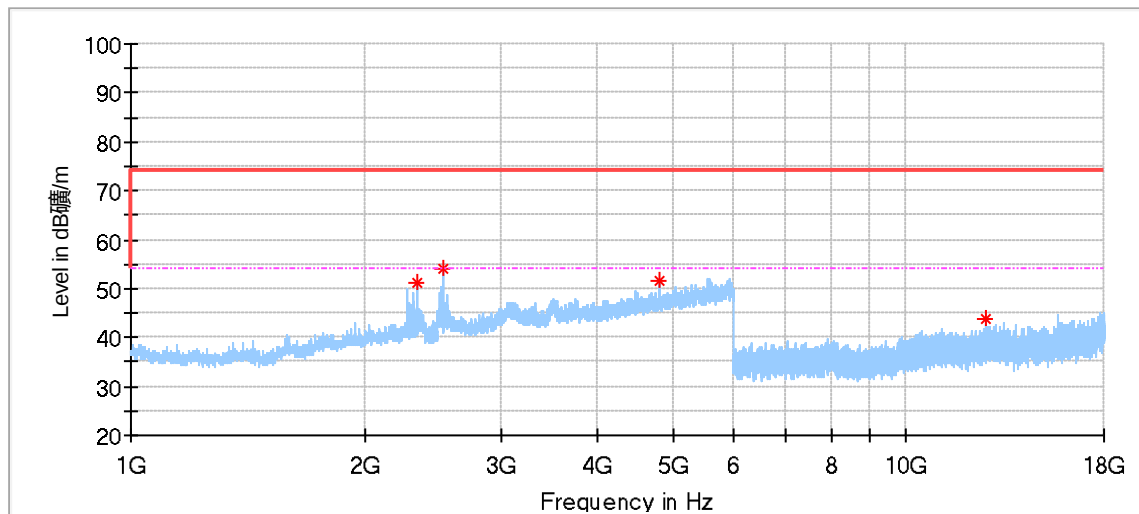


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2338.500000*	51.22	74.00	22.78	150.0	H	224.0	-2.92
2530.000000	54.22	74.00	19.78	150.0	H	197.0	-1.60
4804.500000*	51.68	74.00	22.32	150.0	H	224.0	4.94
12665.000000*	43.87	74.00	30.13	150.0	H	235.0	12.76

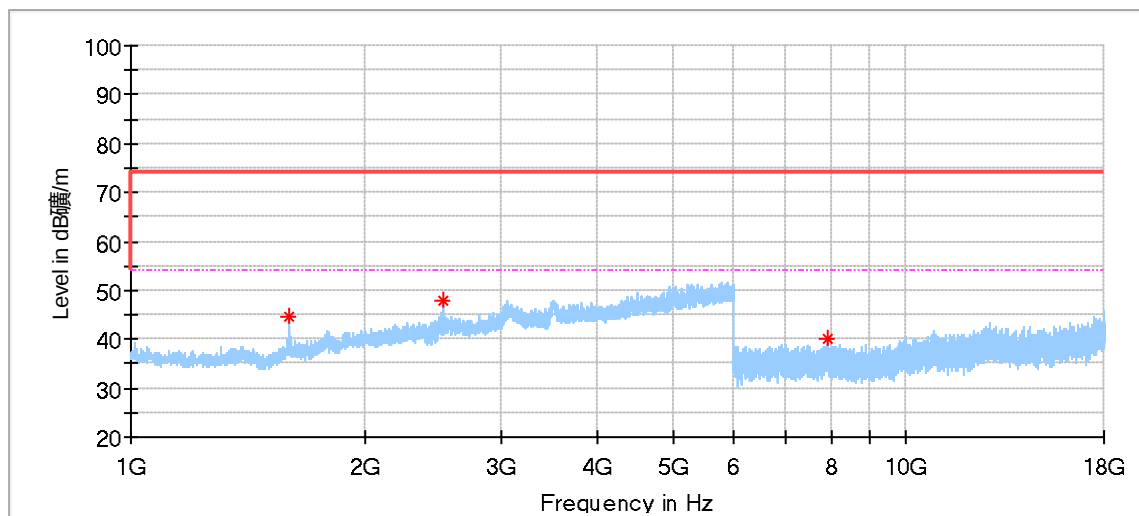


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1596.500000*	44.49	74.00	29.51	150.0	V	265.0	-6.89
2529.500000	48.06	74.00	25.94	150.0	V	356.0	-1.60
7925.500000	39.91	74.00	34.09	150.0	V	61.0	7.23

BLE_2Mbps_Middle Channel:

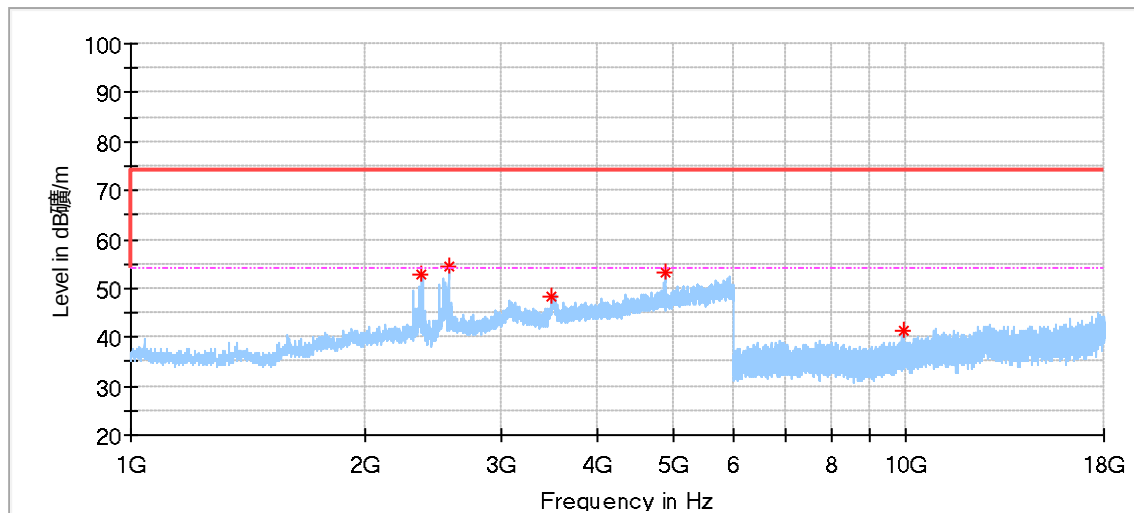


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2375.500000*	52.79	74.00	21.21	150.0	H	222.0	-2.57
2568.000000	54.31	74.00	19.69	150.0	H	236.0	-1.23
3496.000000	48.37	74.00	25.63	150.0	H	345.0	4.18
4880.000000*	53.35	74.00	20.65	150.0	H	236.0	5.09
9946.500000	41.21	74.00	32.79	150.0	H	61.0	9.40

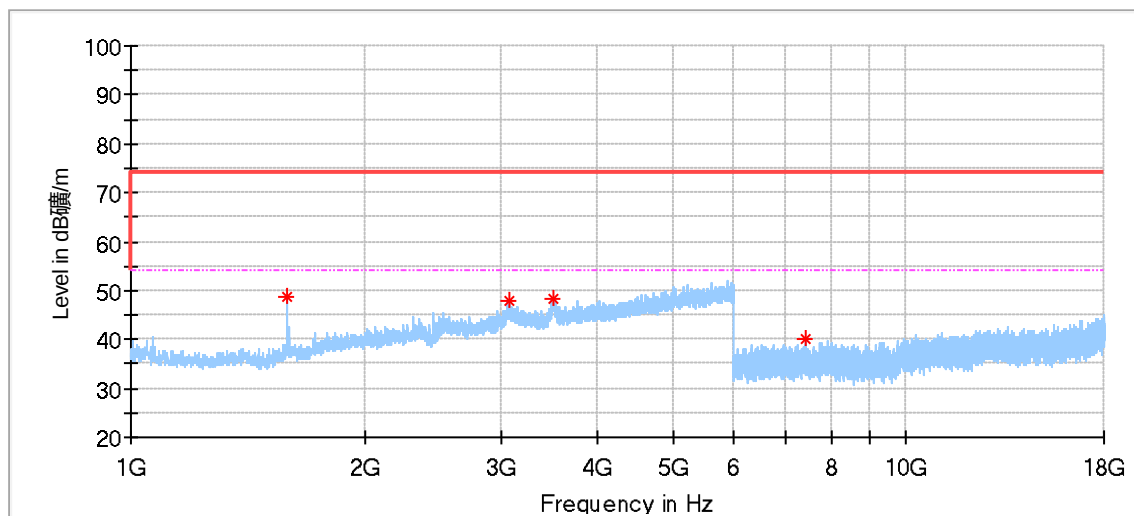


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1593.000000*	48.69	74.00	25.31	150.0	V	272.0	-6.95
3070.500000	47.92	74.00	26.08	150.0	V	122.0	1.56
3499.000000	48.31	74.00	25.69	150.0	V	245.0	4.41
7439.500000*	40.18	74.00	33.82	150.0	V	63.0	6.62

BLE_2Mbps_High Channel:

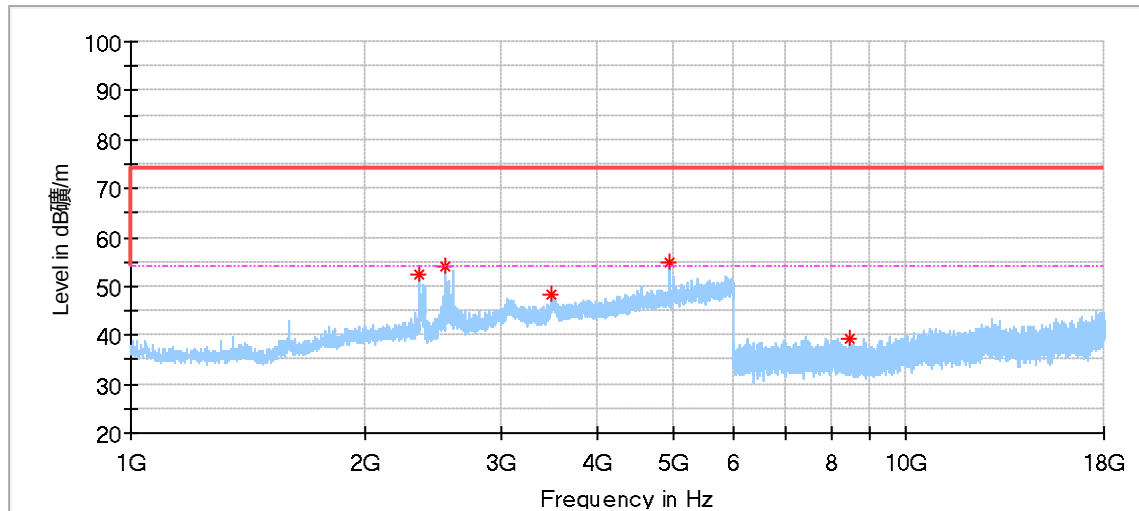

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2352.000000*	52.60	74.00	21.40	150.0	H	347.0	-2.80
2543.500000	54.10	74.00	19.90	150.0	H	209.0	-1.43
3492.000000	48.45	74.00	25.55	150.0	H	253.0	3.87
4960.000000*	54.68	74.00	19.32	150.0	H	239.0	5.28
8478.500000*	39.47	74.00	34.53	150.0	H	260.0	7.60

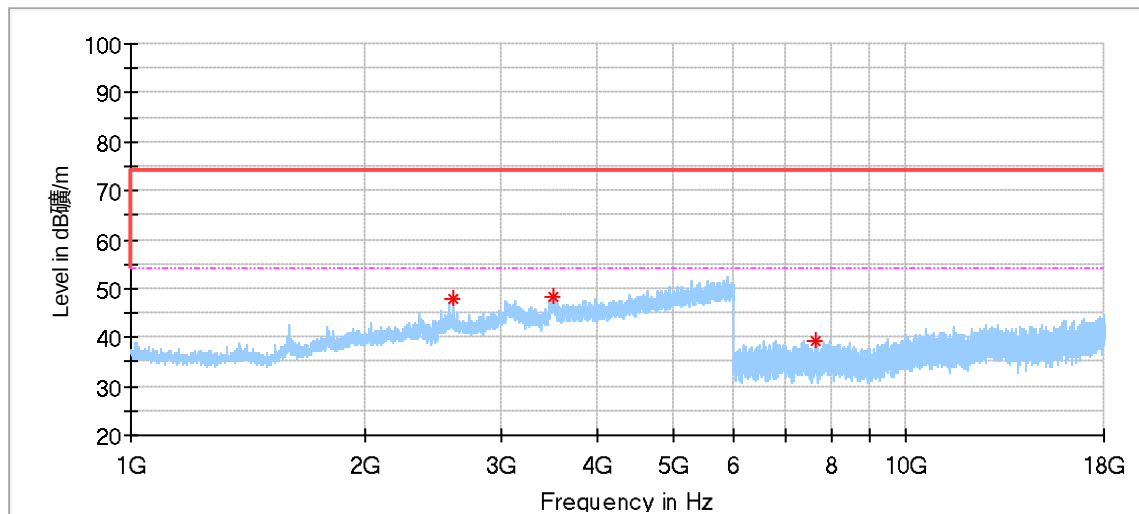


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2608.000000	47.77	74.00	26.23	150.0	V	10.0	-1.13
3505.000000	48.33	74.00	25.67	150.0	V	185.0	4.24
7641.000000*	39.24	74.00	34.76	150.0	V	293.0	6.97

Remark:

- (1) “**” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205 & RSS-GEN 8.10.
- (2) Data of measurement within frequency range 9kHz-30MHz and 18-26GHz are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report
- (3) Corrected Amplitude = Read level + Corrector factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)

Restricted bands of operation. test result as below:

1M 2402MHz:

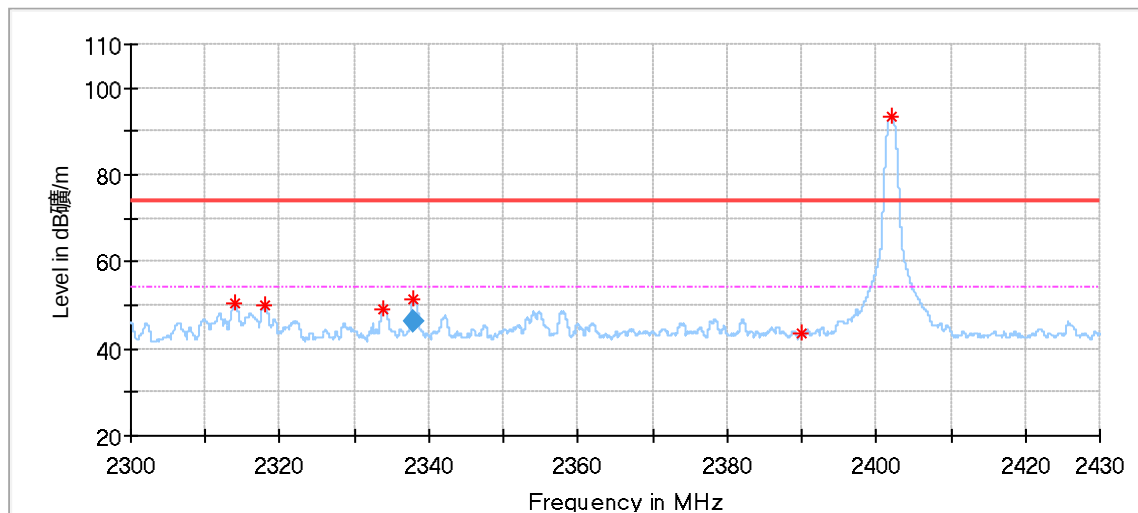


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2313.949000*	50.47	74.00	23.53	150.0	H	141.0	-3.69
2318.005000*	50.03	74.00	23.97	150.0	H	132.0	-3.65
2333.878000*	49.02	74.00	24.98	150.0	H	60.0	-3.51
2337.947000*	51.42	74.00	22.58	150.0	H	298.0	-3.47
2389.999000	43.56	74.00	30.44	150.0	H	316.0	-2.88
2402.011000	93.33	74.00	-19.33	150.0	H	31.0	-2.90

Final_Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2337.947000*	46.13	54.00	7.87	150.0	H	298.0	-3.47

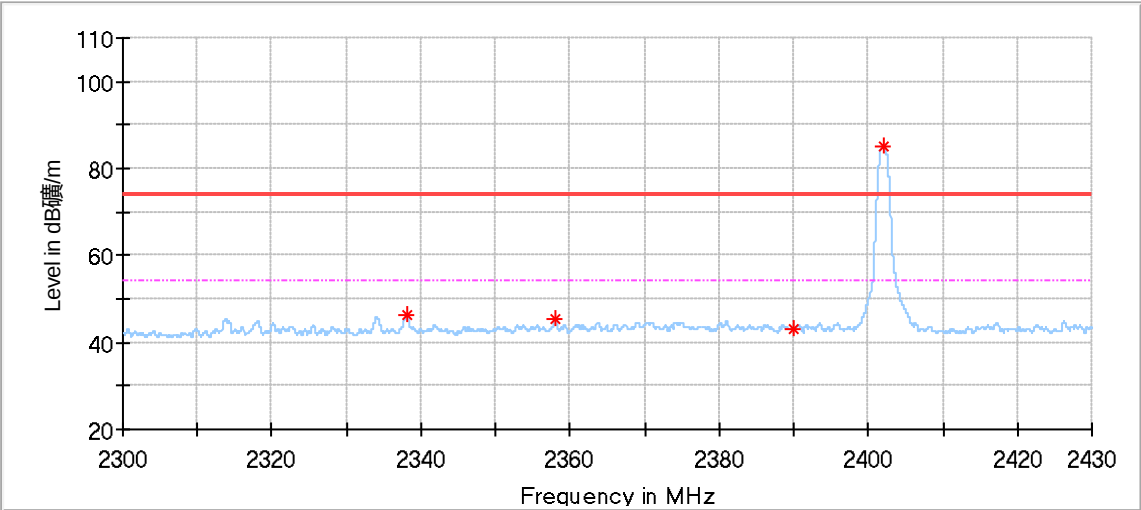


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2338.012000*	46.12	74.00	27.88	150.0	V	349.0	-3.47
2358.058000*	45.36	74.00	28.64	150.0	V	12.0	-3.22
2389.999000*	43.18	74.00	30.82	150.0	V	184.0	-2.88
2402.167000	85.15	74.00	-11.15	150.0	V	341.0	-2.90

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1M 2480MHz:

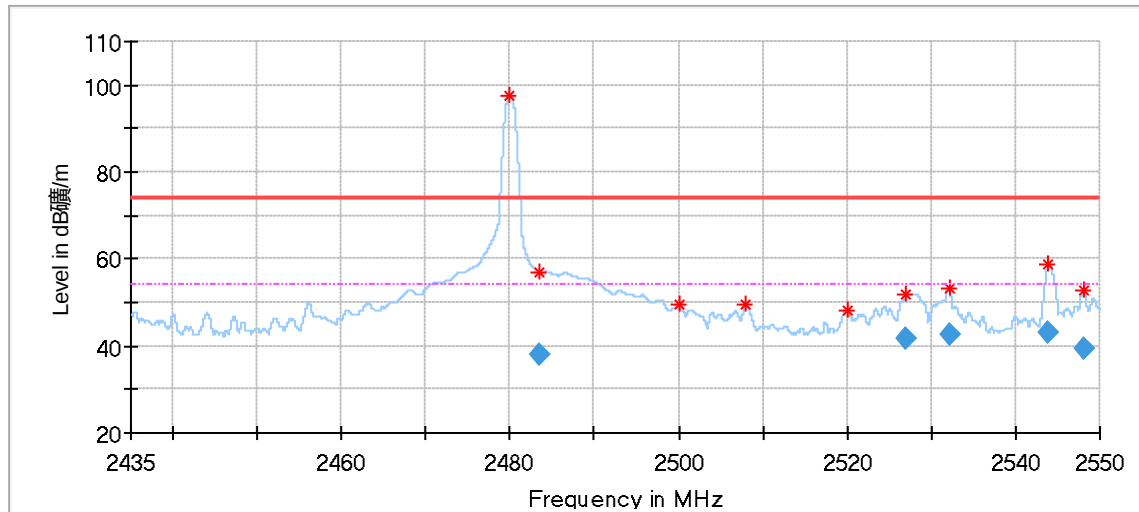


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2480.011000	97.37	74.00	-23.37	150.0	H	234.0	-2.39
2483.495500	57.03	74.00	16.97	150.0	H	223.0	-2.38
2499.998000*	49.73	74.00	24.27	150.0	H	234.0	-2.35
2508.002000	49.33	74.00	24.67	150.0	H	346.0	-2.32
2519.973500	48.26	74.00	25.74	150.0	H	0.0	-2.26
2527.069000	51.96	74.00	22.04	150.0	H	246.0	-2.20
2532.094500	53.37	74.00	20.63	150.0	H	234.0	-2.16
2543.893500	58.77	74.00	15.23	150.0	H	234.0	-2.06
2547.999000	52.69	74.00	21.31	150.0	H	246.0	-2.02

Final_Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.495500	38.13	54.00	15.87	150.0	H	223.0	-2.38
2527.069000	41.85	54.00	12.15	150.0	H	246.0	-2.20
2532.094500	42.62	54.00	11.38	150.0	H	234.0	-2.16
2543.893500	42.85	54.00	11.15	150.0	H	234.0	-2.06
2547.999000	39.44	54.00	14.56	150.0	H	246.0	-2.02

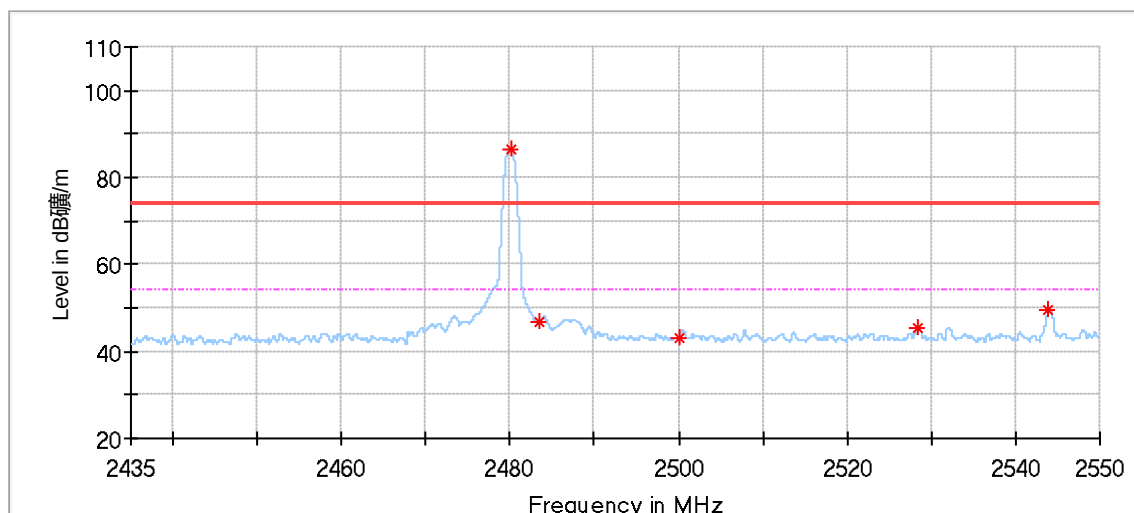

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2480.172000	86.60	74.00	-12.60	150.0	V	125.0	-2.39
2483.507000*	46.73	74.00	27.27	150.0	V	24.0	-2.38
2499.998000*	43.29	74.00	30.71	150.0	V	5.0	-2.35
2528.414500	45.58	74.00	28.42	150.0	V	55.0	-2.19
2543.928000	49.70	74.00	24.30	150.0	V	213.0	-2.06

Final Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



2M 2402MHz:

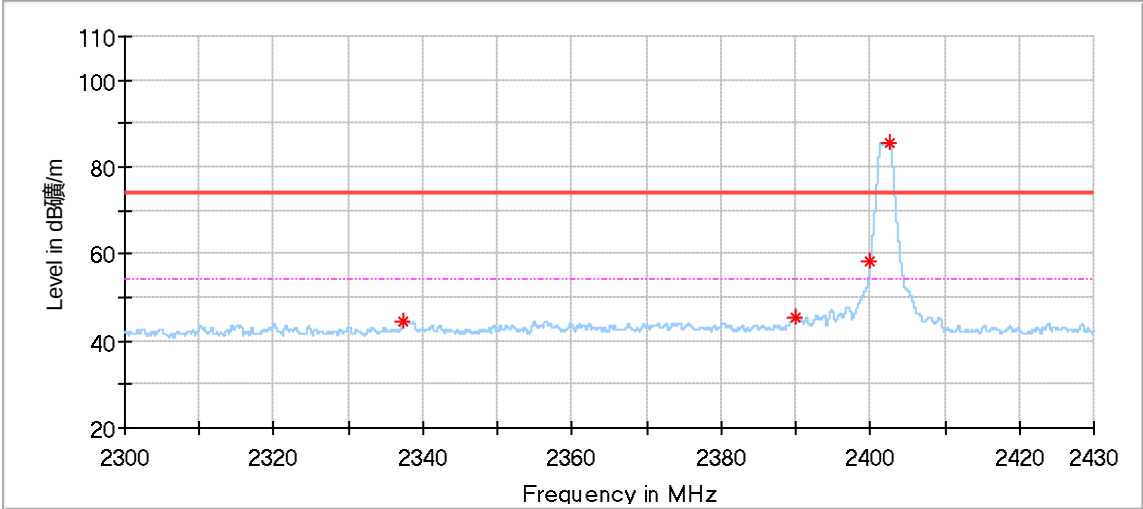


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2337.453000*	44.65	74.00	29.35	150.0	H	223.0	-3.48
2389.999000*	45.59	74.00	28.41	150.0	H	259.0	-2.88
2399.996000	58.44	74.00	15.56	150.0	H	223.0	-2.91
2402.505000	85.74	74.00	-11.74	150.0	H	223.0	-2.89

Final_Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

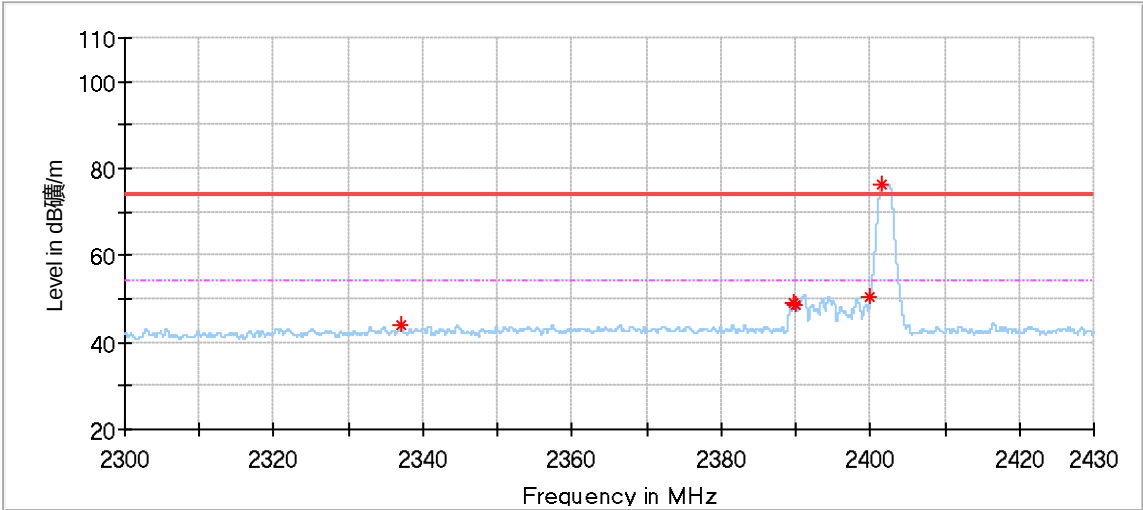

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2337.128000*	44.13	74.00	29.87	150.0	V	19.0	-3.48
2389.843000*	48.90	74.00	25.10	150.0	V	267.0	-2.88
2389.999000*	48.56	74.00	25.44	150.0	V	267.0	-2.88
2399.996000	50.26	74.00	23.74	150.0	V	140.0	-2.91
2401.517000	76.53	74.00	-2.53	150.0	V	149.0	-2.90

Final Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



2M 2480MHz:

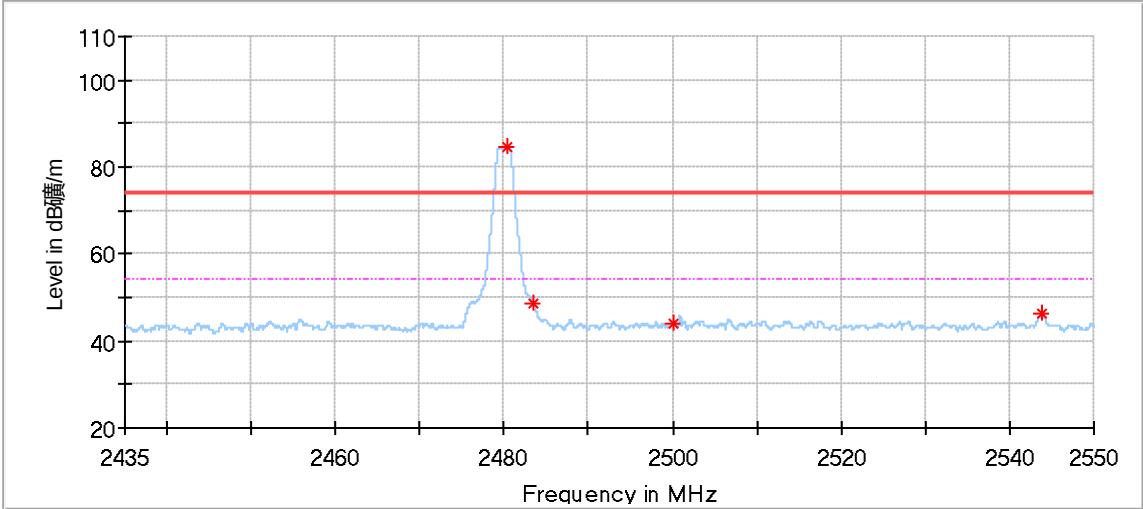


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2480.494000	84.75	74.00	-10.75	150.0	H	191.0	-2.38
2483.495500	48.51	74.00	25.49	150.0	H	223.0	-2.38
2499.998000*	44.20	74.00	29.80	150.0	H	356.0	-2.35
2543.824500	46.31	74.00	27.69	150.0	H	203.0	-2.06

Final_Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

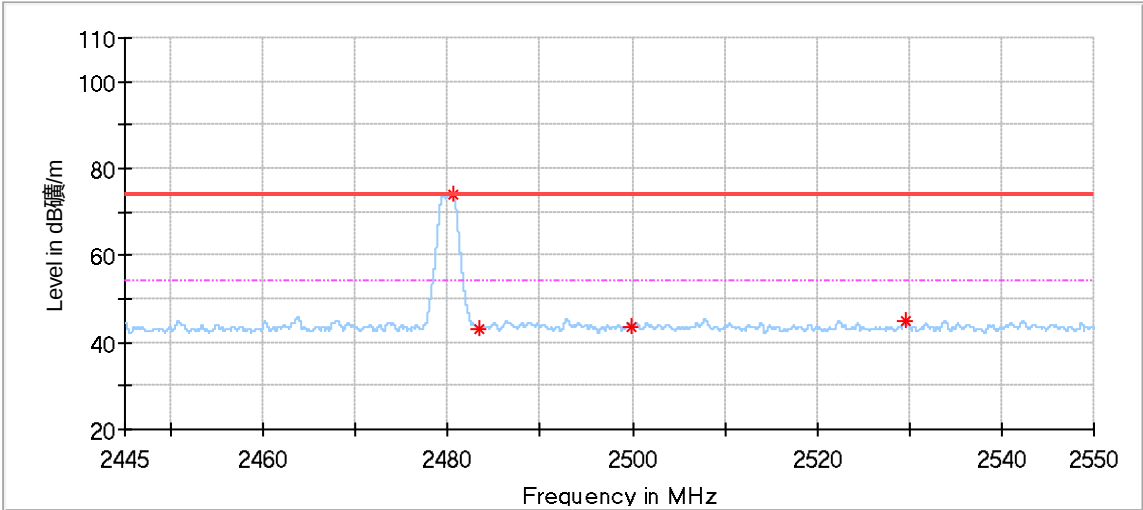

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2480.511000	74.18	74.00	-0.18	150.0	V	150.0	-2.38
2483.503500*	43.21	74.00	30.79	150.0	V	208.0	-2.38
2499.988500*	43.50	74.00	30.50	150.0	V	288.0	-2.35
2529.682500	44.83	74.00	29.17	150.0	V	347.0	-2.18

Final Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

10 Test Equipment List

List of Test Instruments

Radiated Emission Test 1# (9kHz – 1GHz)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2024-5-20
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2024-8-7
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2024-5-19
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2024-8-1
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2024-5-19
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2024-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Radiated Emission 2# Test (1GHz – 40GHz)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2024-5-20
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2024-3-5
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2024-4-26
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	1	2024-5-19
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2024-7-11
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2024-8-1
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2024-5-19
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2024-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Conducted RF Test System

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2024-5-19
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157W	68-4-93-14-003	101226/100929	1	2024-5-20
Power Splitter	Weinschel	1580	68-4-85-14-001	SC319	1	2024-5-20
10dB Attenuator	Weinschel	4M-10	68-4-81-14-003	43152	1	2024-5-19
10dB Attenuator	R&S	DNF	68-4-81-14-004	DNF-001	1	2024-5-19
10dB Attenuator	R&S	DNF	68-4-81-14-005	DNF-002	1	2024-5-19
10dB Attenuator	R&S	DNF	68-4-81-14-006	DNF-003	1	2024-5-19
10dB Attenuator	R&S	DNF	68-4-81-14-007	DNF-004	1	2024-5-19
Test software	Tonscend	System for BT/WIFI	68-4-74-14-006-A13	Version 2.6.77.0518	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	3	2025-10-15

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001) 9kHz-30MHz	4.70dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 30MHz-1000MHz	Horizontal: 4.63dB; Vertical: 4.78dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.38dB; Vertical: 5.38dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 18GHz-40GHz	5.29dB
Uncertainty for Conducted RF test	RF Power Conducted: 1.31dB Frequency test involved: 0.6×10^{-8} or 1%

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2021, clause 4.4.3 and 4.5.1.

---THE END OF REPORT---