

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:	Shenzhen Kula Technology Co.,LTD
CUSTOMER:	
客 戶 料 號:	
CUST P/N:	
料 號:	G43.5-7.5uH 0.08*24*2P*12TS
FINE P/N:	
產 品 型 號:	Φ43.5MMX5.0MMX0.6MM
DESC:	
日 期:	2024/04/10
DATE:	
版 本:	A.0
Version:	


1001, Building 6, Hongchuang Technology Center Xikeng Community,
Fucheng Street Longhua District Shenzhen, Guangdong China

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
黃燕銘	寧元安	黃錦華	

SPECIFICATION


產品型號: DESC	Φ 15.2x38-7.5uH-0.08x24x2P-12mm-43.5 C	版本 Rev: A.0	客戶 CUST: 客戶料号 CUST P/N:	XXX
---------------	---	----------------	----------------------------	-----

一、尺寸 DIMENSION:(mm)

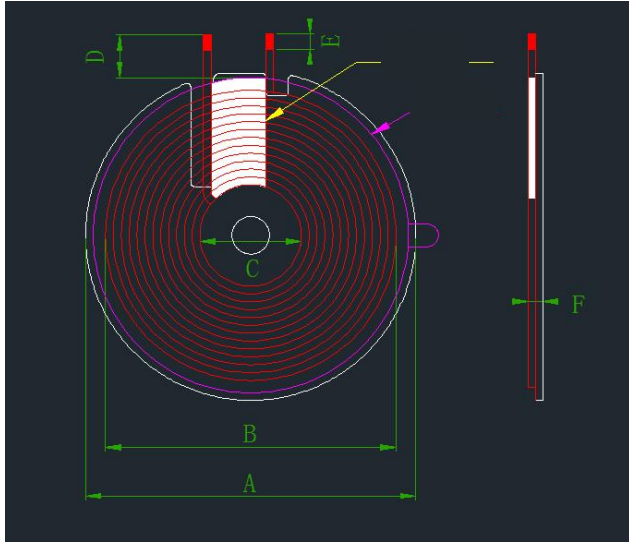

A	43.5.0 $\pm$ 0.5
B	38 $\pm$ 1
C	15.2 $\pm$ 0.5
D	12 $\pm$ 2
E	3 $\pm$ 2
F	1.5 $\pm$ 0.2

二、原理图 SCHEMATIC DIAGRAM:

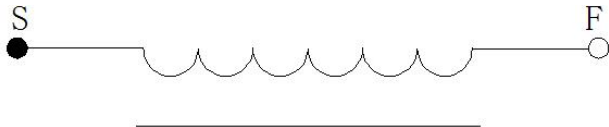

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S F	0.08*24*2P	12Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25 $\pm$ 10°C, 湿度 RELATIVE HUMIDITY:65 $\pm$ 20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	4.2uH $\pm$ 20%	100KHz/0.25V	LCZ METER 1062B
2	IND.	S-F	7.5uH $\pm$ 10%	100KHz/0.25V	LCZ METER 1062B
3	Q 值	S-F	$\geq$ 36	100KHz/0.25V	LCZ METER 502B
4	DCR	S-F	$\leq$ 86m Ω	100KHz/0.25V	LCZ METER 502B

拟制/日期 PREPARED BY/DATE

审核/日期 CHECKED BY/DATE

黄燕铭 2024/04/10

黄锦华 2024/04/10