




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 406 of 535

802.11a CDD_Channel 64

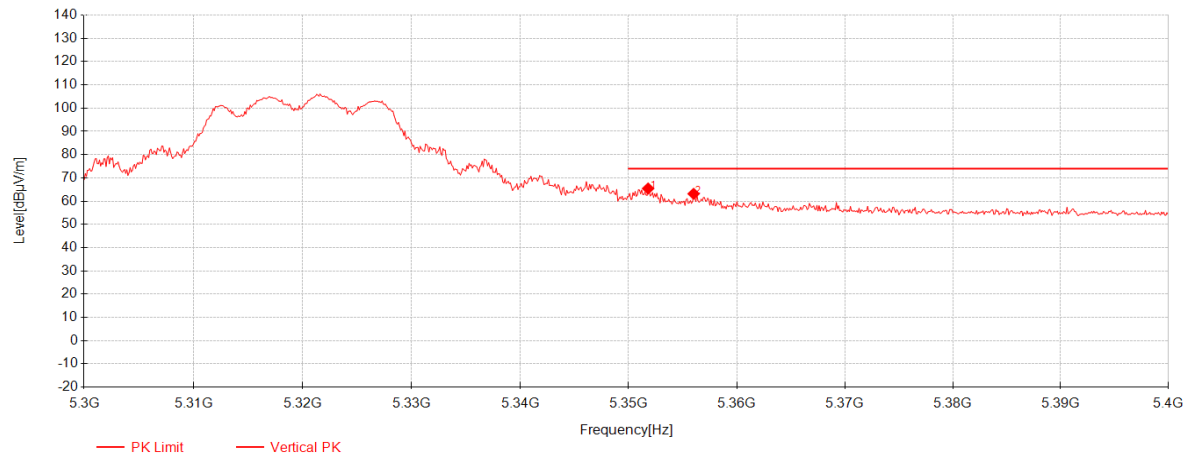


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351.8	48.09	33.13	-15.80	65.42	74.00	8.58	Vertical
2	5356	45.84	33.13	-15.80	63.17	74.00	10.83	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 407 of 535

802.11a CDD_Channel 64

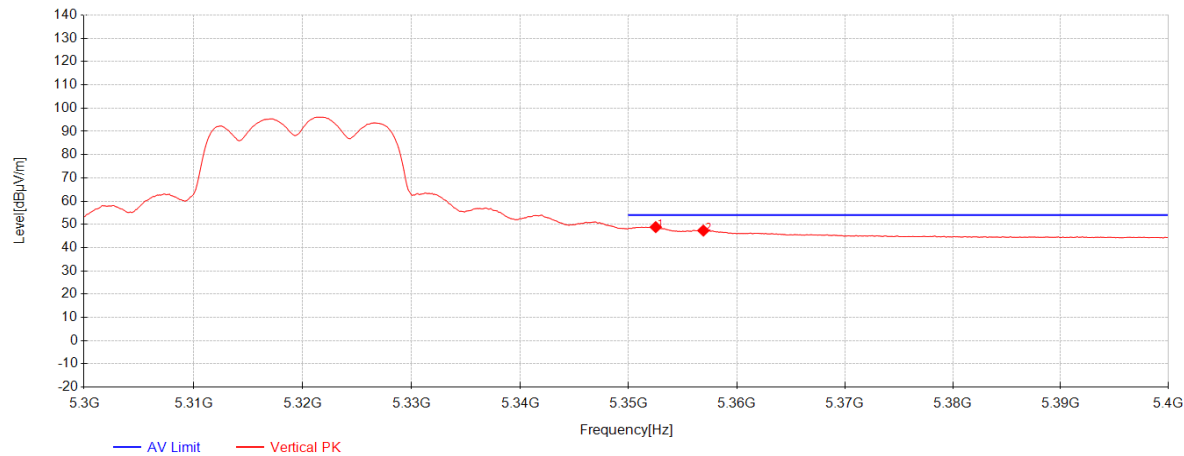


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5352.5	31.50	33.13	-15.80	48.83	54.00	5.17	Vertical
2	5356.9	30.00	33.13	-15.80	47.33	54.00	6.67	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 408 of 535

802.11a CDD_Channel 100

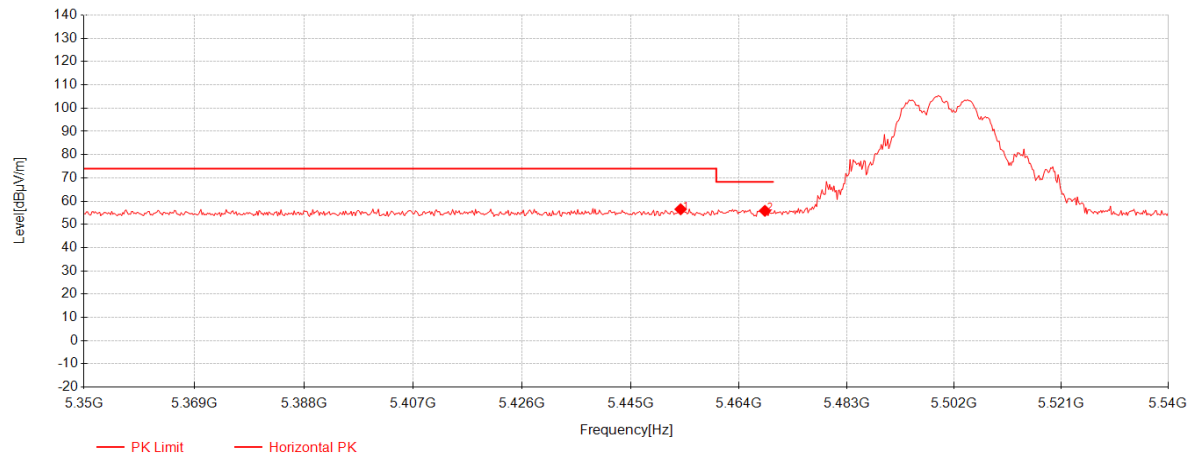


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5453.74	38.89	33.11	-15.51	56.49	74.00	17.51	Horizontal
2	5468.56	38.16	33.11	-15.43	55.84	68.30	12.46	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 409 of 535

802.11a CDD_Channel 100

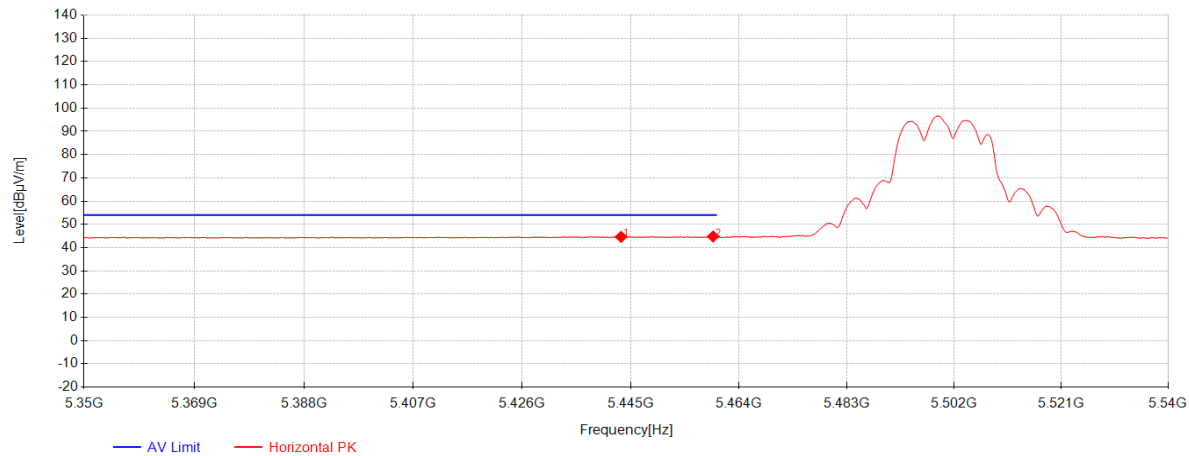


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5443.29	27.10	33.11	-15.57	44.64	54.00	9.36	Horizontal
2	5459.44	27.18	33.11	-15.48	44.81	54.00	9.19	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 410 of 535

802.11a CDD_Channel 100

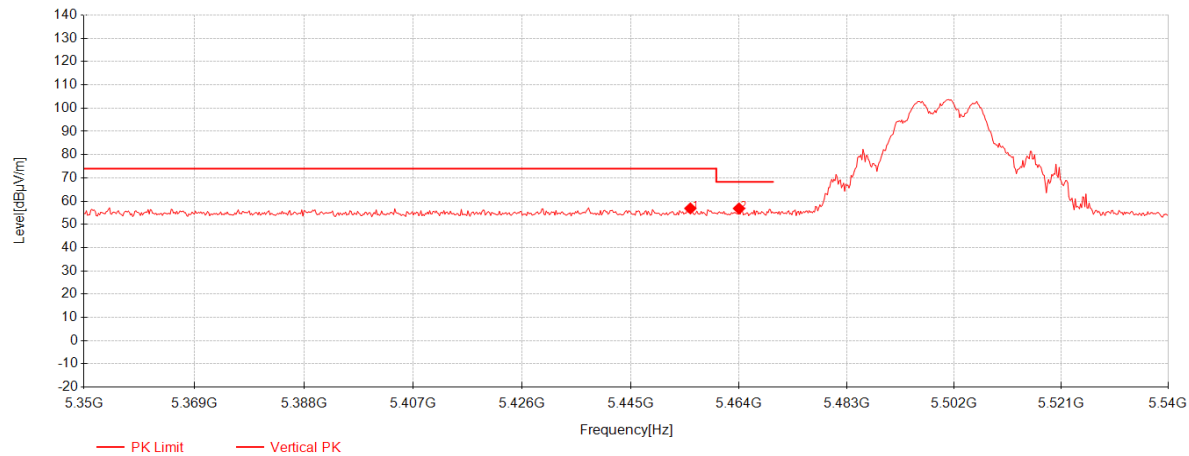


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5455.45	39.27	33.11	-15.50	56.87	74.00	17.13	Vertical
2	5464	39.20	33.11	-15.46	56.85	68.30	11.45	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 411 of 535

802.11a CDD_Channel 100

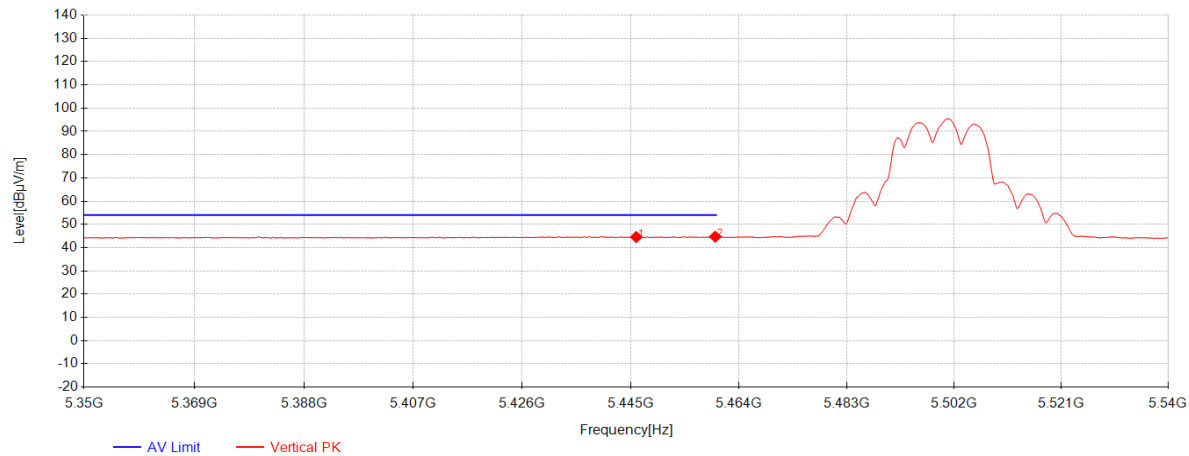


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5445.95	27.01	33.11	-15.56	44.56	54.00	9.44	Vertical
2	5459.82	27.09	33.11	-15.48	44.72	54.00	9.28	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 412 of 535

802.11a CDD_Channel 140

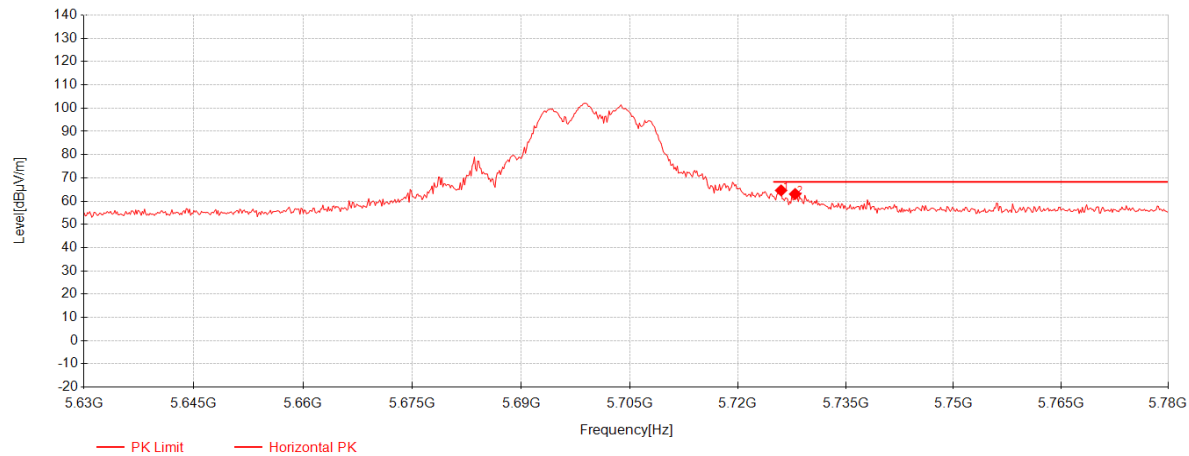


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5726	45.68	33.87	-14.95	64.60	68.30	3.70	Horizontal
2	5727.95	44.13	33.88	-14.94	63.07	68.30	5.23	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 413 of 535

802.11a CDD_Channel 140

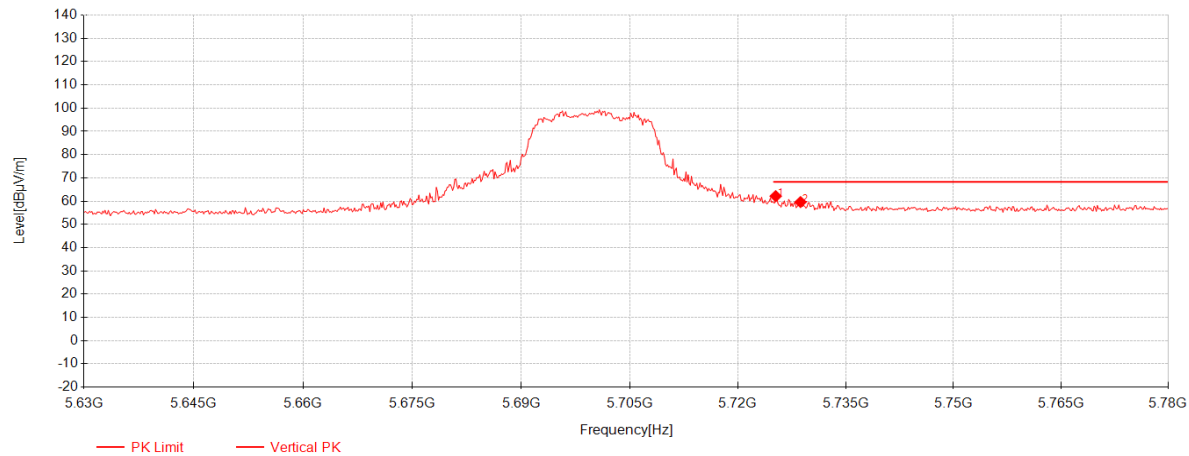


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5725.25	43.22	33.87	-14.96	62.13	68.30	6.17	Vertical
2	5728.7	40.65	33.88	-14.93	59.59	68.30	8.71	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 414 of 535

802.11a CDD_Channel 149

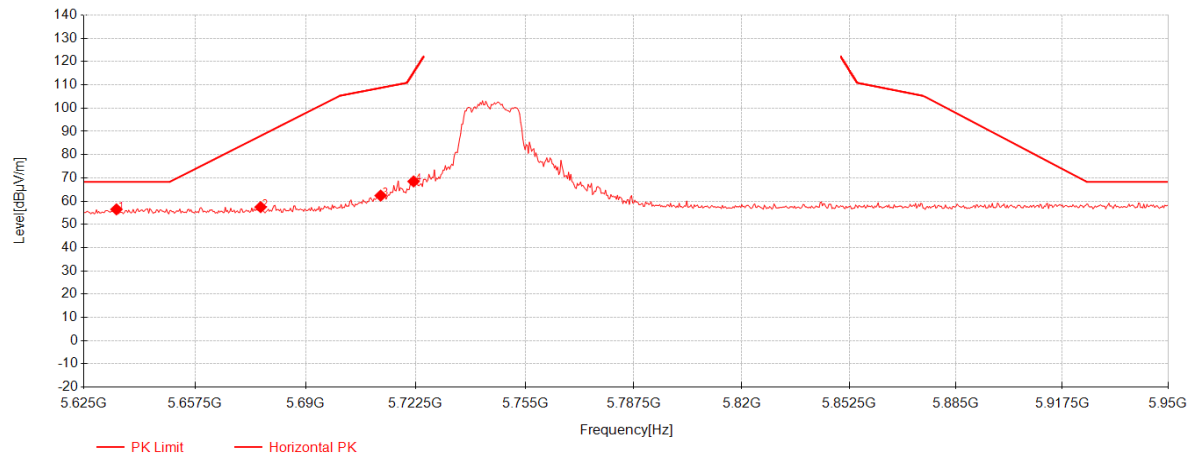

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5634.425	38.15	33.56	-15.25	56.46	68.30	11.84	Horizontal
2	5676.675	38.91	33.70	-15.17	57.44	88.08	30.64	Horizontal
3	5712.1	43.60	33.82	-15.05	62.37	108.69	46.32	Horizontal
4	5721.85	49.61	33.85	-14.98	68.48	115.12	46.64	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 415 of 535

802.11a CDD_Channel 149

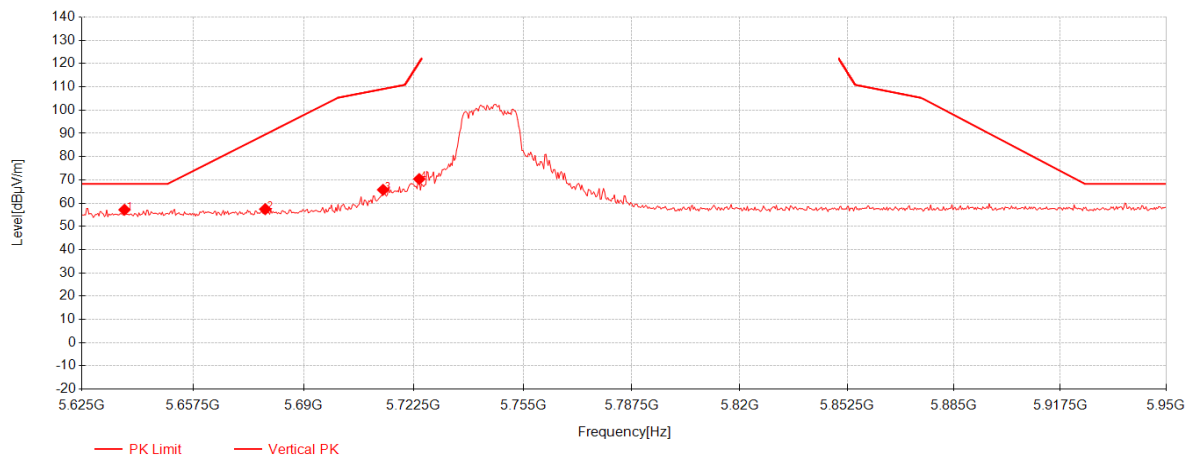


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5637.35	38.82	33.57	-15.24	57.14	68.30	11.16	Vertical
2	5678.625	38.86	33.71	-15.17	57.40	89.52	32.12	Vertical
3	5713.4	46.95	33.83	-15.04	65.74	109.05	43.31	Vertical
4	5724.125	51.45	33.86	-14.97	70.35	120.31	49.96	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 416 of 535

802.11a CDD_Channel 165

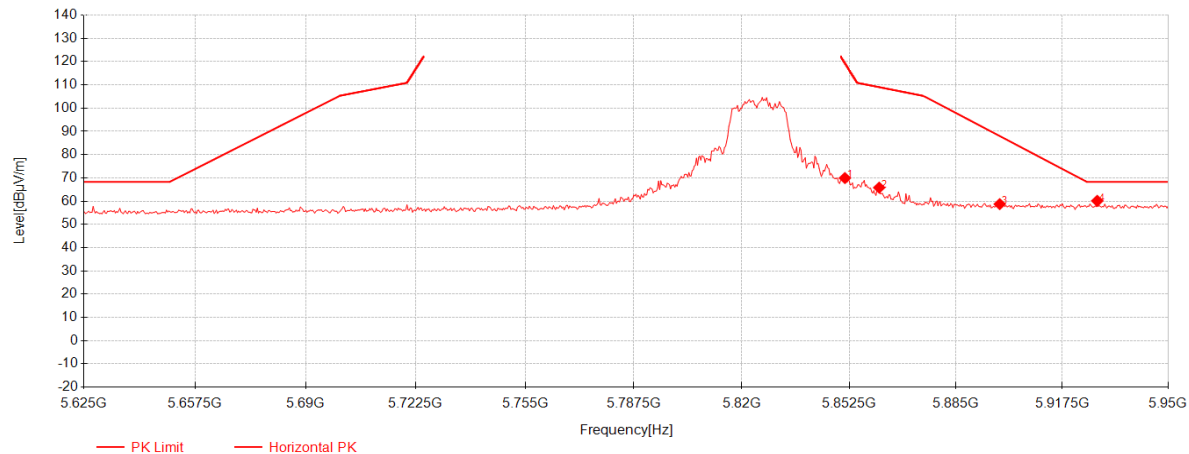


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.2	50.12	34.29	-14.49	69.92	119.56	49.64	Horizontal
2	5861.6	45.98	34.33	-14.50	65.81	109.05	43.24	Horizontal
3	5898.325	38.79	34.45	-14.53	58.72	88.00	29.28	Horizontal
4	5928.225	40.10	34.56	-14.54	60.12	68.30	8.18	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 417 of 535

802.11a CDD_Channel 165

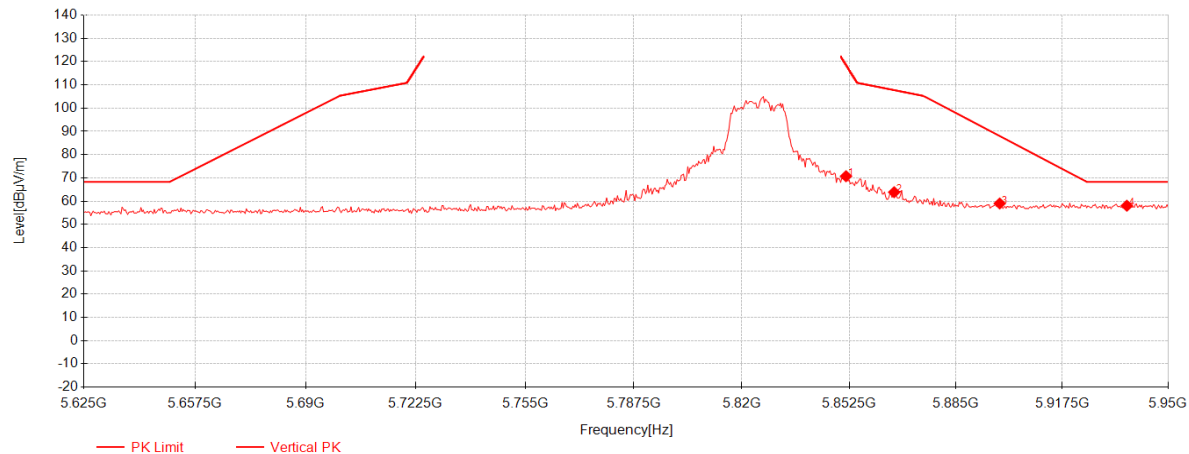


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.525	50.91	34.30	-14.49	70.71	118.82	48.11	Vertical
2	5866.15	44.00	34.34	-14.50	63.84	107.78	43.94	Vertical
3	5898.325	39.06	34.45	-14.53	58.99	88.00	29.01	Vertical
4	5937.325	37.98	34.59	-14.54	58.03	68.30	10.27	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 418 of 535

802.11ax20 MIMO_Channel 36

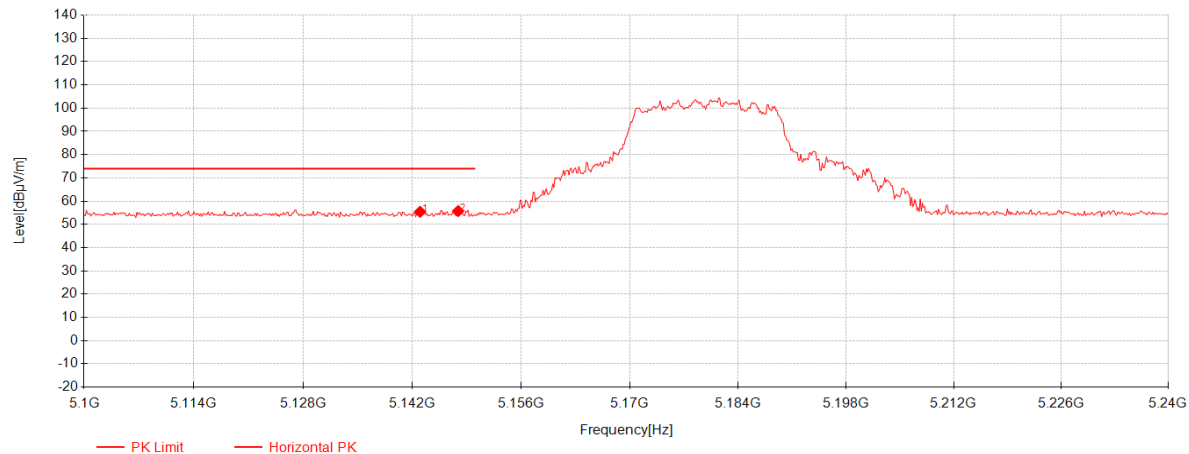


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5142.98	38.34	33.17	-16.08	55.43	74.00	18.57	Horizontal
2	5147.88	38.65	33.17	-16.07	55.75	74.00	18.25	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 419 of 535

802.11ax20 MIMO_Channel 36

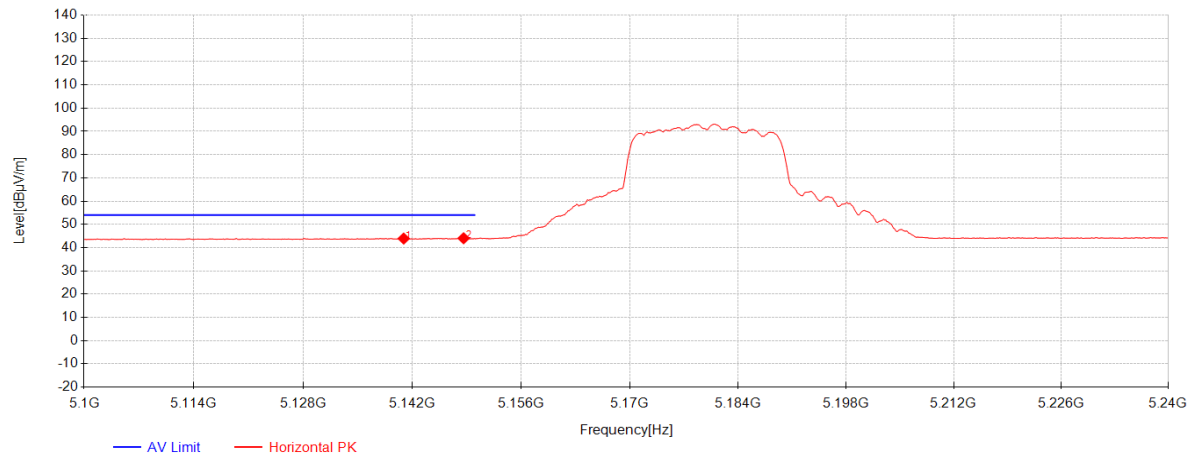


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5140.88	26.81	33.17	-16.08	43.90	54.00	10.10	Horizontal
2	5148.58	26.93	33.17	-16.07	44.03	54.00	9.97	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 420 of 535

802.11ax20 MIMO_Channel 36

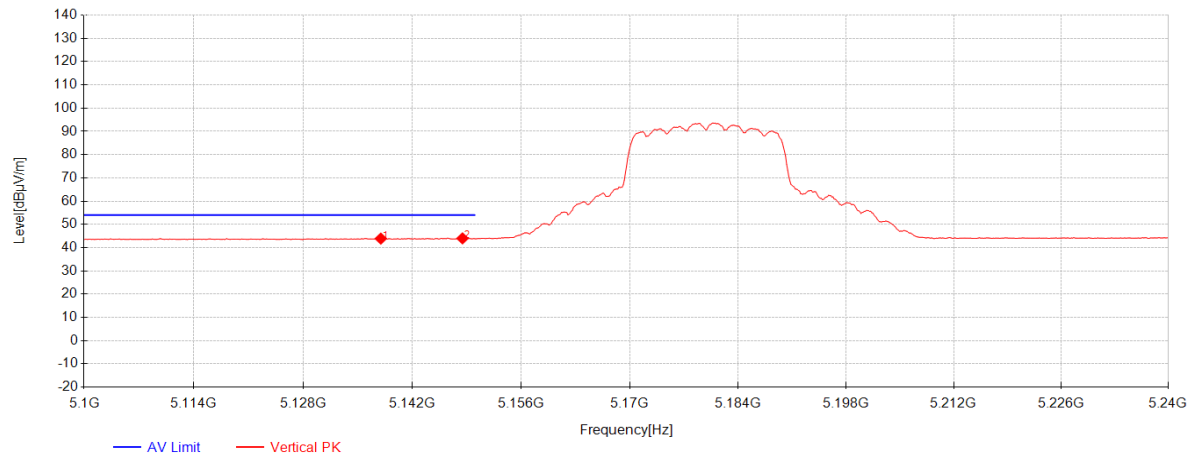


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5137.94	26.80	33.17	-16.09	43.89	54.00	10.11	Vertical
2	5148.44	26.88	33.17	-16.07	43.98	54.00	10.02	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 421 of 535

802.11ax20 MIMO_Channel 36

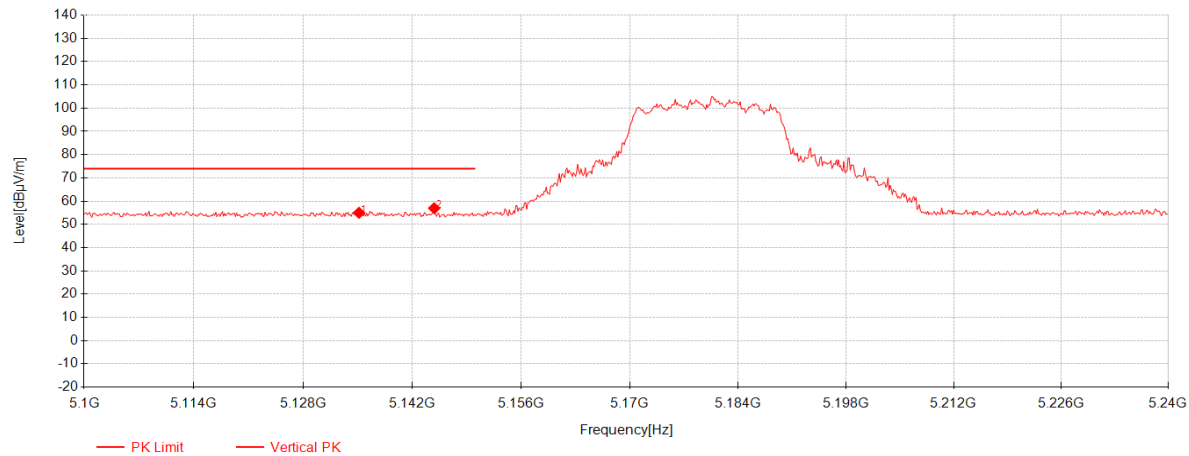


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5135.14	37.91	33.17	-16.09	54.99	74.00	19.01	Vertical
2	5144.8	39.84	33.17	-16.07	56.94	74.00	17.06	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 422 of 535

802.11ax20 MIMO_Channel 64

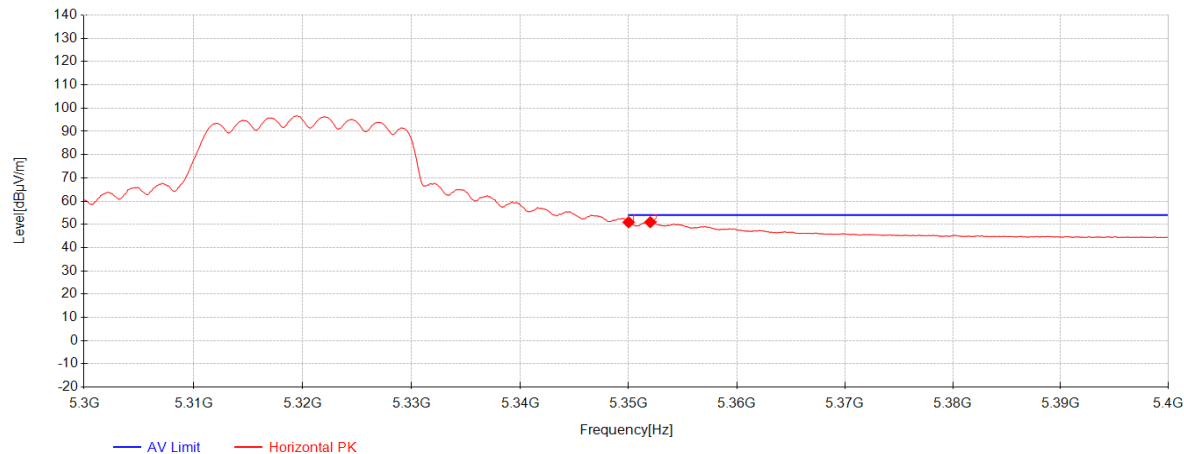


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350	33.58	33.13	-15.80	50.92	54.00	3.08	Horizontal
2	5352	33.62	33.13	-15.80	50.95	54.00	3.05	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 423 of 535

802.11ax20 MIMO_Channel 64

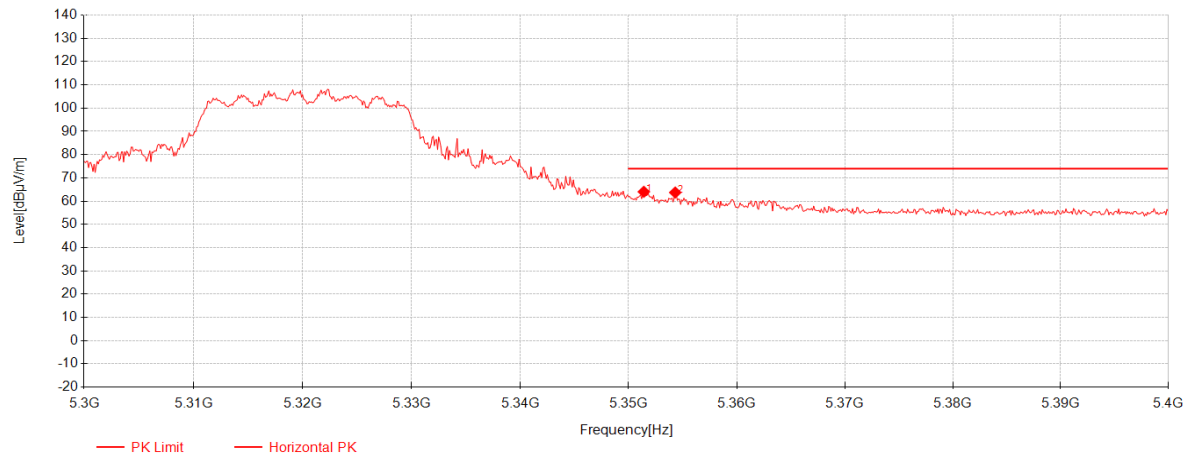


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351.4	46.69	33.13	-15.80	64.02	74.00	9.98	Horizontal
2	5354.3	46.38	33.13	-15.80	63.71	74.00	10.29	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 424 of 535

802.11ax20 MIMO_Channel 64

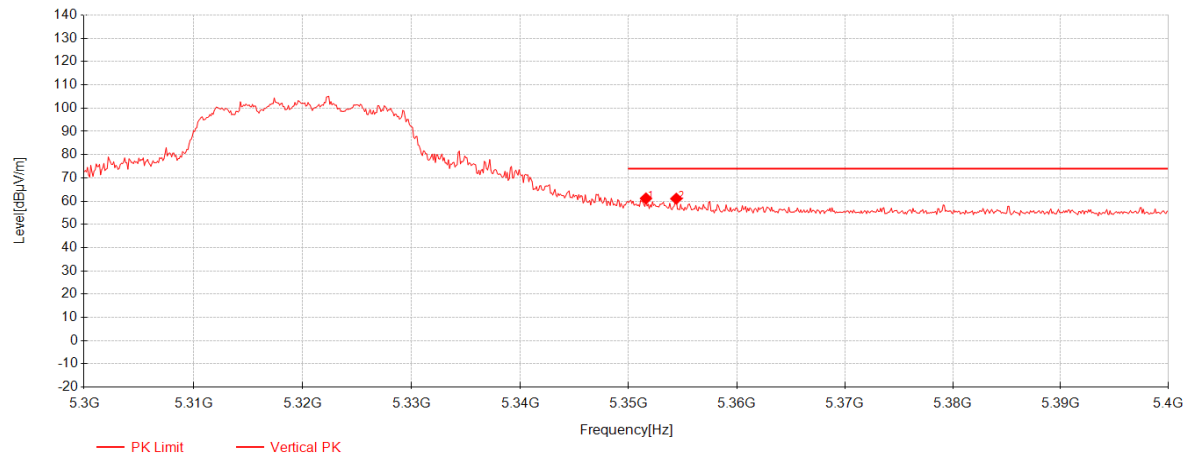


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351.6	43.82	33.13	-15.80	61.15	74.00	12.85	Vertical
2	5354.4	43.72	33.13	-15.80	61.05	74.00	12.95	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 425 of 535

802.11ax20 MIMO_Channel 64

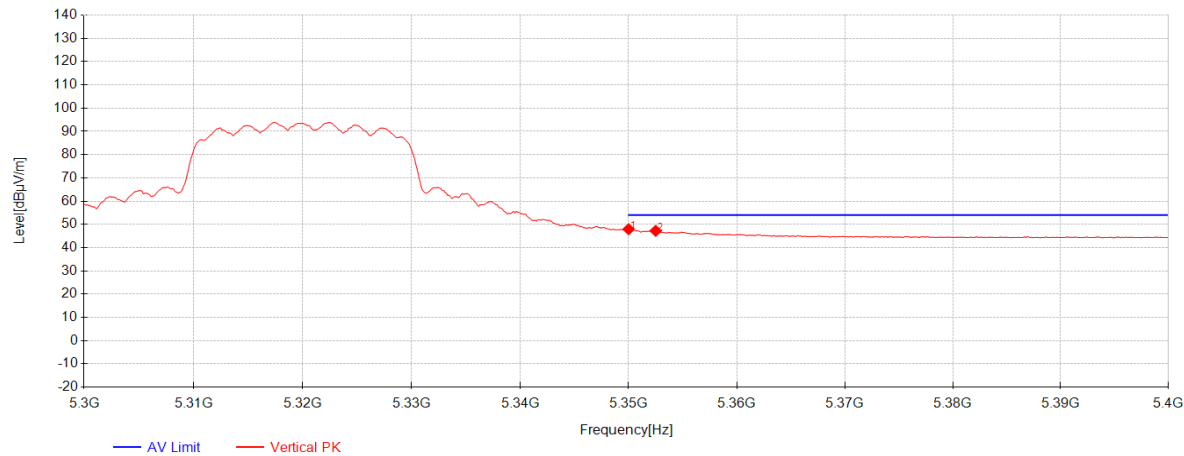


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350	30.60	33.13	-15.80	47.94	54.00	6.06	Vertical
2	5352.5	29.90	33.13	-15.80	47.23	54.00	6.77	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 426 of 535

802.11ax20 MIMO_Channel 100

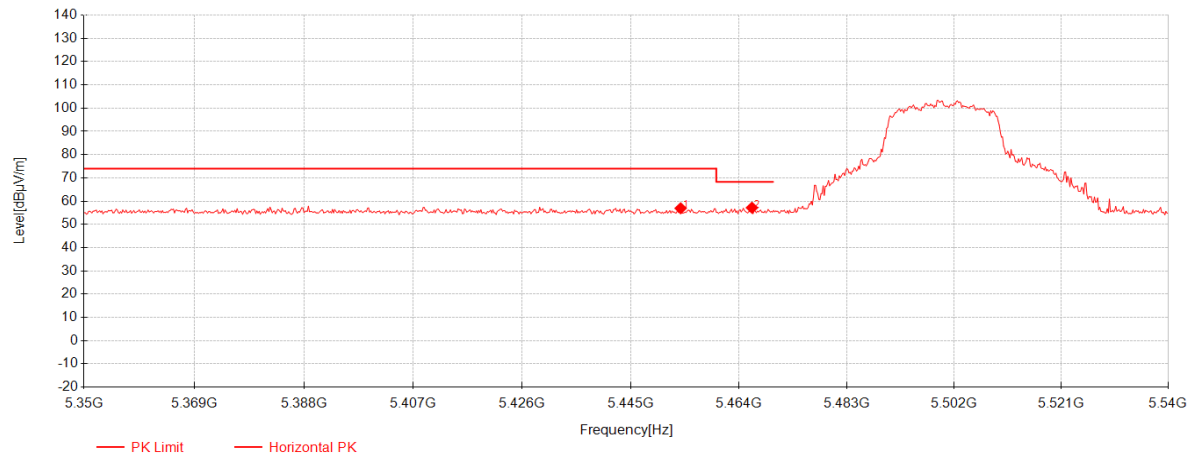


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5453.74	39.32	33.11	-15.51	56.92	74.00	17.08	Horizontal
2	5466.28	39.50	33.11	-15.44	57.16	68.30	11.14	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 427 of 535

802.11ax20 MIMO_Channel 100

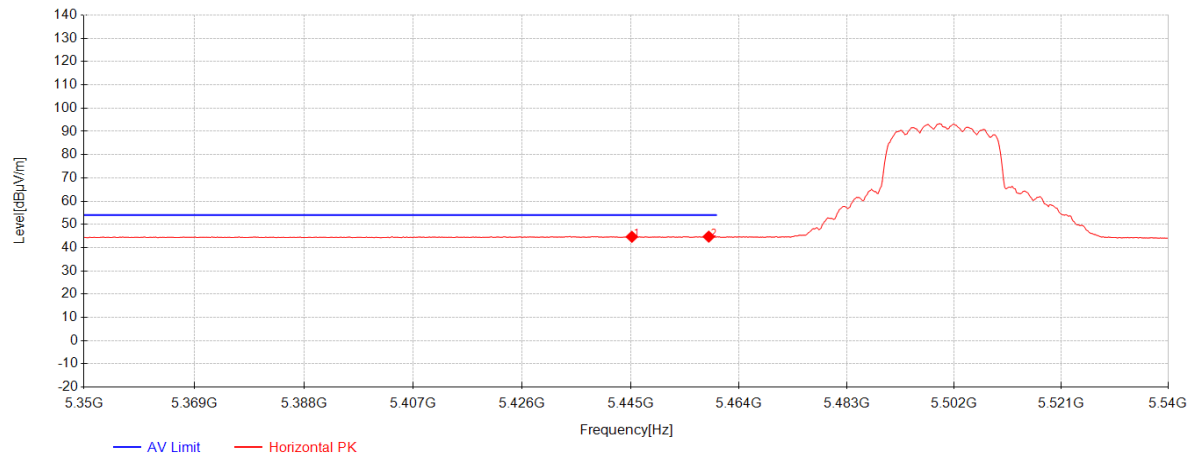


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5445.19	27.11	33.11	-15.56	44.66	54.00	9.34	Horizontal
2	5458.68	27.11	33.11	-15.49	44.73	54.00	9.27	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 428 of 535

802.11ax20 MIMO_Channel 100

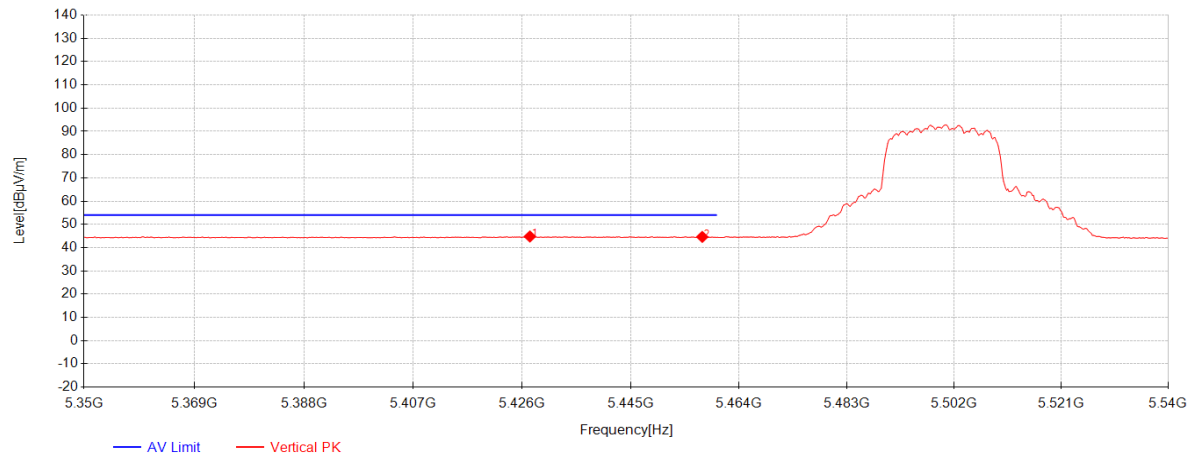


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5427.33	27.34	33.11	-15.66	44.79	54.00	9.21	Vertical
2	5457.54	27.00	33.11	-15.49	44.62	54.00	9.38	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 429 of 535

802.11ax20 MIMO_Channel 100

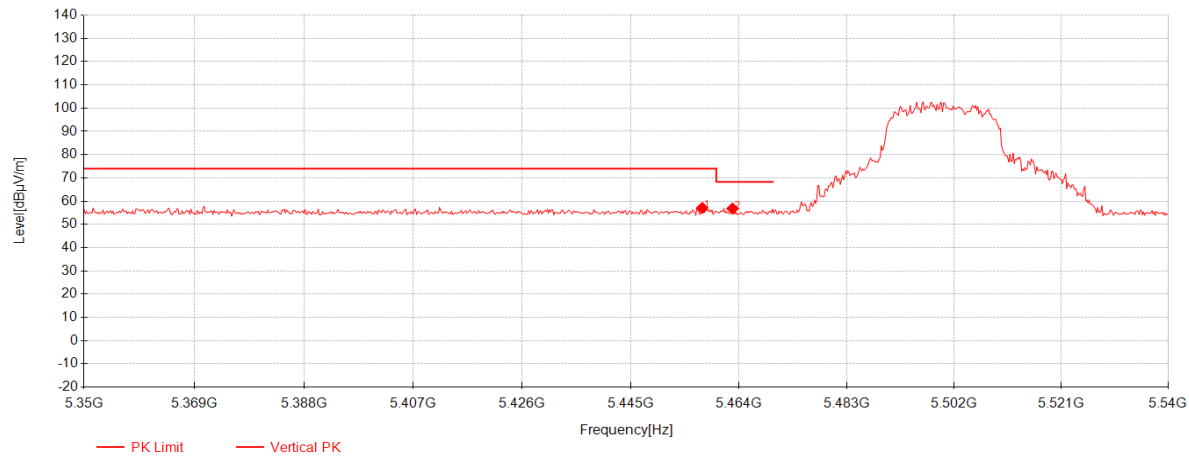


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5457.54	39.45	33.11	-15.49	57.07	74.00	16.93	Vertical
2	5462.86	39.16	33.11	-15.46	56.81	68.30	11.49	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 430 of 535

802.11ax20 MIMO_Channel 140

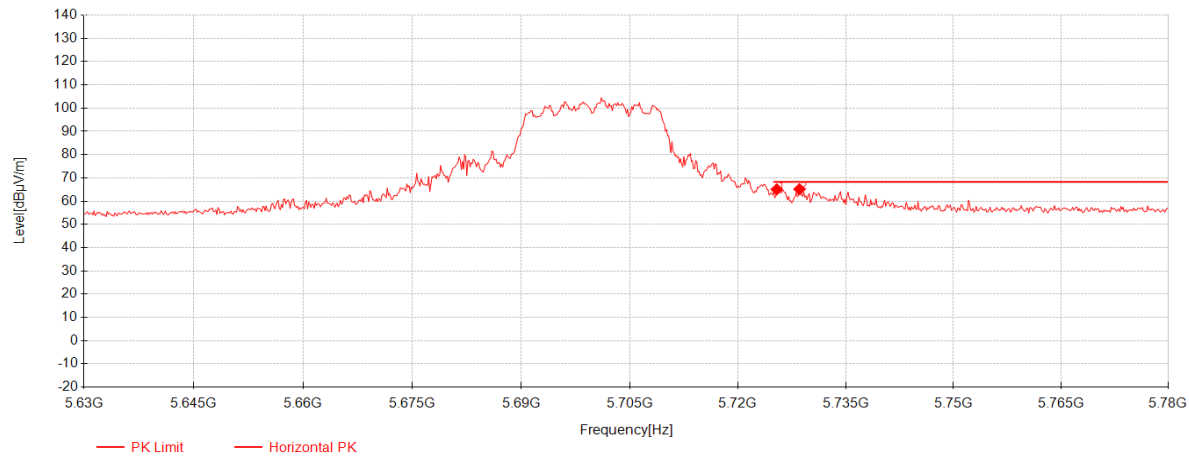


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5725.4	46.15	33.87	-14.96	65.06	68.30	3.24	Horizontal
2	5728.55	46.20	33.88	-14.94	65.14	68.30	3.16	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 431 of 535

802.11ax20 MIMO_Channel 140

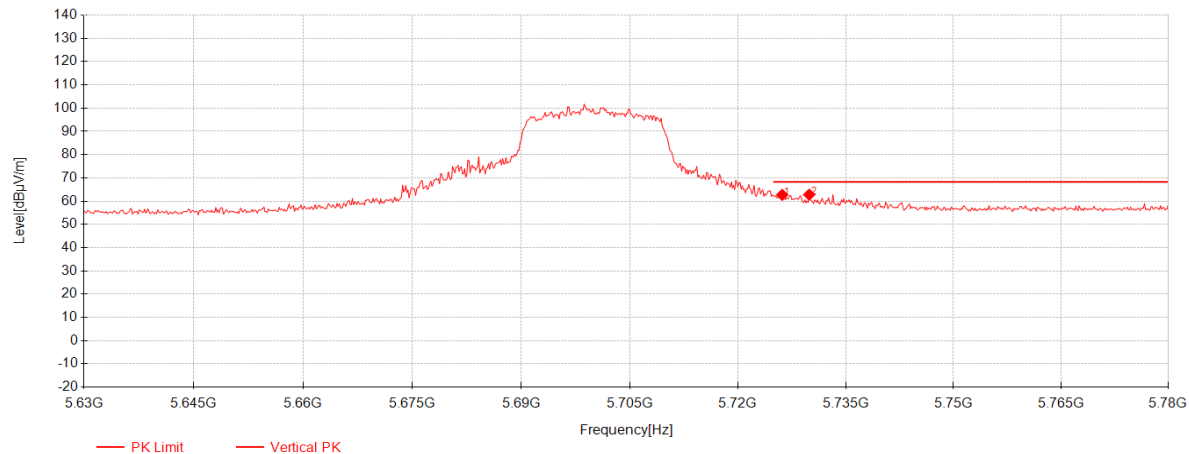


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5726.15	43.76	33.87	-14.95	62.68	68.30	5.62	Vertical
2	5729.9	43.85	33.88	-14.93	62.80	68.30	5.50	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 432 of 535

802.11ax20 MIMO_Channel 149

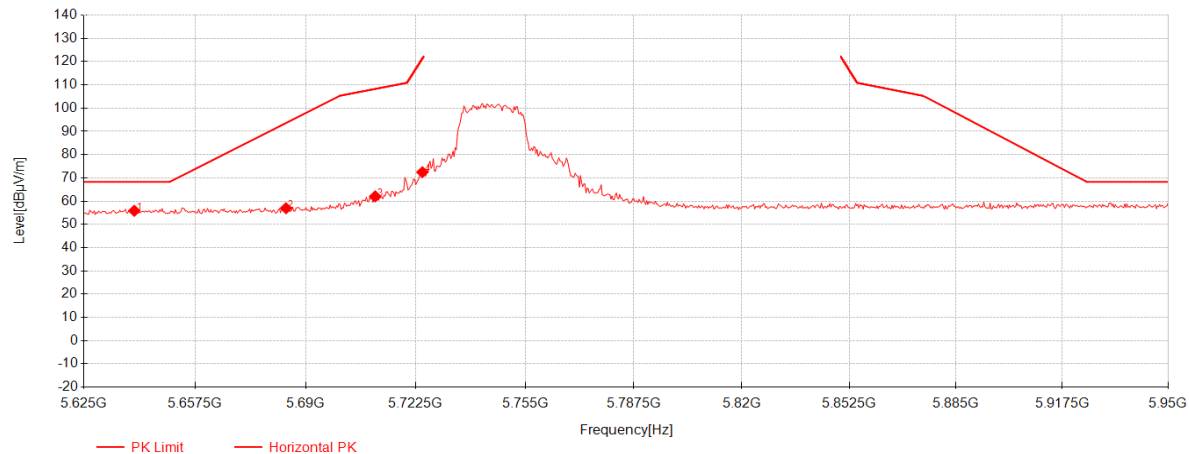


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5639.625	37.51	33.57	-15.24	55.85	68.30	12.45	Horizontal
2	5684.15	38.37	33.73	-15.16	56.94	93.61	36.67	Horizontal
3	5710.475	43.31	33.82	-15.06	62.07	108.24	46.17	Horizontal
4	5724.45	53.56	33.86	-14.96	72.46	121.05	48.59	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 433 of 535

802.11ax20 MIMO_Channel 149

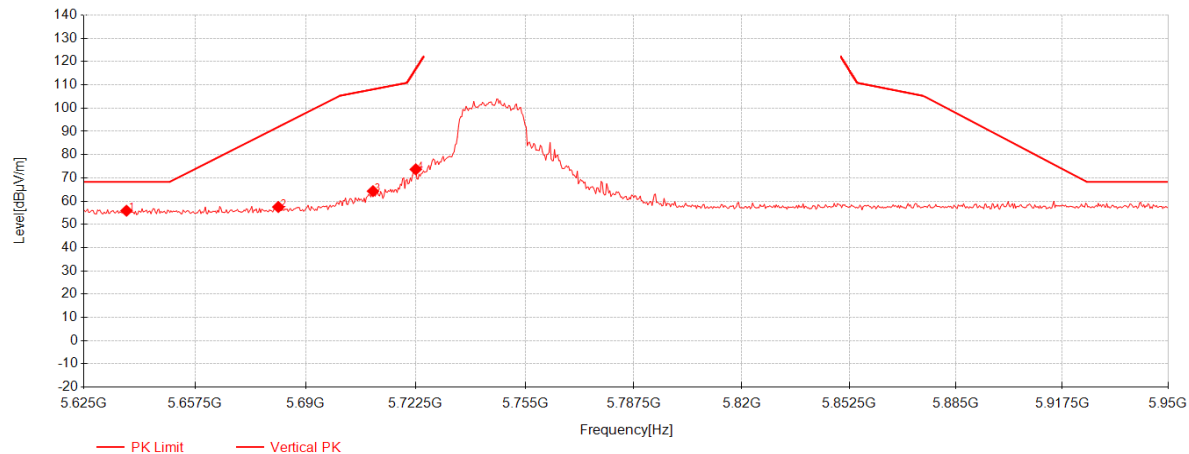

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5637.35	37.55	33.57	-15.24	55.87	68.30	12.43	Vertical
2	5681.875	38.92	33.72	-15.16	57.48	91.93	34.45	Vertical
3	5709.825	45.55	33.81	-15.06	64.30	108.05	43.75	Vertical
4	5722.5	54.79	33.86	-14.98	73.67	116.60	42.93	Vertical




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 434 of 535

802.11ax20 MIMO_Channel 165

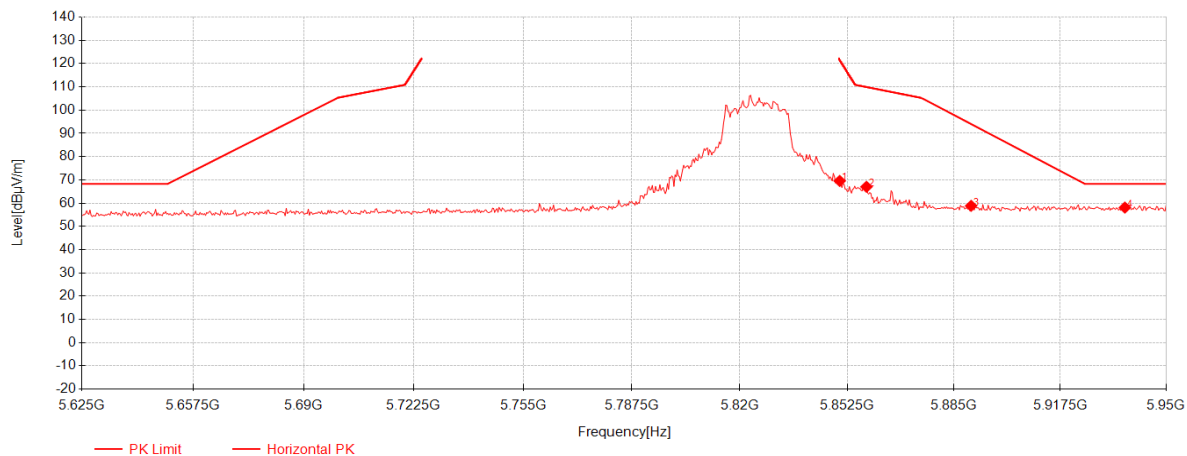


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5850.225	49.75	34.29	-14.49	69.55	121.79	52.24	Horizontal
2	5858.35	47.21	34.32	-14.50	67.03	109.96	42.93	Horizontal
3	5890.2	38.94	34.43	-14.52	58.84	94.02	35.18	Horizontal
4	5937.325	38.04	34.59	-14.54	58.09	68.30	10.21	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 435 of 535

802.11ax20 MIMO_Channel 165

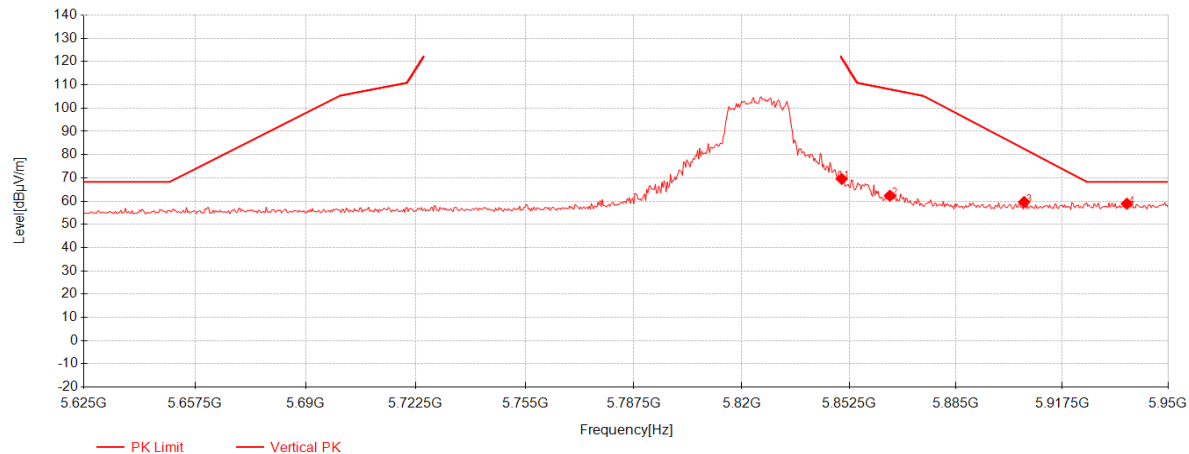


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5850.225	49.75	34.29	-14.49	69.55	121.79	52.24	Vertical
2	5864.85	42.49	34.34	-14.50	62.33	108.14	45.81	Vertical
3	5905.8	39.70	34.48	-14.53	59.65	82.47	22.82	Vertical
4	5937.325	38.86	34.59	-14.54	58.91	68.30	9.39	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 436 of 535

802.11ax40 MIMO_Channel 38

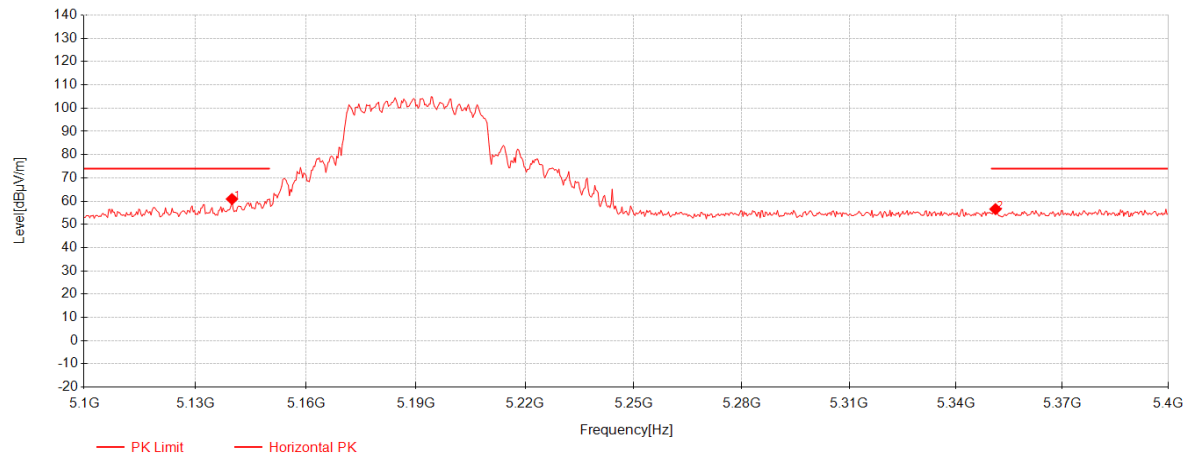


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5139.9	43.81	33.17	-16.08	60.90	74.00	13.10	Horizontal
2	5351.1	39.23	33.13	-15.80	56.56	74.00	17.44	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 437 of 535

802.11ax40 MIMO_Channel 38

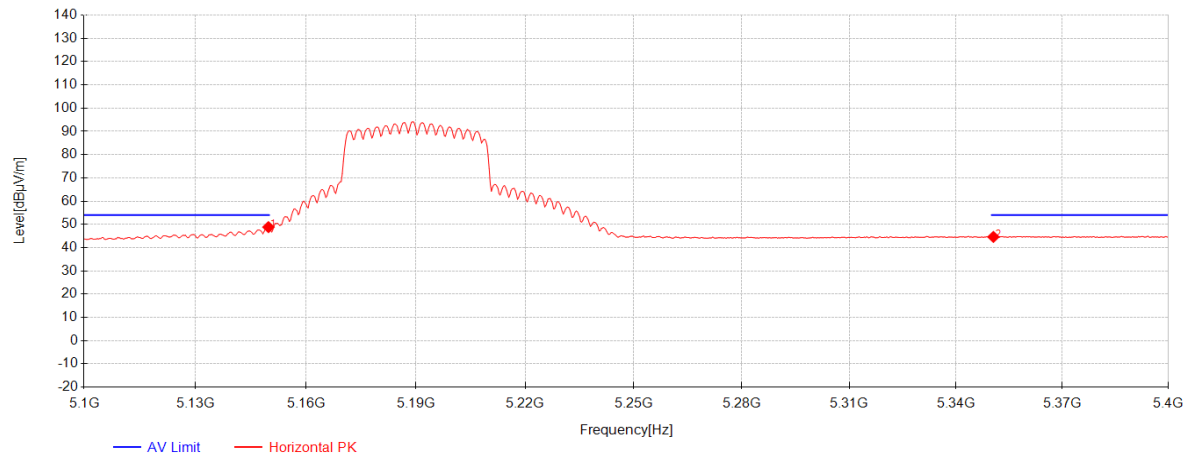


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5149.8	31.72	33.17	-16.07	48.82	54.00	5.18	Horizontal
2	5350.5	27.29	33.13	-15.80	44.62	54.00	9.38	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 438 of 535

802.11ax40 MIMO_Channel 38

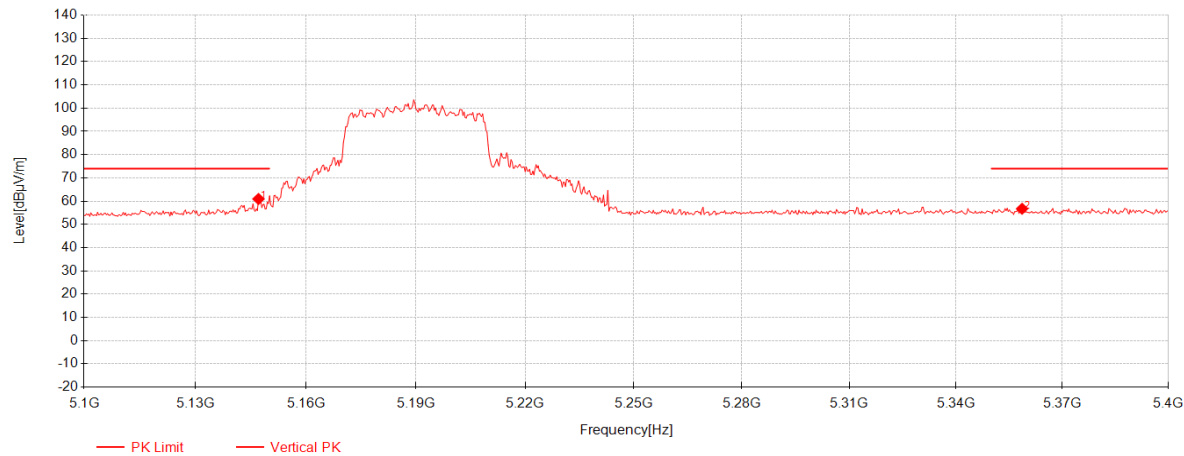


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5147.1	43.83	33.17	-16.07	60.93	74.00	13.07	Vertical
2	5358.6	39.40	33.13	-15.80	56.73	74.00	17.27	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 439 of 535

802.11ax40 MIMO_Channel 38

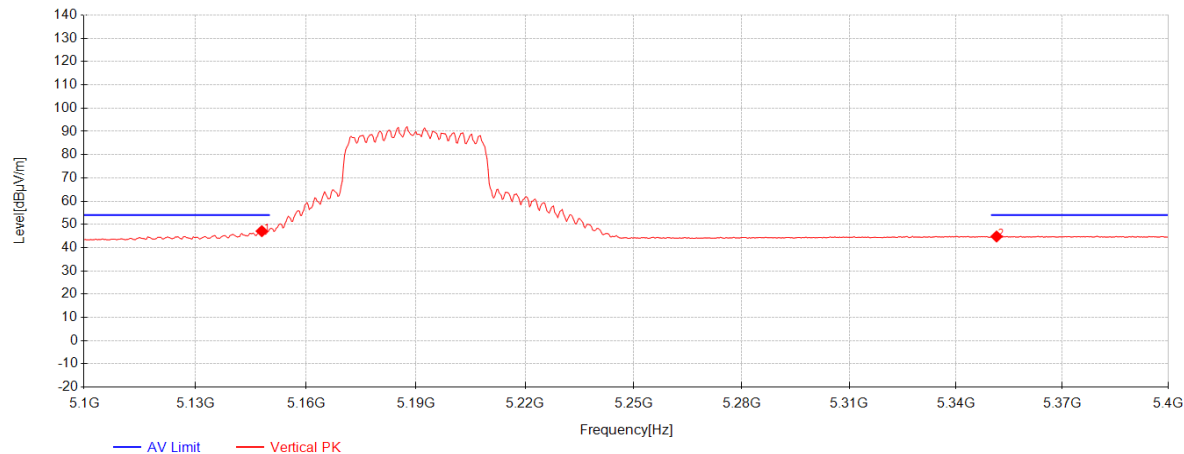


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148	29.98	33.17	-16.07	47.08	54.00	6.92	Vertical
2	5351.4	27.46	33.13	-15.80	44.79	54.00	9.21	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 440 of 535

802.11ax40 MIMO_Channel 62

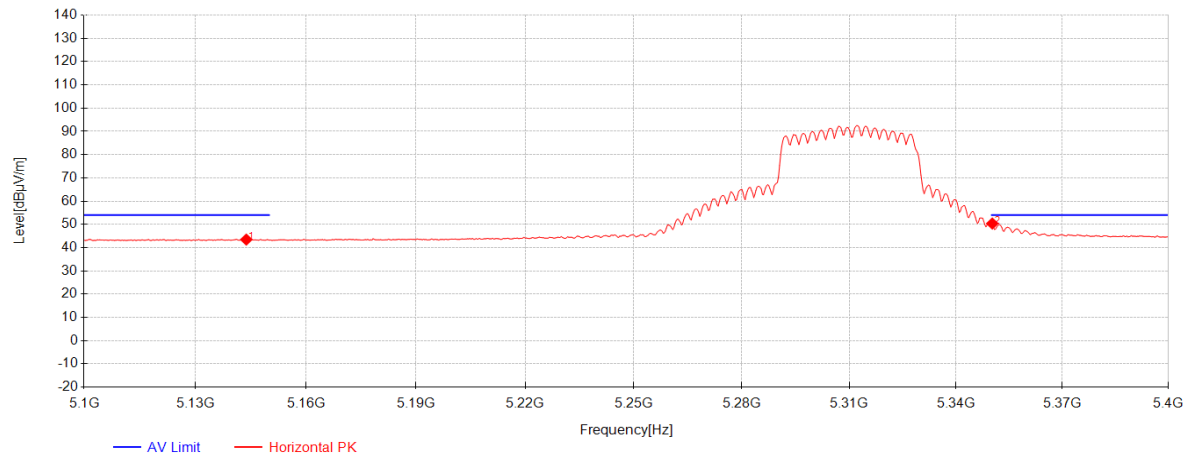


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5143.8	26.36	33.17	-16.08	43.46	54.00	10.54	Horizontal
2	5350.2	33.04	33.13	-15.80	50.37	54.00	3.63	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 441 of 535

802.11ax40 MIMO_Channel 62

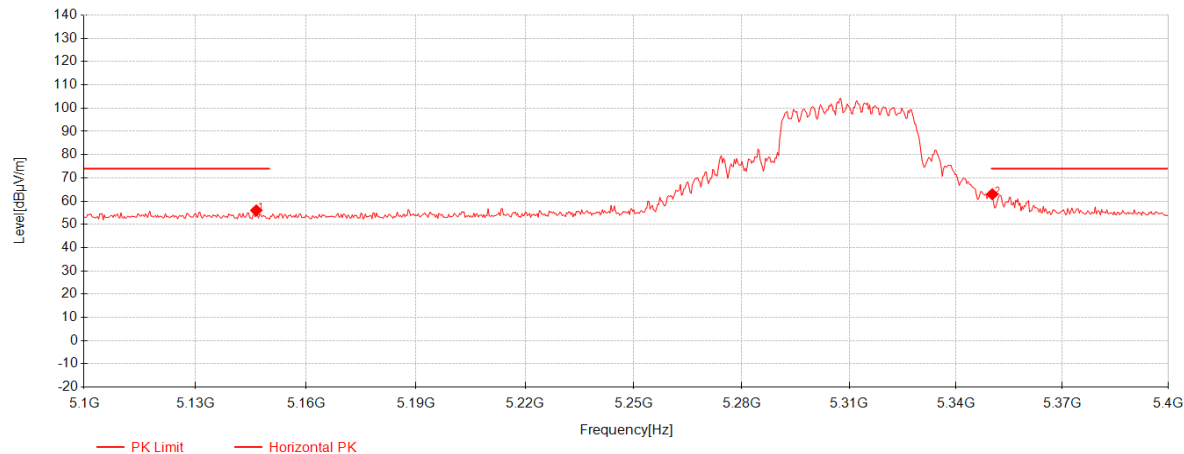


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5146.5	38.93	33.17	-16.07	56.03	74.00	17.97	Horizontal
2	5350.2	45.63	33.13	-15.80	62.96	74.00	11.04	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 442 of 535

802.11ax40 MIMO_Channel 62

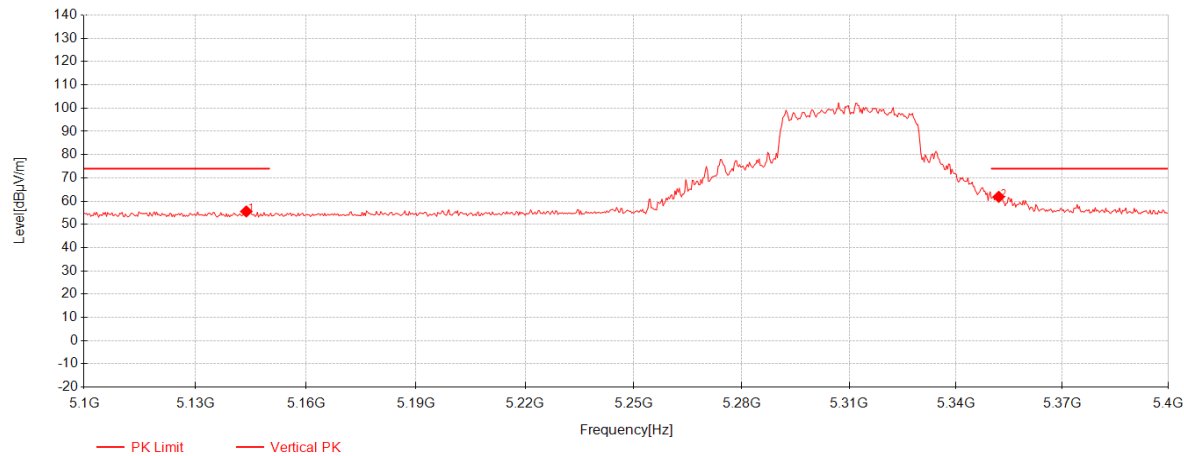


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5143.8	38.46	33.17	-16.08	55.56	74.00	18.44	Vertical
2	5352	44.53	33.13	-15.80	61.86	74.00	12.14	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 443 of 535

802.11ax40 MIMO_Channel 62

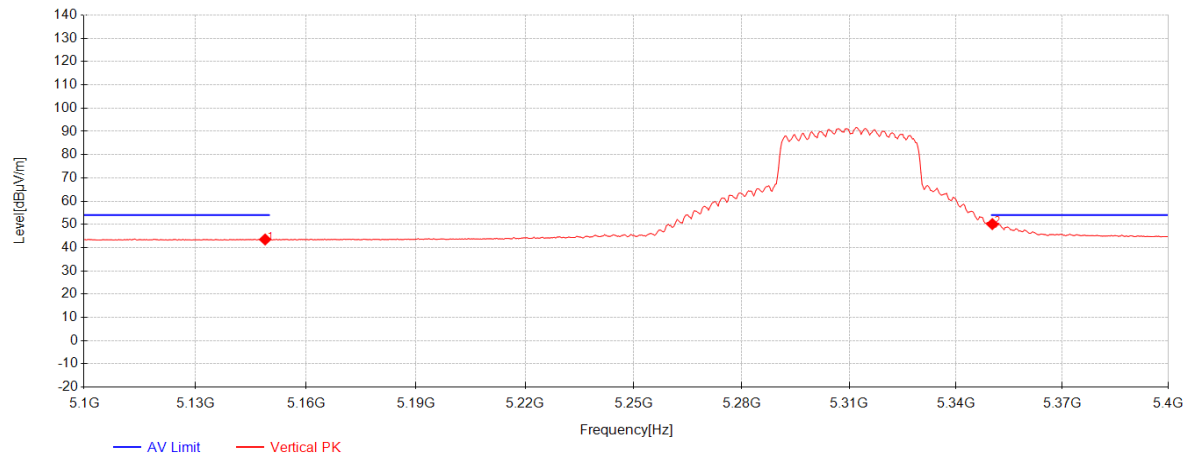


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	26.41	33.17	-16.07	43.51	54.00	10.49	Vertical
2	5350.2	32.81	33.13	-15.80	50.14	54.00	3.86	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 444 of 535

802.11ax40 MIMO_Channel 102

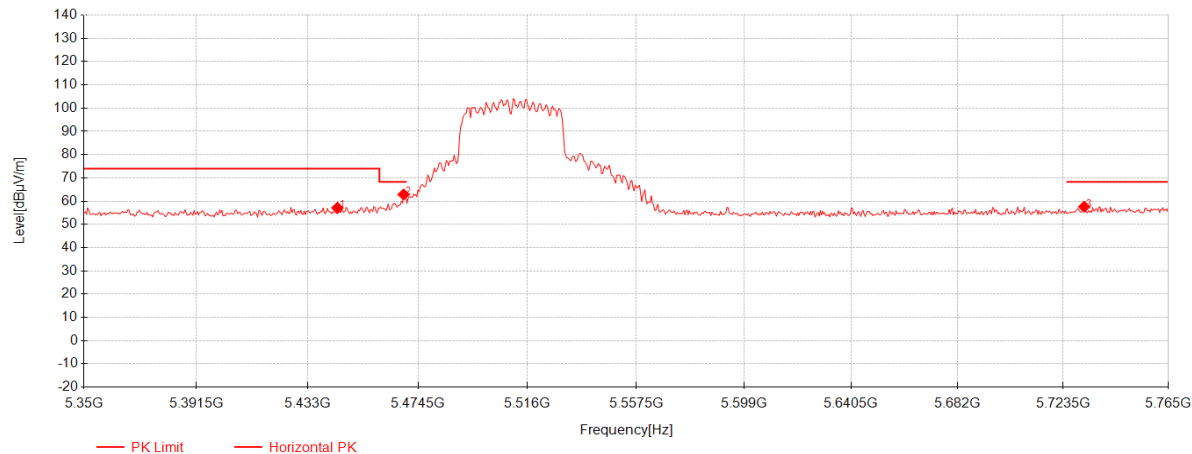


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5444.205	39.55	33.11	-15.57	57.09	74.00	16.91	Horizontal
2	5469.105	45.17	33.11	-15.43	62.85	68.30	5.45	Horizontal
3	5731.8	38.63	33.89	-14.91	57.60	68.30	10.70	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 445 of 535

802.11ax40 MIMO_Channel 102

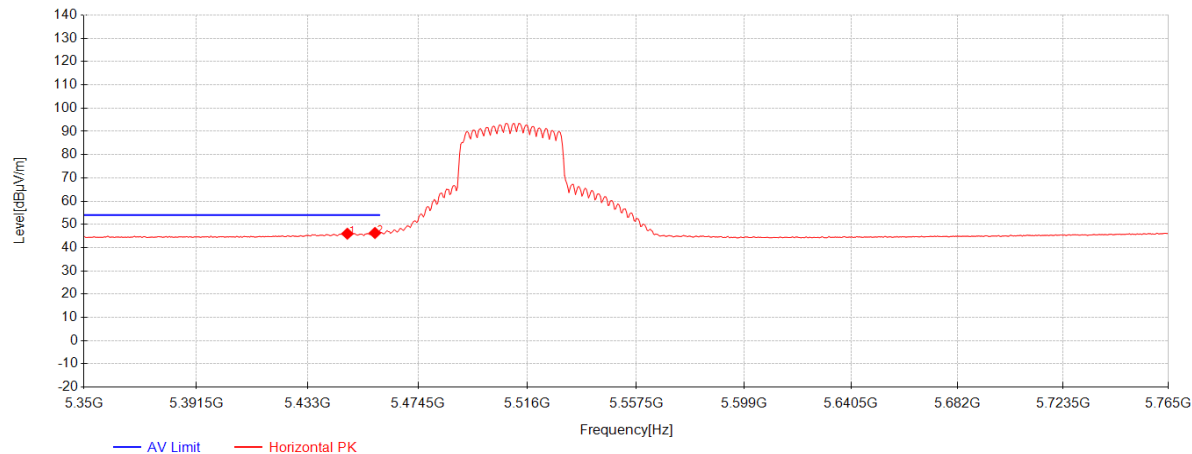


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5447.94	28.42	33.11	-15.55	45.98	54.00	8.02	Horizontal
2	5458.315	28.68	33.11	-15.49	46.30	54.00	7.70	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 446 of 535

802.11ax40 MIMO_Channel 102

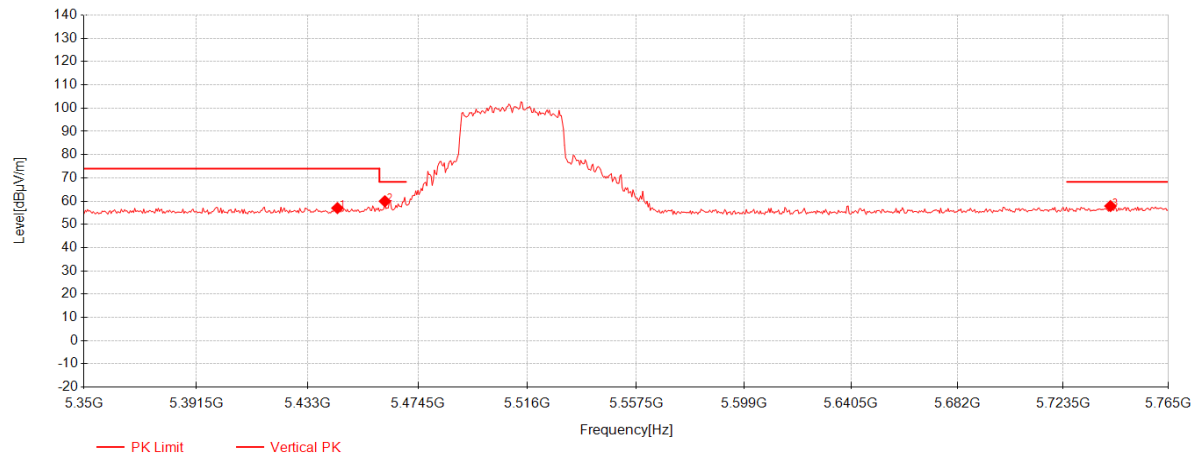


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5444.205	39.46	33.11	-15.57	57.00	74.00	17.00	Vertical
2	5462.05	42.32	33.11	-15.47	59.96	68.30	8.34	Vertical
3	5742.175	38.80	33.92	-14.84	57.88	68.30	10.42	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 447 of 535

802.11ax40 MIMO_Channel 102

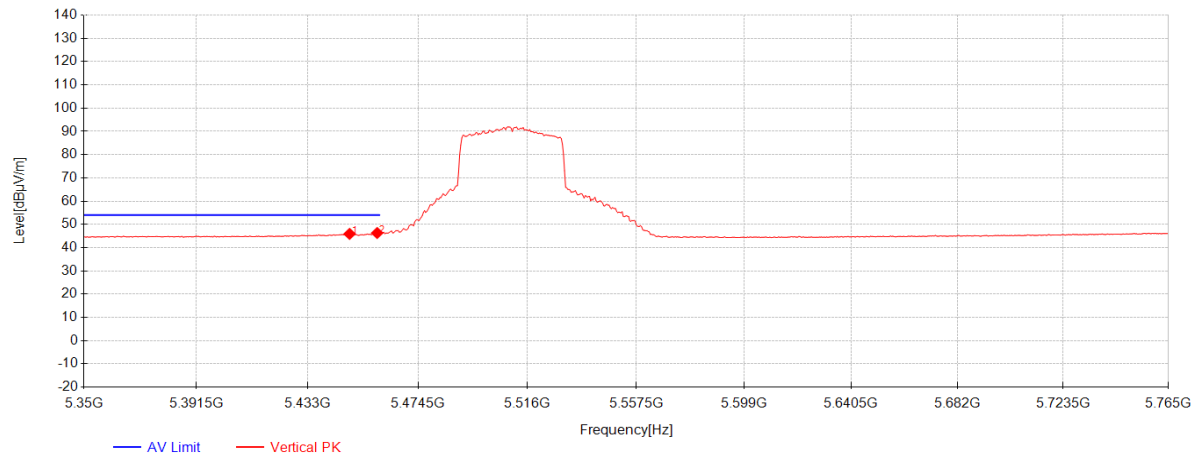


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5448.77	28.34	33.11	-15.54	45.91	54.00	8.09	Vertical
2	5459.145	28.66	33.11	-15.48	46.29	54.00	7.71	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 448 of 535

802.11ax40 MIMO_Channel 134

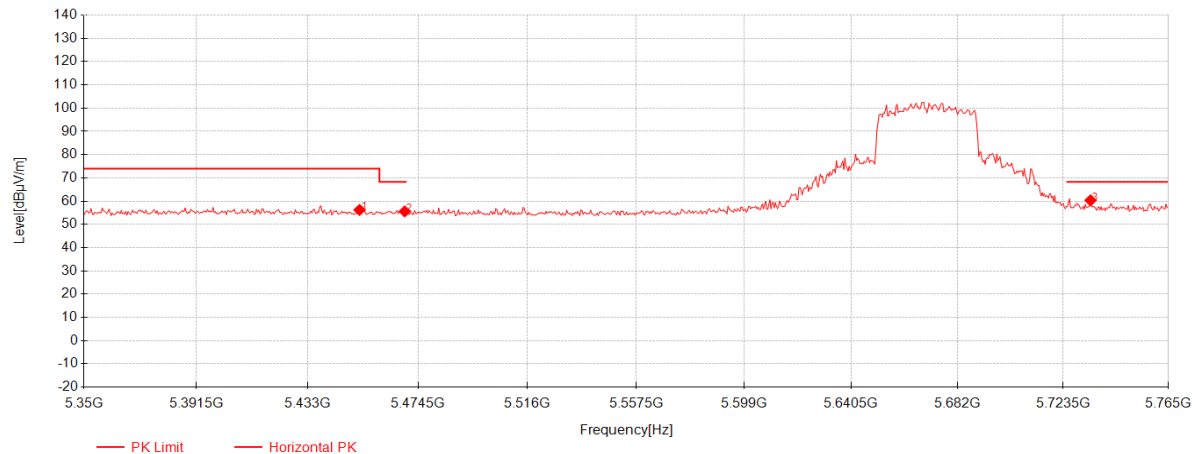


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5452.505	38.64	33.11	-15.52	56.23	74.00	17.77	Horizontal
2	5469.52	37.91	33.11	-15.42	55.59	68.30	12.71	Horizontal
3	5734.29	41.35	33.90	-14.90	60.35	68.30	7.95	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 449 of 535

802.11ax40 MIMO_Channel 134

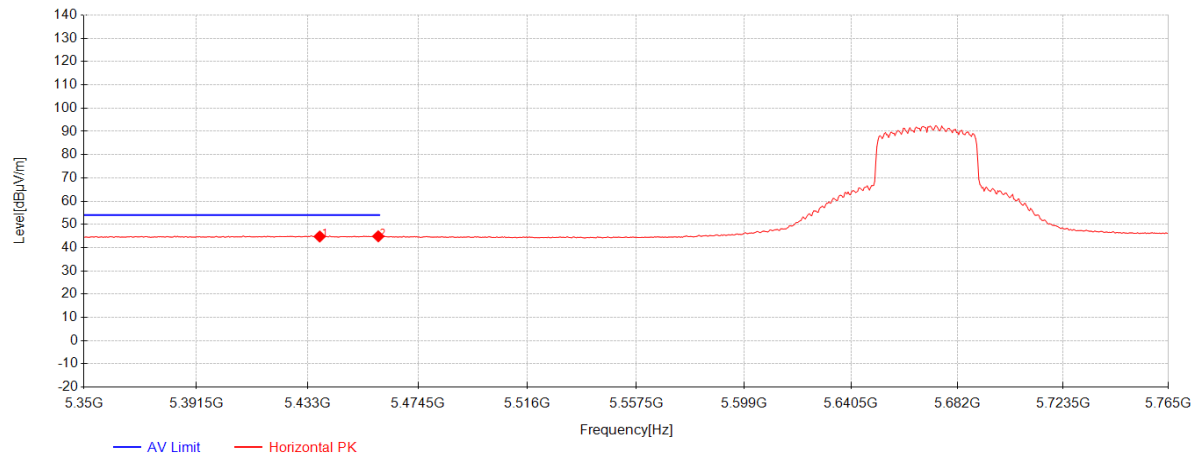


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5437.565	27.28	33.11	-15.61	44.79	54.00	9.21	Horizontal
2	5459.56	27.25	33.11	-15.48	44.88	54.00	9.12	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 450 of 535

802.11ax40 MIMO_Channel 134

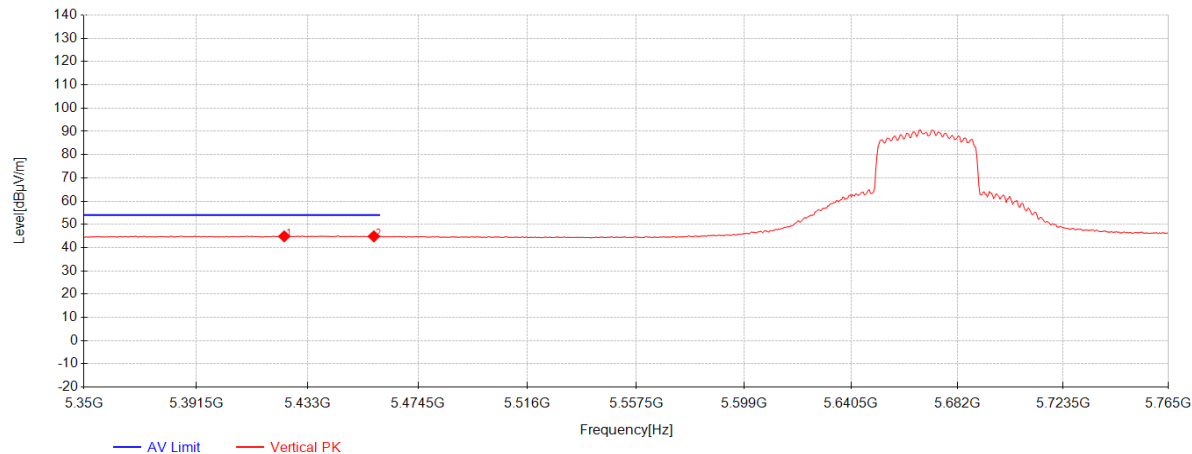


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5424.285	27.43	33.12	-15.68	44.86	54.00	9.14	Vertical
2	5457.9	27.25	33.11	-15.49	44.87	54.00	9.13	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 451 of 535

802.11ax40 MIMO_Channel 134

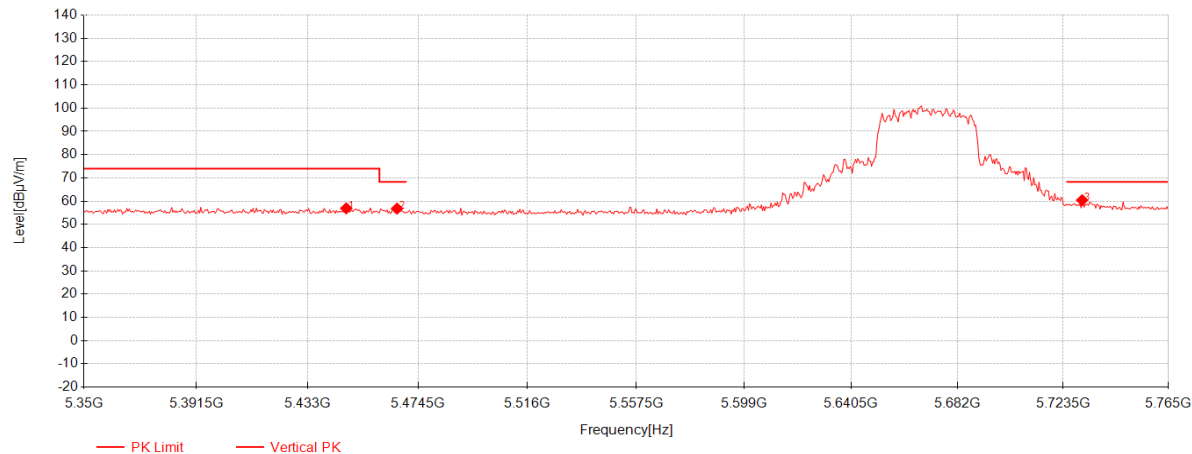

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5447.525	39.32	33.11	-15.55	56.88	74.00	17.12	Vertical
2	5466.615	39.10	33.11	-15.44	56.77	68.30	11.53	Vertical
3	5730.97	41.44	33.89	-14.92	60.41	68.30	7.89	Vertical




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 452 of 535

802.11ax40 MIMO_Channel 151

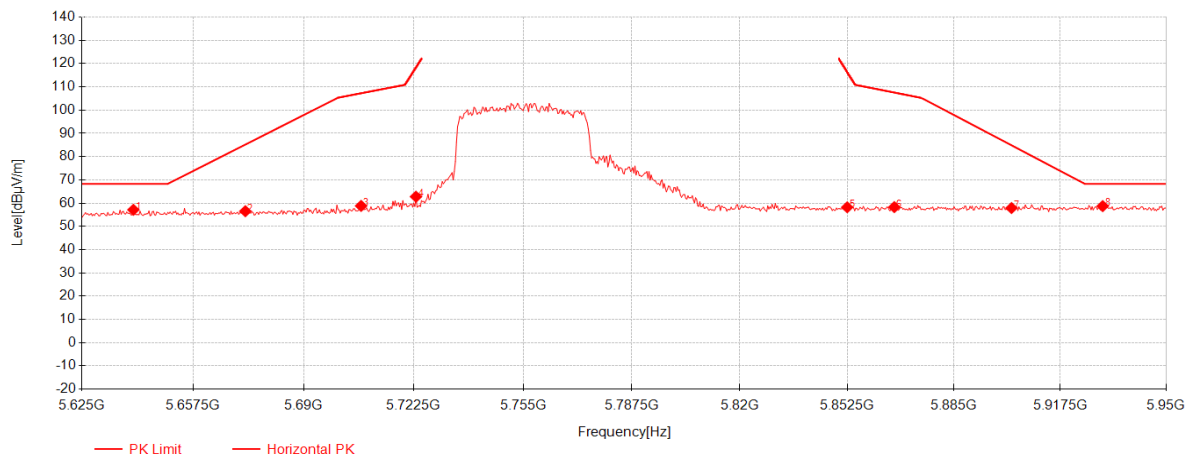

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5639.95	38.81	33.58	-15.24	57.15	68.30	11.15	Horizontal
2	5672.775	38.02	33.69	-15.18	56.53	85.19	28.66	Horizontal
3	5706.9	40.10	33.80	-15.08	58.82	107.23	48.41	Horizontal
4	5723.15	43.88	33.86	-14.97	62.77	118.08	55.31	Horizontal
5	5852.5	38.42	34.30	-14.49	58.23	116.60	58.37	Horizontal
6	5866.8	38.46	34.35	-14.50	58.30	107.59	49.29	Horizontal
7	5902.55	37.96	34.47	-14.53	57.90	84.87	26.97	Horizontal
8	5930.5	38.70	34.56	-14.54	58.72	68.30	9.58	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 453 of 535

802.11ax40 MIMO_Channel 151

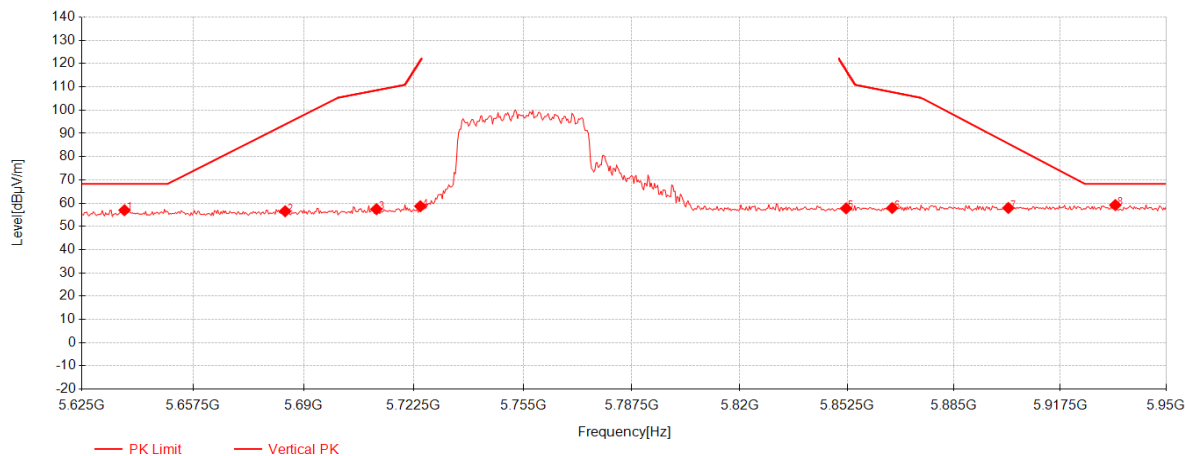

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5637.35	38.63	33.57	-15.24	56.95	68.30	11.35	Vertical
2	5684.475	37.94	33.73	-15.16	56.51	93.85	37.34	Vertical
3	5711.45	38.64	33.82	-15.05	57.41	108.51	51.10	Vertical
4	5724.45	39.76	33.86	-14.96	58.66	121.05	62.39	Vertical
5	5852.175	37.92	34.30	-14.49	57.73	117.34	59.61	Vertical
6	5866.15	38.04	34.34	-14.50	57.88	107.78	49.90	Vertical
7	5901.575	38.00	34.47	-14.53	57.93	85.60	27.67	Vertical
8	5934.4	39.13	34.58	-14.54	59.17	68.30	9.13	Vertical




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 454 of 535

802.11ax40 MIMO_Channel 159

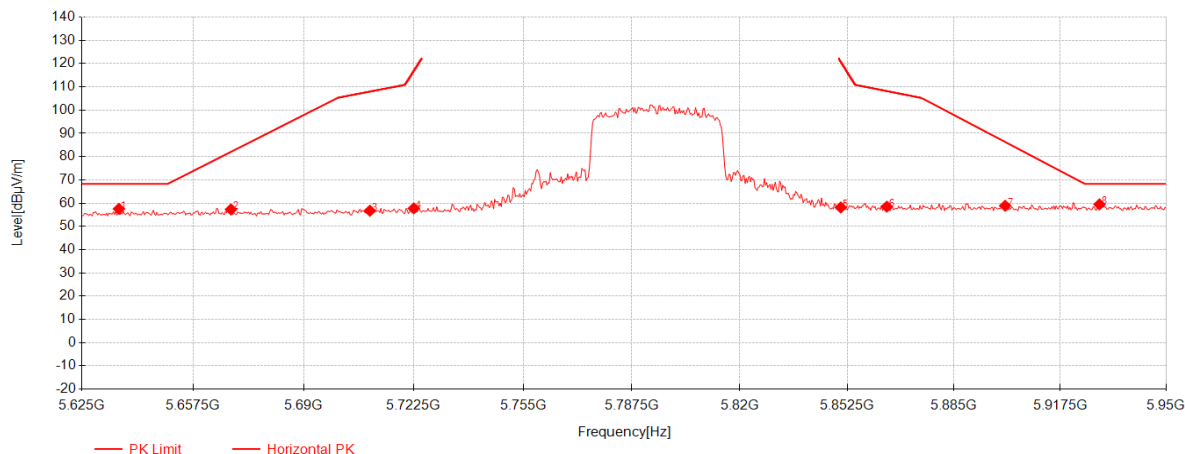

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5635.725	39.23	33.56	-15.25	57.55	68.30	10.75	Horizontal
2	5668.55	38.81	33.67	-15.19	57.30	82.07	24.77	Horizontal
3	5709.5	37.99	33.81	-15.07	56.74	107.96	51.22	Horizontal
4	5722.5	38.86	33.86	-14.98	57.74	116.60	58.86	Horizontal
5	5850.55	38.35	34.29	-14.49	58.15	121.05	62.90	Horizontal
6	5864.525	38.65	34.34	-14.50	58.49	108.23	49.74	Horizontal
7	5900.6	38.94	34.46	-14.53	58.87	86.32	27.45	Horizontal
8	5929.525	39.45	34.56	-14.54	59.47	68.30	8.83	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 455 of 535

802.11ax40 MIMO_Channel 159

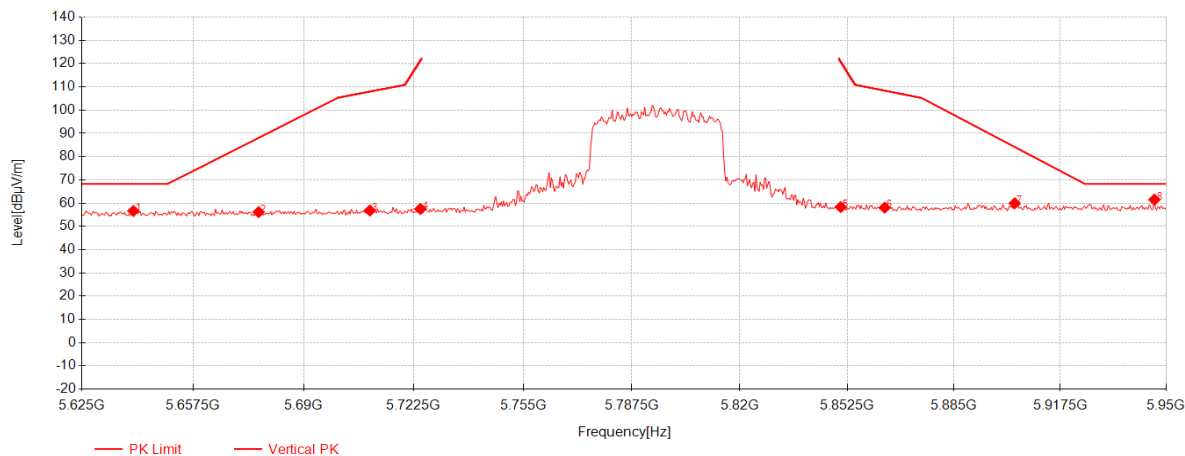


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5639.95	38.31	33.58	-15.24	56.65	68.30	11.65	Vertical
2	5676.675	37.61	33.70	-15.17	56.14	88.08	31.94	Vertical
3	5709.5	38.07	33.81	-15.07	56.82	107.96	51.14	Vertical
4	5724.45	38.60	33.86	-14.96	57.50	121.05	63.55	Vertical
5	5850.55	38.50	34.29	-14.49	58.30	121.05	62.75	Vertical
6	5863.875	38.22	34.34	-14.50	58.06	108.41	50.35	Vertical
7	5903.525	39.98	34.47	-14.53	59.92	84.15	24.23	Vertical
8	5946.425	41.43	34.62	-14.54	61.50	68.30	6.80	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 456 of 535

802.11ax80 MIMO_Channel 42

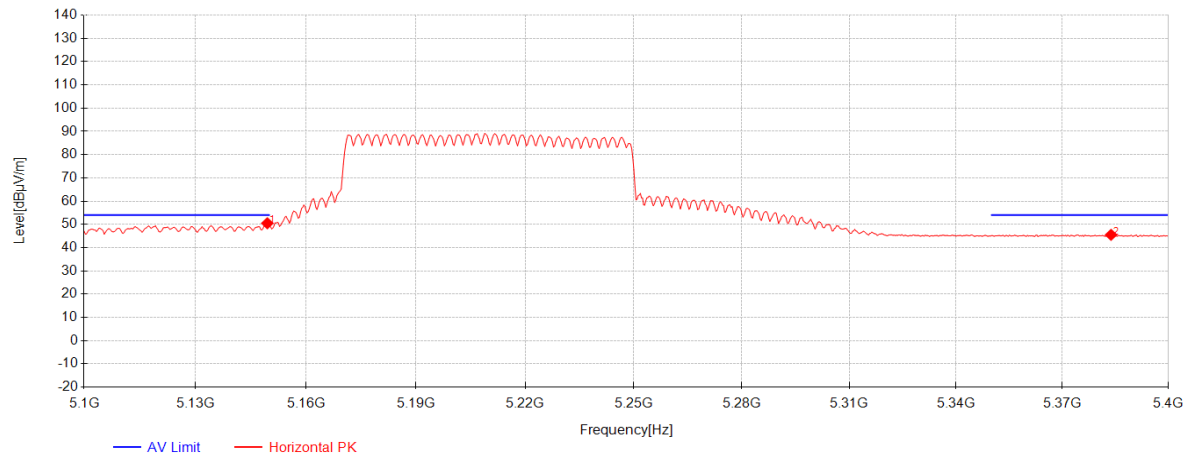


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5149.5	33.38	33.17	-16.07	50.48	54.00	3.52	Horizontal
2	5383.8	28.20	33.12	-15.81	45.51	54.00	8.49	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 457 of 535

802.11ax80 MIMO_Channel 42

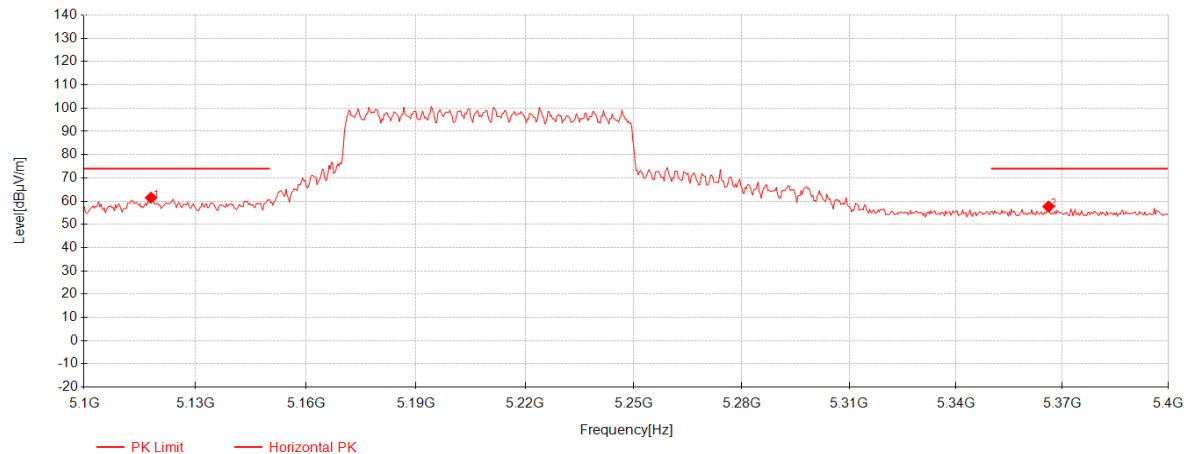


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5118	44.43	33.18	-16.12	61.49	74.00	12.51	Horizontal
2	5366.1	40.34	33.13	-15.80	57.66	74.00	16.34	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 458 of 535

802.11ax80 MIMO_Channel 42

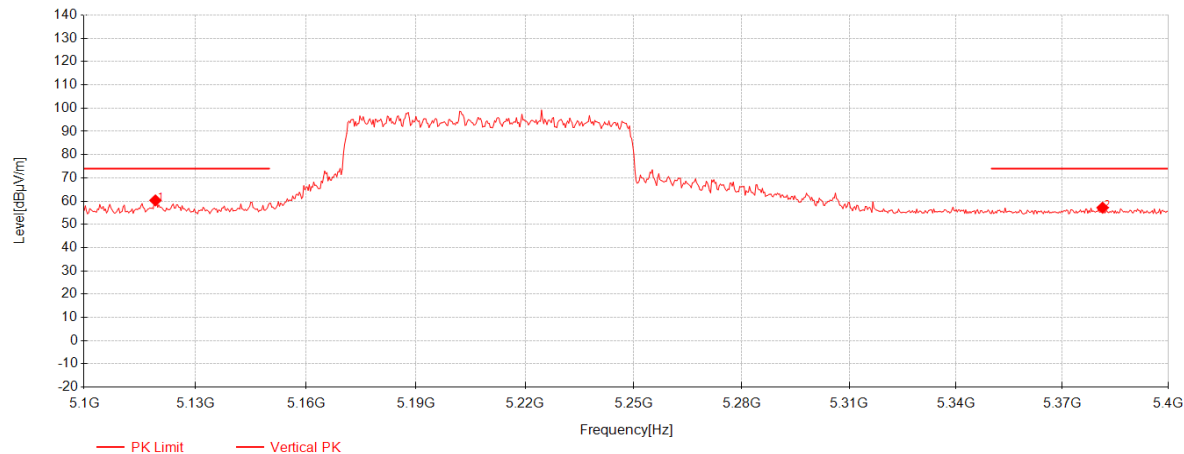


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5119.2	43.25	33.18	-16.12	60.31	74.00	13.69	Vertical
2	5381.4	39.87	33.12	-15.81	57.18	74.00	16.82	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 459 of 535

802.11ax80 MIMO_Channel 42

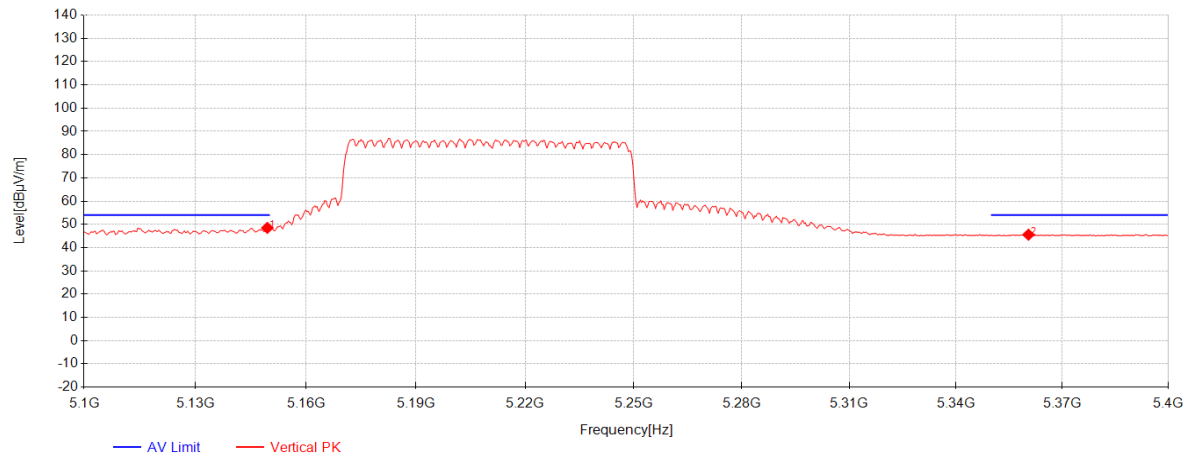


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5149.5	31.40	33.17	-16.07	48.50	54.00	5.50	Vertical
2	5360.4	28.24	33.13	-15.80	45.57	54.00	8.43	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 460 of 535

802.11ax80 MIMO_Channel 58

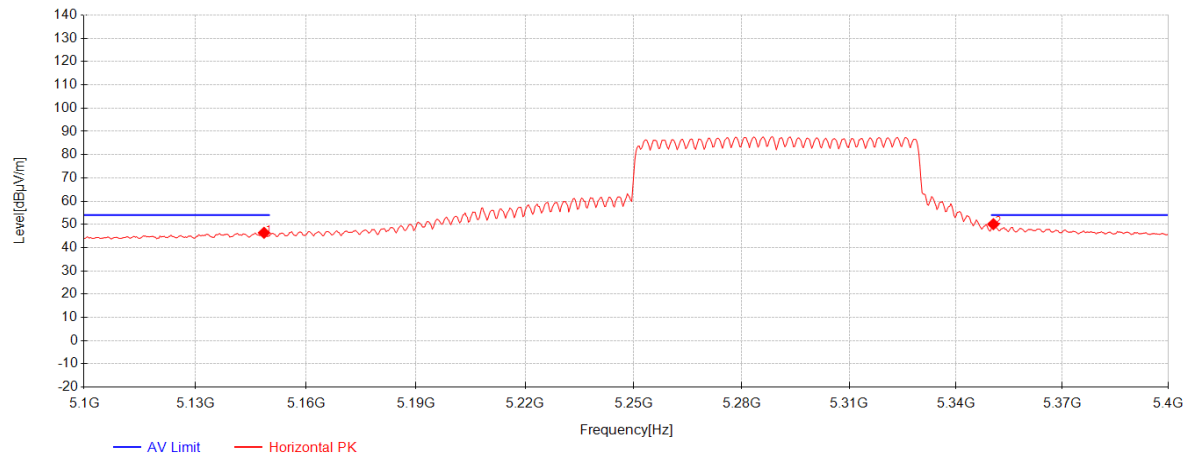


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.6	29.27	33.17	-16.07	46.37	54.00	7.63	Horizontal
2	5350.5	32.76	33.13	-15.80	50.09	54.00	3.91	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 461 of 535

802.11ax80 MIMO_Channel 58

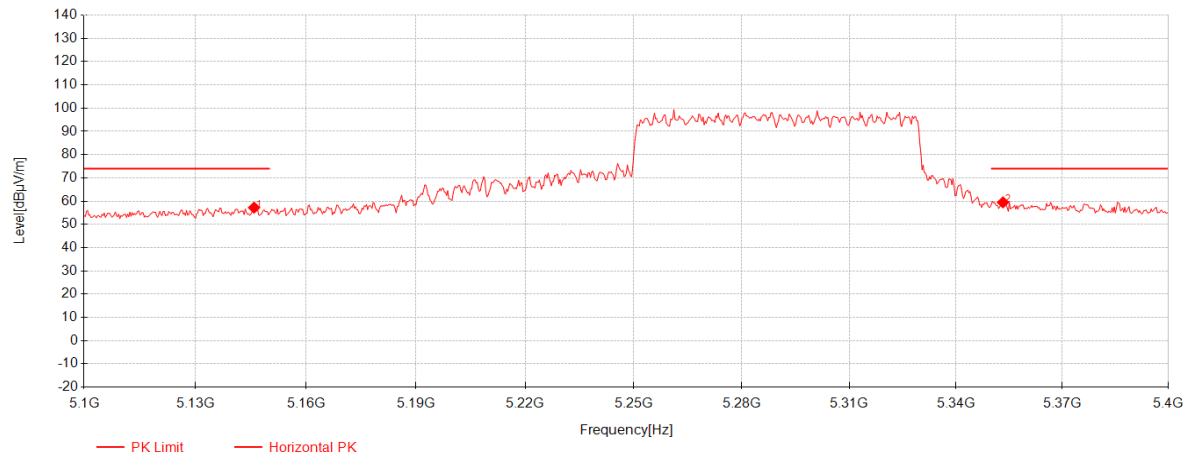


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5145.9	40.09	33.17	-16.07	57.19	74.00	16.81	Horizontal
2	5353.2	42.15	33.13	-15.80	59.48	74.00	14.52	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 462 of 535

802.11ax80 MIMO_Channel 58

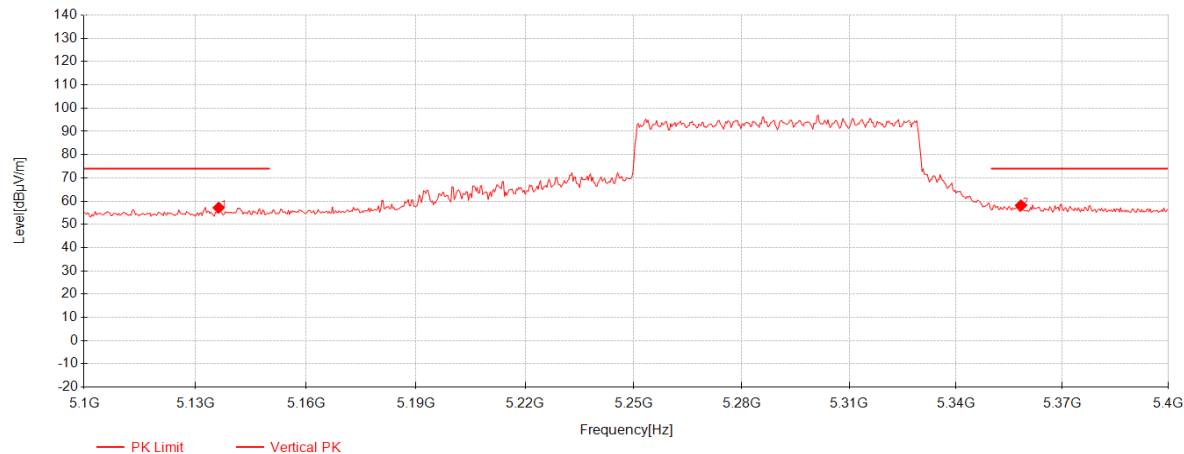


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5136.3	40.10	33.17	-16.09	57.18	74.00	16.82	Vertical
2	5358.3	40.83	33.13	-15.80	58.16	74.00	15.84	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 463 of 535

802.11ax80 MIMO_Channel 58

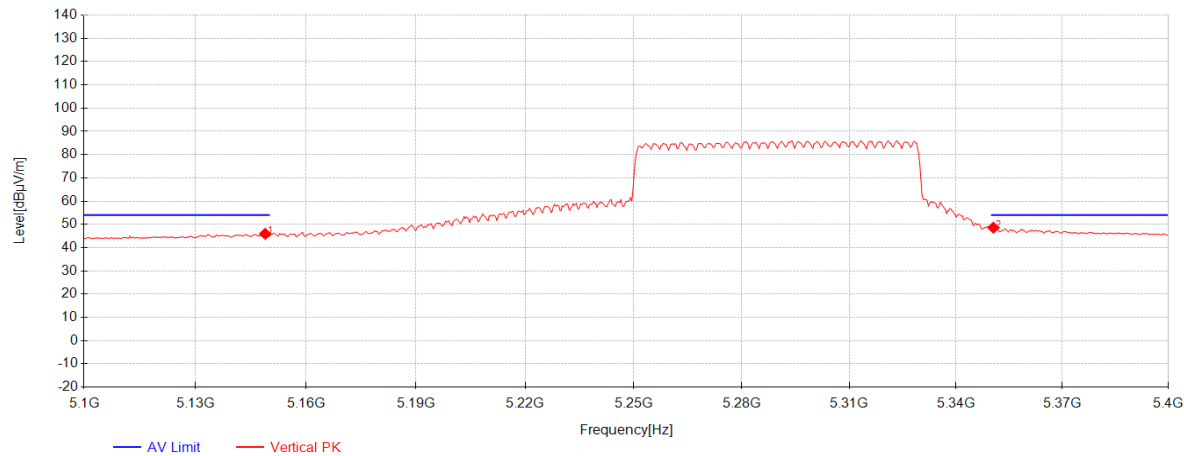

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	28.84	33.17	-16.07	45.94	54.00	8.06	Vertical
2	5350.5	31.25	33.13	-15.80	48.58	54.00	5.42	Vertical




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 464 of 535

802.11ax80 MIMO_Channel 106

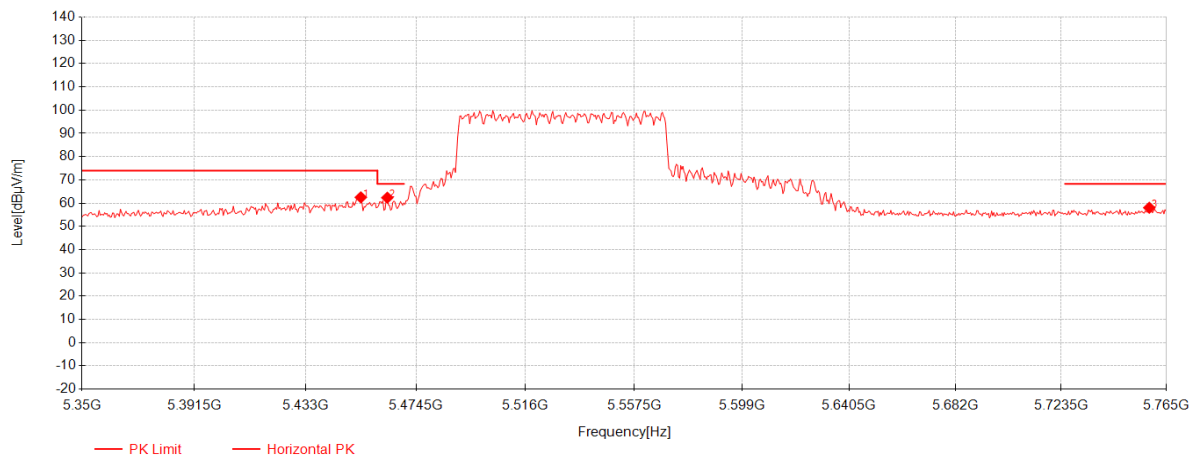


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5453.75	44.88	33.11	-15.51	62.48	74.00	11.52	Horizontal
2	5463.71	44.69	33.11	-15.46	62.34	68.30	5.96	Horizontal
3	5758.36	38.77	33.98	-14.73	58.02	68.30	10.28	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 465 of 535

802.11ax80 MIMO_Channel 106

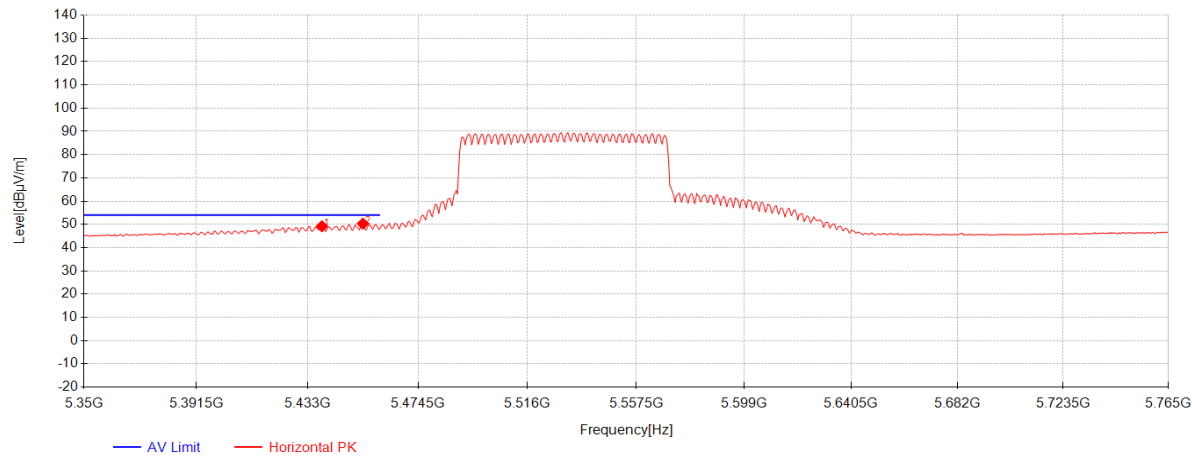


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5438.395	31.69	33.11	-15.60	49.20	54.00	4.80	Horizontal
2	5453.75	32.73	33.11	-15.51	50.33	54.00	3.67	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 466 of 535

802.11ax80 MIMO_Channel 106

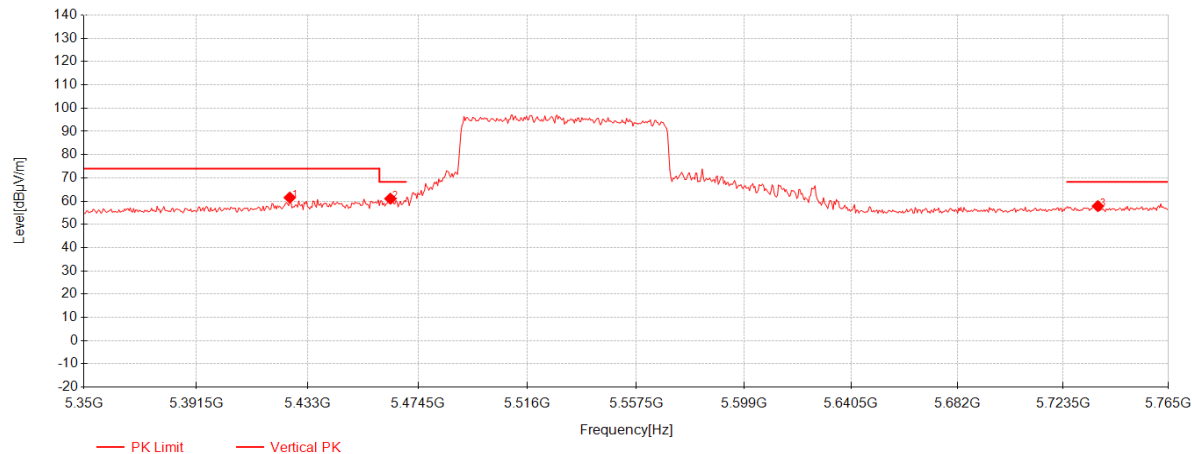


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5426.36	44.08	33.11	-15.67	61.52	74.00	12.48	Vertical
2	5464.125	43.41	33.11	-15.45	61.06	68.30	7.24	Vertical
3	5737.195	38.83	33.91	-14.88	57.86	68.30	10.44	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 467 of 535

802.11ax80 MIMO_Channel 106

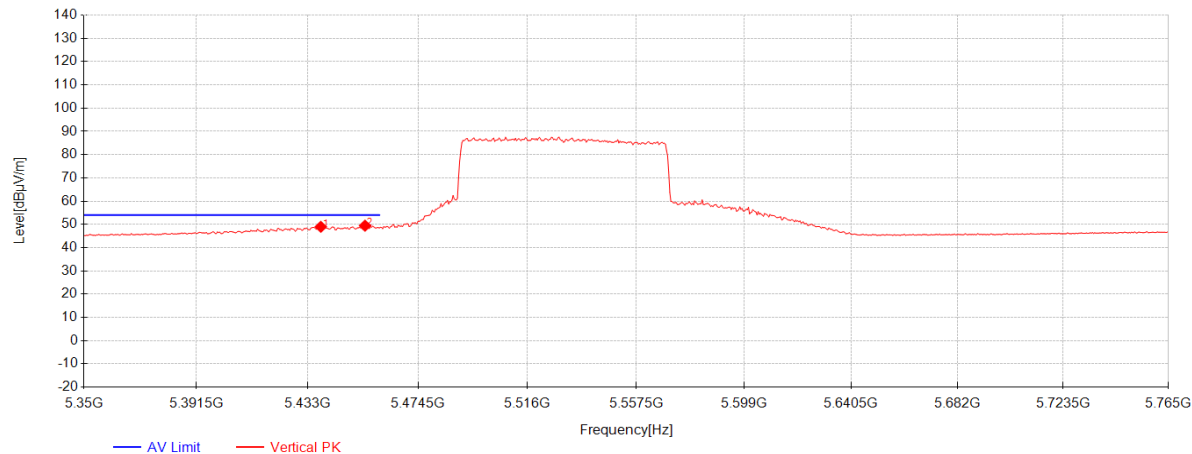


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5437.98	31.44	33.11	-15.60	48.95	54.00	5.05	Vertical
2	5454.58	31.85	33.11	-15.51	49.45	54.00	4.55	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 468 of 535

802.11ax80 MIMO_Channel 122

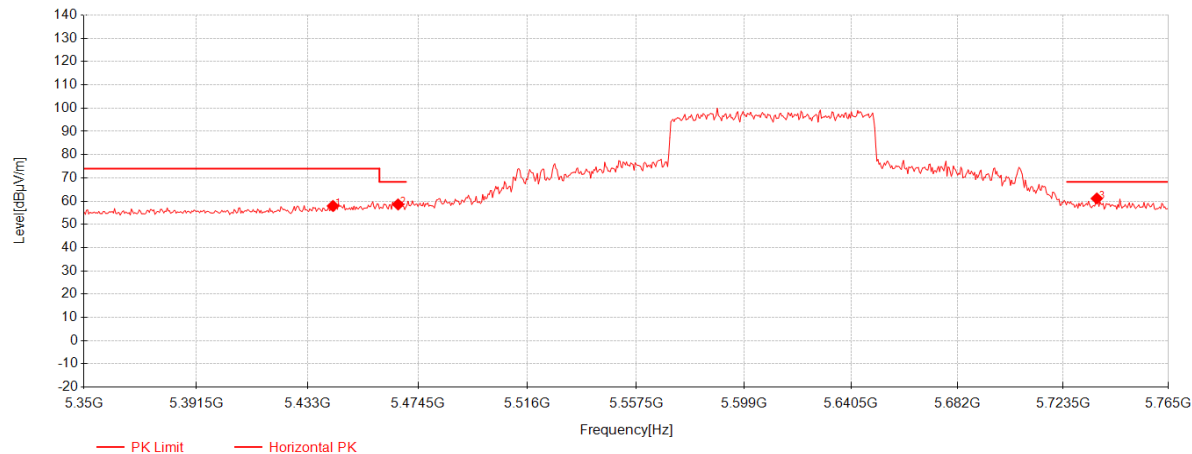


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5442.545	40.40	33.11	-15.58	57.93	74.00	16.07	Horizontal
2	5467.03	40.90	33.11	-15.44	58.57	68.30	9.73	Horizontal
3	5736.78	42.11	33.91	-14.88	61.14	68.30	7.16	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 469 of 535

802.11ax80 MIMO_Channel 122

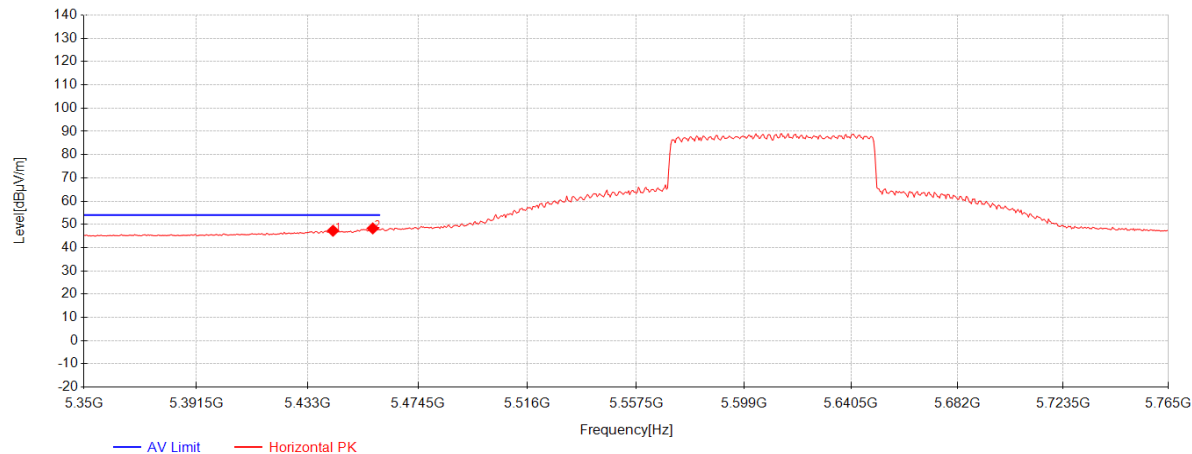

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5442.545	29.74	33.11	-15.58	47.27	54.00	6.73	Horizontal
2	5457.485	30.64	33.11	-15.49	48.26	54.00	5.74	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 470 of 535

802.11ax80 MIMO_Channel 122

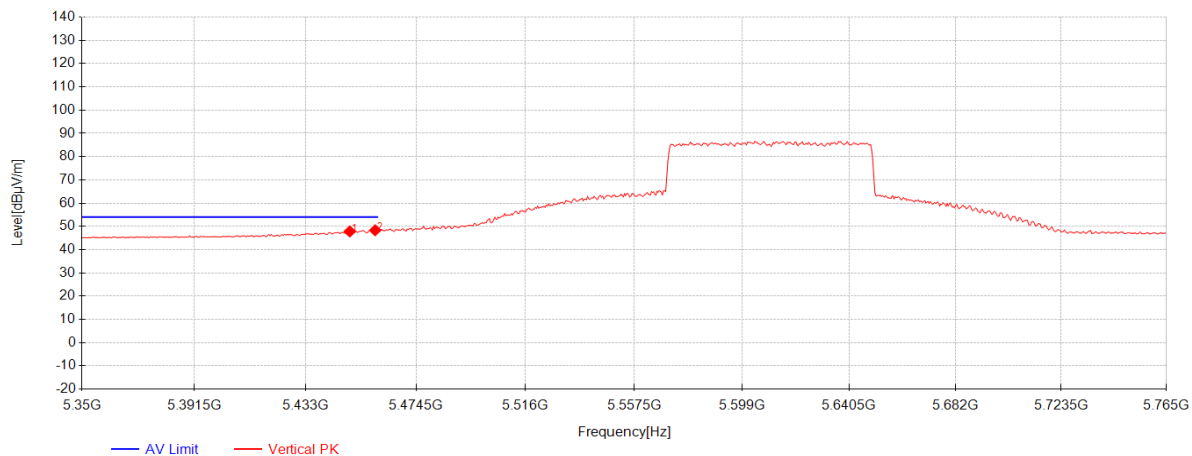

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5449.6	30.26	33.11	-15.54	47.83	54.00	6.17	Vertical
2	5459.145	30.70	33.11	-15.48	48.33	54.00	5.67	Vertical




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 471 of 535

802.11ax80 MIMO_Channel 122

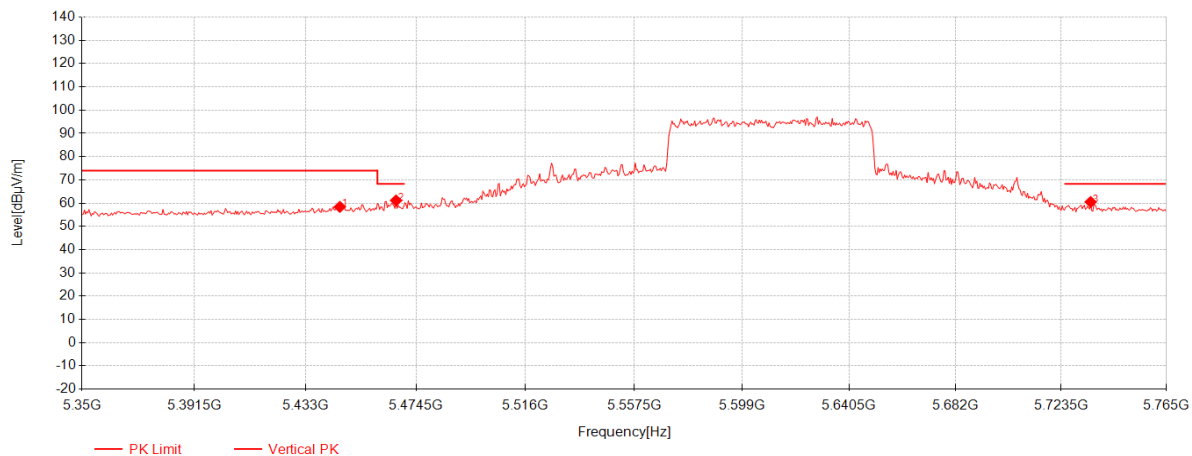

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5445.865	40.84	33.11	-15.56	58.39	74.00	15.61	Vertical
2	5467.03	43.47	33.11	-15.44	61.14	68.30	7.16	Vertical
3	5735.12	41.50	33.90	-14.89	60.51	68.30	7.79	Vertical




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 472 of 535

802.11ax80 MIMO_Channel 155

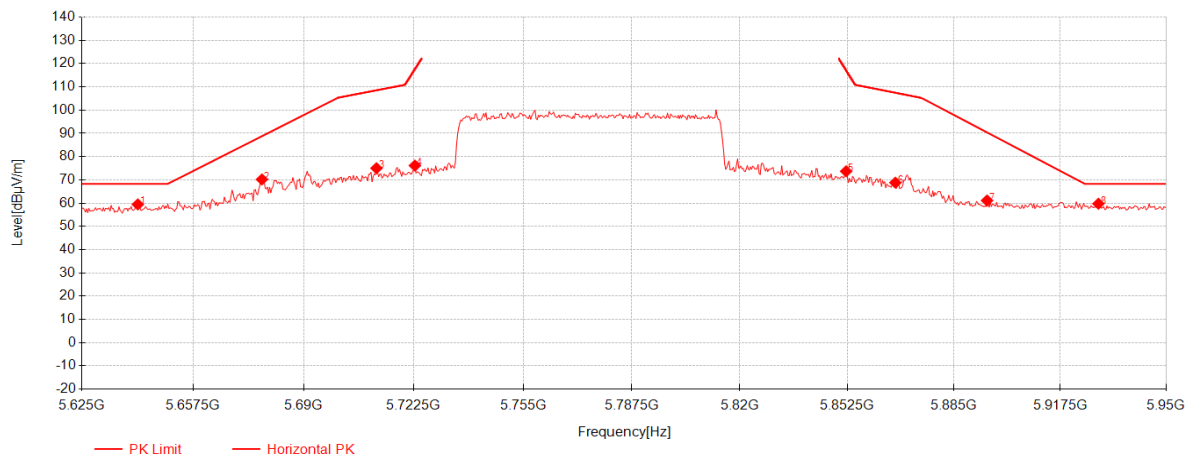

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5641.25	41.11	33.58	-15.24	59.45	68.30	8.85	Horizontal
2	5677.65	51.67	33.70	-15.17	70.20	88.80	18.60	Horizontal
3	5711.45	56.24	33.82	-15.05	75.01	108.51	33.50	Horizontal
4	5722.825	57.26	33.86	-14.97	76.14	117.34	41.20	Horizontal
5	5852.175	53.88	34.30	-14.49	73.69	117.34	43.65	Horizontal
6	5867.125	48.95	34.35	-14.50	68.79	107.50	38.71	Horizontal
7	5895.075	41.22	34.44	-14.53	61.14	90.41	29.27	Horizontal
8	5929.2	39.72	34.56	-14.54	59.74	68.30	8.56	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 473 of 535

802.11ax80 MIMO_Channel 155

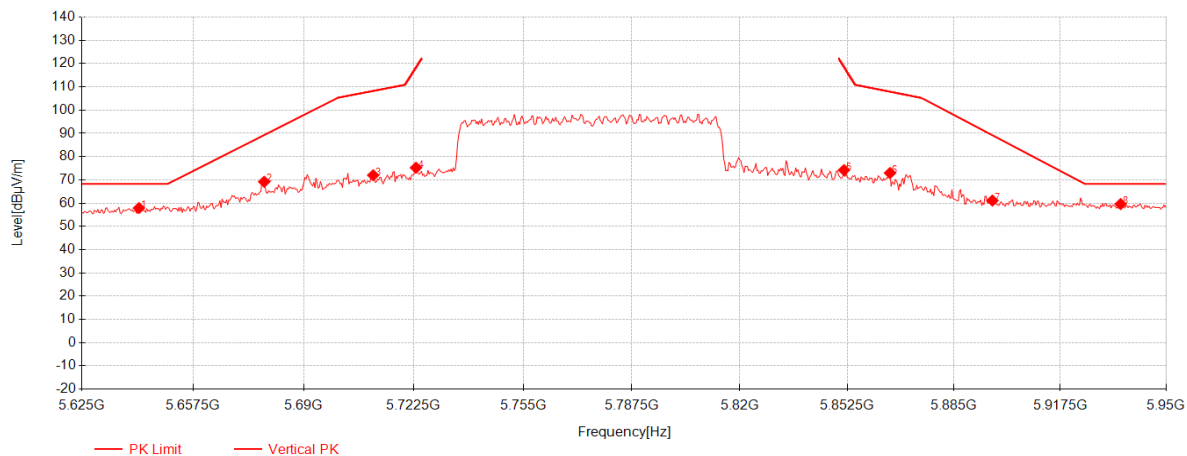


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5641.575	39.55	33.58	-15.24	57.90	68.30	10.40	Vertical
2	5678.3	50.65	33.71	-15.17	69.19	89.28	20.09	Vertical
3	5710.475	53.26	33.82	-15.06	72.02	108.24	36.22	Vertical
4	5723.15	56.35	33.86	-14.97	75.24	118.08	42.84	Vertical
5	5851.525	54.43	34.30	-14.49	74.23	118.82	44.59	Vertical
6	5865.5	53.13	34.34	-14.50	72.97	107.96	34.99	Vertical
7	5896.7	41.20	34.45	-14.53	61.12	89.20	28.08	Vertical
8	5936.025	39.55	34.58	-14.54	59.59	68.30	8.71	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 474 of 535

802.11ax160 MIMO_Channel 50

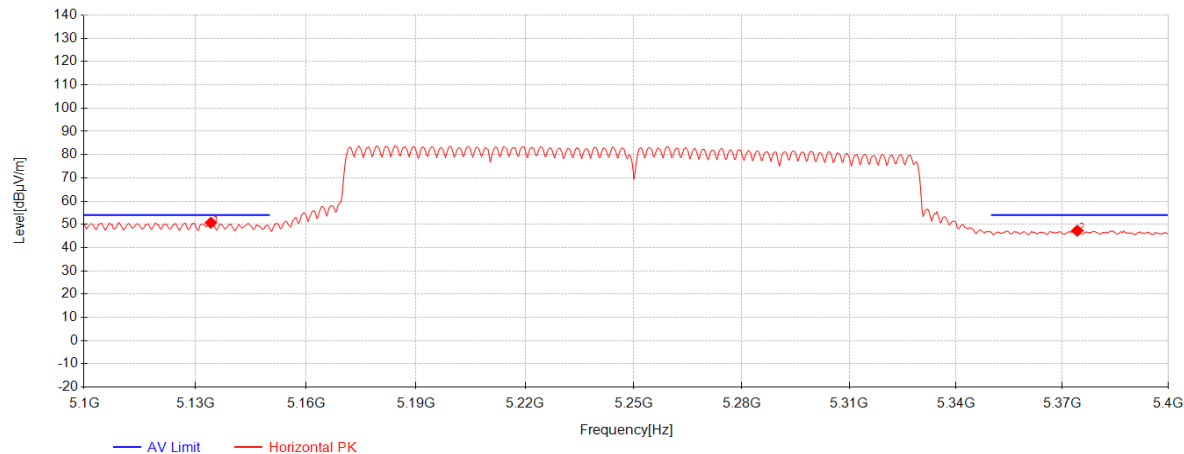


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5134.2	33.63	33.17	-16.09	50.71	54.00	3.29	Horizontal
2	5374.2	29.95	33.13	-15.81	47.27	54.00	6.73	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 475 of 535

802.11ax160 MIMO_Channel 50

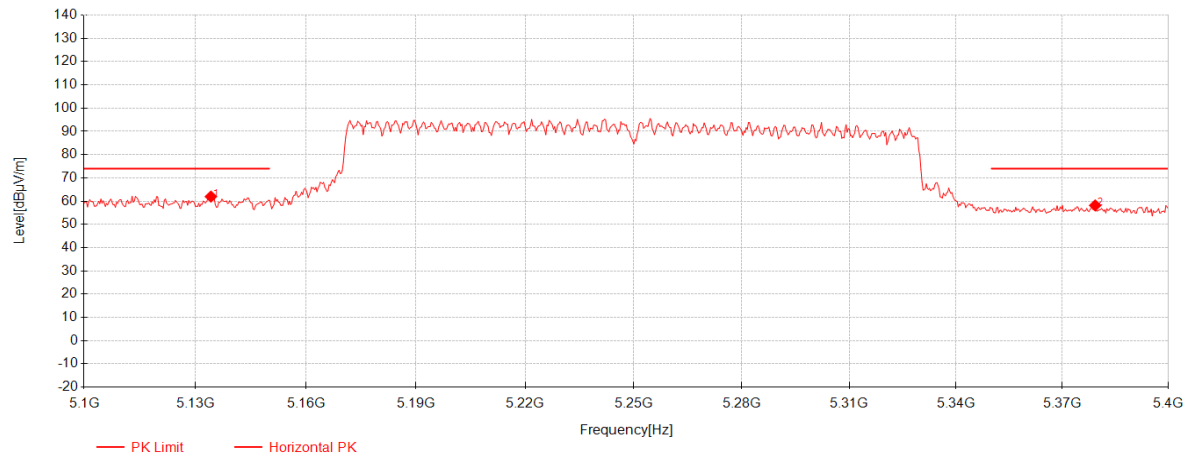


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5134.2	44.87	33.17	-16.09	61.95	74.00	12.05	Horizontal
2	5379.3	40.84	33.12	-15.81	58.15	74.00	15.85	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 476 of 535

802.11ax160 MIMO_Channel 50

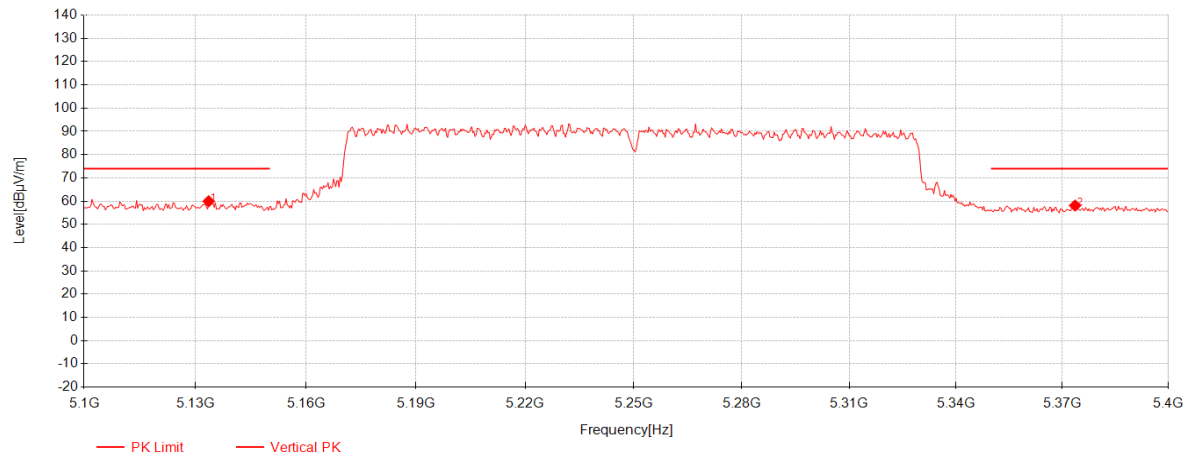

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5133.6	42.86	33.17	-16.09	59.94	74.00	14.06	Vertical
2	5373.6	40.78	33.13	-15.81	58.10	74.00	15.90	Vertical




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 477 of 535

802.11ax160 MIMO_Channel 50

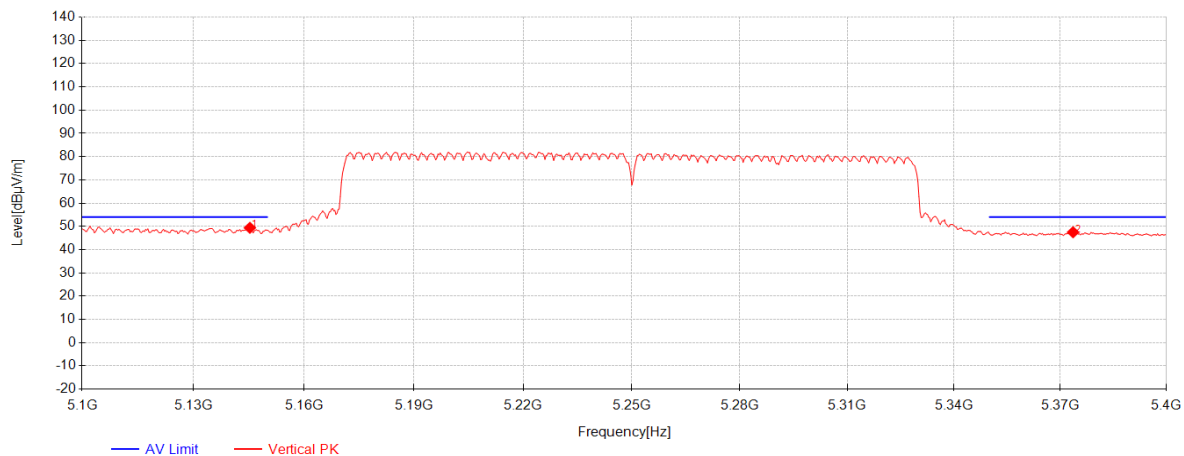


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5145.3	32.28	33.17	-16.07	49.38	54.00	4.62	Vertical
2	5373.6	30.16	33.13	-15.81	47.48	54.00	6.52	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 478 of 535

802.11ax160 MIMO_Channel 114

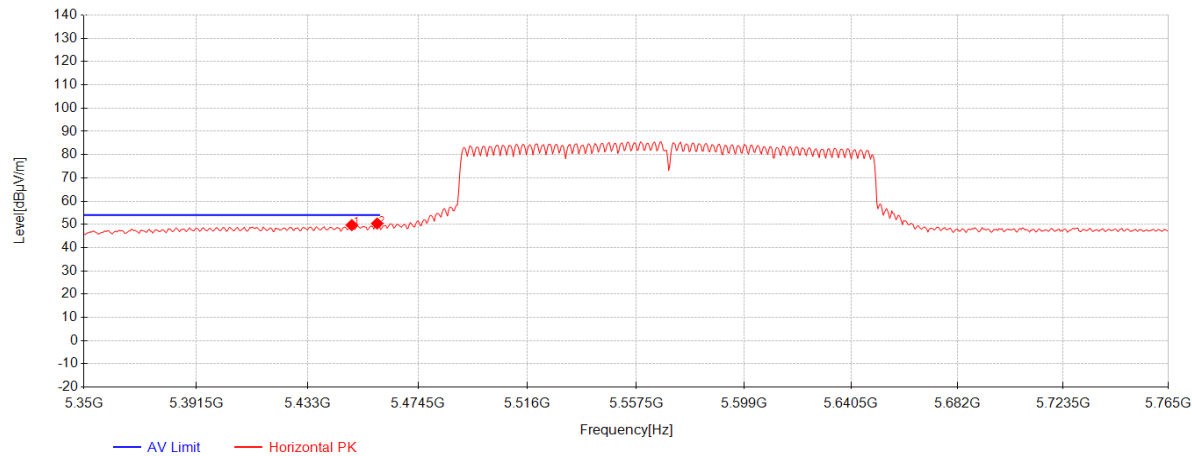


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5449.6	32.12	33.11	-15.54	49.69	54.00	4.31	Horizontal
2	5459.145	32.74	33.11	-15.48	50.37	54.00	3.63	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 479 of 535

802.11ax160 MIMO_Channel 114

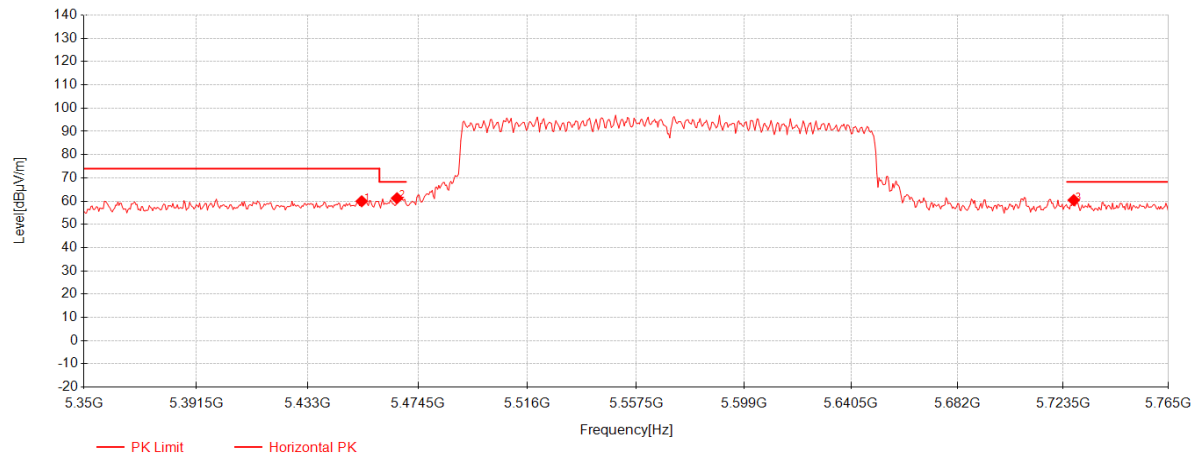


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5453.335	42.35	33.11	-15.52	59.94	74.00	14.06	Horizontal
2	5466.615	43.59	33.11	-15.44	61.26	68.30	7.04	Horizontal
3	5727.65	41.51	33.87	-14.94	60.44	68.30	7.86	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 480 of 535

802.11ax160 MIMO_Channel 114

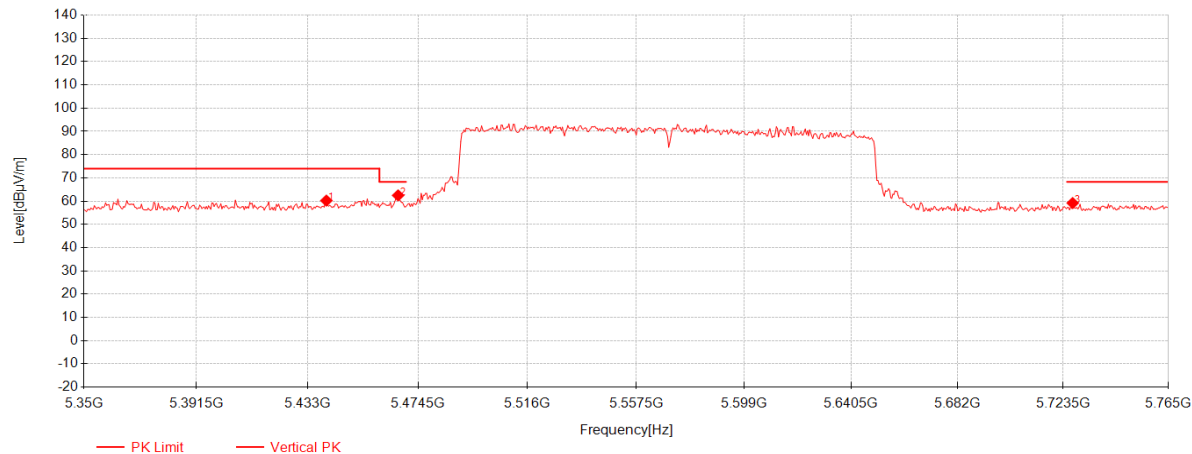


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5440.055	42.71	33.11	-15.59	60.23	74.00	13.77	Vertical
2	5467.03	44.79	33.11	-15.44	62.46	68.30	5.84	Vertical
3	5727.235	40.25	33.87	-14.94	59.18	68.30	9.12	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 481 of 535

802.11ax160 MIMO_Channel 114

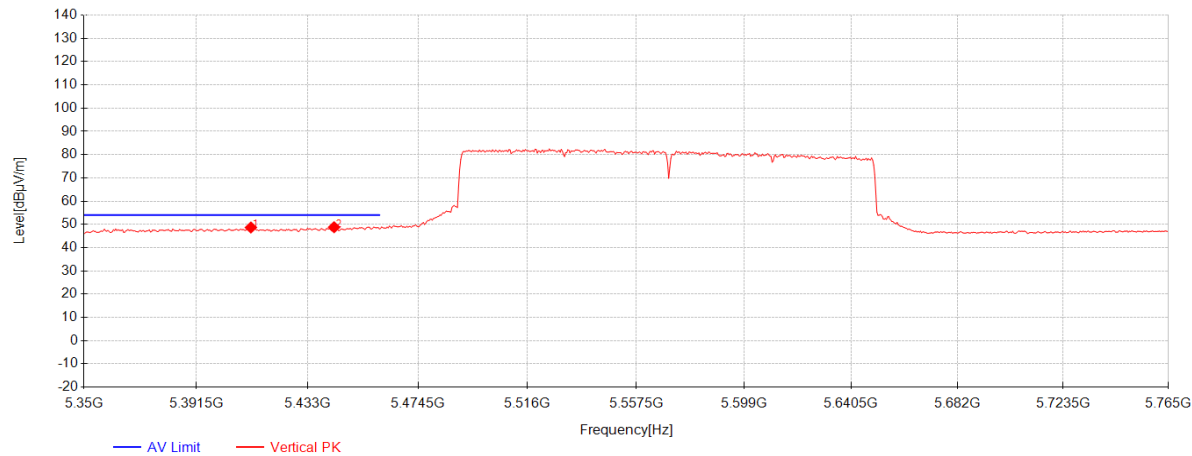


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5411.835	31.30	33.12	-15.75	48.67	54.00	5.33	Vertical
2	5442.96	31.23	33.11	-15.58	48.77	54.00	5.23	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 482 of 535

802.11ax20 MIMO RU26 Left_Channel 36

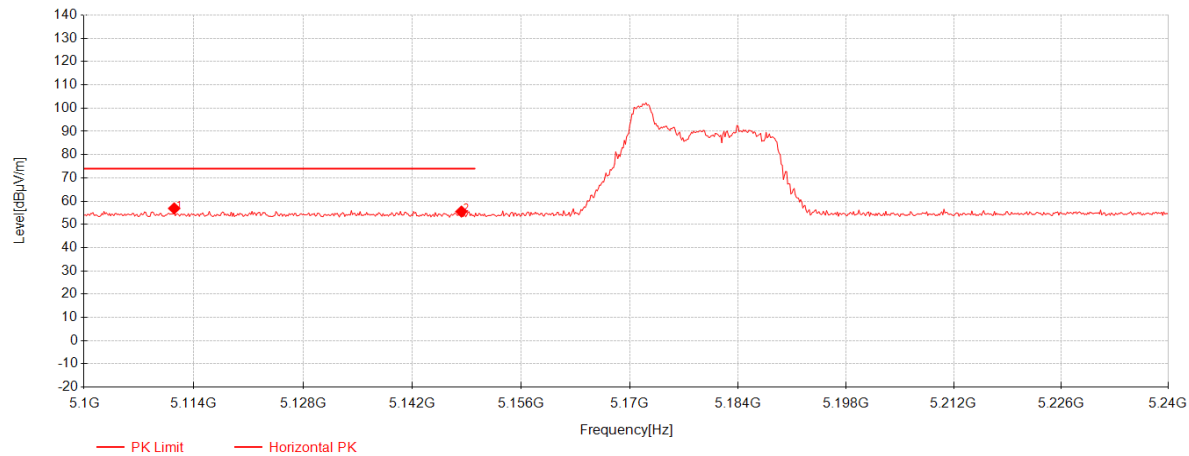


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5111.48	39.82	33.18	-16.13	56.87	74.00	17.13	Horizontal
2	5148.3	38.43	33.17	-16.07	55.53	74.00	18.47	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 483 of 535

802.11ax20 MIMO RU26 Left_Channel 36

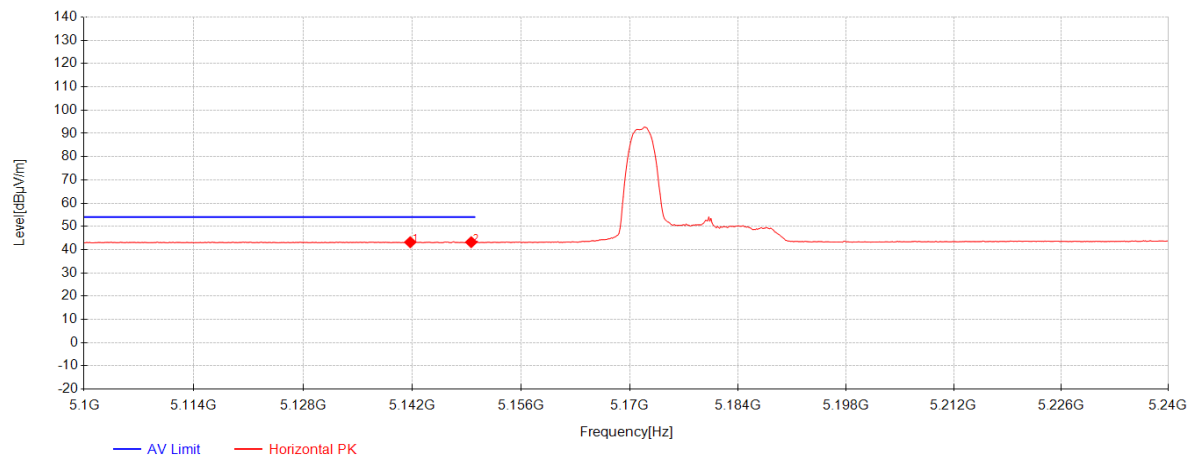


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5141.72	26.10	33.17	-16.08	43.19	54.00	10.81	Horizontal
2	5149.56	26.12	33.17	-16.07	43.22	54.00	10.78	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 484 of 535

802.11ax20 MIMO RU26 Left_Channel 36

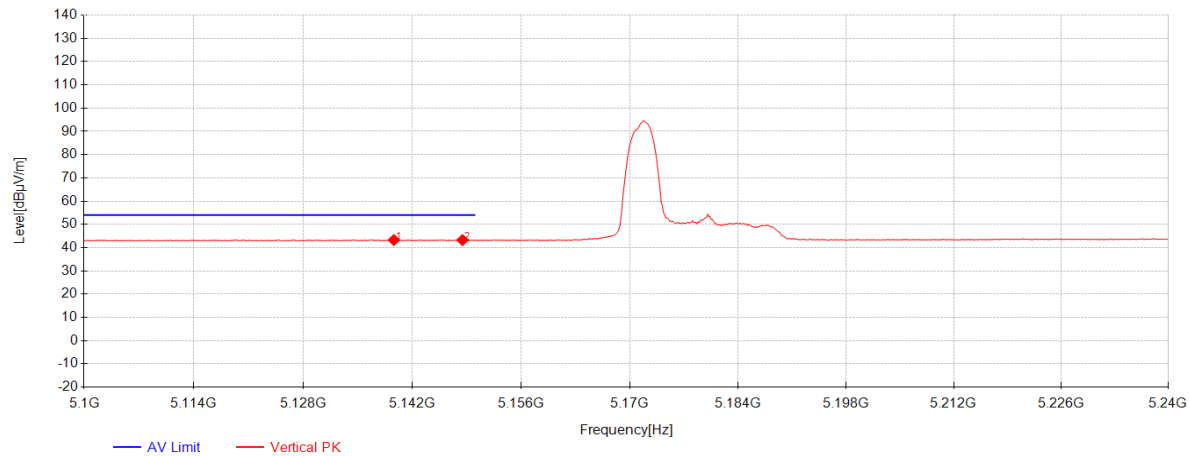


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5139.62	26.20	33.17	-16.08	43.29	54.00	10.71	Vertical
2	5148.44	26.16	33.17	-16.07	43.26	54.00	10.74	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 485 of 535

802.11ax20 MIMO RU26 Left_Channel 36

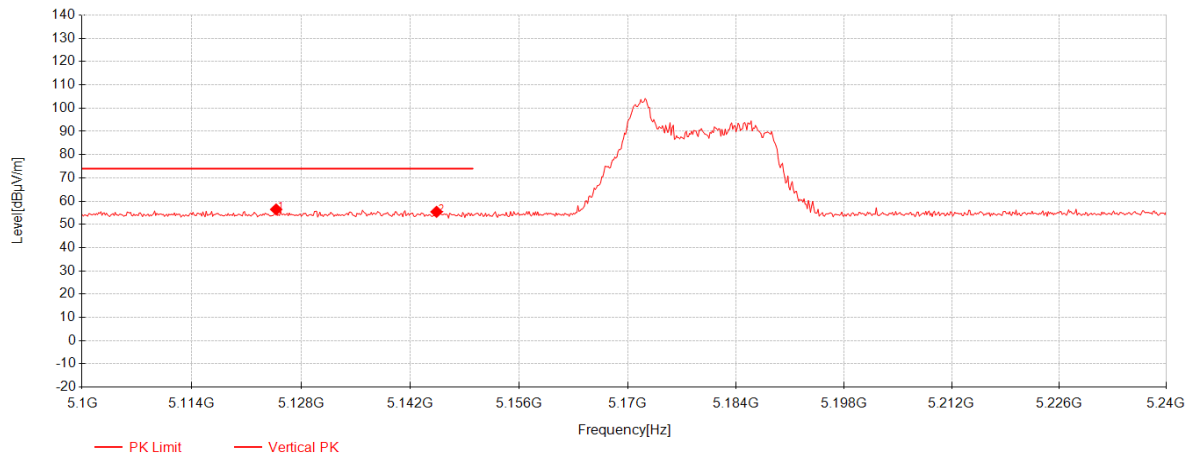


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5124.78	39.36	33.18	-16.11	56.43	74.00	17.57	Vertical
2	5145.36	38.30	33.17	-16.07	55.40	74.00	18.60	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 486 of 535

802.11ax20 MIMO RU26 Right_Channel 64

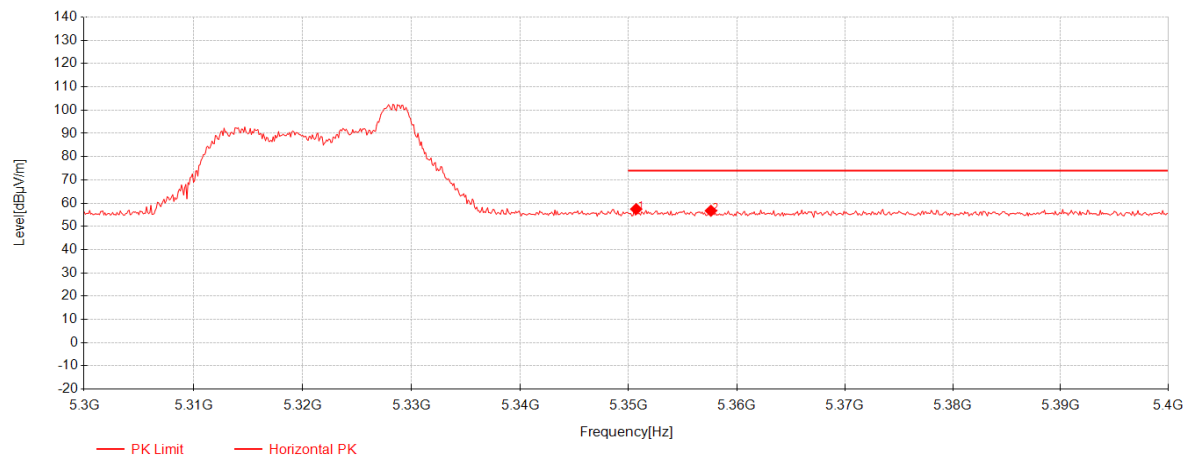

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.7	40.11	33.13	-15.80	57.44	74.00	16.56	Horizontal
2	5357.6	39.38	33.13	-15.80	56.71	74.00	17.29	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 487 of 535

802.11ax20 MIMO RU26 Right_Channel 64

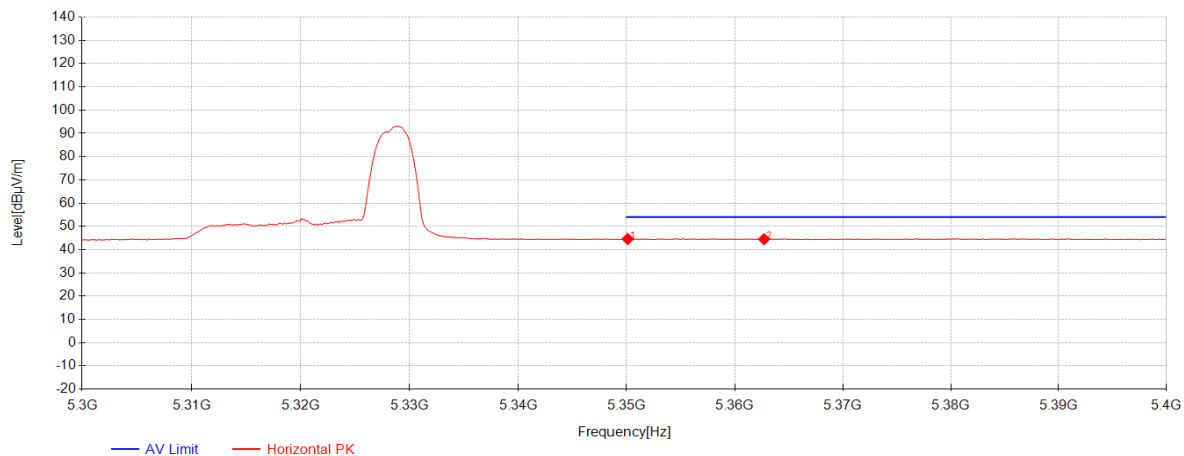


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.1	27.26	33.13	-15.80	44.59	54.00	9.41	Horizontal
2	5362.7	27.19	33.13	-15.80	44.52	54.00	9.48	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 488 of 535

802.11ax20 MIMO RU26 Right_Channel 64

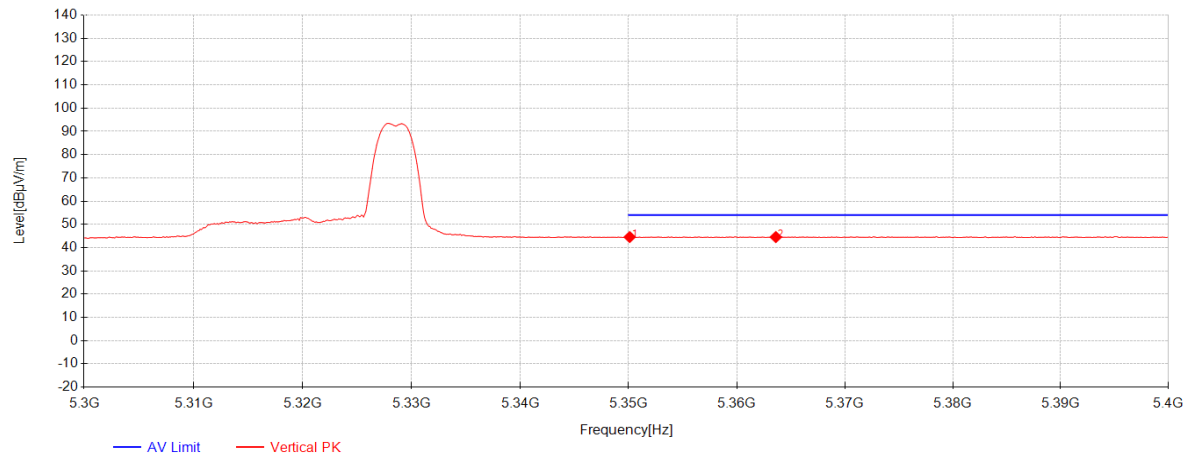


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.1	27.23	33.13	-15.80	44.56	54.00	9.44	Vertical
2	5363.6	27.21	33.13	-15.80	44.54	54.00	9.46	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 489 of 535

802.11ax20 MIMO RU26 Right_Channel 64

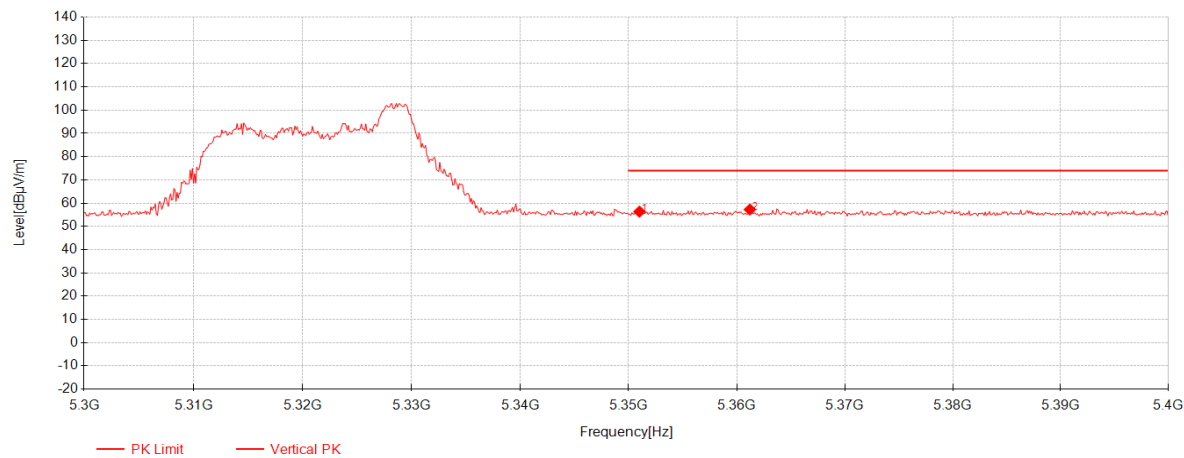


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351	39.01	33.13	-15.80	56.34	74.00	17.66	Vertical
2	5361.2	39.91	33.13	-15.80	57.24	74.00	16.76	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 490 of 535

802.11ax20 MIMO RU26 Left_Channel 100

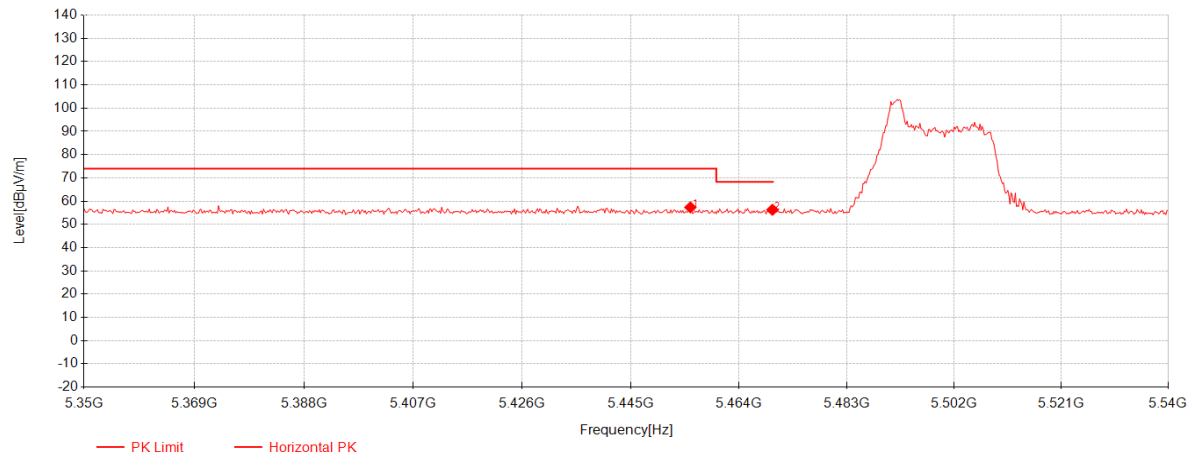


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5455.45	39.73	33.11	-15.50	57.33	74.00	16.67	Horizontal
2	5469.89	38.60	33.11	-15.42	56.28	68.30	12.02	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 491 of 535

802.11ax20 MIMO RU26 Left_Channel 100

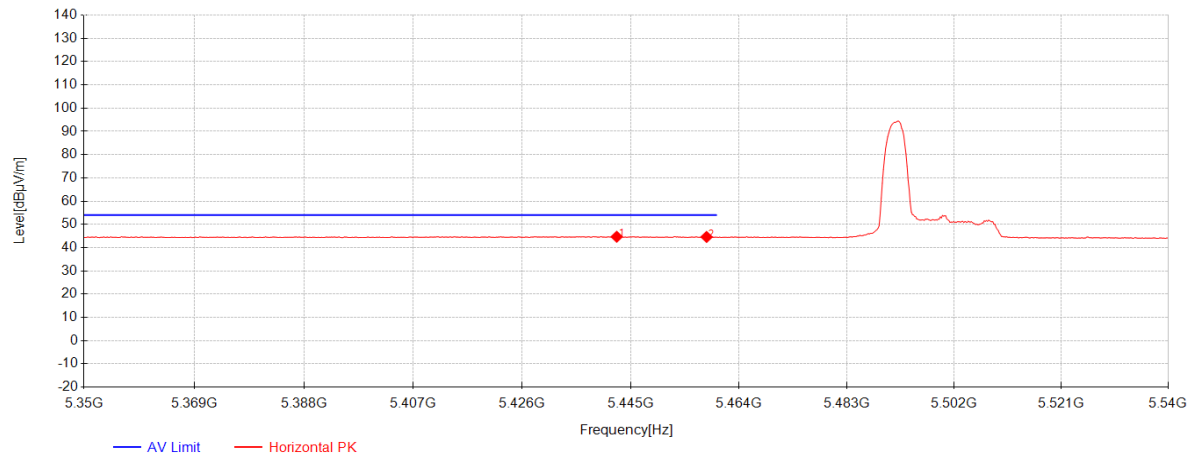


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5442.53	27.14	33.11	-15.58	44.67	54.00	9.33	Horizontal
2	5458.3	26.99	33.11	-15.49	44.61	54.00	9.39	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 492 of 535

802.11ax20 MIMO RU26 Left_Channel 100

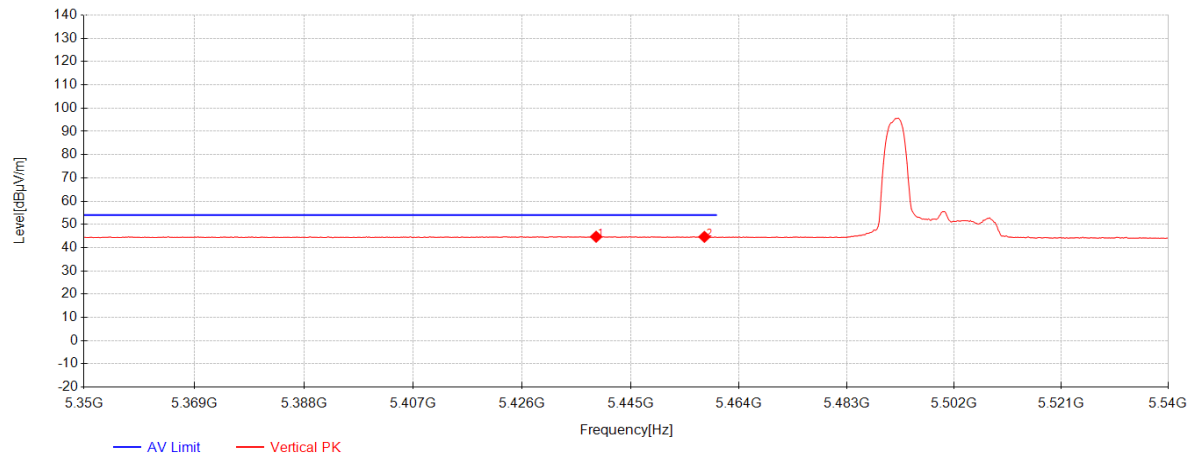


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5438.92	27.16	33.11	-15.60	44.67	54.00	9.33	Vertical
2	5457.92	27.02	33.11	-15.49	44.64	54.00	9.36	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 493 of 535

802.11ax20 MIMO RU26 Left_Channel 100

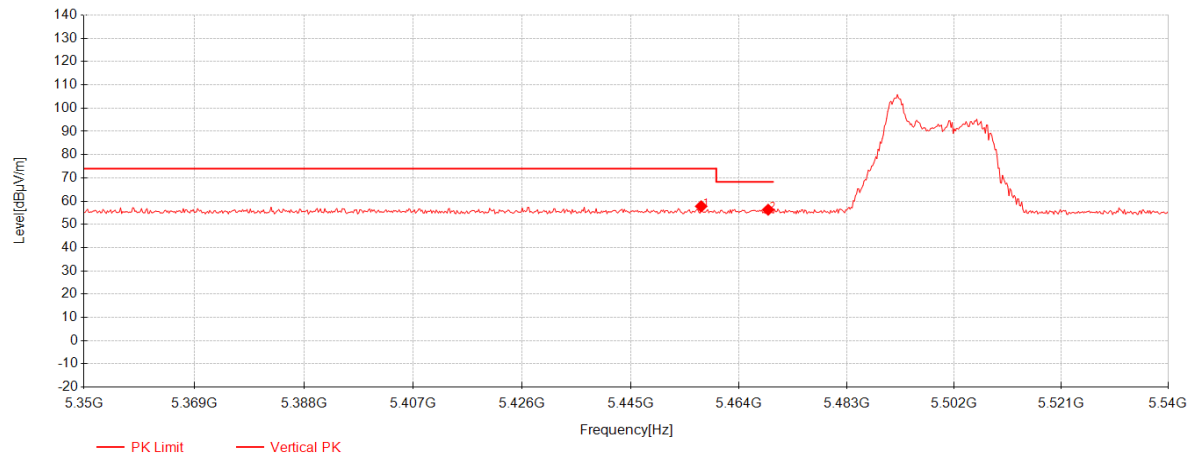


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5457.35	40.15	33.11	-15.49	57.77	74.00	16.23	Vertical
2	5469.13	38.62	33.11	-15.43	56.30	68.30	12.00	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 494 of 535

802.11ax20 MIMO RU26 Right_Channel 140

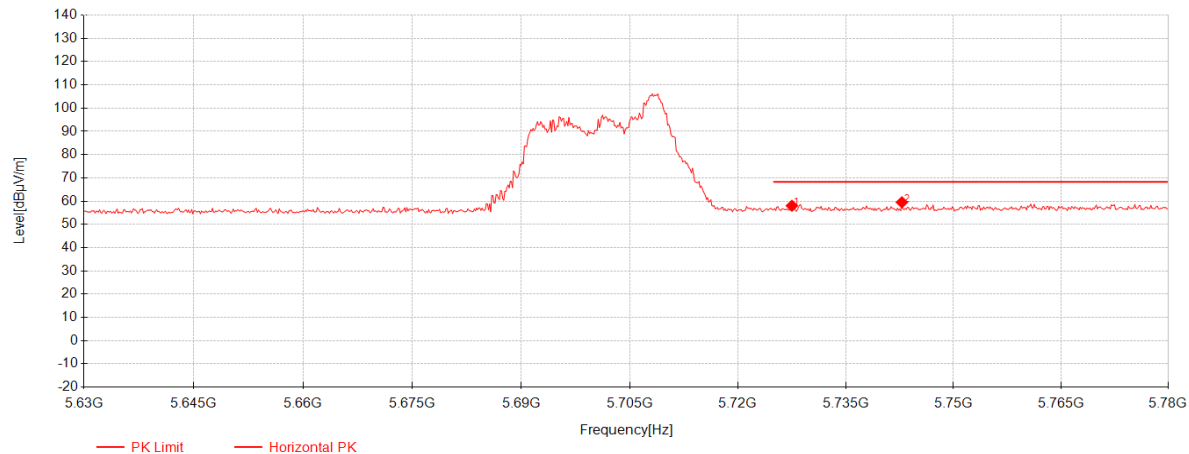


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5727.5	39.10	33.87	-14.94	58.03	68.30	10.27	Horizontal
2	5742.8	40.42	33.93	-14.84	59.51	68.30	8.79	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 495 of 535

802.11ax20 MIMO RU26 Right_Channel 140

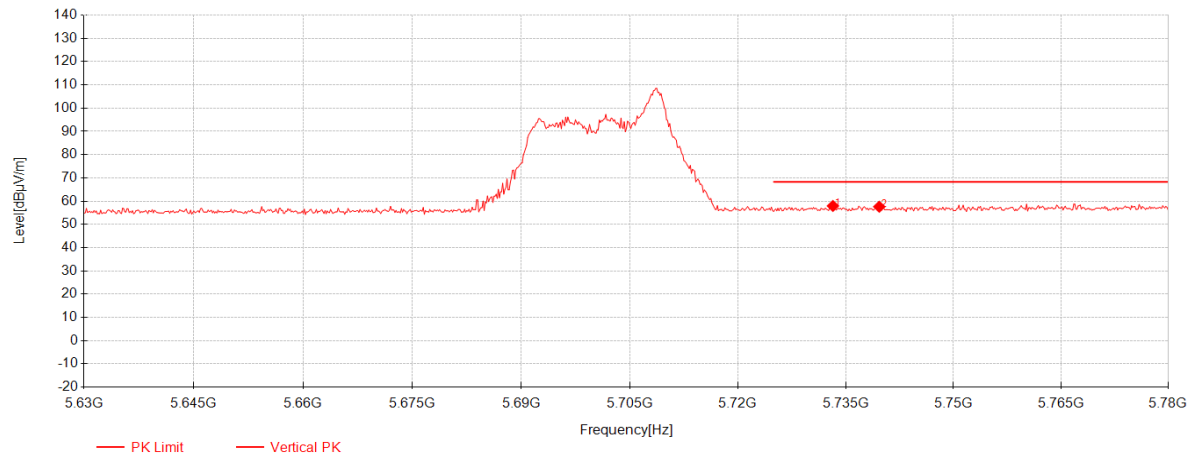


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5733.2	38.93	33.89	-14.90	57.92	68.30	10.38	Vertical
2	5739.65	38.56	33.91	-14.86	57.61	68.30	10.69	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 496 of 535

802.11ax20 MIMO RU26 Left_Channel 149

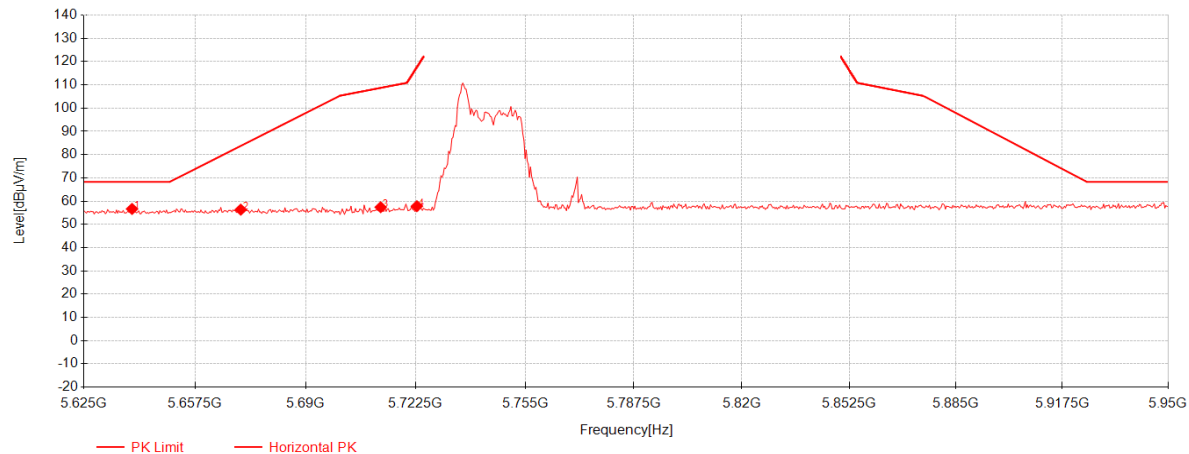

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5638.975	38.31	33.57	-15.24	56.64	68.30	11.66	Horizontal
2	5670.825	37.83	33.68	-15.18	56.33	83.75	27.42	Horizontal
3	5712.1	38.61	33.82	-15.05	57.38	108.69	51.31	Horizontal
4	5722.825	38.95	33.86	-14.97	57.83	117.34	59.51	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 497 of 535

802.11ax20 MIMO RU26 Left_Channel 149

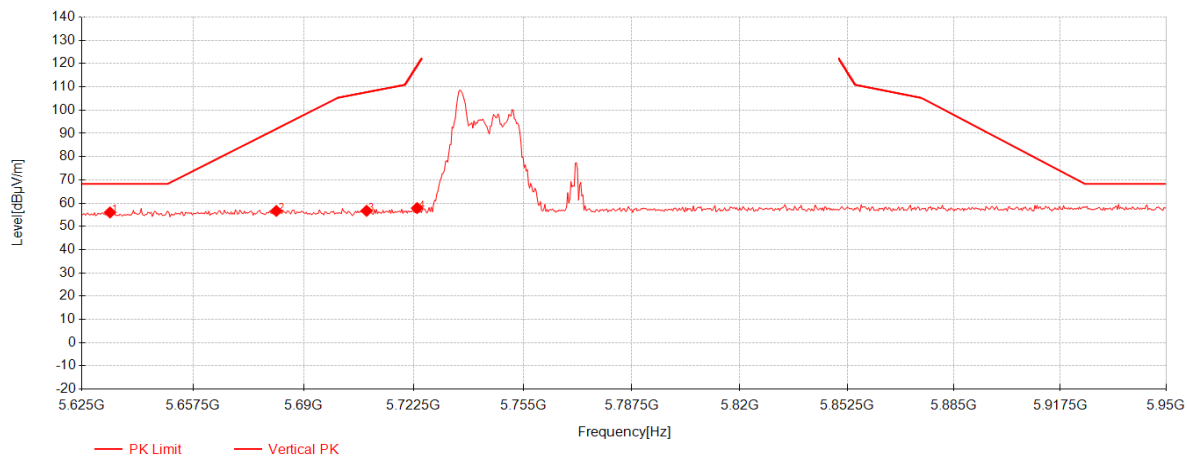


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5633.125	37.70	33.55	-15.25	56.00	68.30	12.30	Vertical
2	5681.875	38.08	33.72	-15.16	56.64	91.93	35.29	Vertical
3	5708.525	37.95	33.81	-15.07	56.69	107.69	51.00	Vertical
4	5723.475	38.99	33.86	-14.97	57.88	118.82	60.94	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 498 of 535

802.11ax20 MIMO RU26 Right_Channel 165

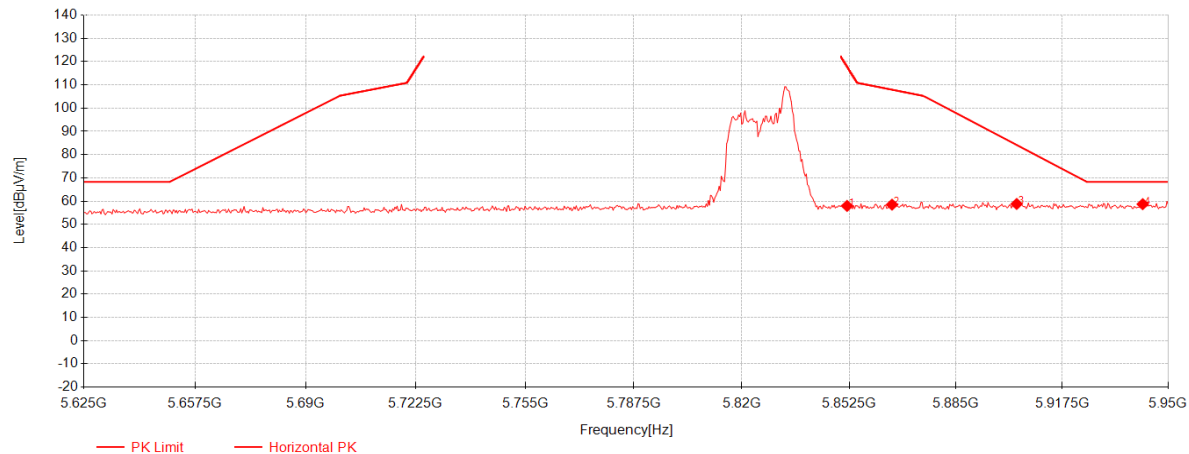


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.85	38.16	34.30	-14.49	57.96	118.08	60.12	Horizontal
2	5865.5	38.66	34.34	-14.50	58.50	107.96	49.46	Horizontal
3	5903.525	38.86	34.47	-14.53	58.80	84.15	25.35	Horizontal
4	5942.2	38.65	34.60	-14.54	58.71	68.30	9.59	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 499 of 535

802.11ax20 MIMO RU26 Right_Channel 165

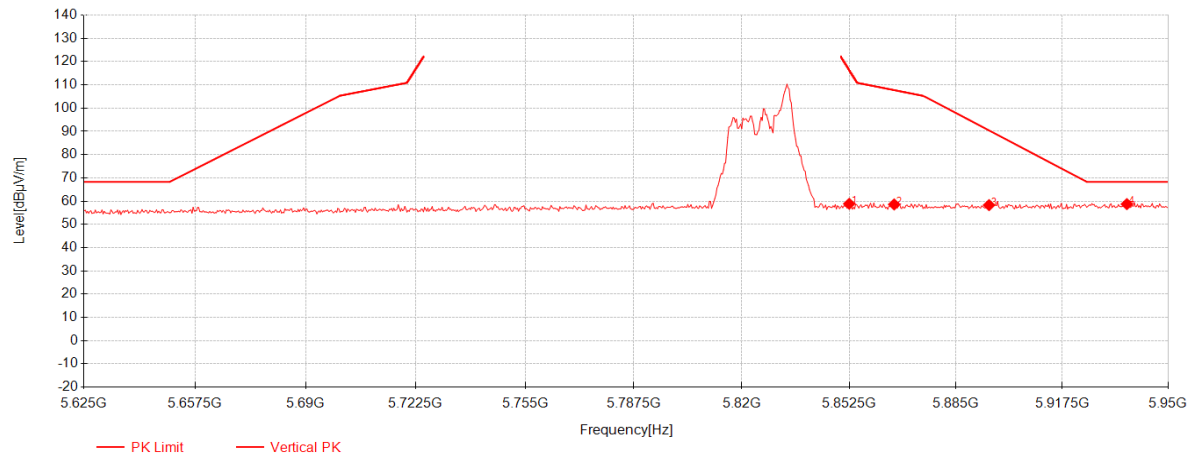


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5852.5	39.04	34.30	-14.49	58.85	116.60	57.75	Vertical
2	5866.15	38.74	34.34	-14.50	58.58	107.78	49.20	Vertical
3	5895.075	38.36	34.44	-14.53	58.28	90.41	32.13	Vertical
4	5937.325	38.68	34.59	-14.54	58.73	68.30	9.57	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 500 of 535

802.11ax20 MIMO RU52 Left_Channel 36

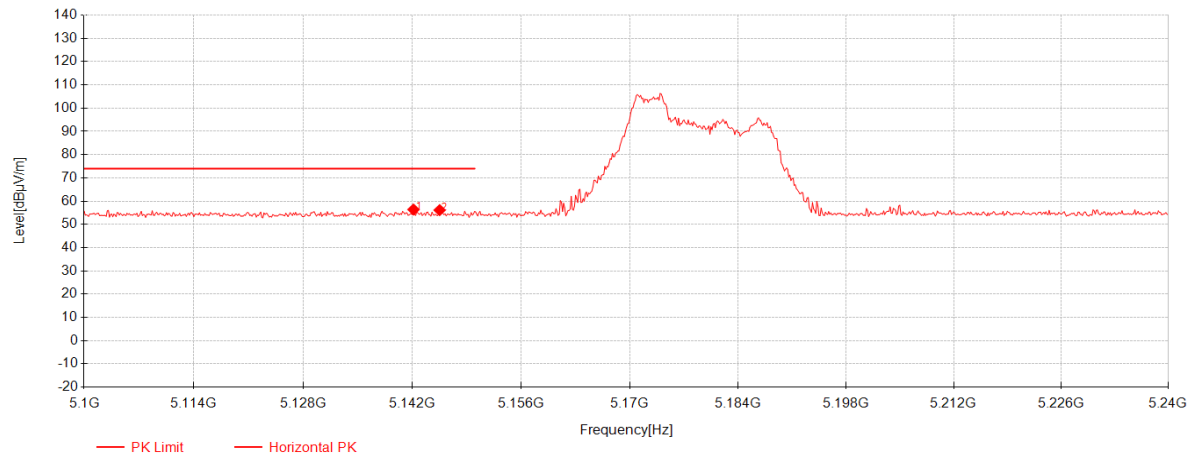


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5142.14	39.29	33.17	-16.08	56.38	74.00	17.62	Horizontal
2	5145.5	39.04	33.17	-16.07	56.14	74.00	17.86	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 501 of 535

802.11ax20 MIMO RU52 Left_Channel 36

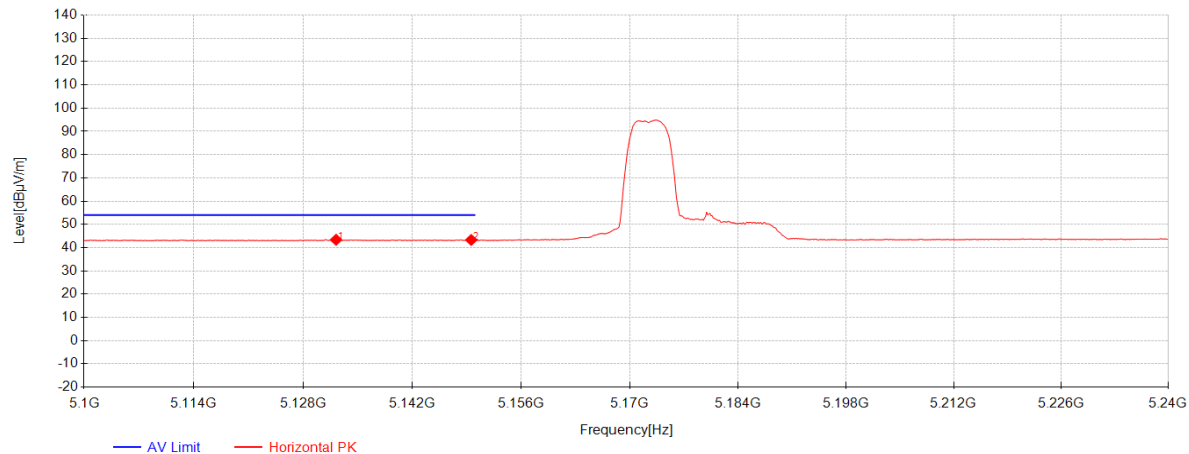


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5132.2	26.31	33.17	-16.10	43.39	54.00	10.61	Horizontal
2	5149.56	26.21	33.17	-16.07	43.31	54.00	10.69	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 502 of 535

802.11ax20 MIMO RU52 Left_Channel 36

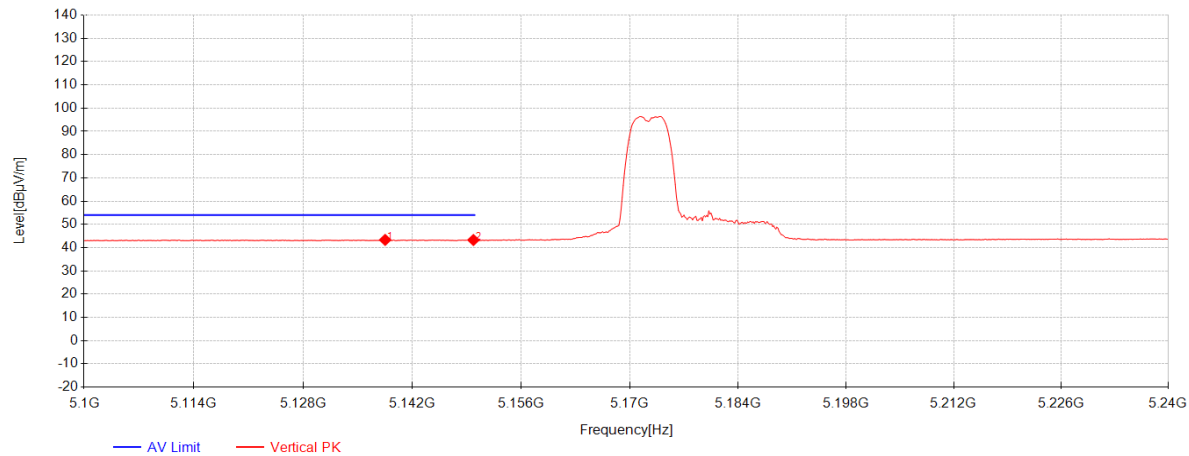


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5138.5	26.24	33.17	-16.08	43.33	54.00	10.67	Vertical
2	5149.84	26.19	33.17	-16.07	43.29	54.00	10.71	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 503 of 535

802.11ax20 MIMO RU52 Left_Channel 36

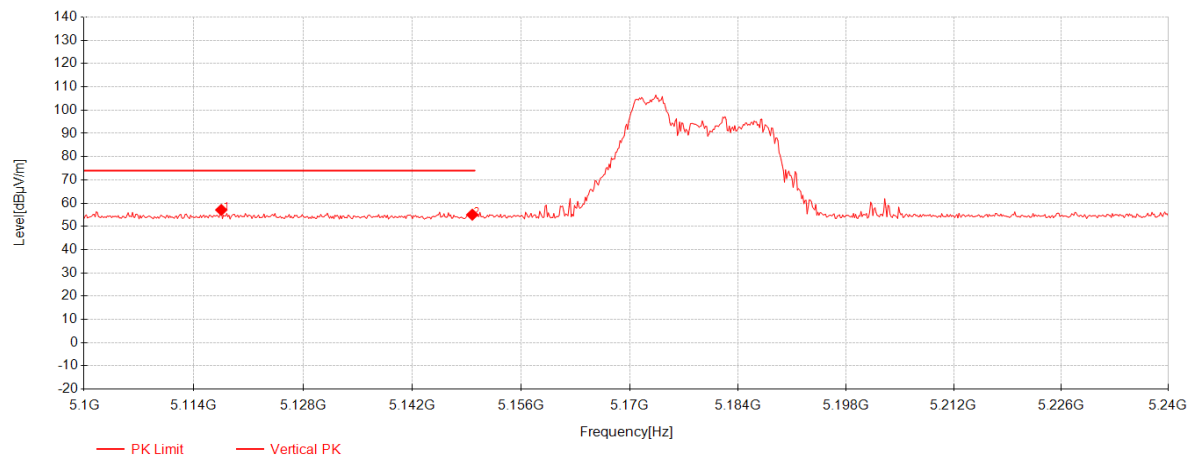


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5117.5	40.01	33.18	-16.12	57.07	74.00	16.93	Vertical
2	5149.7	37.93	33.17	-16.07	55.03	74.00	18.97	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 504 of 535

802.11ax20 MIMO RU52 Right_Channel 64

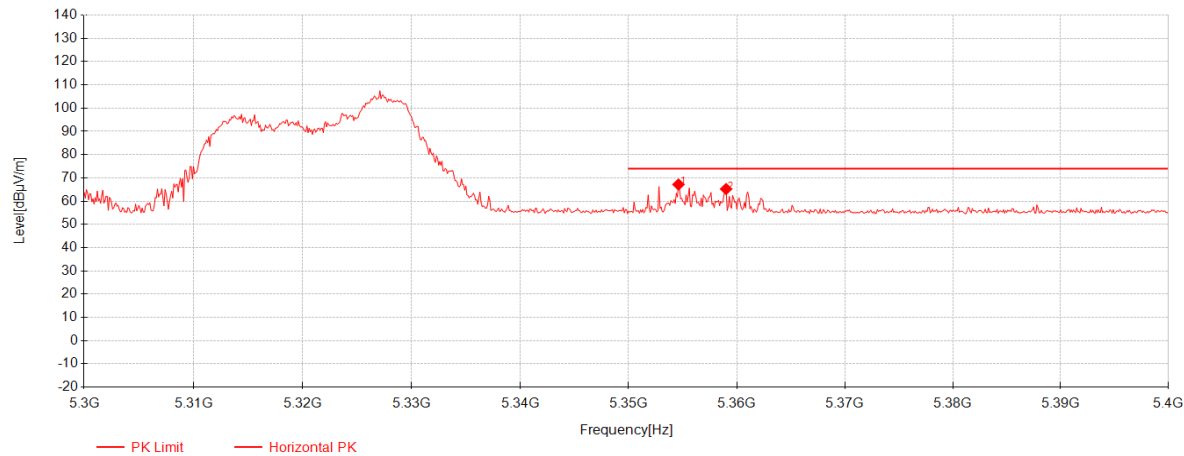


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5354.6	49.84	33.13	-15.80	67.17	74.00	6.83	Horizontal
2	5359	47.88	33.13	-15.80	65.21	74.00	8.79	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 505 of 535

802.11ax20 MIMO RU52 Right_Channel 64

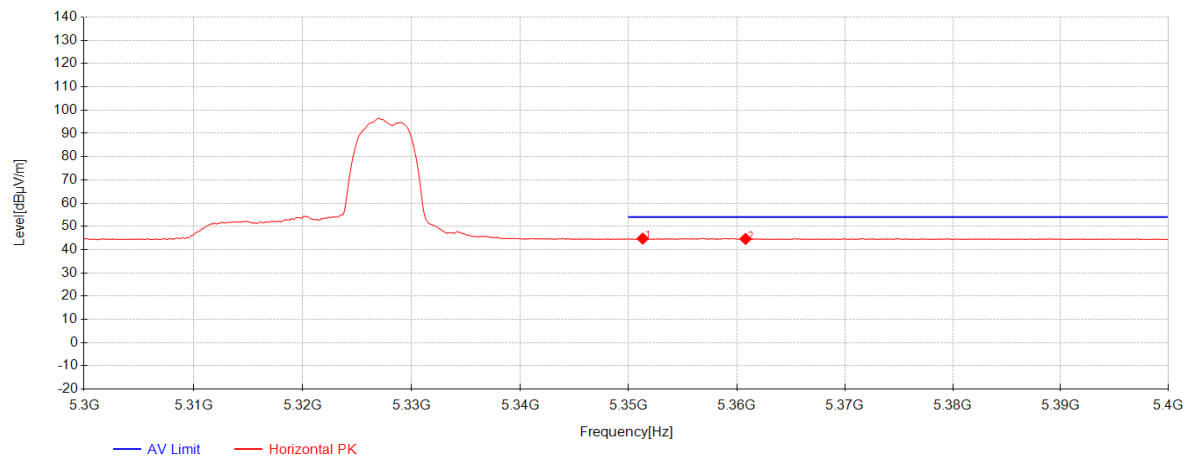


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351.3	27.43	33.13	-15.80	44.76	54.00	9.24	Horizontal
2	5360.8	27.28	33.13	-15.80	44.61	54.00	9.39	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 506 of 535

802.11ax20 MIMO RU52 Right_Channel 64

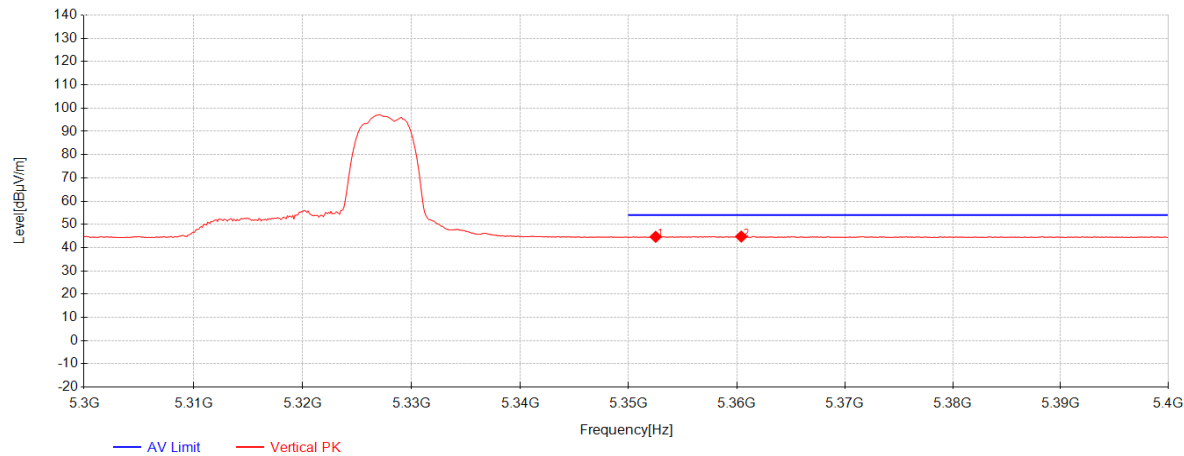


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5352.5	27.33	33.13	-15.80	44.66	54.00	9.34	Vertical
2	5360.4	27.45	33.13	-15.80	44.78	54.00	9.22	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 507 of 535

802.11ax20 MIMO RU52 Right_Channel 64

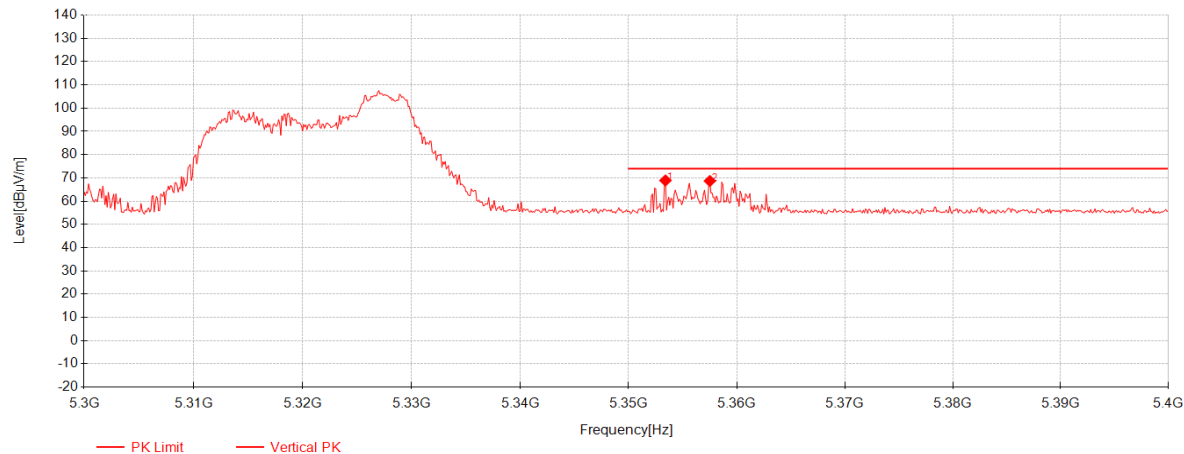


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5353.4	51.57	33.13	-15.80	68.90	74.00	5.10	Vertical
2	5357.5	51.34	33.13	-15.80	68.67	74.00	5.33	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 508 of 535

802.11ax20 MIMO RU52 Left_Channel 100

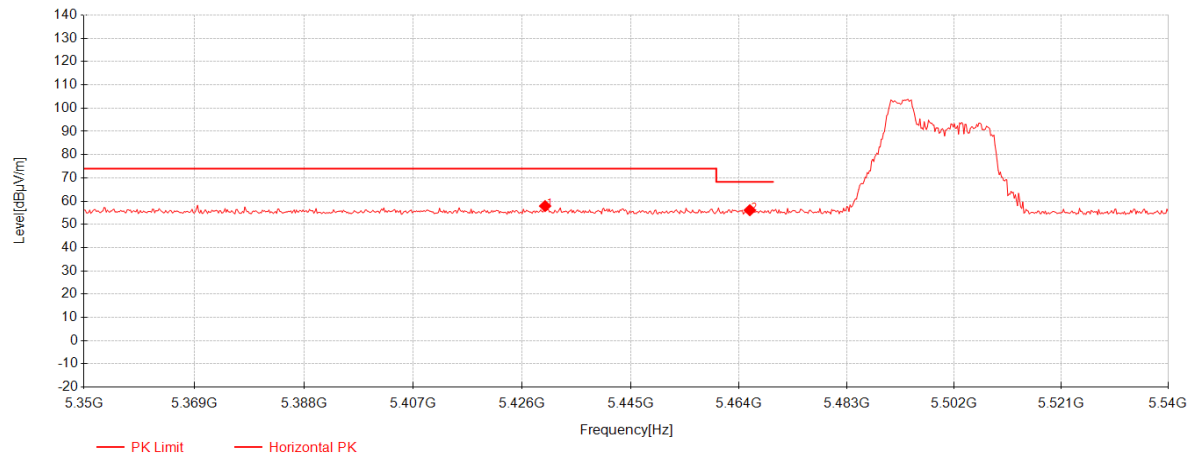


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5429.99	40.42	33.11	-15.65	57.88	74.00	16.12	Horizontal
2	5465.9	38.43	33.11	-15.44	56.09	68.30	12.21	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 509 of 535

802.11ax20 MIMO RU52 Left_Channel 100

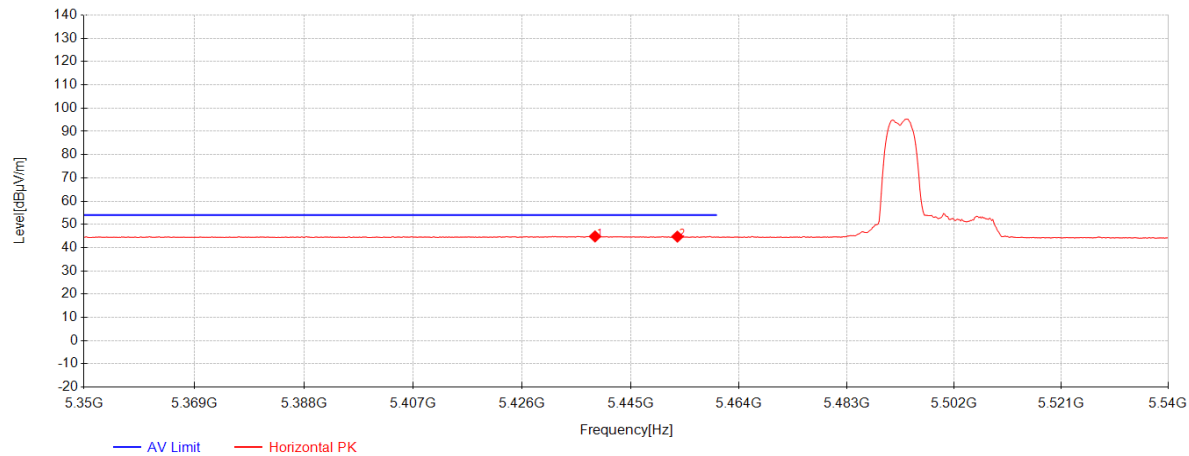


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5438.73	27.30	33.11	-15.60	44.81	54.00	9.19	Horizontal
2	5453.17	27.14	33.11	-15.52	44.73	54.00	9.27	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 510 of 535

802.11ax20 MIMO RU52 Left_Channel 100

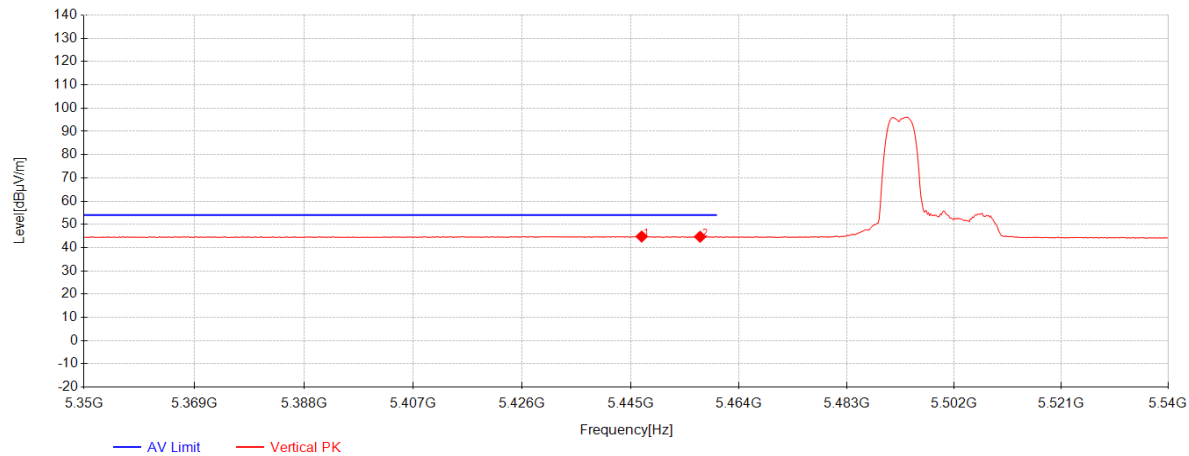


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5446.9	27.22	33.11	-15.55	44.78	54.00	9.22	Vertical
2	5457.16	27.09	33.11	-15.49	44.70	54.00	9.30	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 511 of 535

802.11ax20 MIMO RU52 Left_Channel 100

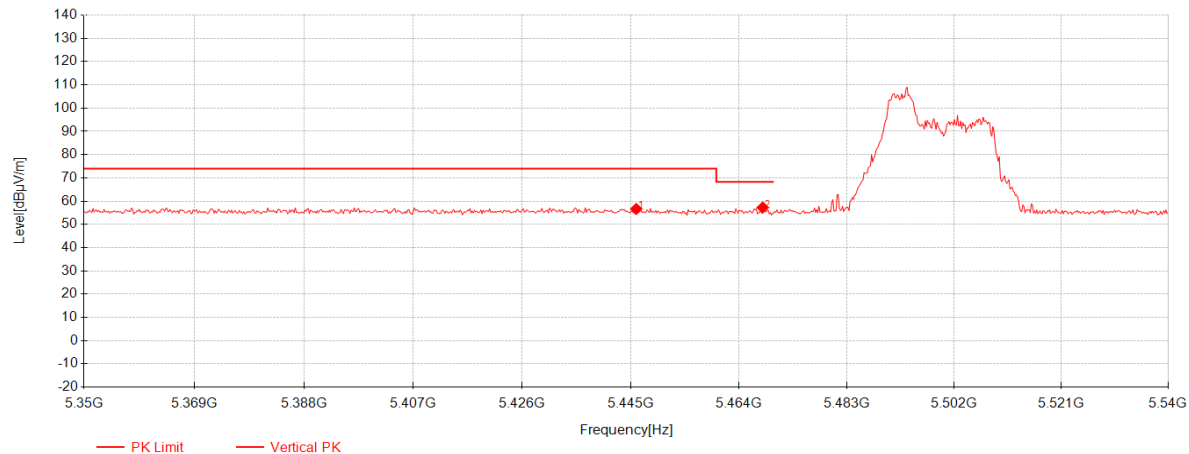


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5445.95	39.06	33.11	-15.56	56.61	74.00	17.39	Vertical
2	5468.18	39.58	33.11	-15.43	57.25	68.30	11.05	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 512 of 535

802.11ax20 MIMO RU52 Right_Channel 140

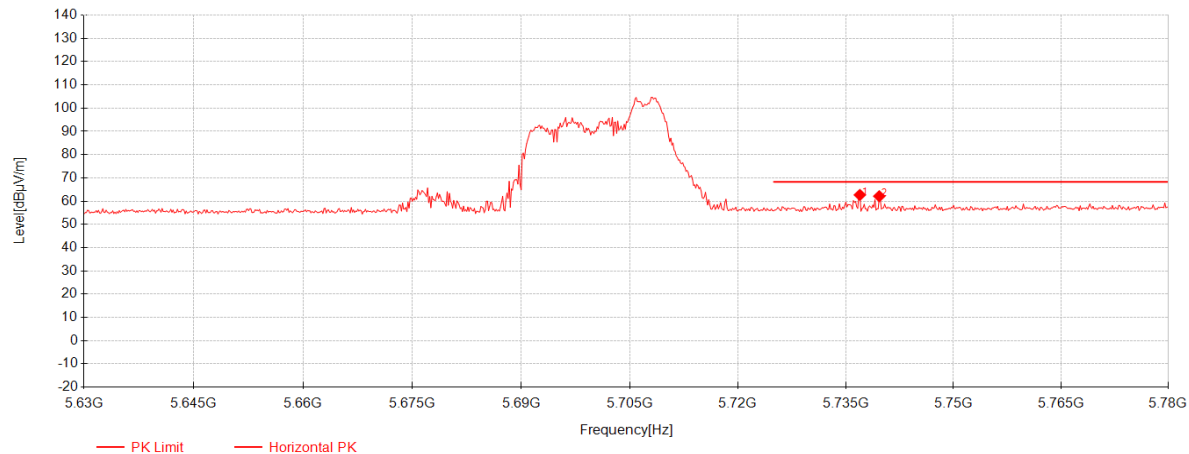


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5736.95	43.63	33.91	-14.88	62.66	68.30	5.64	Horizontal
2	5739.65	43.07	33.91	-14.86	62.12	68.30	6.18	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 513 of 535

802.11ax20 MIMO RU52 Right_Channel 140

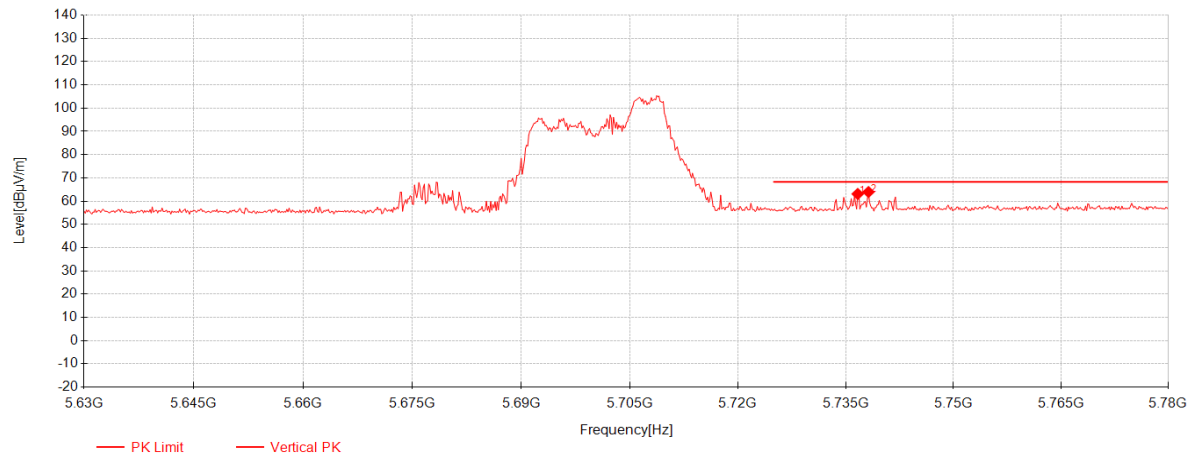


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5736.65	44.08	33.90	-14.88	63.10	68.30	5.20	Vertical
2	5738.15	44.90	33.91	-14.87	63.94	68.30	4.36	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 514 of 535

802.11ax20 MIMO RU52 Right_Channel 149

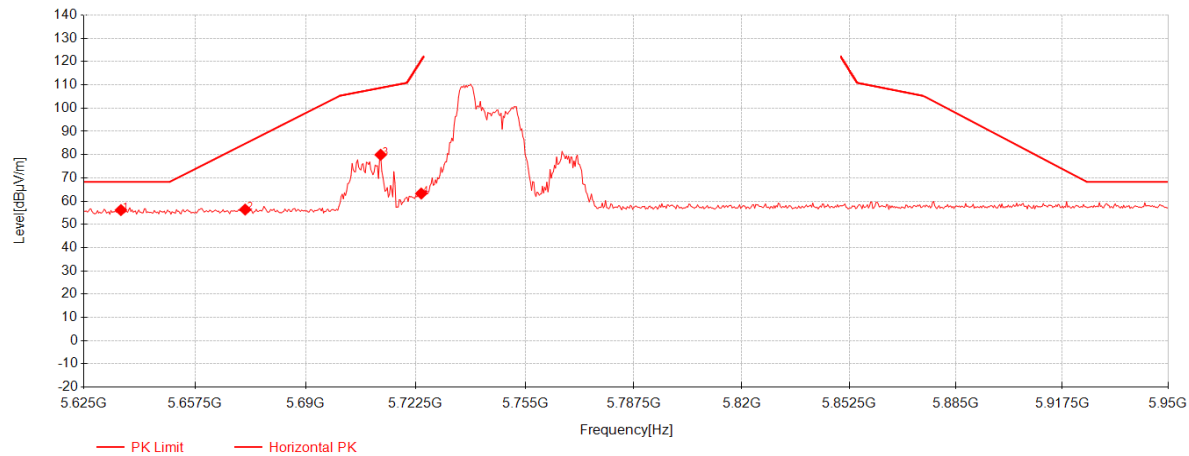


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5635.725	37.84	33.56	-15.25	56.16	68.30	12.14	Horizontal
2	5672.125	37.86	33.69	-15.18	56.37	84.71	28.34	Horizontal
3	5712.1	61.16	33.82	-15.05	79.93	108.69	28.76	Horizontal
4	5724.125	44.37	33.86	-14.97	63.27	120.31	57.04	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 515 of 535

802.11ax20 MIMO RU52 Right_Channel 149

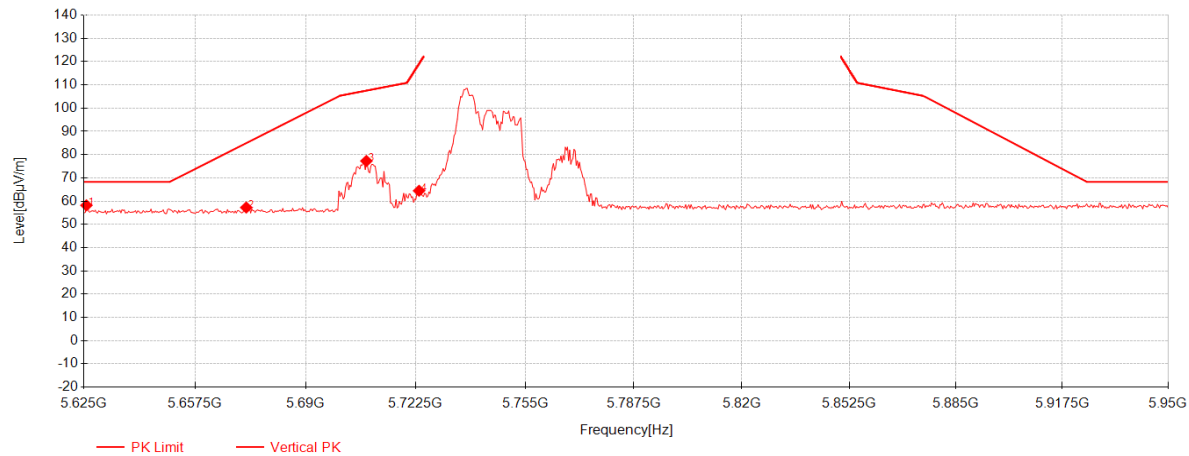

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5625.65	39.95	33.53	-15.26	58.21	68.30	10.09	Vertical
2	5672.45	38.74	33.69	-15.18	57.25	84.95	27.70	Vertical
3	5707.875	58.53	33.81	-15.08	77.26	107.51	30.25	Vertical
4	5723.475	45.58	33.86	-14.97	64.47	118.82	54.35	Vertical




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 516 of 535

802.11ax20 MIMO RU52 Right_Channel 165

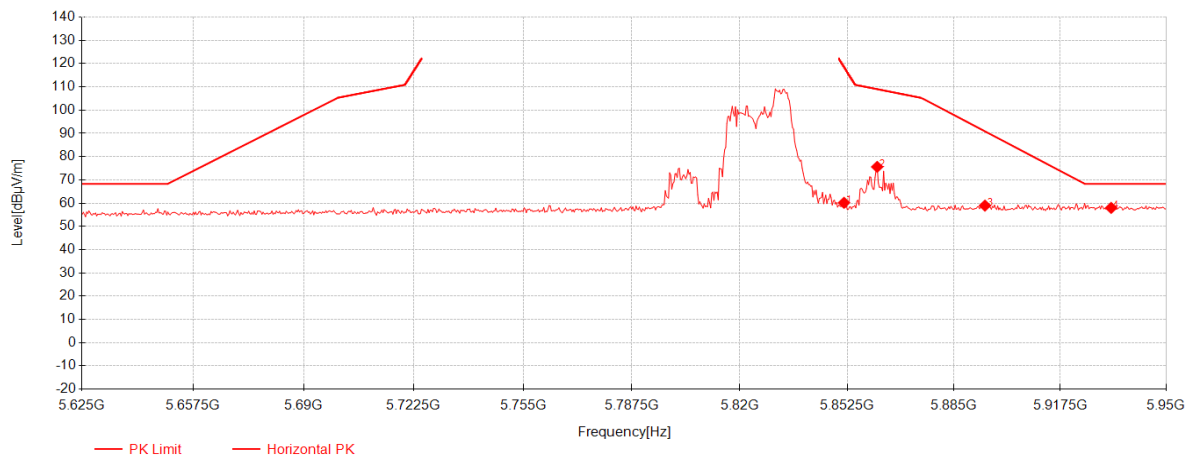


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.525	40.36	34.30	-14.49	60.16	118.82	58.66	Horizontal
2	5861.6	55.78	34.33	-14.50	75.61	109.05	33.44	Horizontal
3	5894.425	39.01	34.44	-14.53	58.93	90.89	31.96	Horizontal
4	5933.1	37.92	34.57	-14.54	57.95	68.30	10.35	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 517 of 535

802.11ax20 MIMO RU52 Right_Channel 165

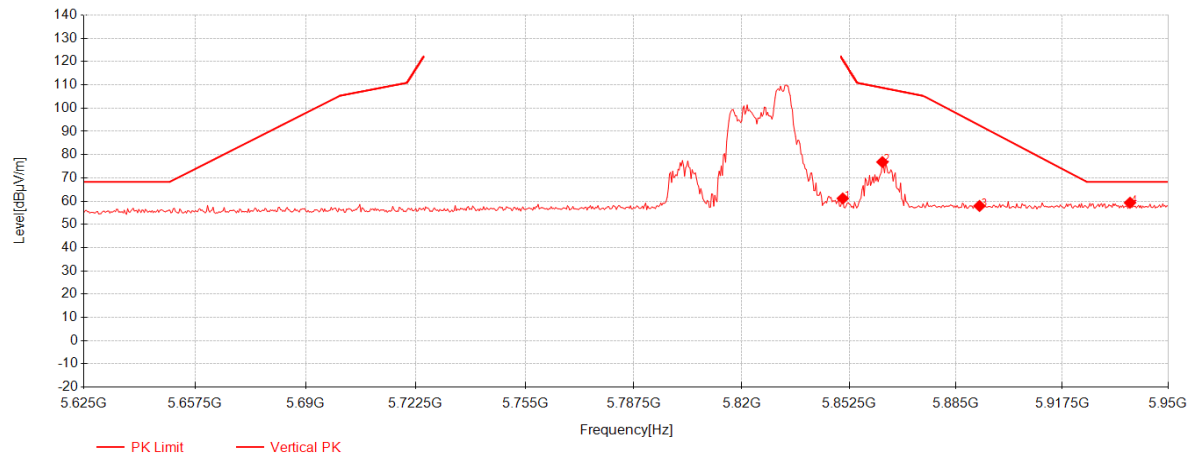


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5850.55	41.34	34.29	-14.49	61.14	121.05	59.91	Vertical
2	5862.575	56.97	34.33	-14.50	76.80	108.78	31.98	Vertical
3	5892.15	38.03	34.43	-14.52	57.94	92.57	34.63	Vertical
4	5938.3	39.26	34.59	-14.54	59.31	68.30	8.99	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 518 of 535

802.11ax20 MIMO RU106 Left_Channel 36

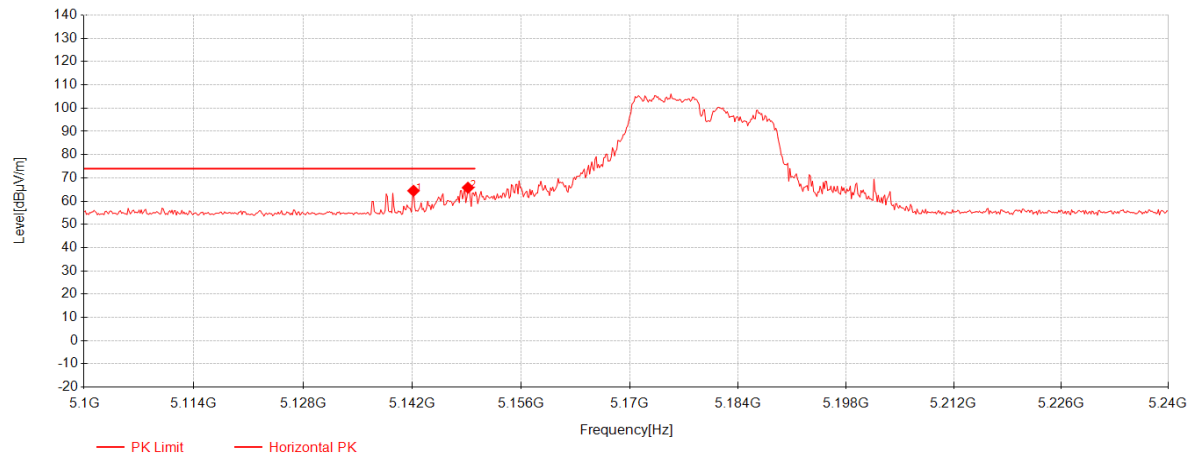


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5142.14	47.36	33.17	-16.08	64.45	74.00	9.55	Horizontal
2	5149.14	48.67	33.17	-16.07	65.77	74.00	8.23	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 519 of 535

802.11ax20 MIMO RU106 Left_Channel 36

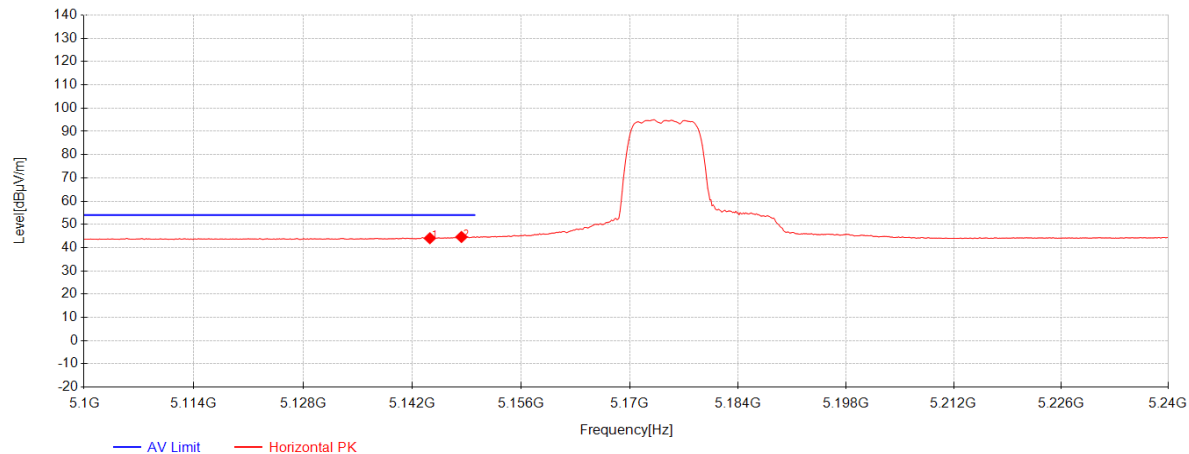


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5144.24	26.94	33.17	-16.07	44.04	54.00	9.96	Horizontal
2	5148.3	27.49	33.17	-16.07	44.59	54.00	9.41	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 520 of 535

802.11ax20 MIMO RU106 Left_Channel 36

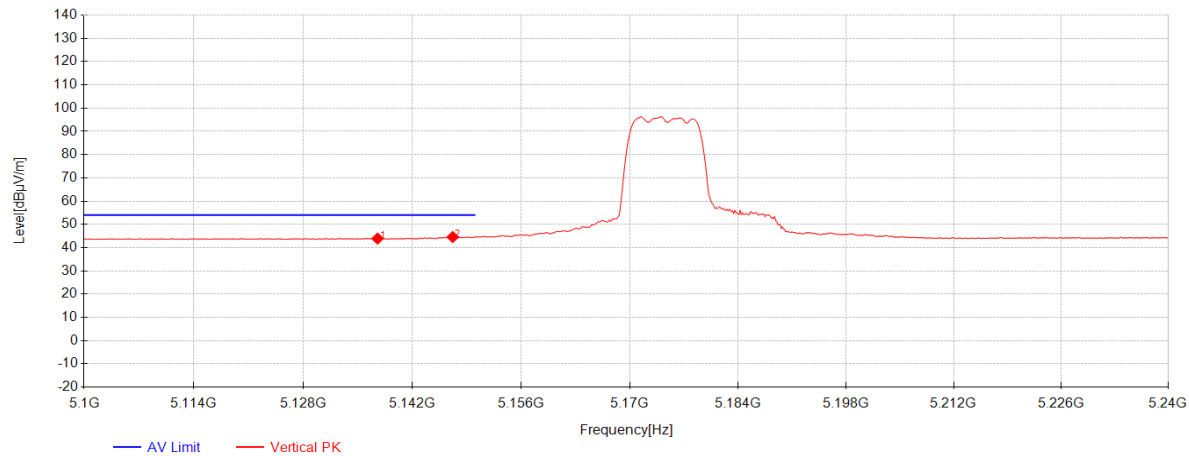


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5137.52	26.80	33.17	-16.09	43.89	54.00	10.11	Vertical
2	5147.18	27.47	33.17	-16.07	44.57	54.00	9.43	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 521 of 535

802.11ax20 MIMO RU106 Left_Channel 36

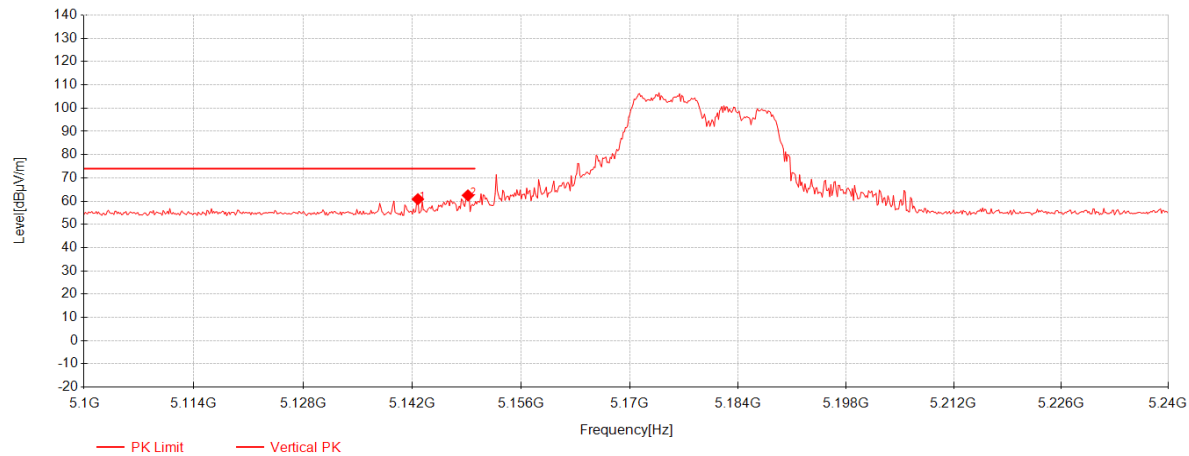


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5142.7	43.74	33.17	-16.08	60.83	74.00	13.17	Vertical
2	5149.14	45.37	33.17	-16.07	62.47	74.00	11.53	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 522 of 535

802.11ax20 MIMO RU106 Right_Channel 64

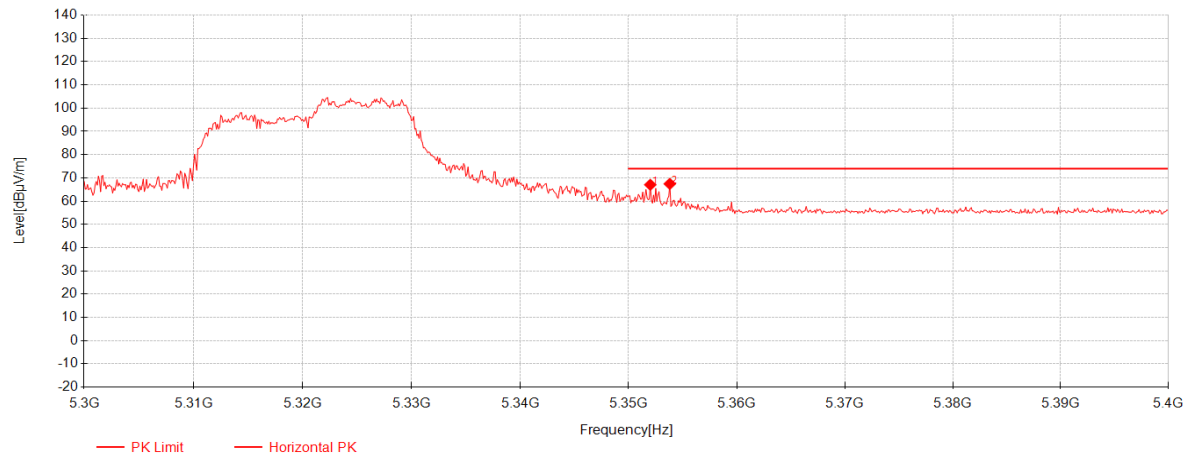


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5352	49.70	33.13	-15.80	67.03	74.00	6.97	Horizontal
2	5353.8	50.10	33.13	-15.80	67.43	74.00	6.57	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 523 of 535

802.11ax20 MIMO RU106 Right_Channel 64

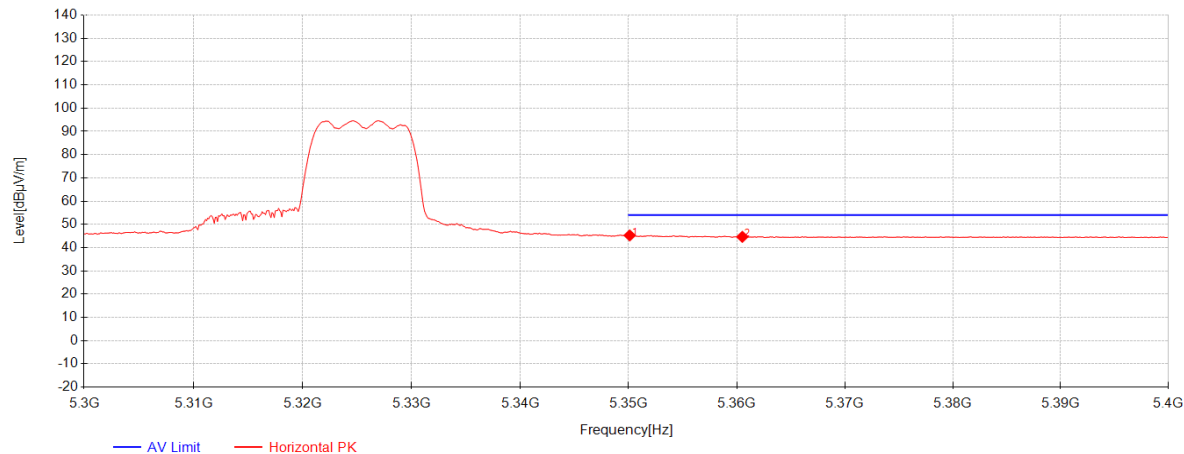


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.1	27.92	33.13	-15.80	45.25	54.00	8.75	Horizontal
2	5360.5	27.32	33.13	-15.80	44.65	54.00	9.35	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 524 of 535

802.11ax20 MIMO RU106 Right_Channel 64

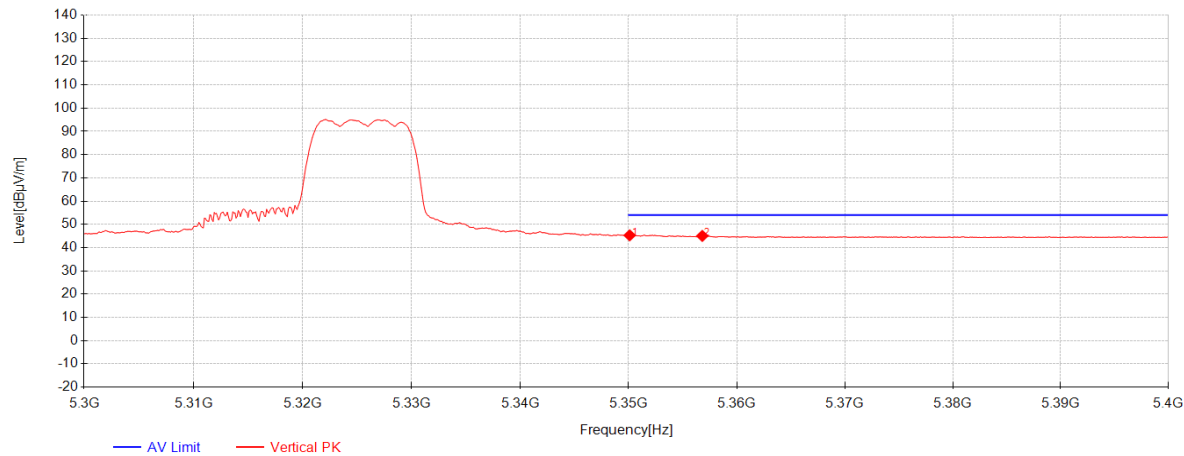


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.1	27.96	33.13	-15.80	45.29	54.00	8.71	Vertical
2	5356.8	27.71	33.13	-15.80	45.04	54.00	8.96	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 525 of 535

802.11ax20 MIMO RU106 Right_Channel 64

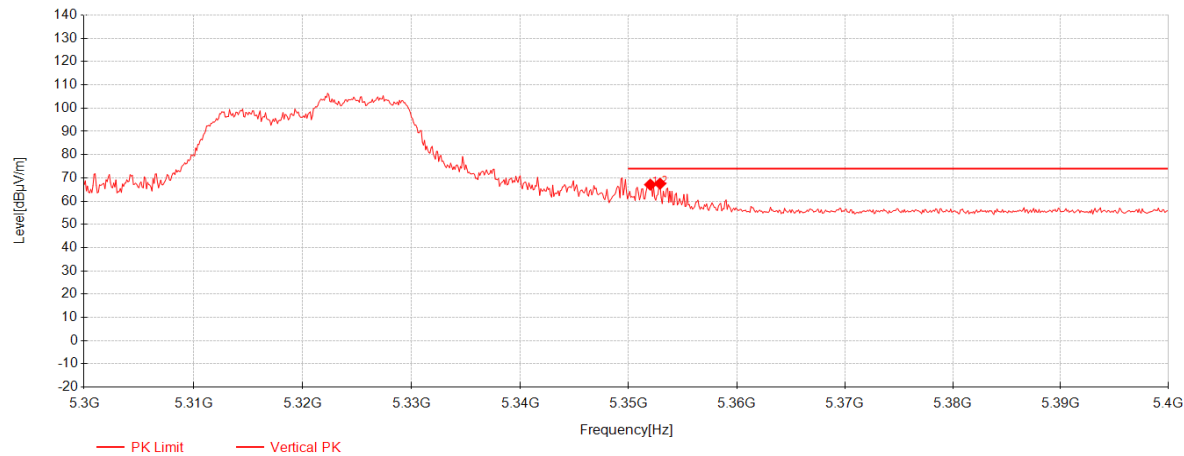


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5352	49.76	33.13	-15.80	67.09	74.00	6.91	Vertical
2	5352.9	50.21	33.13	-15.80	67.54	74.00	6.46	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 526 of 535

802.11ax20 MIMO RU106 Left_Channel 100

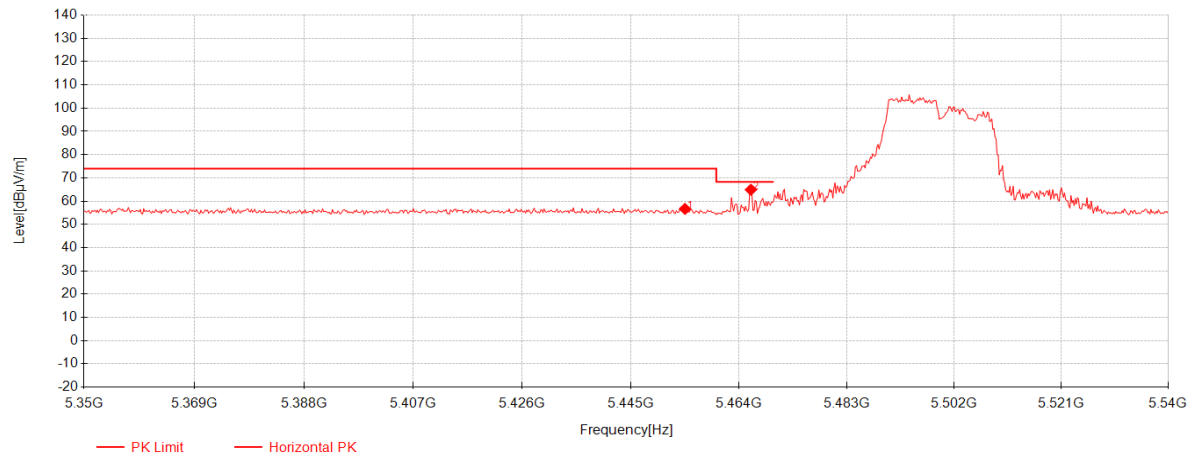


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5454.5	39.06	33.11	-15.51	56.66	74.00	17.34	Horizontal
2	5466.09	47.26	33.11	-15.44	64.92	68.30	3.38	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 527 of 535

802.11ax20 MIMO RU106 Left_Channel 100

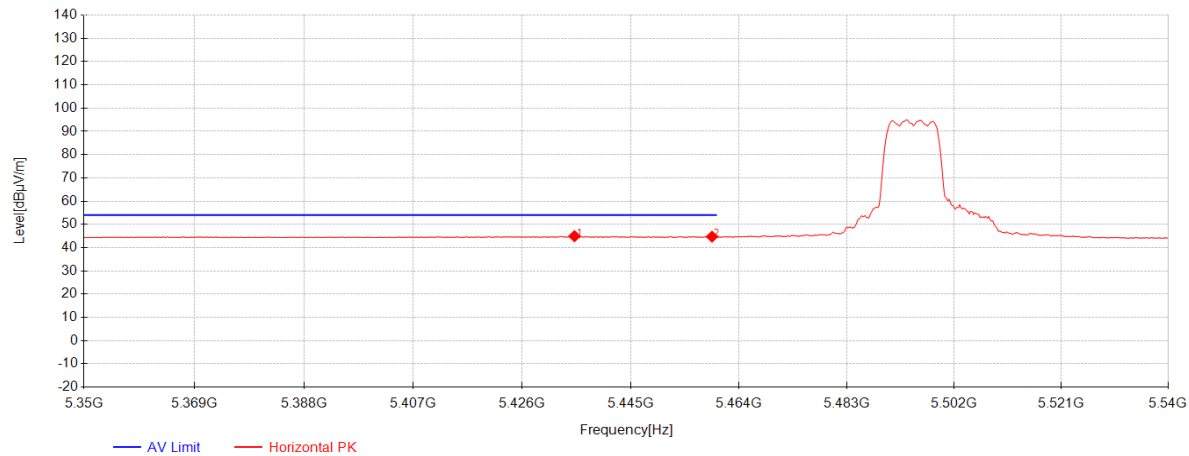


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5435.12	27.44	33.11	-15.62	44.93	54.00	9.07	Horizontal
2	5459.25	27.09	33.11	-15.48	44.72	54.00	9.28	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 528 of 535

802.11ax20 MIMO RU106 Left_Channel 100

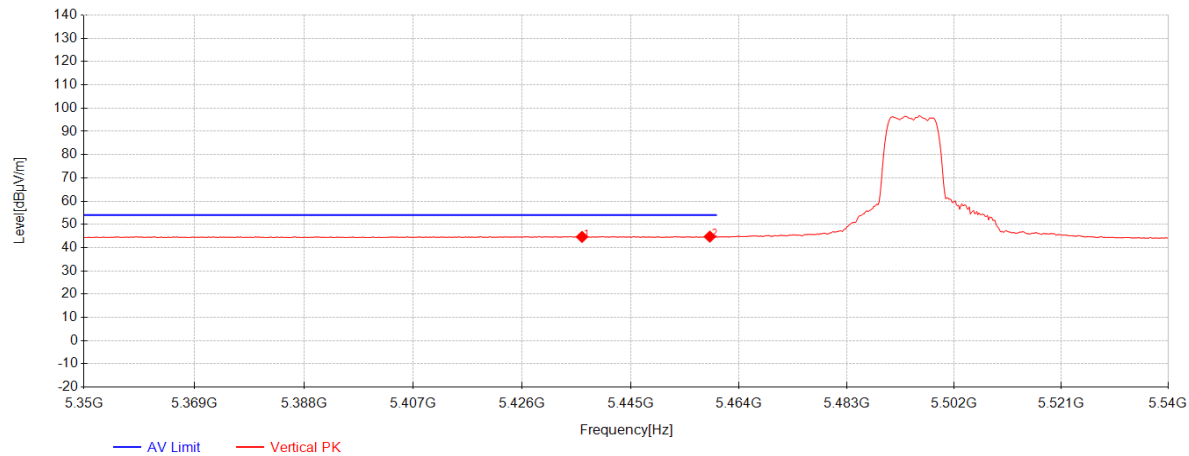


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5436.45	27.13	33.11	-15.61	44.63	54.00	9.37	Vertical
2	5458.87	27.12	33.11	-15.48	44.74	54.00	9.26	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 529 of 535

802.11ax20 MIMO RU106 Left_Channel 100

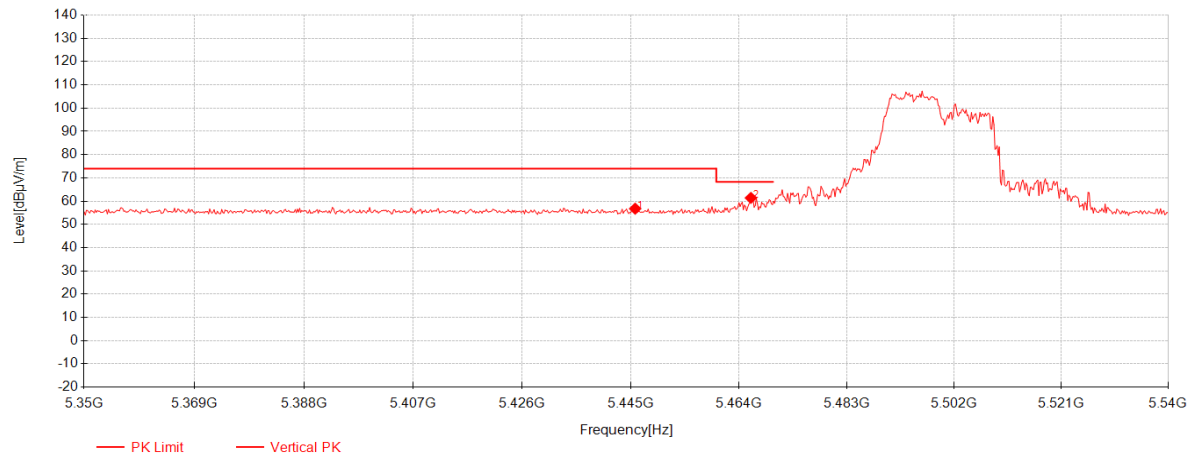


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5445.76	39.21	33.11	-15.56	56.76	74.00	17.24	Vertical
2	5466.09	43.74	33.11	-15.44	61.40	68.30	6.90	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 530 of 535

802.11ax20 MIMO RU106 Right_Channel 140

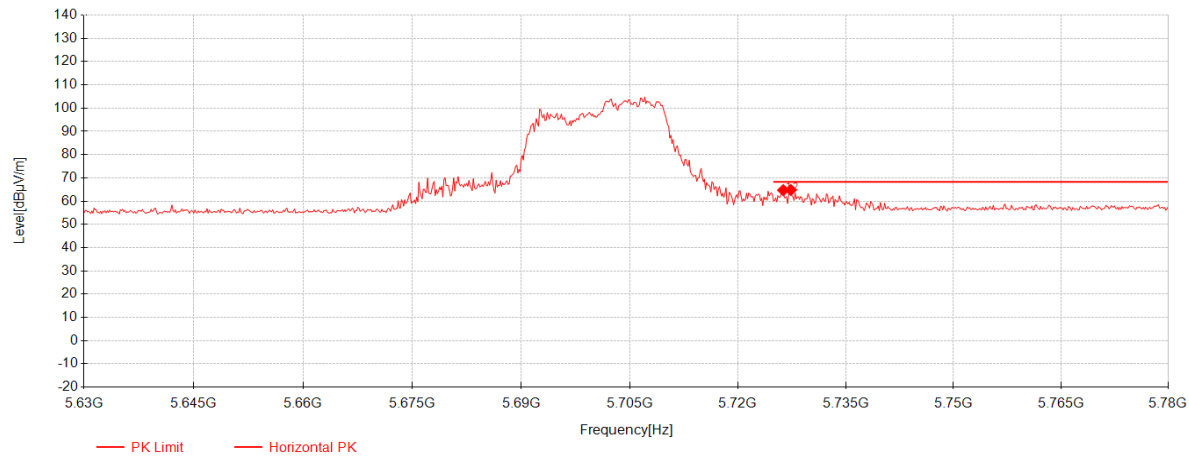


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5726.3	45.80	33.87	-14.95	64.72	68.30	3.58	Horizontal
2	5727.35	45.89	33.87	-14.94	64.82	68.30	3.48	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206
Rev.: 02
Page: 531 of 535

802.11ax20 MIMO RU106 Right_Channel 140

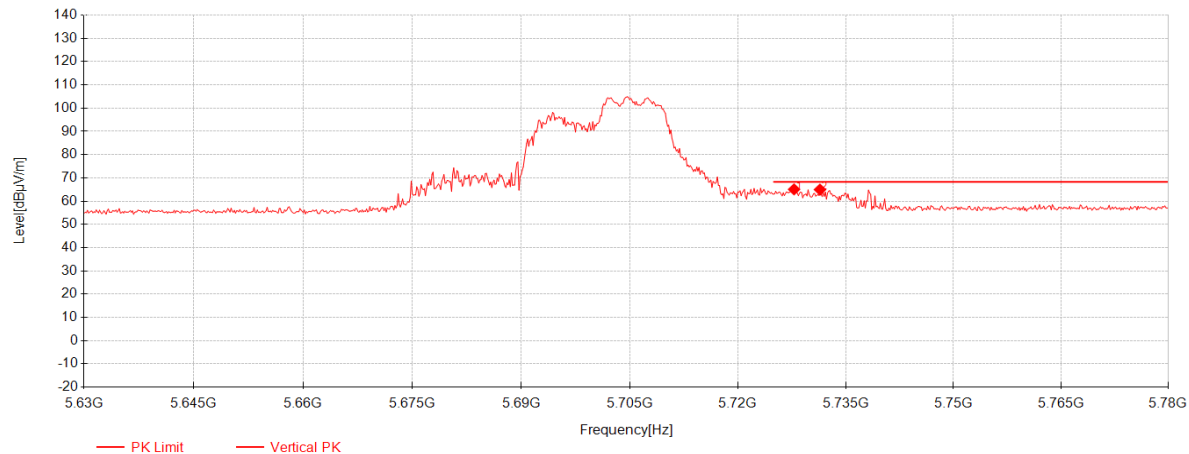

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5727.8	46.13	33.87	-14.94	65.06	68.30	3.24	Vertical
2	5731.4	45.98	33.89	-14.92	64.95	68.30	3.35	Vertical




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 532 of 535

802.11ax20 MIMO RU106 Left_Channel 149

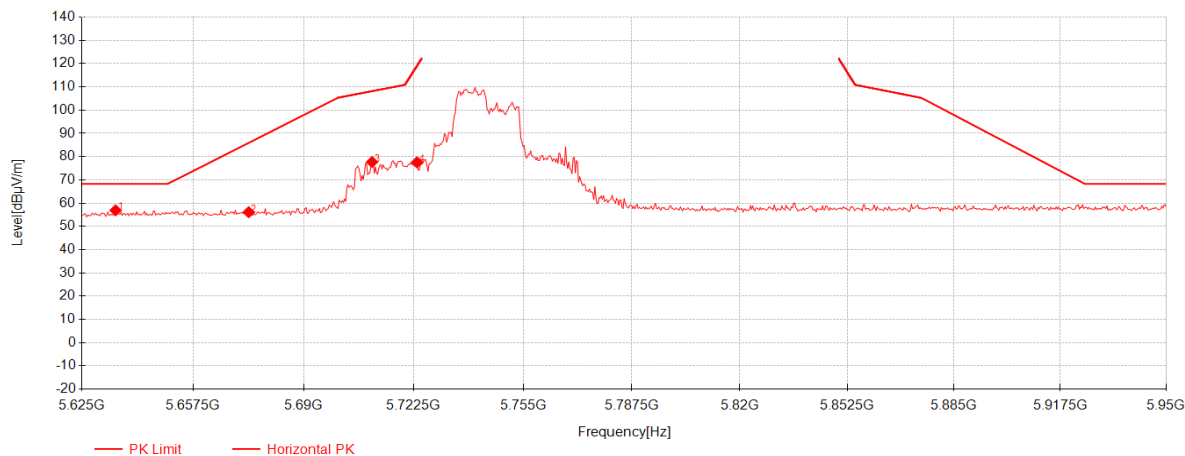

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5634.75	38.61	33.56	-15.25	56.92	68.30	11.38	Horizontal
2	5673.75	37.60	33.69	-15.18	56.11	85.92	29.81	Horizontal
3	5710.15	58.96	33.81	-15.06	77.71	108.14	30.43	Horizontal
4	5723.475	58.66	33.86	-14.97	77.55	118.82	41.27	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 533 of 535

802.11ax20 MIMO RU106 Left_Channel 149

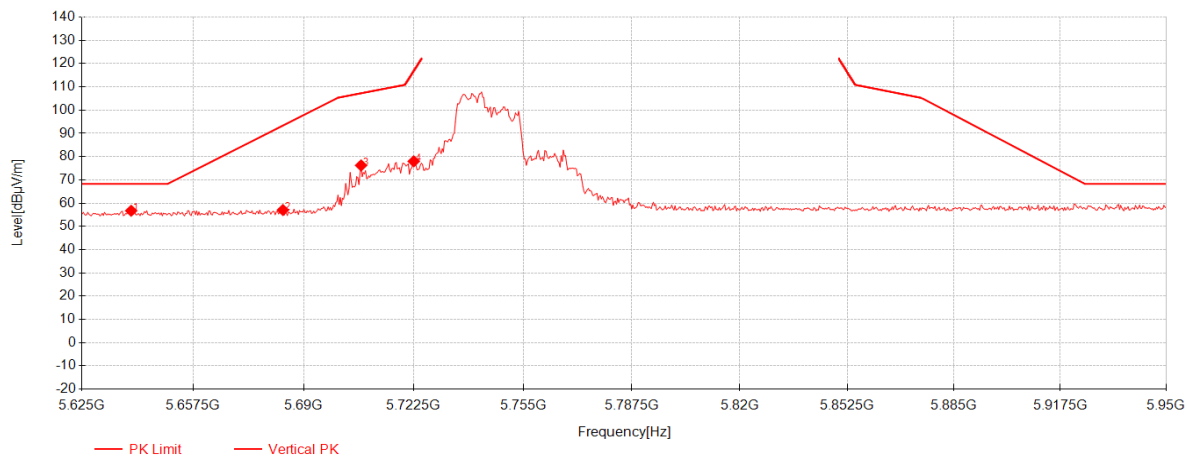

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5639.3	38.40	33.57	-15.24	56.73	68.30	11.57	Vertical
2	5683.825	38.46	33.73	-15.16	57.03	93.37	36.34	Vertical
3	5706.9	57.51	33.80	-15.08	76.23	107.23	31.00	Vertical
4	5722.5	59.09	33.86	-14.98	77.97	116.60	38.63	Vertical




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 534 of 535

802.11ax20 MIMO RU106 Right_Channel 165

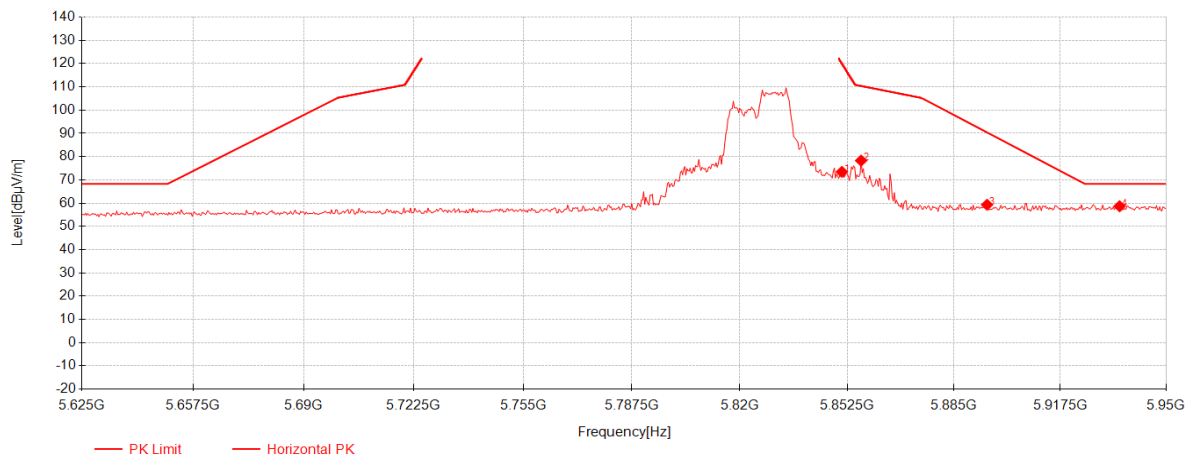

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5850.875	53.64	34.29	-14.49	73.44	120.30	46.86	Horizontal
2	5856.725	58.48	34.31	-14.50	78.30	110.42	32.12	Horizontal
3	5895.075	39.38	34.44	-14.53	59.30	90.41	31.11	Horizontal
4	5935.7	38.62	34.58	-14.54	58.66	68.30	9.64	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400034206

Rev.: 02

Page: 535 of 535

802.11ax20 MIMO RU106 Right_Channel 165

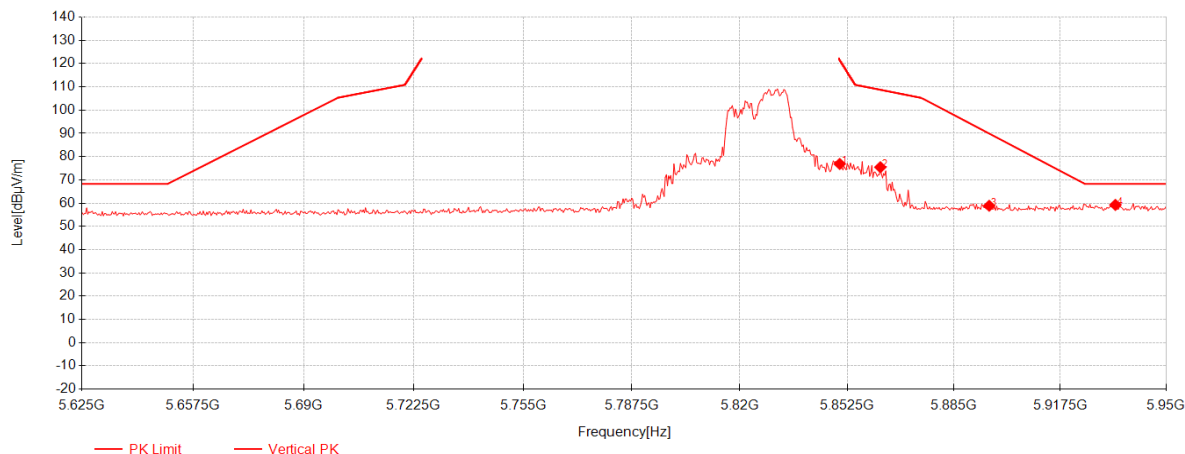

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5850.225	57.06	34.29	-14.49	76.86	121.79	44.93	Vertical
2	5862.575	55.61	34.33	-14.50	75.44	108.78	33.34	Vertical
3	5895.725	38.96	34.45	-14.53	58.88	89.93	31.05	Vertical
4	5934.4	39.20	34.58	-14.54	59.24	68.30	9.06	Vertical

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:
Level = Reading(dBμV) + AF(dB/m) + Factor(dB):
AF = Antenna Factor(dB/m)
Factor = Cable Factor(dB) - Preamplifier gain(dB)
Margin = Limit(dBμV/m) – Level(dBμV/m)
- Both peak and average measured complies with the limit line, so test result is "PASS"

---End of Report---