

EMC TEST REPORT

Applicant	Zhejiang Lingzhu Technology Co., Ltd.
FCC ID	2BEWXSC216
Product	Smart Camera
Model	SC216-WBU4
Series Model	See Page 4
Report No.	R2408A1111-R1
Issue Date	October 12, 2024

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2023)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Liu Wei

Approved by: Fan Guangchang

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory	4
1.1	Notes of the Test Report.....	4
1.2	Test Facility.....	4
1.3	Testing Location.....	4
2	General Description of Equipment Under Test	5
2.1	Applicant and Manufacturer Information	5
2.2	General Information	5
2.3	Applied Standards	7
2.4	Test Mode	8
3	Test Case Results	9
3.1	Radiated Emission.....	9
3.2	Conducted Emission.....	15
4	Uncertainty Measurement.....	18
5	Main Test Instruments	19
	ANNEX A: The EUT Appearance	20
	ANNEX B: Test Setup Photos	21

Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Date of Testing: August 19, 2024 ~ September 21, 2024			
Date of Sample Received: August 14, 2024			
Note:			
1. All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company:	Eurofins TA Technology (Shanghai) Co., Ltd.
Address:	Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City:	Shanghai
Post code:	201201
Country:	P. R. China
Contact:	Fan Guangchang
Telephone:	+86-021-50791141/2/3
Fax:	+86-021-50791141/2/3-8000
Website:	https://www.eurofins.com/electrical-and-electronics
E-mail:	Jack.Fan@cpt.eurofinscn.com

2 General Description of Equipment Under Test

2.1 Applicant and Manufacturer Information

Applicant	Zhejiang Lingzhu Technology Co., Ltd.
Applicant address	Room 302, No 1 Building Huace Center, Xihu District, Hangzhou City, Zhejiang Province, China
Manufacturer	Zhejiang Lingzhu Technology Co., Ltd.
Manufacturer address	Room 302, No 1 Building Huace Center, Xihu District, Hangzhou City, Zhejiang Province, China

2.2 General Information

EUT Description			
Device Type	Fixed Device		
Model	SC216-WBU4		
Series Model	SC216-WBU3; SC216-WBU3A; SC216-WBU3B; SC216-WBU3C; SC216-WBU4A; SC216-WBU4B; SC216-WBU4C; SC216-WBU5; SC216-WBU5A; SC216-WBU5B; SC216-WBU5C; SC216-WBU3-FC; SC216-WBU3A-FC; SC216-WBU3B-FC; SC216-WBU3C-FC; SC216-WBU4-FC; SC216-WBU4A-FC; SC216-WBU4B-FC; SC216-WBU4C-FC; SC216-WBU5-FC; SC216-WBU5A-FC; SC216-WBU5B-FC; SC216-WBU5C-FC		
Lab internal SN	R2408A1111/S01		
Hardware Version	V1.0.1		
Software Version	V1.0.3		
Power Rating	DC 5V		
Connecting I/O Port(s)	Please refer to the User's Manual.		
Antenna Type	Patch Antenna		
Frequency	Band	Tx (MHz)	Rx (MHz)
	Bluetooth LE	2400 ~ 2483.5	2400 ~ 2483.5
	Wi-Fi 2.4G	2400 ~ 2483.5	2400 ~ 2483.5
EUT Accessory			
Adapter 1	Manufacturer: SHENZHEN KEYU POWER SUPPLY TECHNOLOGY CO., LTD. Model: KA06E-0501000US Input: 100-240V~50/60Hz 0.25A Max. Output: 5.0V ---1.0A		

Adapter 2	Manufacturer: SHENZHEN TIANYIN ELECTRONICS CO., LTD. Model: TPA-418G050120UU01 Input: 100-240V~50/60Hz 0.3A Output: 5.0V  1.2A
Auxiliary Test Equipment	
Phone	Manufacturer: SUMSANG Model: S6
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.	

2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2023)

ANSI C63.4-2014

2.4 Test Mode

Test Mode	
Mode 1	Adapter + EUT + Wi-Fi /Bluetooth LE + camera on
Mode 2	Adapter + EUT + Wi-Fi TX

Test Type	Test Mode	Worst Mode
Radiated Emission	Mode 1, 2	Mode 1
Conducted Emission	Mode 1, 2	Mode 1
After technical evaluation or/and preliminary test, the test data of the worst-case condition was recorded in this report.		

3 Test Case Results

3.1 Radiated Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 10 meters below 1GHz; 3 meters for above 1GHz. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO

(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Test Setup

Below 1GHz

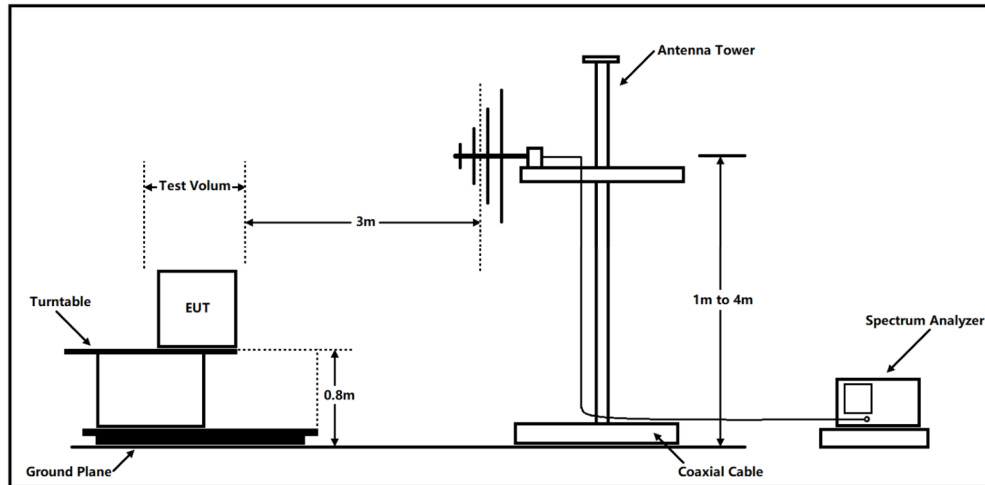


Distance 10m

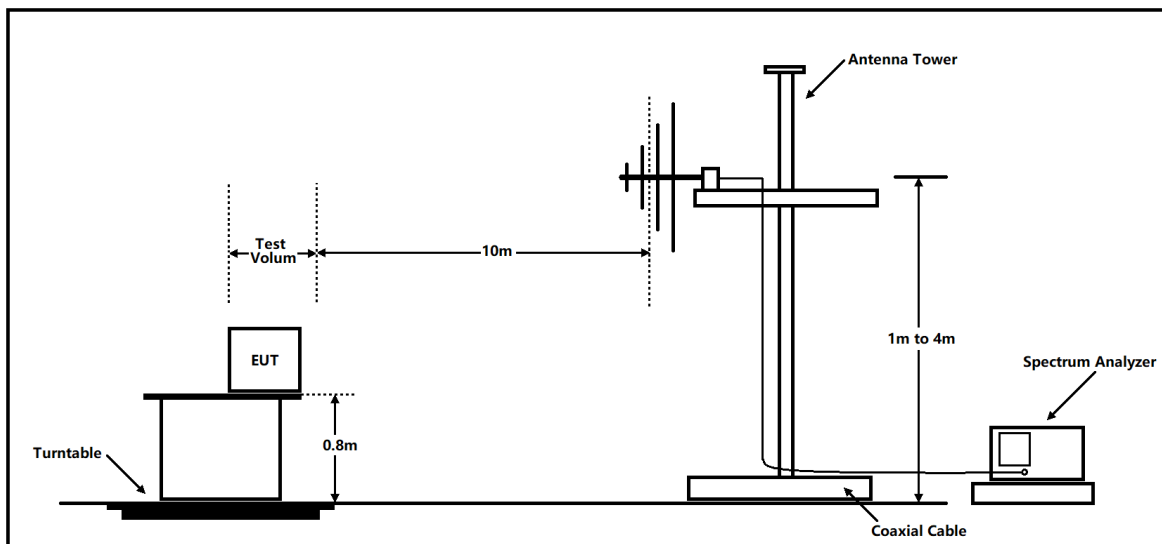

Note: Area side: 21m x 12m

Above 1GHz

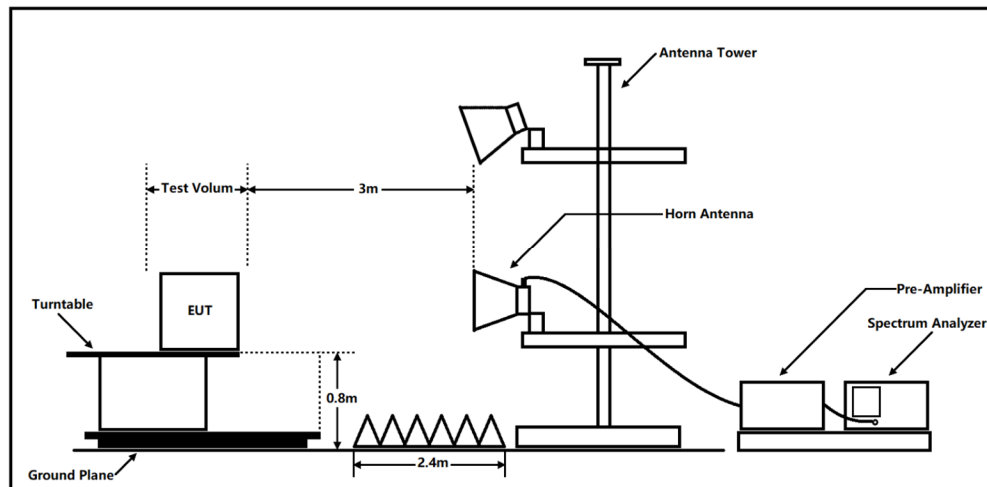

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits

Class B

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	30.0	Quasi-peak
88-216	33.5	Quasi-peak
216 – 960	36.0	Quasi-peak
960-1000	44.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak


Frequency range of radiated measurements

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. The Emissions in the frequency band 18GHz – 26.5GHz is more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software.

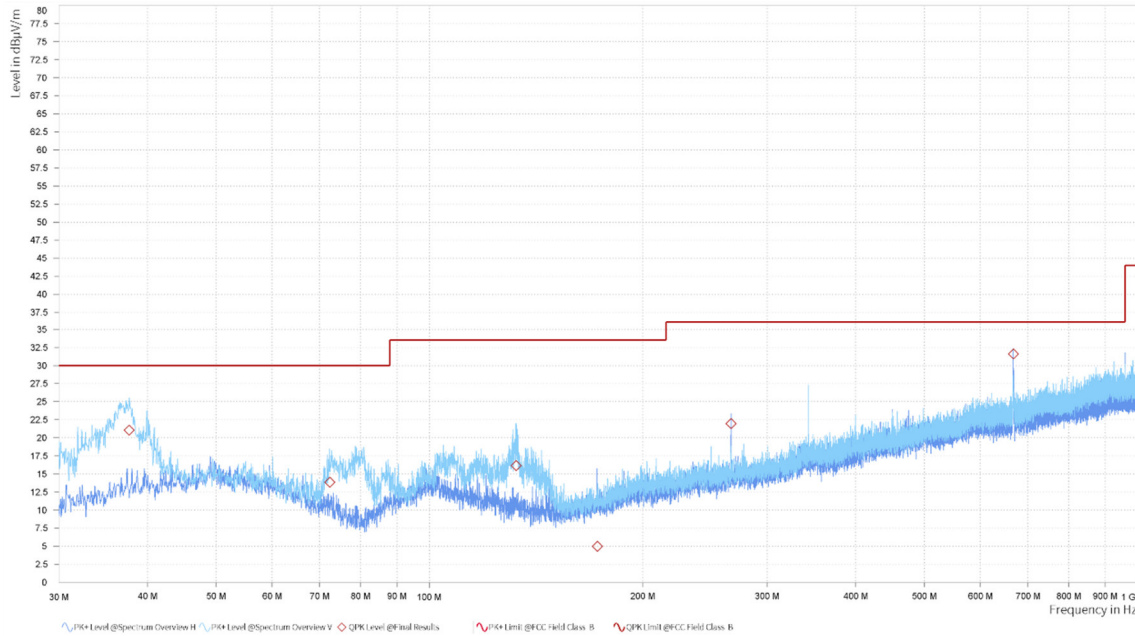


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (m)	Polarization	Azimuth (deg)	Correct Factor (dB)
172.770	4.98	33.50	28.52	1.75	H	227.4	-12.55
266.680	21.95	36.00	14.05	2.25	H	101.1	-8.70
667.692	31.58	36.00	4.42	1.25	H	141.3	-1.69
37.706	21.03	30.00	8.97	1.21	V	81.8	-10.25
72.363	13.85	30.00	16.15	1.75	V	351	-12.95
132.611	16.13	33.50	17.37	1.25	V	252.5	-12.70

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

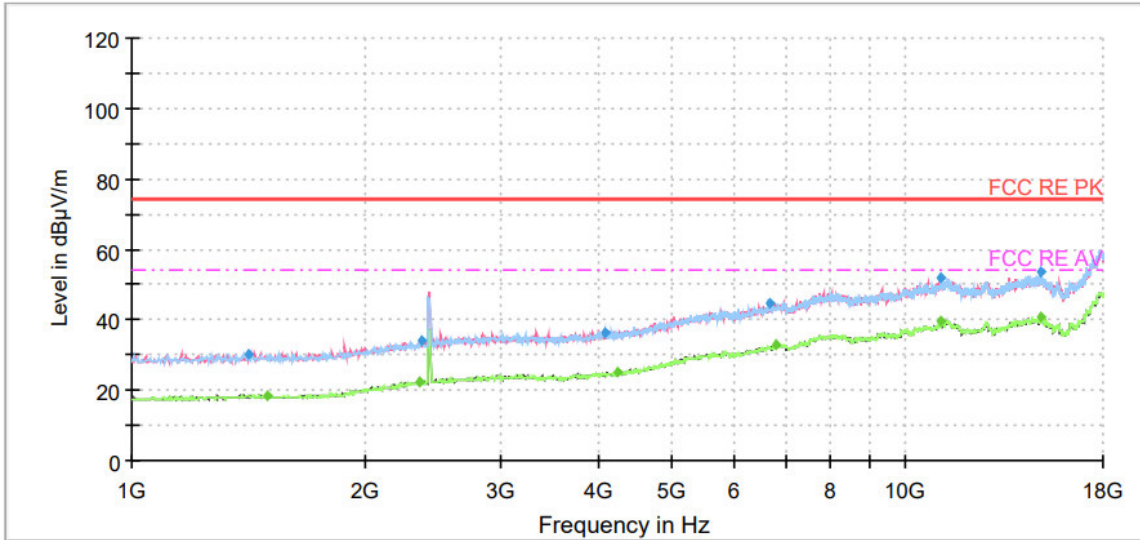

Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1414.77	30.24	---	74.00	43.76	500.00	200.0	V	245.00	-13
1492.91	---	18.43	54.00	35.57	500.00	100.0	H	356.00	-13
2358.08	---	22.15	54.00	31.85	500.00	200.0	V	344.00	-9
2370.74	34.08	---	74.00	39.92	500.00	200.0	V	180.00	-9
4076.67	36.32	---	74.00	37.68	500.00	100.0	H	147.00	-5
4234.16	---	24.93	54.00	29.07	500.00	200.0	H	147.00	-4
6652.41	44.52	---	74.00	29.48	500.00	200.0	H	0.00	3
6806.01	---	32.67	54.00	21.33	500.00	100.0	H	328.00	4
11079.20	52.09	---	74.00	21.91	500.00	200.0	H	160.00	9
11104.03	---	39.39	54.00	14.61	500.00	200.0	H	7.00	9
14940.54	---	41.00	54.00	13.00	500.00	100.0	H	352.00	9
14974.39	53.51	---	74.00	20.49	500.00	200.0	V	325.00	9

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit – MaxPeak / Average

3.2 Conducted Emission


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

Test Setup

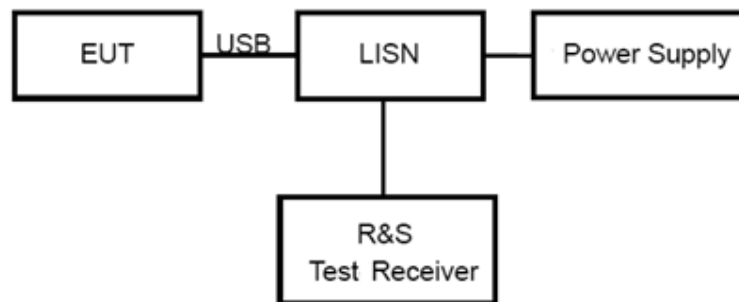

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.


Limits

Frequency (MHz)	Class A (dBμV)		Class B (dBμV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 to 56 *	56 to 46*
0.5 - 5	73	60	56	46
5 - 30	73	60	60	50
*: Decreases with the logarithm of the frequency.				

Note: The EUT should meet CLASS B limit.

Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

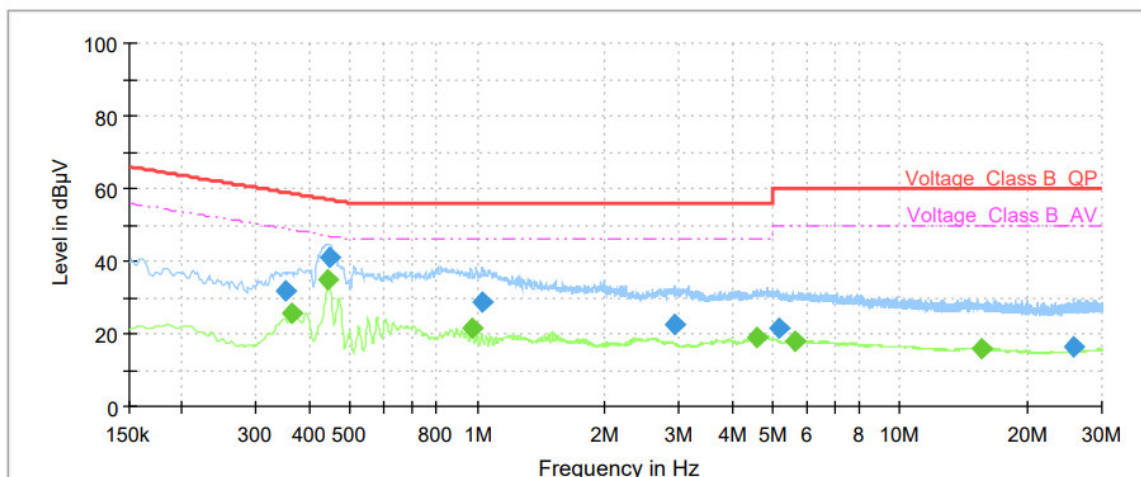


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.35	31.56	---	58.96	27.40	1000.0	9.000	L1	ON	21.0
0.36	---	25.43	48.69	23.26	1000.0	9.000	L1	ON	21.0
0.44	---	34.99	46.97	11.98	1000.0	9.000	L1	ON	20.9
0.45	41.18	---	56.93	15.75	1000.0	9.000	L1	ON	20.9
0.97	---	21.51	46.00	24.49	1000.0	9.000	L1	ON	20.3
1.03	28.78	---	56.00	27.22	1000.0	9.000	L1	ON	20.2
2.94	22.67	---	56.00	33.33	1000.0	9.000	L1	ON	19.6
4.59	---	19.01	46.00	26.99	1000.0	9.000	L1	ON	19.5
5.18	21.74	---	60.00	38.26	1000.0	9.000	L1	ON	19.5
5.66	---	17.97	50.00	32.03	1000.0	9.000	L1	ON	19.5
15.53	---	16.04	50.00	33.96	1000.0	9.000	L1	ON	19.6
25.88	16.34	---	60.00	43.66	1000.0	9.000	L1	ON	19.7

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 kHz to 30 MHz

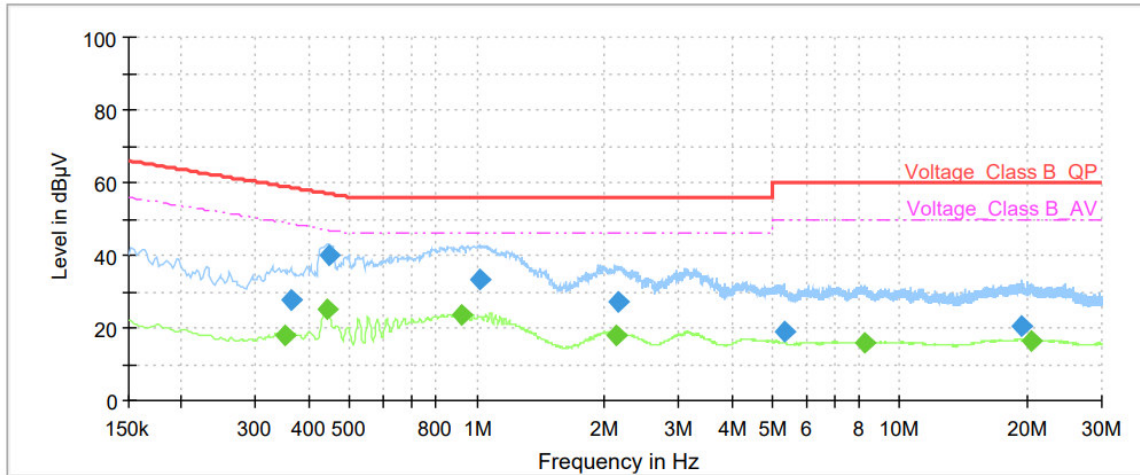

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.35	---	17.97	48.96	30.99	1000.0	9.000	N	ON	21.0
0.36	27.74	---	58.69	30.95	1000.0	9.000	N	ON	21.0
0.44	---	25.21	47.02	21.80	1000.0	9.000	N	ON	20.9
0.45	40.06	---	56.93	16.87	1000.0	9.000	N	ON	20.9
0.92	---	23.66	46.00	22.34	1000.0	9.000	N	ON	20.3
1.01	33.41	---	56.00	22.59	1000.0	9.000	N	ON	20.2
2.13	---	17.73	46.00	28.27	1000.0	9.000	N	ON	19.7
2.15	27.14	---	56.00	28.86	1000.0	9.000	N	ON	19.7
5.35	18.79	---	60.00	41.21	1000.0	9.000	N	ON	19.5
8.24	---	15.75	50.00	34.25	1000.0	9.000	N	ON	19.5
19.45	20.52	---	60.00	39.48	1000.0	9.000	N	ON	19.7
20.39	---	16.27	50.00	33.73	1000.0	9.000	N	ON	19.8

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 kHz to 30 MHz

4 Uncertainty Measurement

Case	Uncertainty	Factor k
Radiated Emission 30MHz – 200MHz	3.39 dB	1.96
Radiated Emission 200MHz – 1GHz	3.82 dB	1.96
Radiated Emission 1GHz – 18GHz	4.35 dB	1.96
Radiated Emission 18GHz – 26.5GHz	5.90 dB	1.96
Conducted Emission	2.57 dB	2

5 Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESR	102389	2024-05-07	2025-05-06
Signal Analyzer	R&S	FSV40	101298	2024-05-07	2025-05-06
EMI Test Receiver	R&S	ESR	102720	2024-05-07	2025-05-06
EMI Test Receiver	R&S	ESR	102721	2024-05-07	2025-05-06
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01614	2023-09-13	2026-09-12
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01615	2023-10-19	2026-10-18
Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2024-07-18	2027-07-17
Software	R&S	ELEKTRA	5.00.2	/	/
Software	R&S	EMC32	9.26.01	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	102191	2022-12-10	2024-12-09
EMI Test Receiver	R&S	ESR	101667	2024-05-07	2025-05-06
Software	R&S	EMC32	10.35.10	/	/

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

***** END OF REPORT *****