



Certificate #5055.02

TEST REPORT FOR BLE TESTING

Report No.: SRTC2024-9004(F)-24051402(E)

Product Name: WiFi/BT Module

Product ID: MWH640S

Brand Name: Hisense

Applicant: Qingdao Intelligent & Precise Electronics Co., Ltd.

Manufacturer: Qingdao Intelligent & Precise Electronics Co., Ltd.

Specification: FCC Part 15 Subpart C (2023)

FCC ID: 2AJVQ-MWH640S

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388



CONTENTS

1. GENERAL INFORMATION	2
1.1 NOTES OF THE TEST REPORT	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY	2
1.3 APPLICANT'S DETAILS	2
1.4 MANUFACTURER'S DETAILS	2
1.5 TEST ENVIRONMENT	3
2 DESCRIPTION OF THE DEVICE UNDER TEST	3
2.1 FINAL EQUIPMENT BUILD STATUS	3
2.2 DESCRIPTION OF TEST MODES	4
2.3 DUTY CYCLE OF TEST SIGNAL	5
2.4 EUT OPERATING CONDITIONS	6
2.5 SUPPORT EQUIPMENT	6
3 REFERENCE SPECIFICATION	6
4 KEY TO NOTES AND RESULT CODES	6
5 RESULT SUMMARY	7
6 TEST RESULT	9
7 MEASUREMENT UNCERTAINTIES	21
8 TEST EQUIPMENTS	22
APPENDIX A – TEST DATA OF CONDUCTED EMISSION	23
APPENDIX B – TEST DATA OF RADIATED EMISSION	47



1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Test Site 1:	15th Building, No.30 Shixing Street, Shijingshan District
Test Site 2:	No.80, Zhaojiachang, Beizang, Daxing District
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Designation Number:	CN1267
Registration number:	239125

1.3 Applicant's details

Company:	Qingdao Intelligent & Precise Electronics Co., Ltd.
Address:	No.218 Qianwangang Road, Qingdao Economic & Technological Development Zone, Qingdao City, Shandong Province, P. R. China
City:	Qingdao
Country or Region:	CHINA
Contacted person:	wanghaining
Tel:	013381232625
Email:	wanghaining@hisense.com

1.4 Manufacturer's details

Company:	Qingdao Intelligent & Precise Electronics Co., Ltd.
Address:	No.218 Qianwangang Road, Qingdao Economic & Technological Development Zone, Qingdao City, Shandong Province, P. R. China
City:	Qingdao
Country or Region:	CHINA
Contacted person:	wanghaining
Tel:	013381232625
Email:	wanghaining@hisense.com



1.5 Test Environment

Date of Receipt of test sample at SRTC:	2024/5/14
Testing Start Date:	2024/5/15
Testing End Date:	2024/6/11

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	40
Maximum Extreme	70	---
Minimum Extreme	-10	---

Normal Supply Voltage (V d.c.):	3.3
Maximum Extreme Supply Voltage (V d.c.):	3.5
Minimum Extreme Supply Voltage (V d.c.):	3.1

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Range:	2.402GHz~2.480GHz
Number of Channel:	40
Modulation Type:	GFSK
Equipment Class:	DTS
Channel Spacing:	2MHz
Data Rate:	LE 1Mbps/2Mbps LE Coded 125kbps/500kbps
Power Supply:	DC supply
Software Revision:	NA
Hardware Revision:	V1.00
IMEI:	NA
Antenna type:	Refer to Note
Antenna connector:	Refer to Note



Antenna requirement (FCC Part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT is permanently attached.
- There are no provisions for connection to an external antenna.

Note: The antenna provides to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency band	Antenna type	Connector Type
N/A	N/A	1.06dBi(max)	2.4GHz~2.4835GHz	PIFA antenna	NA

The antenna gain is provided by the customer and involved in the calculation and influence of the test results. Our laboratory takes the value declared by the customer as the criterion, and the customer is responsible for the antenna gain value. Manufacturers ensure that their designs will not be modified by the user or third party's arbitrary antenna parameters and performance.

2.2Description of Test Modes

40 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE ≥ 1G	RE<1G	PLC	APCM	-
GFSK	√	√	√	√	-

Where

RE ≥ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with



antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1

2.3 Duty Cycle of Test Signal

Duty cycle of test signal is < 98 %, duty factor shall be considered.

Modulation Type	Duty Cycle	Correction factor(dB)
GFSK (LE 1Mbps)	86.20%	0.64
GFSK (LE 2Mbps)	60.00%	2.22
GFSK (Coded 125K)	97.70%	0.10
GFSK (Coded 500K)	91.30%	0.40



2.4 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:N/A

3 REFERENCE SPECIFICATION

Specification	Version	Title
FCC Part15 Subpart C	2023	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 v05r02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

4 KEY TO NOTES AND RESULT CODES




Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.



5 RESULT SUMMARY

No.	Test case	Reference	Verdict	Test Site
1	6dB Bandwidth	15.247(a)(2)	Pass	1
2	Transmitter Output Power	15.247(b)(3))	Pass	1
3	Transmitter Power Spectral Density	15.247(e))	Pass	1
4	Conducted Out of band emission measurement	15.247(d)	Pass	1
5	Band-edge	15.247(d)	Pass	1
6	Antenna requirement	15.203	Pass(refer to section 2.1)	1

Test Site 1: 15th Building, No.30 Shixing Street, Shijingshan District

This Test Report Is Approved by: Mr. Peng Zhen 	Review by: Mr. Li Bin 
Tested and Issued by: Mr. LiangXisheng 	Approved date: 20240611



No.	Test case	Reference	Verdict	Test Site
7	Band-edge	15.247(d)	Pass	2
8	Spurious Radiated Emissions	15.205/15.209/15.247(d)	Pass	2
9	AC Power line Conducted Emission	15.207	Pass	2

Test Site 2: No.80, Zhaojiachang, Beizang, Daxing District

This Test Report Is Approved by: Mr. Liu Wei 	Review by: Mr. Guo Yu 
Tested and Issued by: Mr. Dong Qifeng 	Approved date: 20240611



6 TEST RESULT

6.1 6dB Bandwidth

6.1.1 Test limit

Part15.247 (a) (2)

The minimum permissible 6dB bandwidth is 500 kHz

6.1.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2


KDB 558074 D01 v05r02 – Section 8.2

6.1.3 Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

6.1.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.1.5 Test result

The test results are shown in Appendix A.



6.2 Transmitter Output Power

6.2.1 Test limit

Part15.247 (b) (3)

The maximum permissible conducted output power is 1 Watt.

6.2.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3

ANSI C63.10-2013 – Section 11.9.2.2.4

KDB 558074 D01 v05r02 – Section 8.3.1.3

6.2.3 Test Settings

Peak Power Measurement


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.2.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.2.5 Test result

The test results are shown in Appendix A.



6.3 Transmitter Power Spectral Density

6.3.1 Test limit

Part 15.247 (e)

The maximum permissible power spectral density is 8.0 dBm in any 3 kHz band.

6.3.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD


KDB 558074 D01 v05r02 – Section 8.4

6.3.3 Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.3.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.3.5 Test result

The test results are shown in Appendix A.



6.4 Conducted Out of band emission measurement

6.4.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.4.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.5

6.4.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 MHz
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

6.4.4 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.4.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.4.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.



6.5 Band-edge measurement

6.5.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.5.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

6.5.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 MHz
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

6.5.4 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.5.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.



6.6 Spurious Radiated Emissions

6.6.1 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.6.2 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB $\mu\text{V/m}$) = 20 log (Limit ($\mu\text{V/m}$)/1 $\mu\text{V/m}$)

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits



6.6.3 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05r02– Section 12.2.7

For Radiated emission below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

- Signals below 30MHz are not recorded in the report because they are lower than the limits by more than 20dB.

For Radiated emission above 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.



For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.6.4 Test Settings

Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)

Frequency	Detector
<1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.5 Test Setup


For Radiated emission below 30MHz

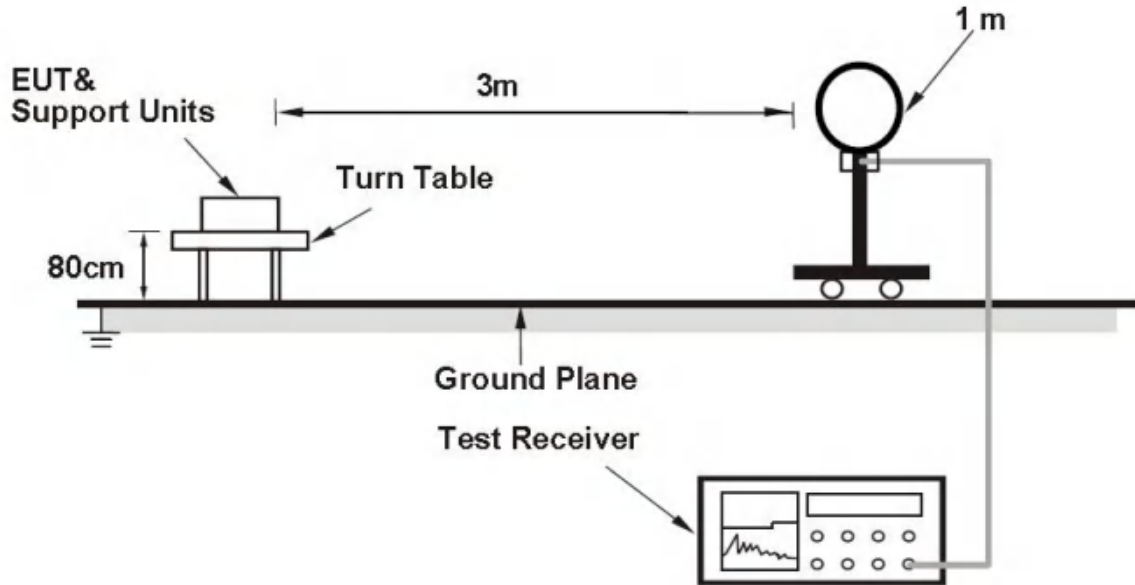

For Radiated emission 30MHz to 1GHz

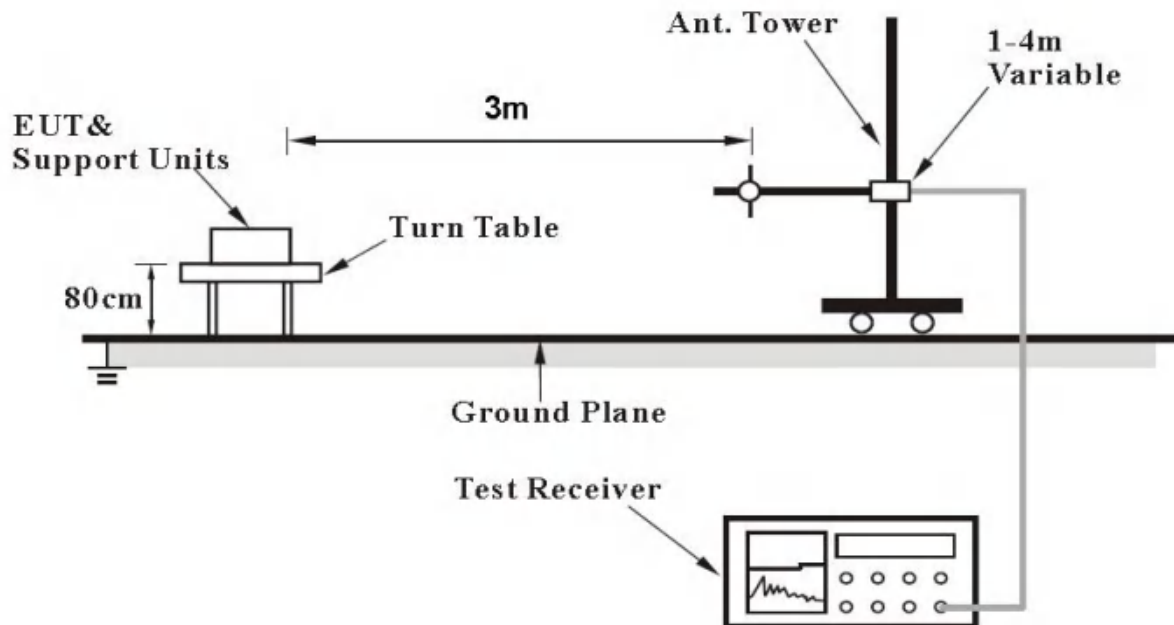

For Radiated emission above 1GHz

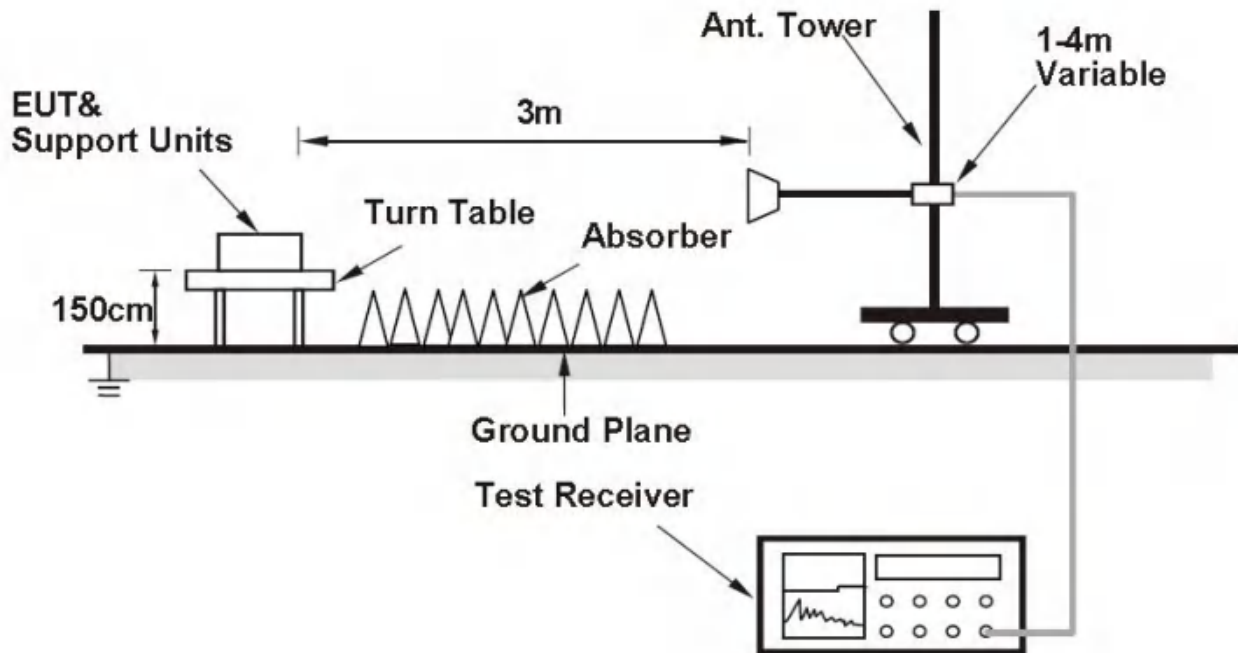

6.6.6 Test result

The test results are shown in Appendix B.



6.7 AC Power line Conducted Emission

6.7.1 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.7.2 Test Procedures


a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.

b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.
The EUT shall test under the power AC120V/60Hz.

6.7.3 Test Setup

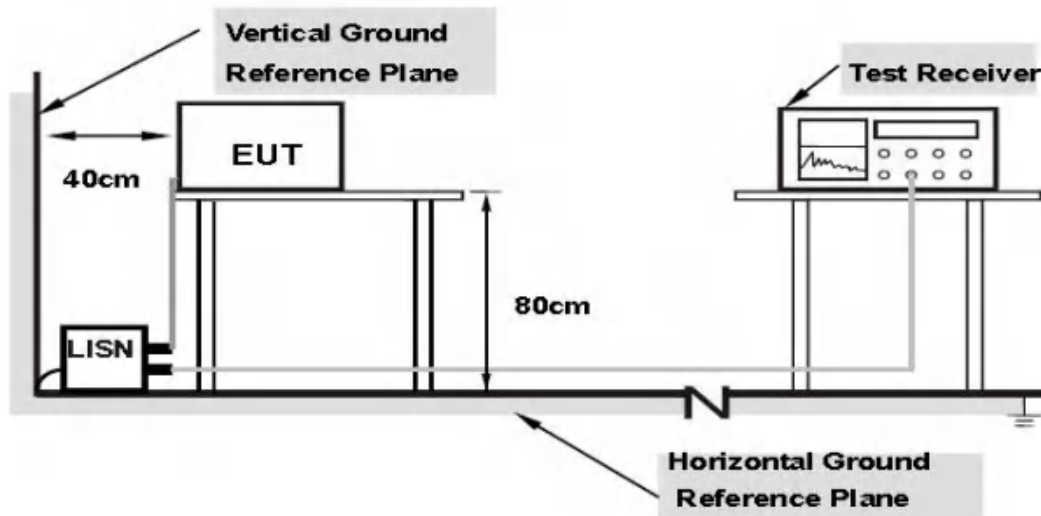

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.4 Test result

The test results are shown in AppendixB.



7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
6dB Bandwidth	3kHz	
Peak power output	0.67dB	
Transmitter Power Spectral Density	0.75dB	
Band edge compliance	1.20dB	
Conducted Out of band emission measurement	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB
Spurious Radiated Emissions	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB
AC Power line Conducted Emission	3.92dB	



8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer / FSV	ROHDE & SCHWARZ	101065	2023.06.21	2024.06.20
2.	Signal Analyzer / N9020A	Agilent	MY48010771	2024.03.06	2025.03.05
3.	Bluetooth Test Set / MT8852B	Anritsu	1329003	2023.06.21	2024.06.20
4.	Power Divider / 11667A	HP	19632	2023.06.21	2024.06.20
5.	Signal Generator / SMBV100A	R&S	260910	2023.06.21	2024.06.20
6.	Temperature chamber / SH241	ESPEC	92013758	2023.06.21	2024.06.20
7.	Fully-Anechoic Chamber / 12.65m×8.03m×7.50m	FRANKONIA	-----	-----	-----
8.	Semi-Anechoic/Chamber / 23.18m×16.88m×9.60m	FRANKONIA	---	-----	-----
9.	Turn table Diameter:1m	FRANKONIA	-----	-----	-----
10.	Turn table Diameter:5m	FRANKONIA	-----	-----	-----
11.	Antenna master FAC(MA4.0)	MATURO	-----	-----	-----
12.	Antenna master SAC(MA4.0)	MATURO	-----	-----	-----
13.	Shielding room / 9.080m×5.255m×3.525m	FRANKONIA	-----	-----	-----
14.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100512	2023.06.21	2024.06.20
15.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100513	2023.06.21	2024.06.20
16.	Ultra log antenna / HL562	R&S	100016	2023.06.21	2024.06.20
17.	Receive antenna /3160-09	SCHWARZ-BECK	002058-002	2023.06.21	2024.06.20
18.	EMI test receiver / ESI 40	R&S	100015	2023.06.21	2024.06.20
19.	EMI test receiver / ESCS30	R&S	100029	2023.06.21	2024.06.20
20.	Receive antenna / HL562	R&S	100167	2023.06.21	2024.06.20
21.	AMN / ENV216	R&S	3560.6550.12	2023.06.21	2024.06.20
22.	WLAN AP WIA3300-20	SKSpruce	8152017060700339	---	---
23.	Notebook E470c	Lenovo	PF10UZW7	---	---
24.	Loop Antenna	R&S	100340	2023.08.21	2024.08.20
25.	FCC auto test system / RT9200BW-2	Radiosky	V2.05	/	/
26.	EMI test software / EMC32	R&S	V10.20.01	/	/



APPENDIX A – TEST DATA OF CONDUCTED EMISSION

BLE

1 Duty Cycle and Antenna Gain

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK (LE 1Mbps)	2402	Fig.1	86.20%	0.64	1.06

Note: Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK (LE 2Mbps)	2402	Fig.2	60.00%	2.22	1.06

Note: Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$


Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
Coded 125K	2402	Fig.3	97.70%	0.10	1.06

Note: Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
Coded 500K	2402	Fig.4	91.30%	0.40	1.06

Note: Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode: GFSK (LE 1Mbps)

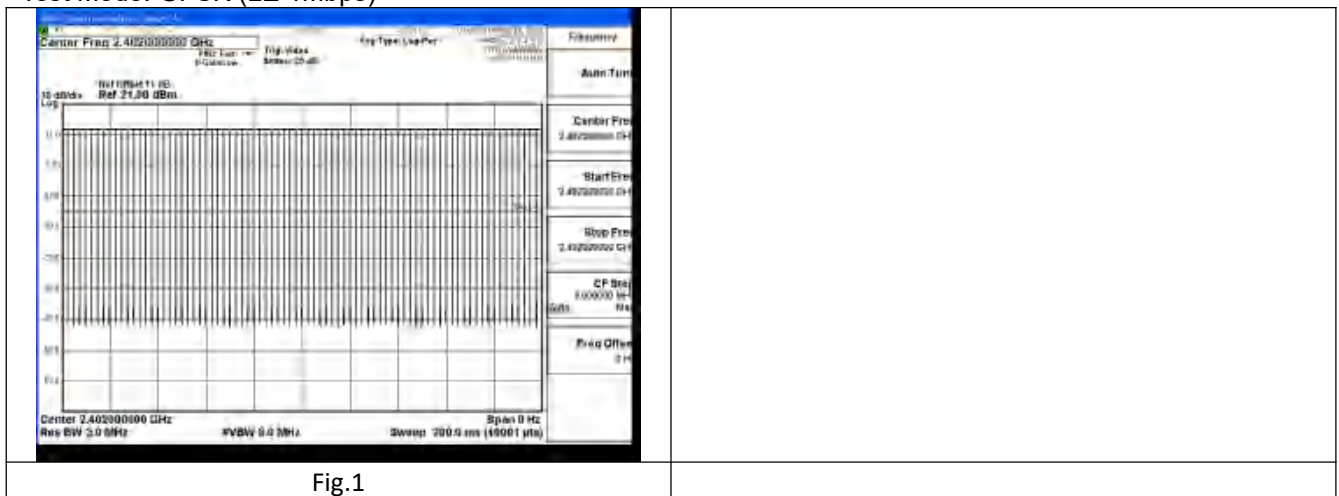



Test Mode: GFSK (LE 2Mbps)

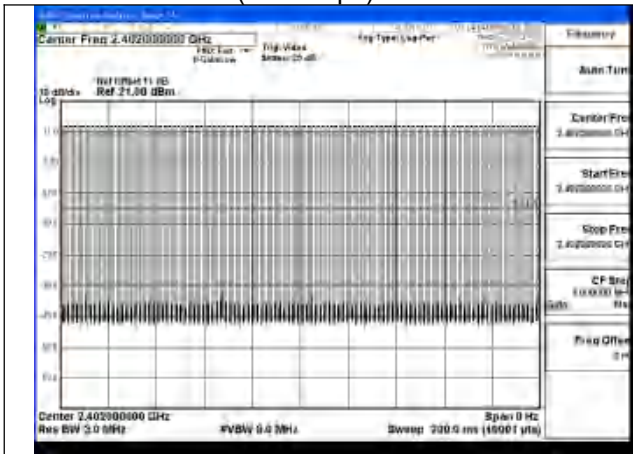


Fig.2

Test Mode: Coded 125K

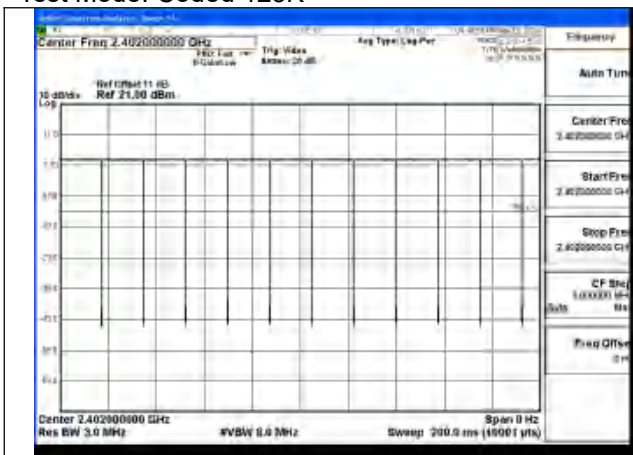


Fig.3

Test Mode: Coded 500K

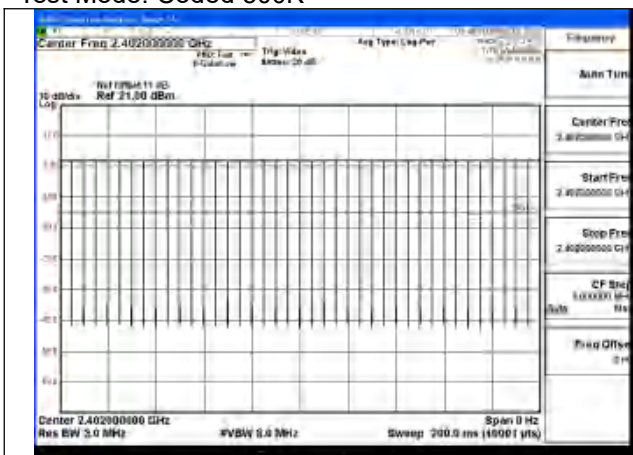


Fig.4



2 EIRP Conducted Power

Modulation type	Conducted Peak Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	2.99	2.68	2.11
GFSK (LE 2Mbps)	2.93	2.57	1.98
Coded 125K	2.99	2.66	2.09
Coded 500K	3.03	2.68	2.12

Modulation type	Conducted Average Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	2.14	2.46	1.33
GFSK (LE 2Mbps)	2.27	2.25	1.65
Coded 125K	2.51	2.19	1.49
Coded 500K	2.60	2.47	1.53

EIRP

Modulation type	Peak EIRP(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	4.05	3.74	3.17
GFSK (LE 2Mbps)	3.99	3.63	3.04
Coded 125K	4.05	3.72	3.15
Coded 500K	4.09	3.74	3.18

Modulation type	Average EIRP(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	3.20	3.52	2.39
GFSK (LE 2Mbps)	3.33	3.31	2.71
Coded 125K	3.57	3.25	2.55
Coded 500K	3.66	3.53	2.59

EIRP (dBm)=Conducted Power(dBm)+Antenna Gain(dBi)



3 Occupied Bandwidth
6dB Bandwidth

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
GFSK (LE 1Mbps)	2402	712.8
GFSK (LE 1Mbps)	2440	717.5
GFSK (LE 1Mbps)	2480	718.4




Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
GFSK (LE 2Mbps)	2402	1386.7
GFSK (LE 2Mbps)	2440	1390.8
GFSK (LE 2Mbps)	2480	1371.0

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
Coded 125K	2402	650.2
Coded 125K	2440	648.7
Coded 125K	2480	650.1

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
Coded 500K	2402	709.2
Coded 500K	2440	708.6
Coded 500K	2480	713.7




Test Mode: GFSK (LE 1Mbps)

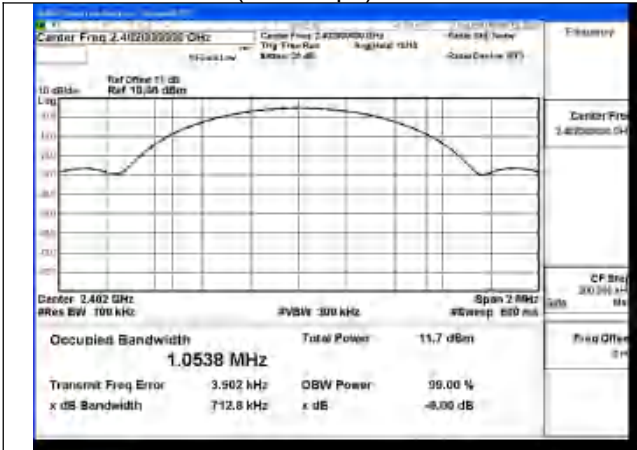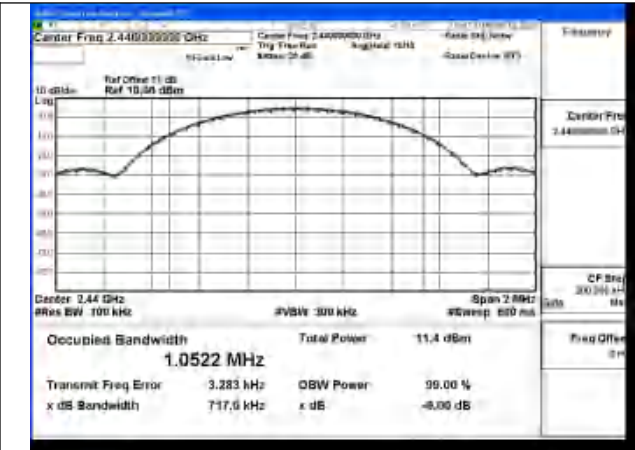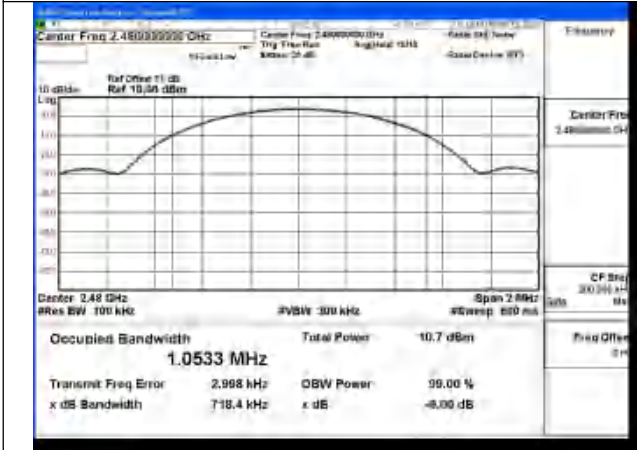 Center Freq 2.40200000 GHz Center Freq 2.40200000 GHz Try This Run Signal 12 dB Sweep 2 dB Sweep 2 dB Ref Offset 11 dB Ref 10.00 dBm Center Freq 2.40200000 GHz Span 2.000 MHz Res BW 100 kHz VBW 300 kHz Sweep 600 ms Occupied Bandwidth 1.0538 MHz Total Power 11.7 dBm Transmit Freq Error 3.902 kHz OBW Power 99.00 % x dB Bandwidth 712.6 kHz x dB -6.00 dB	 Center Freq 2.44000000 GHz Center Freq 2.44000000 GHz Try This Run Signal 12 dB Sweep 2 dB Sweep 2 dB Ref Offset 11 dB Ref 10.00 dBm Center Freq 2.44000000 GHz Span 2.000 MHz Res BW 100 kHz VBW 300 kHz Sweep 600 ms Occupied Bandwidth 1.0522 MHz Total Power 11.4 dBm Transmit Freq Error 3.383 kHz OBW Power 99.00 % x dB Bandwidth 717.6 kHz x dB -6.00 dB
Test Mode:GFSK (LE 1Mbps) 2402MHz	Test Mode:GFSK (LE 1Mbps) 2440MHz
 Center Freq 2.48000000 GHz Center Freq 2.48000000 GHz Try This Run Signal 12 dB Sweep 2 dB Sweep 2 dB Ref Offset 11 dB Ref 10.00 dBm Center Freq 2.48000000 GHz Span 2.000 MHz Res BW 100 kHz VBW 300 kHz Sweep 600 ms Occupied Bandwidth 1.0533 MHz Total Power 10.7 dBm Transmit Freq Error 2.988 kHz OBW Power 99.00 % x dB Bandwidth 716.4 kHz x dB -6.00 dB	
Test Mode:GFSK (LE 1Mbps) 2480MHz	




Test Mode: GFSK (LE 2Mbps)

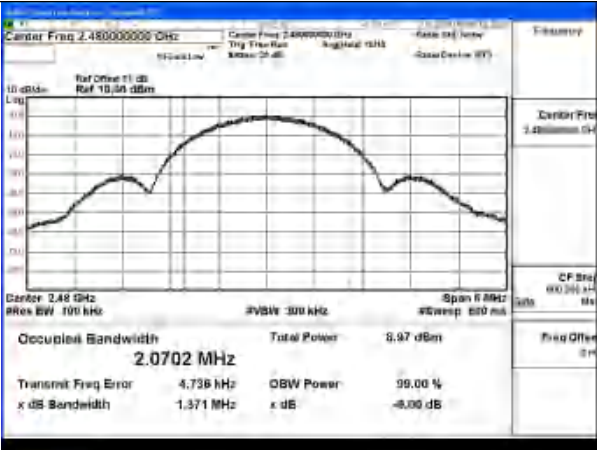	
Test Mode:GFSK (LE 2Mbps) 2402MHz	Test Mode:GFSK (LE 2Mbps) 2440MHz
	
Test Mode:GFSK (LE 2Mbps) 2480MHz	





Test Mode: Coded 125K

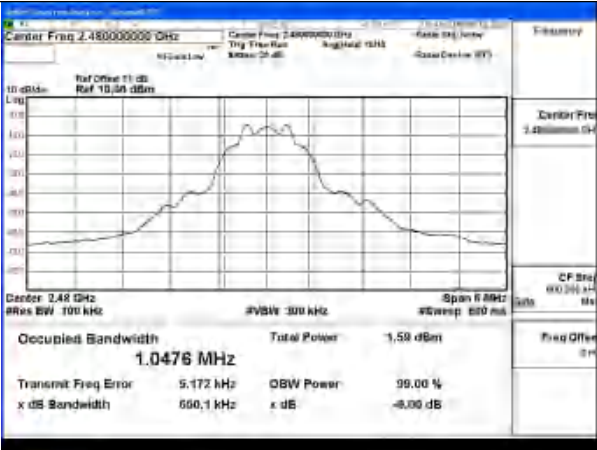	
Test Mode:Coded 125K 2402MHz	Test Mode:Coded 125K 2440MHz
	
Test Mode:Coded 125K 2480MHz	



Test Mode: Coded 500K

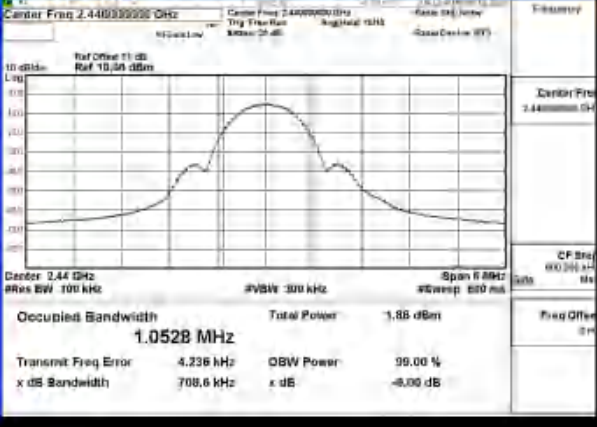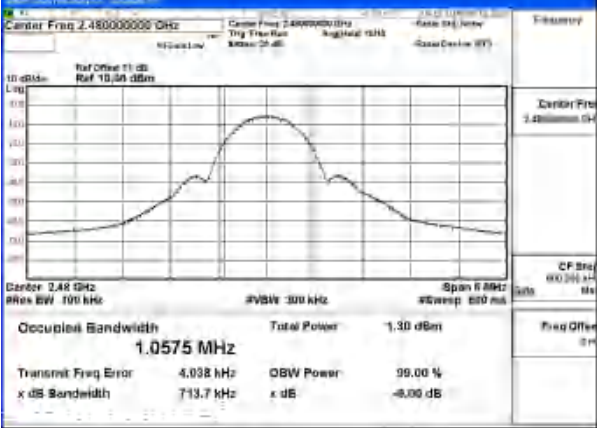 Center Freq 2.402000000 MHz Center Freq 2.402000000 MHz Try This Run Signal 12 dB Signal Center 100% Ref Offset 11 dB Ref 10.00 dBm Center Freq 2.402000000 MHz Span 6 MHz Res BW 100 kHz VBW 300 kHz Sweep 600 ms Occupied Bandwidth 1.0522 MHz Total Power 2.18 dBm Transmit Freq Error 3.154 kHz OBW Power 99.00 % x dB Bandwidth 709.2 kHz x dB -6.00 dB	 Center Freq 2.440000000 MHz Center Freq 2.440000000 MHz Try This Run Signal 12 dB Signal Center 100% Ref Offset 11 dB Ref 10.00 dBm Center Freq 2.440000000 MHz Span 6 MHz Res BW 100 kHz VBW 300 kHz Sweep 600 ms Occupied Bandwidth 1.0528 MHz Total Power 1.85 dBm Transmit Freq Error 4.236 kHz OBW Power 99.00 % x dB Bandwidth 708.6 kHz x dB -6.00 dB
Test Mode:Coded 500K 2402MHz	Test Mode:Coded 500K 2440MHz
 Center Freq 2.480000000 MHz Center Freq 2.480000000 MHz Try This Run Signal 12 dB Signal Center 100% Ref Offset 11 dB Ref 10.00 dBm Center Freq 2.480000000 MHz Span 6 MHz Res BW 100 kHz VBW 300 kHz Sweep 600 ms Occupied Bandwidth 1.0575 MHz Total Power 1.30 dBm Transmit Freq Error 4.038 kHz OBW Power 99.00 % x dB Bandwidth 713.7 kHz x dB -6.00 dB	
Test Mode:Coded 500K 2480MHz	



99% Bandwidth

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK (LE 1Mbps)	2402	1044.4
GFSK (LE 1Mbps)	2440	1029.8
GFSK (LE 1Mbps)	2480	1030.7




Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK (LE 2Mbps)	2402	2059.6
GFSK (LE 2Mbps)	2440	2056.9
GFSK (LE 2Mbps)	2480	2057.6

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
Coded 125K	2402	1021.2
Coded 125K	2440	1020.0
Coded 125K	2480	1024.7

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
Coded 500K	2402	1029.3
Coded 500K	2440	1031.2
Coded 500K	2480	1033.8




Test Mode: GFSK (LE 1Mbps)

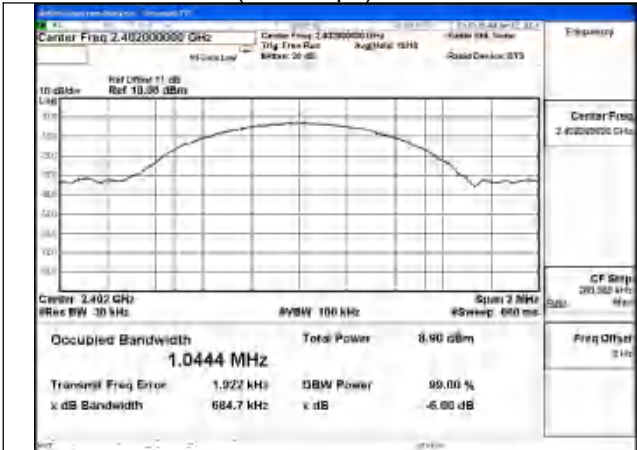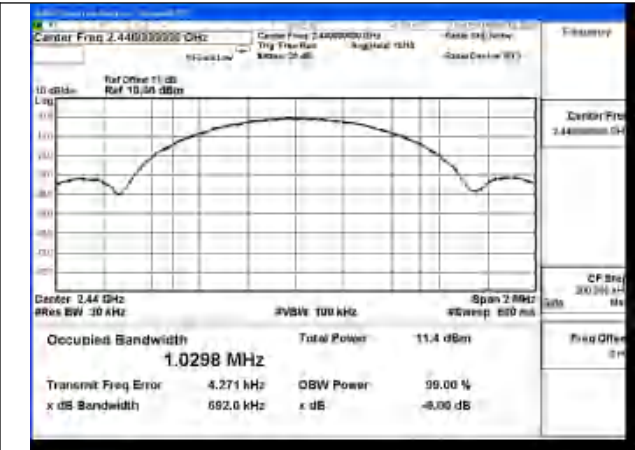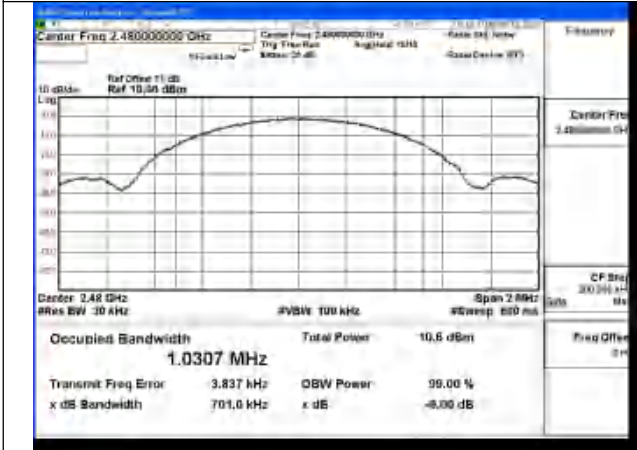	
Test Mode:GFSK (LE 1Mbps) 2402MHz	Test Mode:GFSK (LE 1Mbps) 2440MHz
	
Test Mode:GFSK (LE 1Mbps) 2480MHz	




Test Mode: Coded 125K

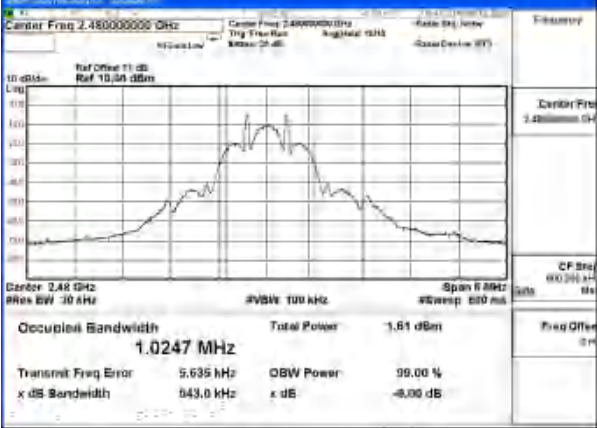 Center Freq 2.402000000 GHz Center Freq 2.402000000 GHz Try This Run Narrow 25 dB Rate 500 Hz Sweep 500 ms Ref Offset 11 dB Ref 10.00 dBm Center Freq 2.402000000 GHz CP Stat 60.00 Hz Occupied Bandwidth 1.0212 MHz Total Power 12.4 dBm Transmit Freq Error 4.253 kHz OBW Power 99.00 % x dB Bandwidth 542.6 kHz x dB -6.00 dB	 Center Freq 2.440000000 GHz Center Freq 2.440000000 GHz Try This Run Narrow 25 dB Rate 500 Hz Sweep 500 ms Ref Offset 11 dB Ref 10.00 dBm Center Freq 2.440000000 GHz CP Stat 60.00 Hz Occupied Bandwidth 1.0200 MHz Total Power 12.1 dBm Transmit Freq Error 3.878 kHz OBW Power 99.00 % x dB Bandwidth 543.6 kHz x dB -6.00 dB
Test Mode:Coded 125K 2402MHz	Test Mode:Coded 125K 2440MHz
 Center Freq 2.480000000 GHz Center Freq 2.480000000 GHz Try This Run Narrow 25 dB Rate 500 Hz Sweep 500 ms Ref Offset 11 dB Ref 10.00 dBm Center Freq 2.480000000 GHz CP Stat 60.00 Hz Occupied Bandwidth 1.0247 MHz Total Power 1.61 dBm Transmit Freq Error 5.635 kHz OBW Power 99.00 % x dB Bandwidth 543.0 kHz x dB -6.00 dB	
Test Mode:Coded 125K 2480MHz	



Test Mode: Coded 500K

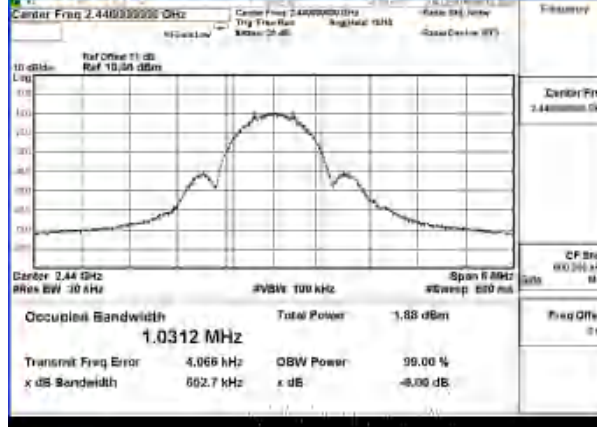 Center Freq 2.402000000 GHz Ref Offset 11 dB Ref 10.00 dBm Center Freq 2.402000000 GHz Span 6 MHz Res BW 30 kHz AVBW 100 kHz Span 6 MHz Res BW 30 kHz Occupied Bandwidth 1.0293 MHz Total Power 2.20 dBm Transmit Freq Error 3.629 kHz OBW Power 99.00 % x dB Bandwidth 666.7 kHz x dB -8.00 dB	 Center Freq 2.440000000 GHz Ref Offset 11 dB Ref 10.00 dBm Center Freq 2.440000000 GHz Span 6 MHz Res BW 30 kHz AVBW 100 kHz Span 6 MHz Res BW 30 kHz Occupied Bandwidth 1.0312 MHz Total Power 1.88 dBm Transmit Freq Error 4.066 kHz OBW Power 99.00 % x dB Bandwidth 662.7 kHz x dB -8.00 dB
Test Mode:Coded 500K 2402MHz	Test Mode:Coded 500K 2440MHz
 Center Freq 2.480000000 GHz Ref Offset 11 dB Ref 10.00 dBm Center Freq 2.480000000 GHz Span 6 MHz Res BW 30 kHz AVBW 100 kHz Span 6 MHz Res BW 30 kHz Occupied Bandwidth 1.0338 MHz Total Power 1.32 dBm Transmit Freq Error 4.025 kHz OBW Power 99.00 % x dB Bandwidth 663.6 kHz x dB -8.00 dB	
Test Mode:Coded 500K 2480MHz	



4 Transmitter Power Spectral Density

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
GFSK (LE 1Mbps)	2402	0	-13.9
GFSK (LE 1Mbps)	2440	19	-14.1
GFSK (LE 1Mbps)	2480	39	-14.7


Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
GFSK (LE 2Mbps)	2402	0	-17.0
GFSK (LE 2Mbps)	2440	19	-17.3
GFSK (LE 2Mbps)	2480	39	-19.3

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
Coded 125K	2402	0	-3.5
Coded 125K	2440	19	-3.9
Coded 125K	2480	39	-4.5

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
Coded 500K	2402	0	-3.7
Coded 500K	2440	19	-5.7
Coded 500K	2480	39	-5.2




Test Mode: GFSK (LE 1Mbps)

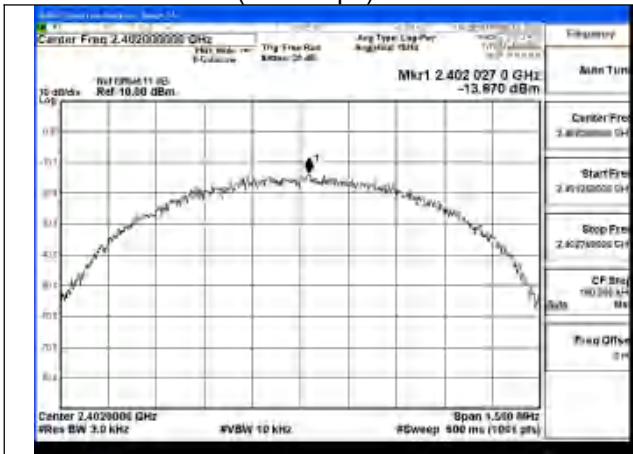

Test Mode:GFSK (LE 1Mbps) 2402MHz




Test Mode:GFSK (LE 1Mbps) 2440MHz

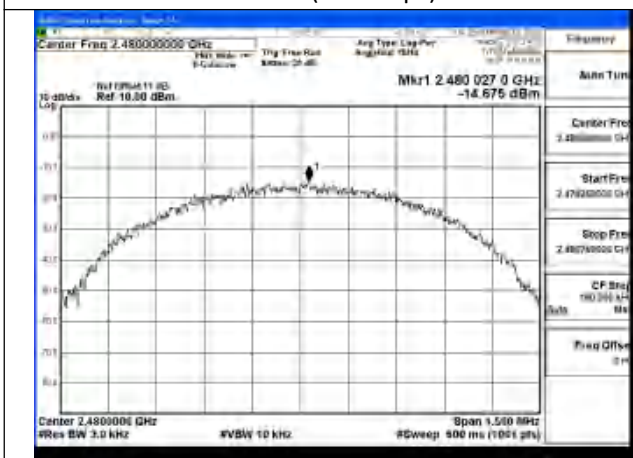

Test Mode:GFSK (LE 1Mbps) 2480MHz



Test Mode: GFSK (LE 2Mbps)

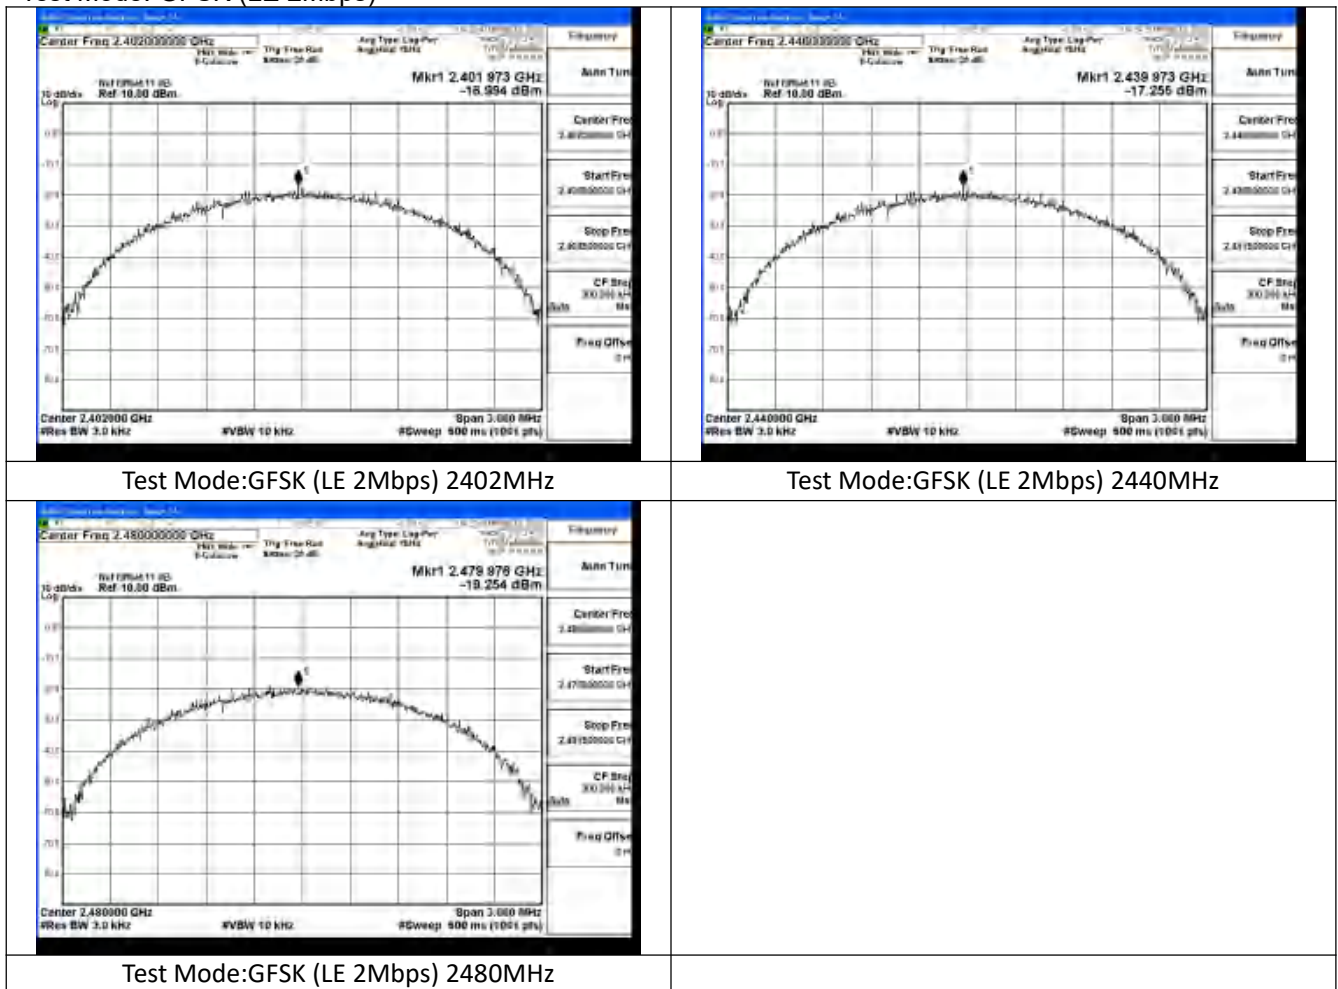





Test Mode: Coded 125K



Test Mode:Coded 125K 2402MHz

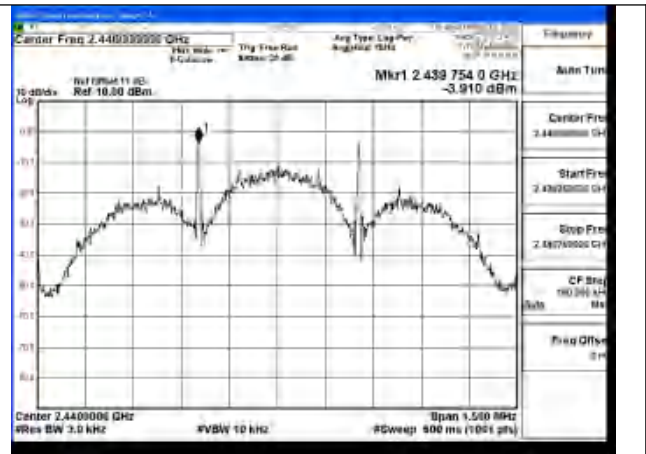


Test Mode:Coded 125K 2440MHz

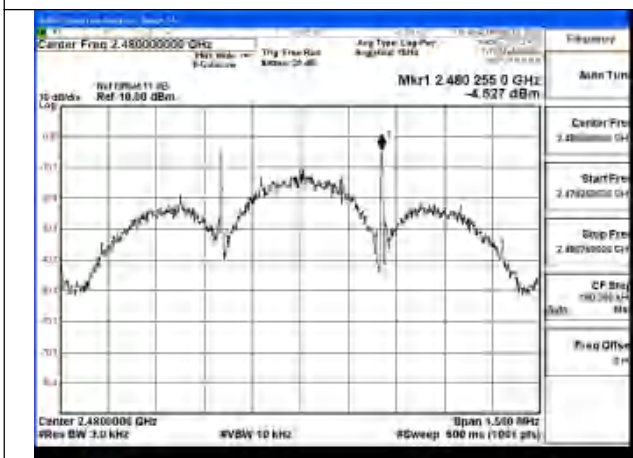

Test Mode:Coded 125K 2480MHz




Test Mode: Coded 500K

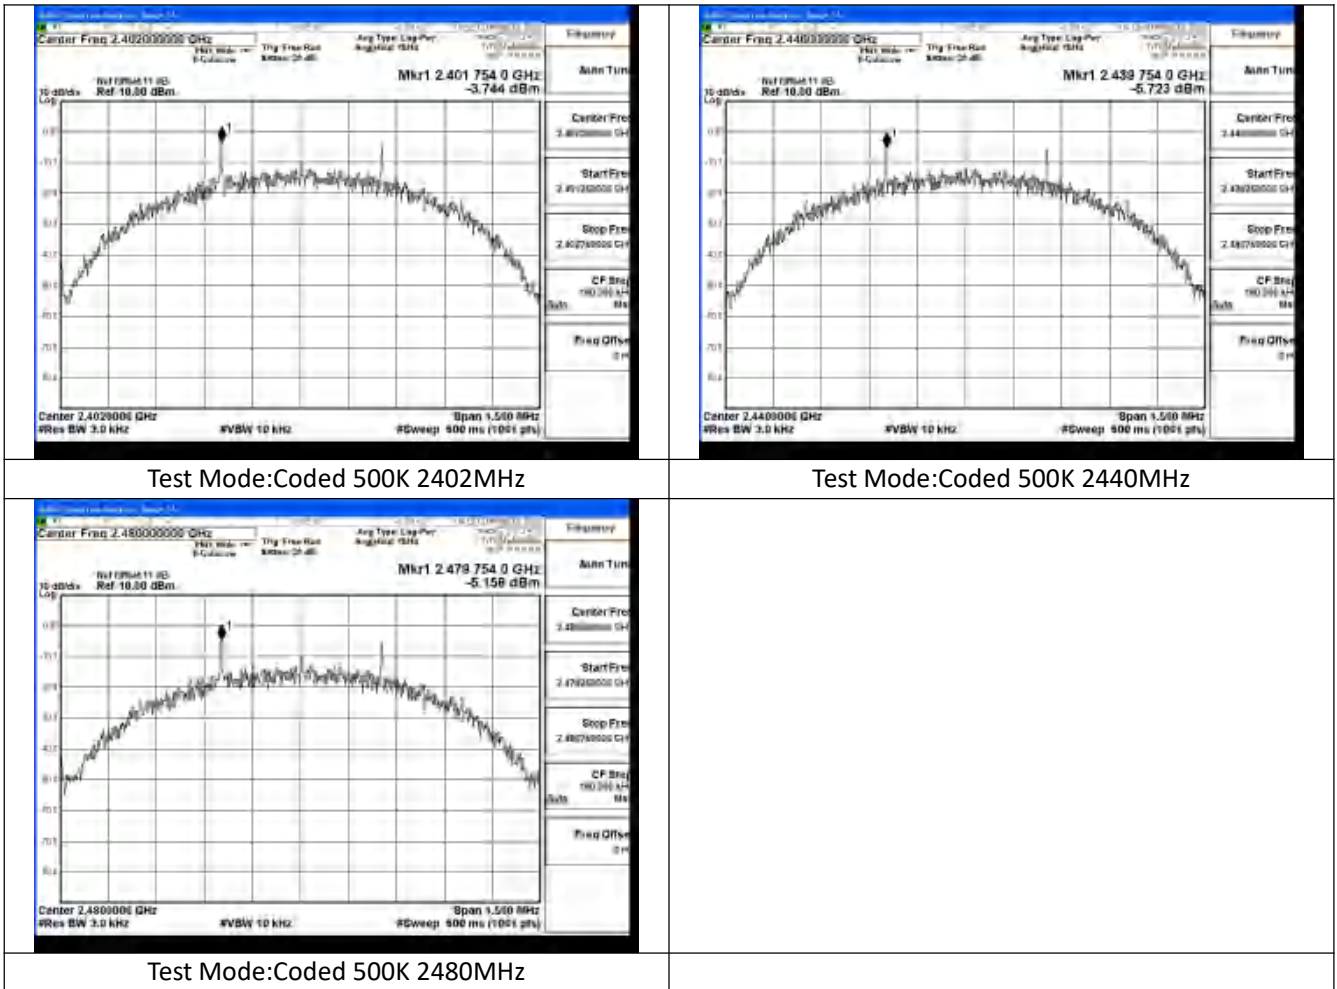




5 Conducted Out of band emission measurement

Test Mode: GFSK (LE 1Mbps)

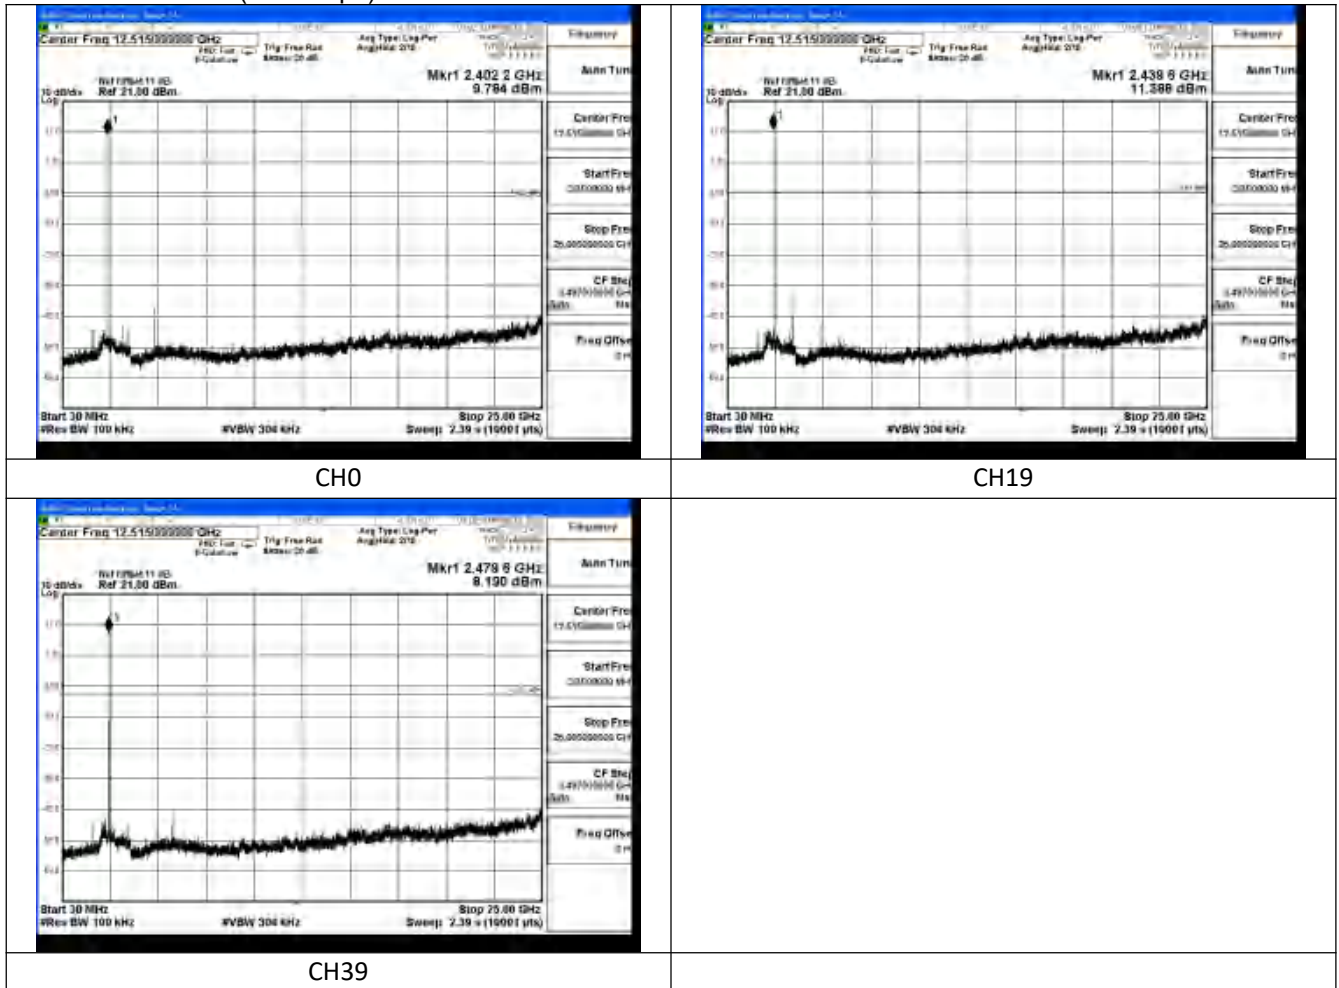





Test Mode: GFSK (LE 2Mbps)

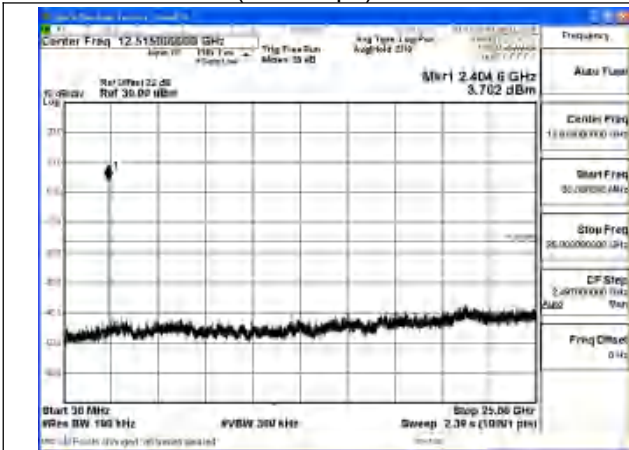

CH0

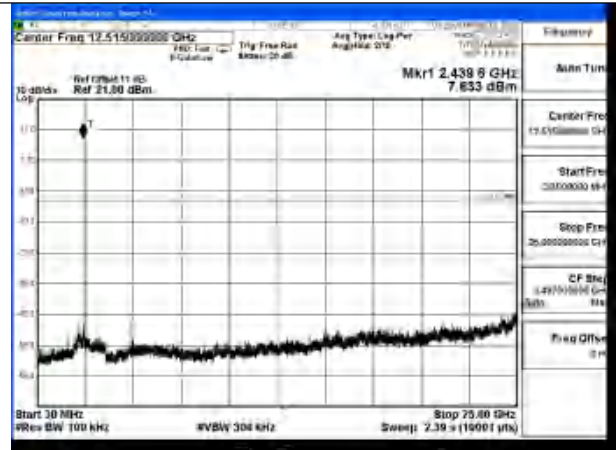


CH19

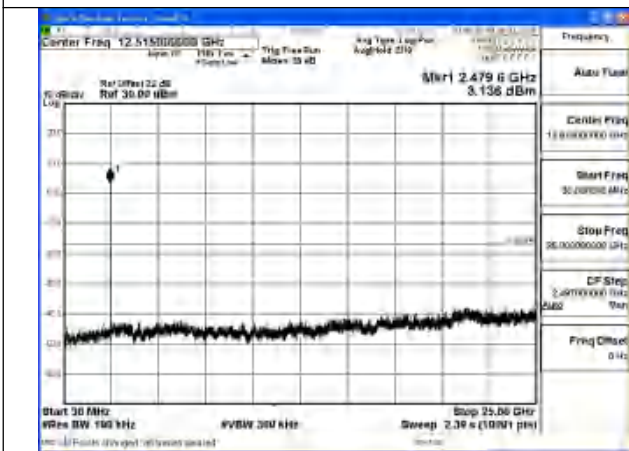

CH39




Test Mode: Coded 125K

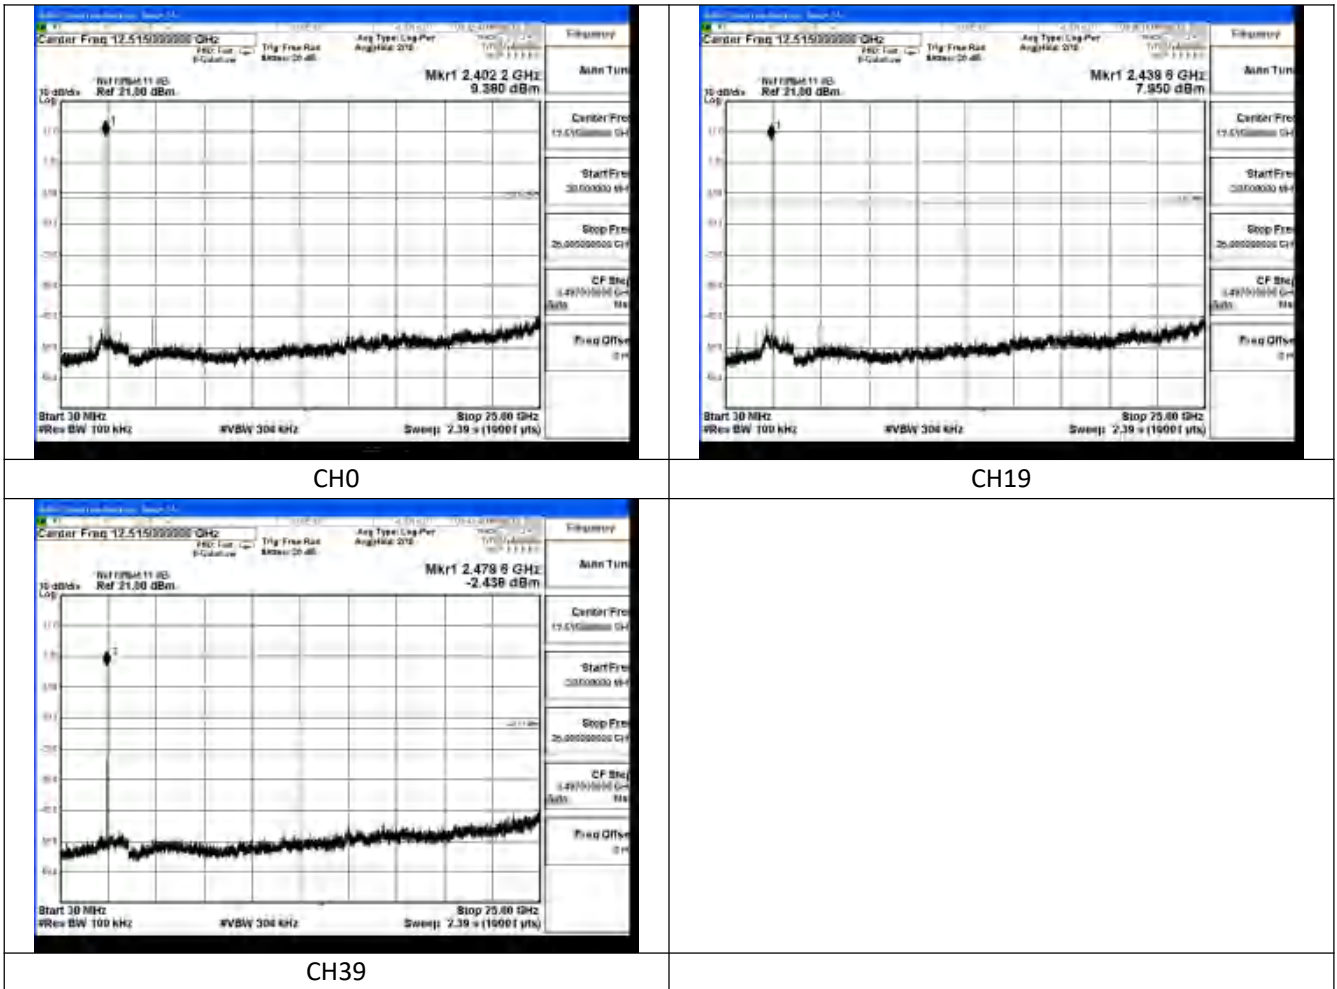




Test Mode: Coded 500K

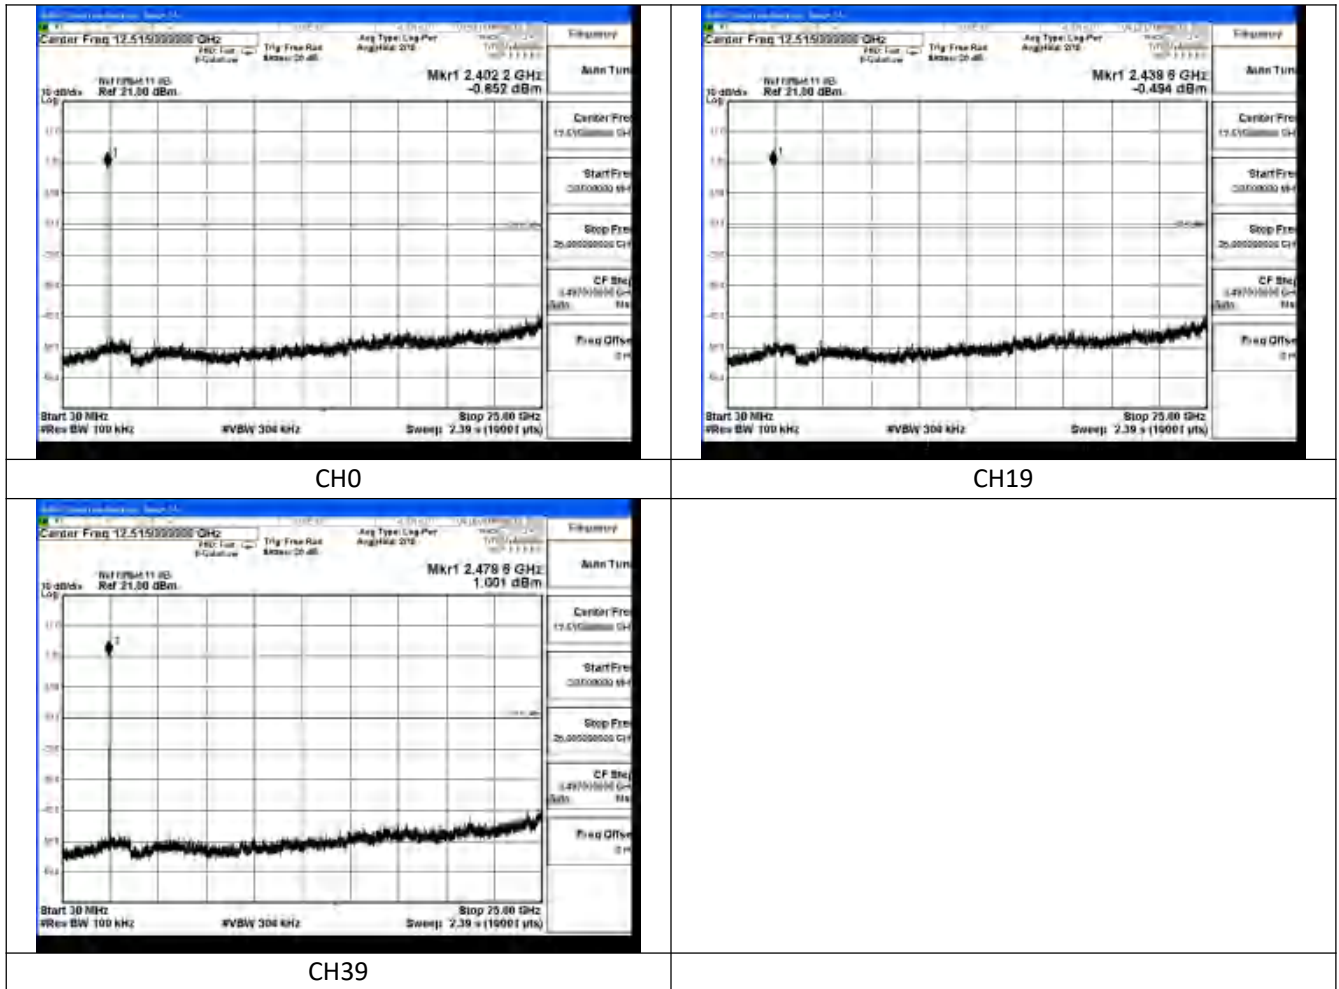




6 Band Edge measurement


Test Mode: GFSK (LE 1Mbps)

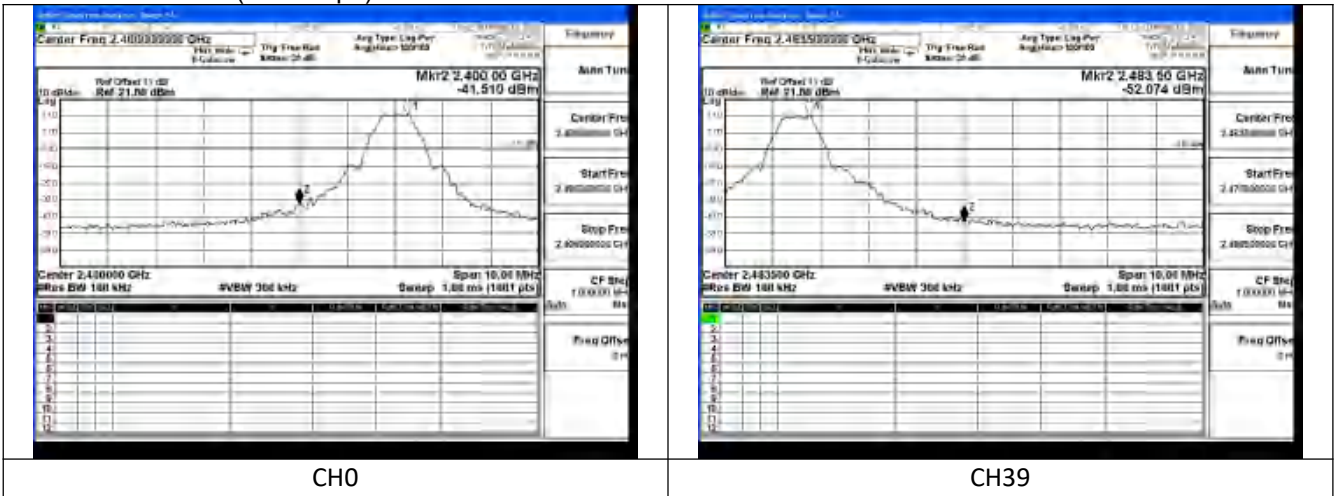

Test Mode: GFSK (LE 2Mbps)

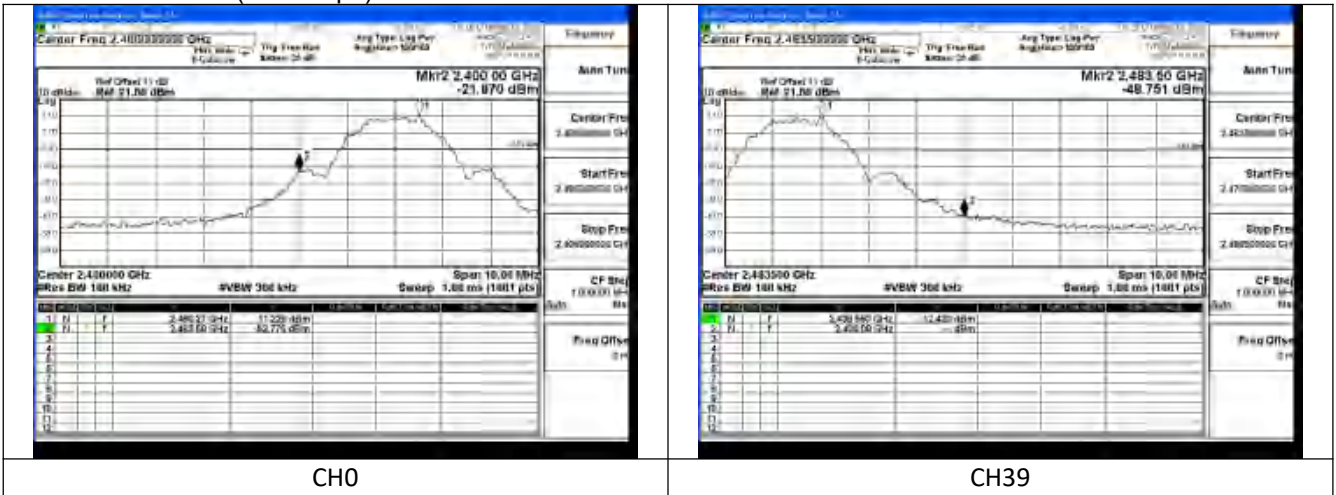

Test Mode: Coded 125K

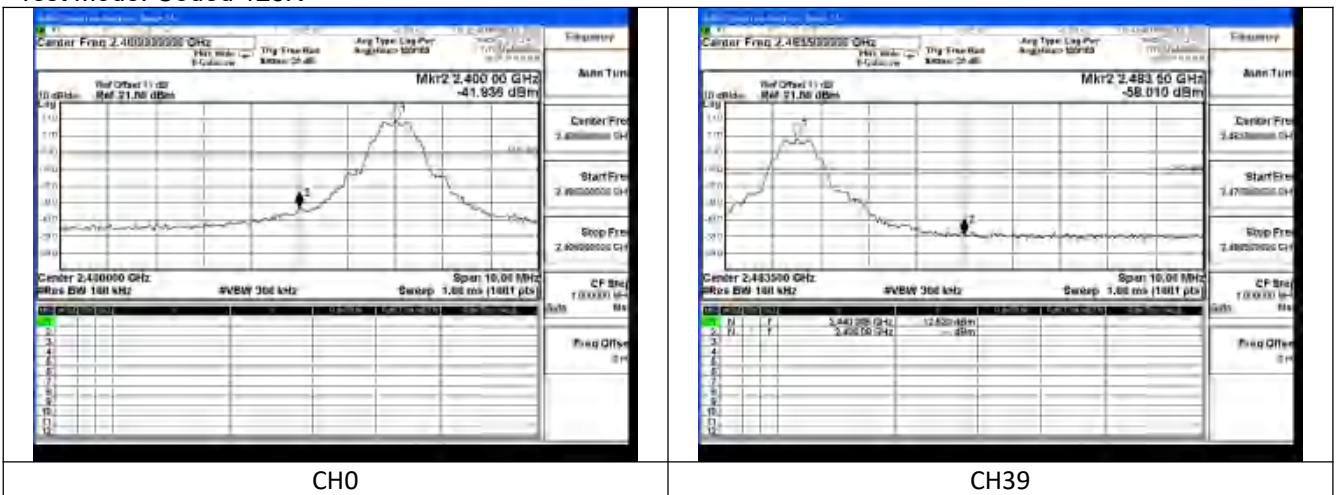



Test Mode: Coded 500K






APPENDIX B – TEST DATA OF RADIATED EMISSION

Note: The worst channel results are reflected in the report.


Note: The scanned graph represents the maximum of both horizontal and vertical polarizations and is not a single horizontal or vertical polarization scan.

Note: This product has multiple types of batteries, and according to verification, the following batteries were found to be the worst mode, so all tests were conducted using this battery

Radiated Emission Band Edge

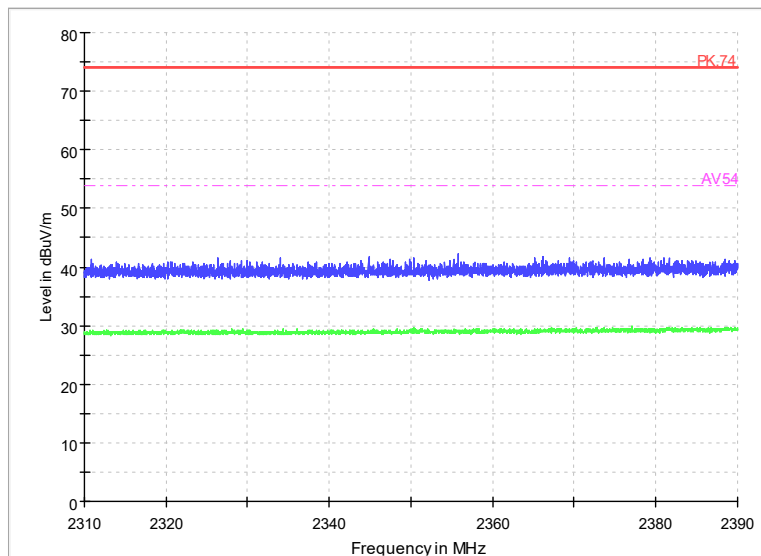


Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: GFSK (LE 1Mbps)
Polarity: Vertical

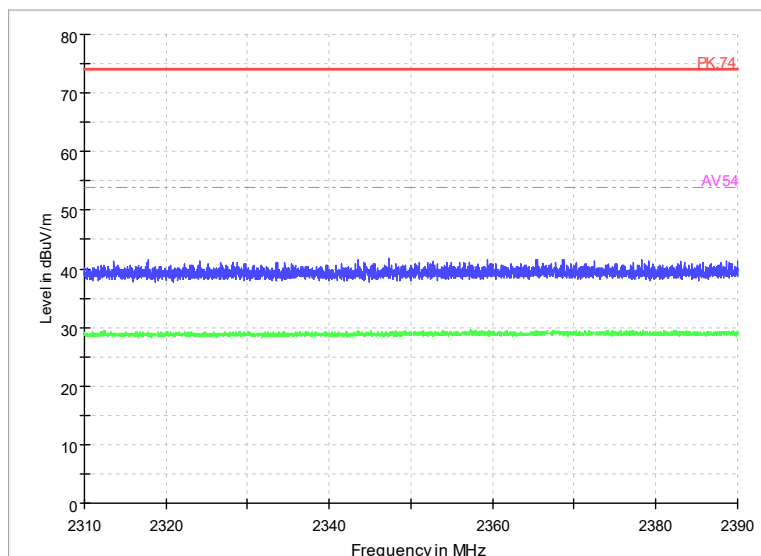





Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: GFSK (LE 1Mbps)
Polarity: Horizontal

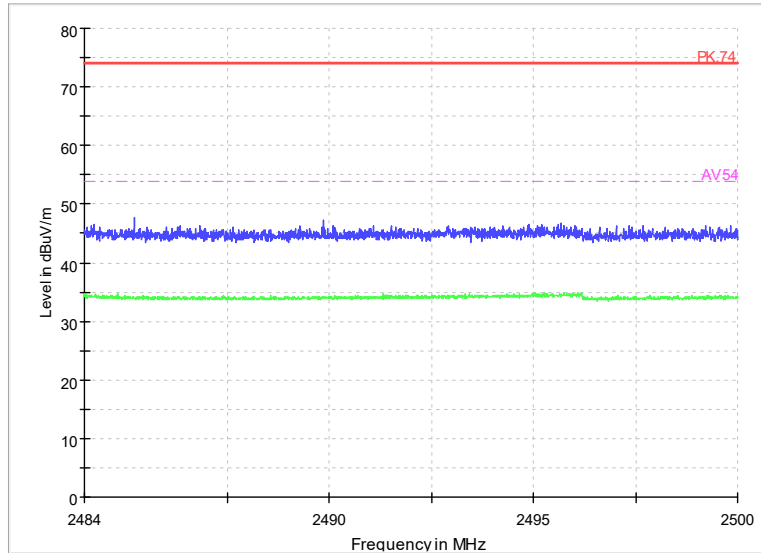


Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: GFSK (LE 1Mbps)
Polarity: Vertical

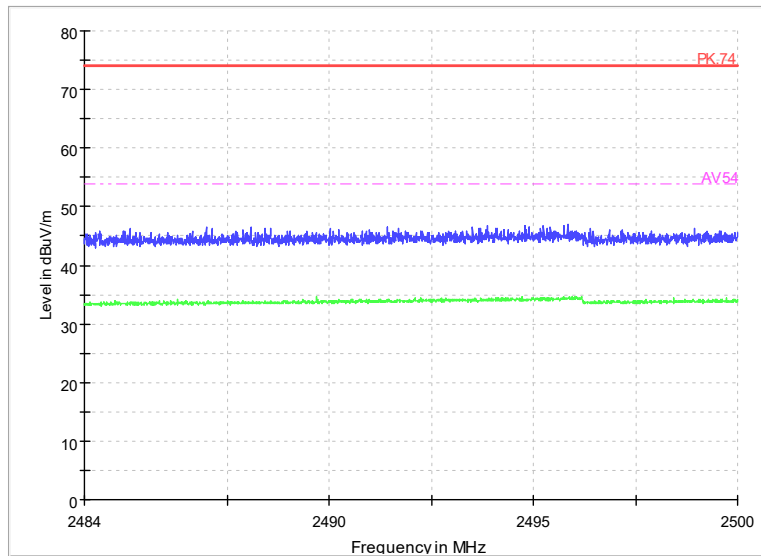


Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: GFSK (LE 1Mbps)
Polarity: Horizontal

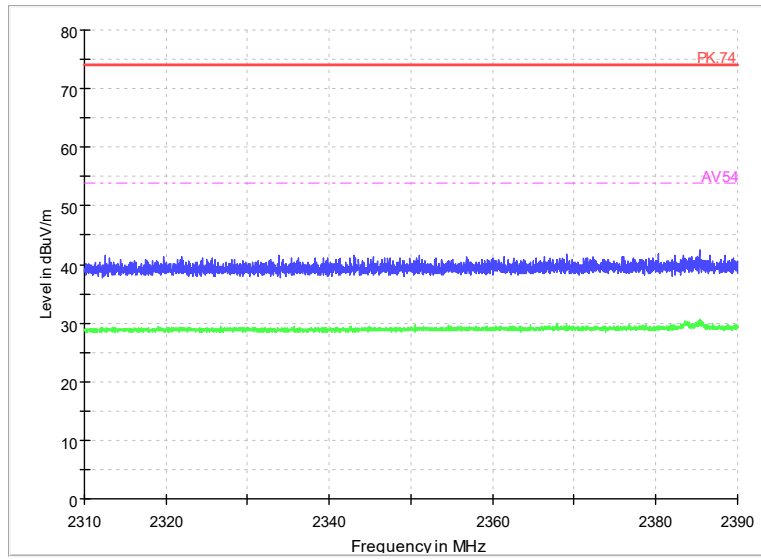


Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: GFSK (LE 2Mbps)
Polarity: Vertical

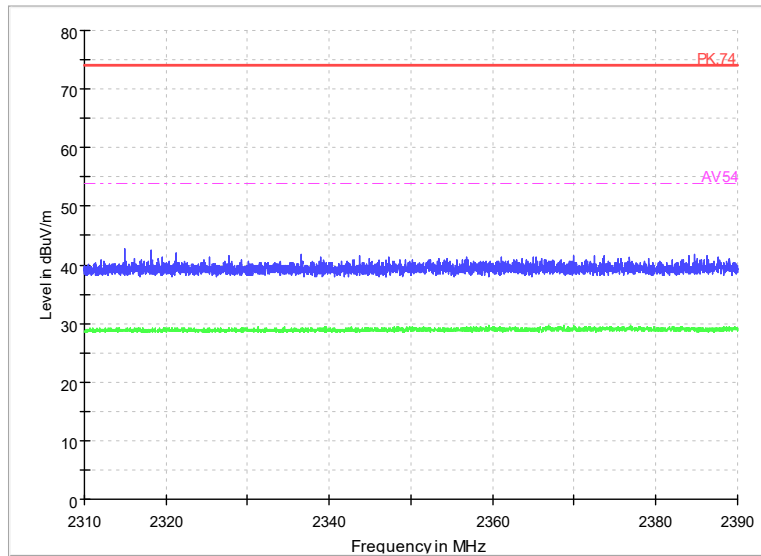


Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: GFSK (LE 2Mbps)
Polarity: Horizontal

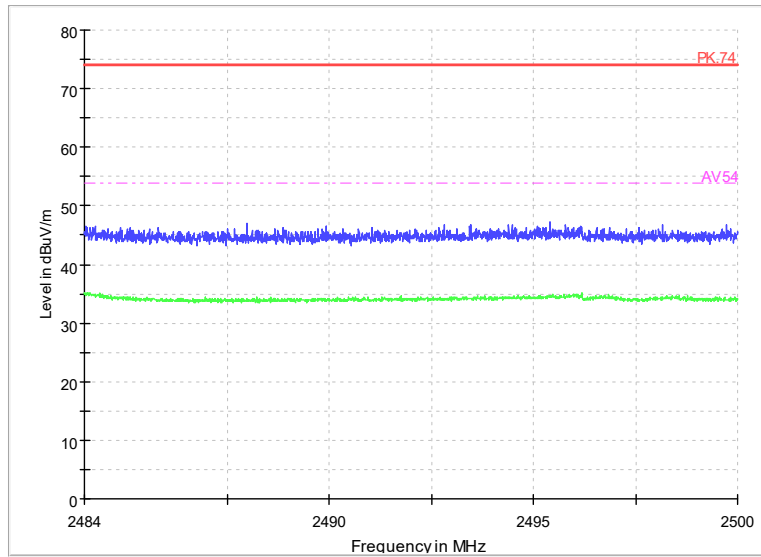


Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: GFSK (LE 2Mbps)
Polarity: Vertical

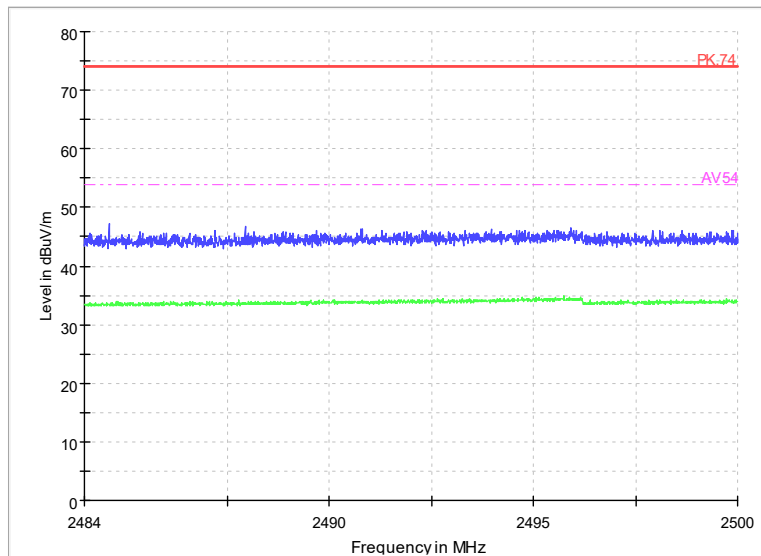


Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: GFSK (LE 2Mbps)
Polarity: Horizontal

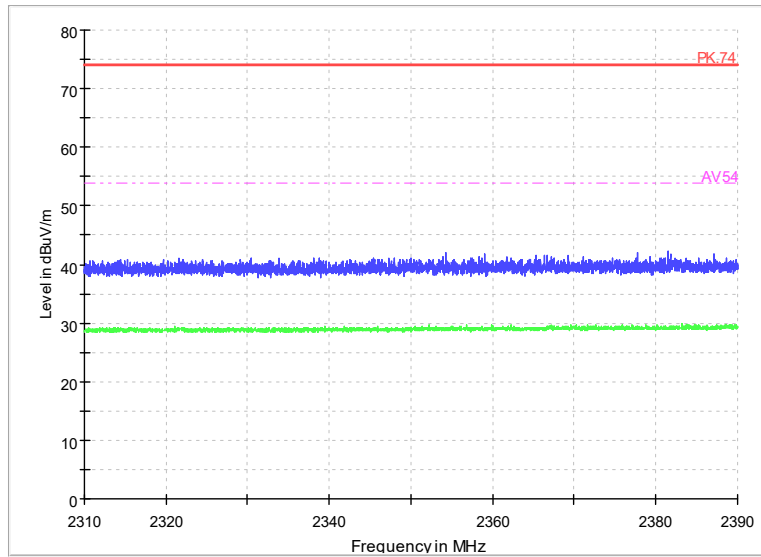


Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: Coded 125K
Polarity: Vertical

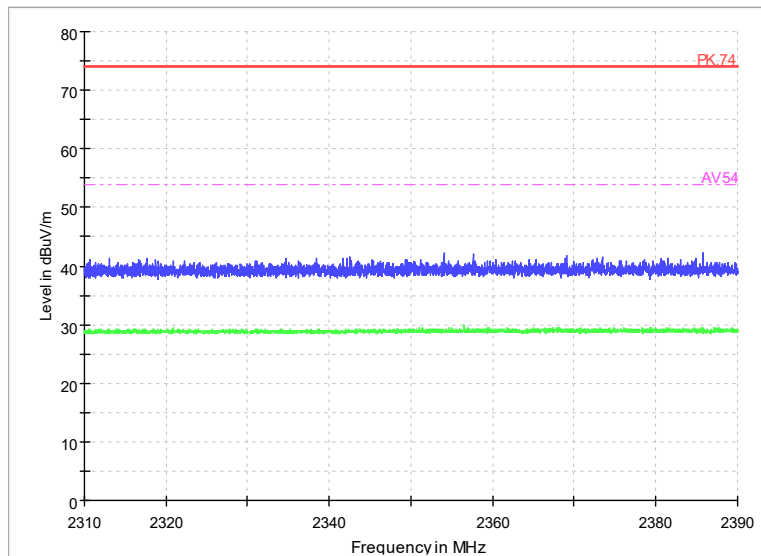


Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: Coded 125K
Polarity: Horizontal

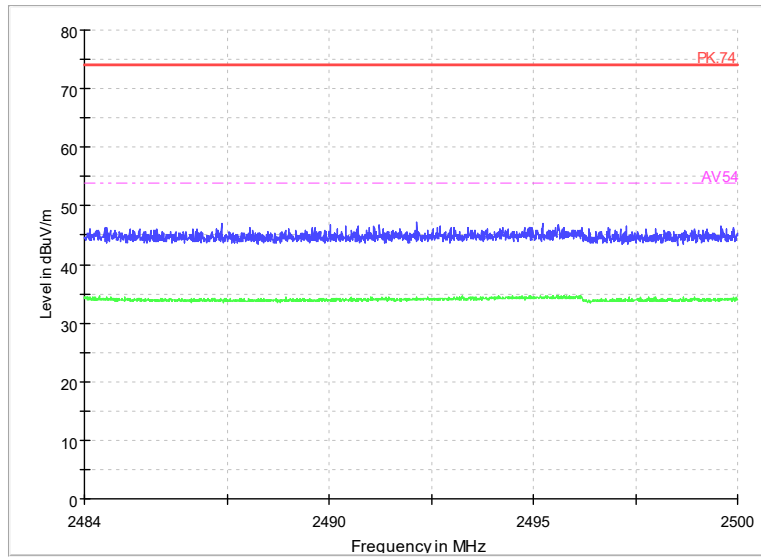


Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: Coded 125K
Polarity: Vertical

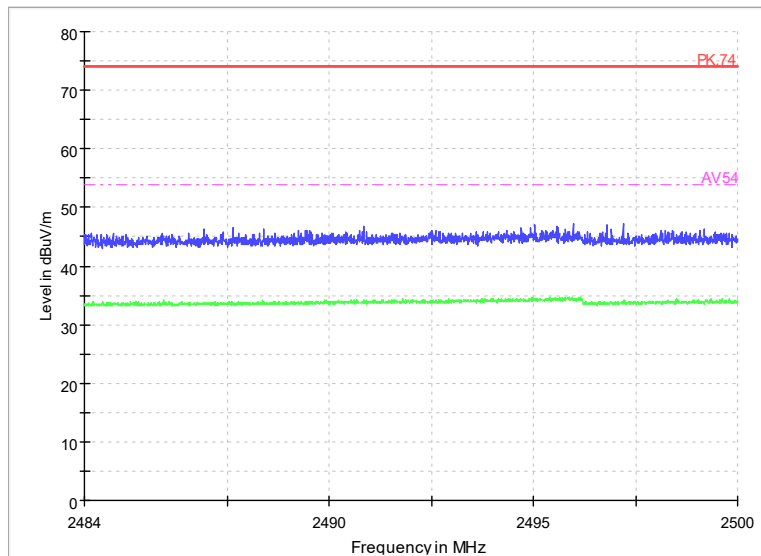


Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: Coded 125K
Polarity: Horizontal

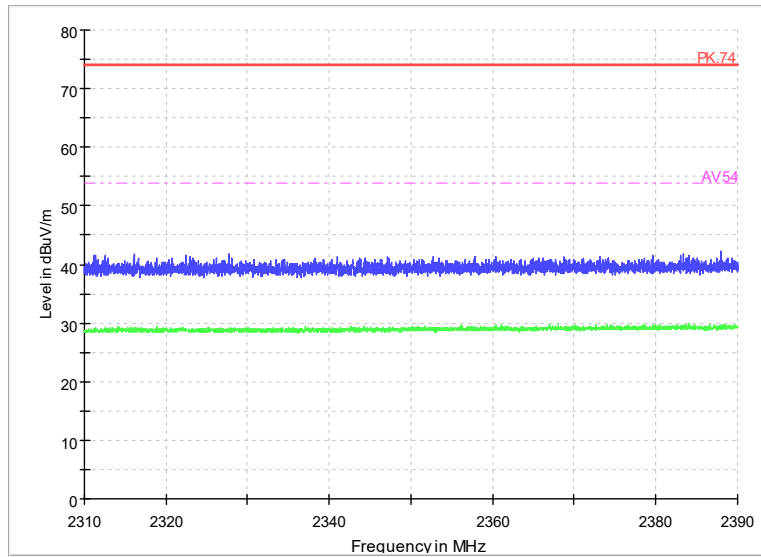


Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: Coded 500K
Polarity: Vertical

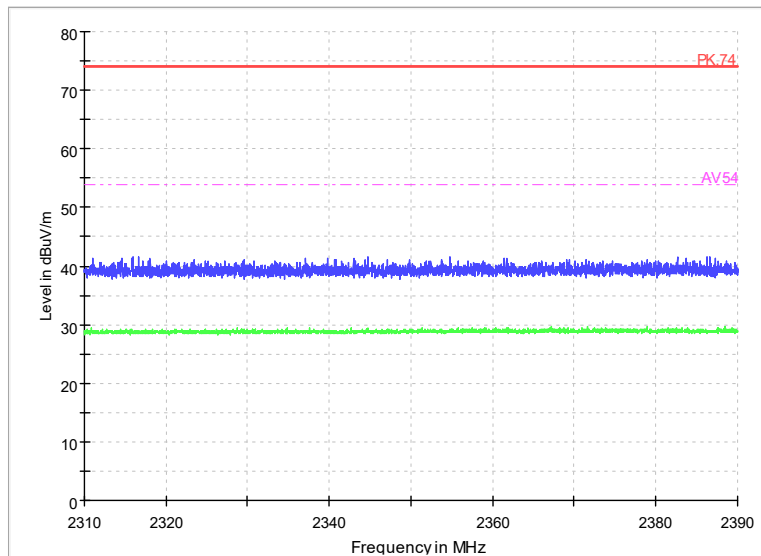

Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: Coded 500K
Polarity: Horizontal

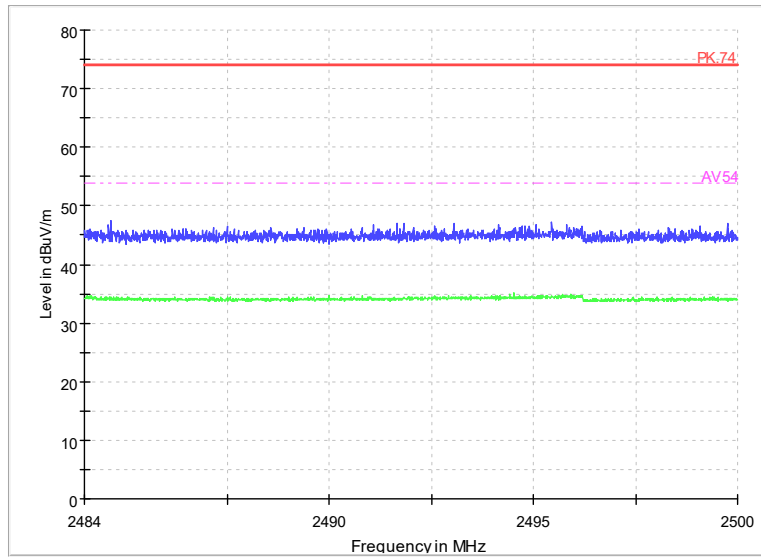

Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: Coded 500K
Polarity: Vertical

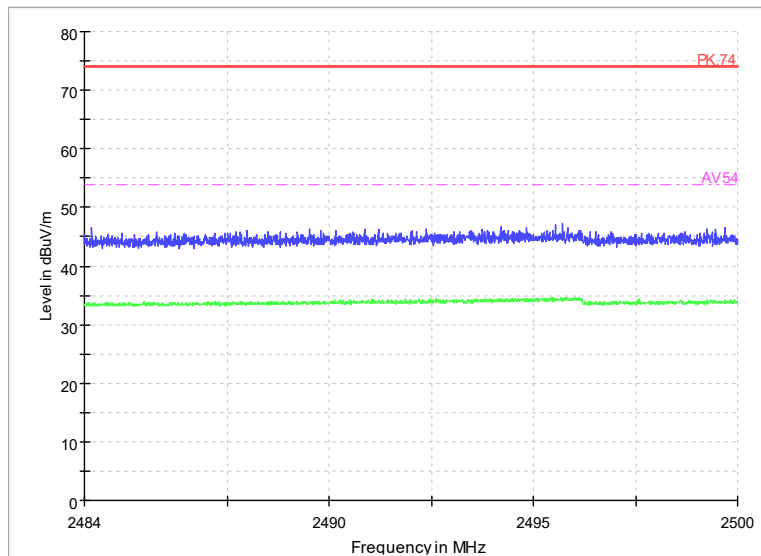

Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: Coded 500K
Polarity: Horizontal



Sample Calculations

After comparison, the worst case attitude is EUT lay down.

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: $(6.66 \text{ dB}\mu\text{V/m}) = (25.46 \text{ dBuV}) + (-18.8 \text{ dB/m})$, the corresponding frequency is 44.9865 MHz.

For GFSK (LE 1Mbps)

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
44.938	6.66	-18.8	25.46	Vertical	40	33.34
96.2995	18.69	-19.3	37.99	Vertical	43.5	24.81
155.7605	17.74	-21.9	39.64	Vertical	43.5	25.76
239.811	10.05	-18.1	28.15	Vertical	46	35.95
332.3975	16.63	-15.2	31.83	Vertical	46	29.37
924.0975	18.5	-3.4	21.9	Vertical	46	27.5

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
44.8895	6.66	-18.8	25.46	Vertical	40	33.34
96.154	18.26	-19.3	37.56	Vertical	43.5	25.24
156.197	18.21	-21.9	40.11	Vertical	43.5	25.29
240.393	15.14	-18	33.14	Vertical	46	30.86
331.6215	12.74	-15.3	28.04	Vertical	46	33.26
953.537	18.55	-3.2	21.75	Vertical	46	27.45

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
51.437	6.64	-18.8	25.44	Vertical	40	33.36
96.057	17.71	-19.3	37.01	Vertical	43.5	25.79
156.0515	18.22	-21.9	40.12	Vertical	43.5	25.28
239.0835	14.17	-18.1	32.27	Vertical	46	31.83
504.9605	17.17	-10.9	28.07	Vertical	46	28.83
935.883	18.53	-3.3	21.83	Vertical	46	27.47

For GFSK (LE 2Mbps)

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
46.587	5.99	-18.7	24.69	Vertical	40	34.01



96.348	18.47	-19.3	37.77	Vertical	43.5	25.03
155.906	18.11	-21.9	40.01	Vertical	43.5	25.39
239.908	15.96	-18.1	34.06	Vertical	46	30.04
387.4935	18.09	-13.6	31.69	Vertical	46	27.91
946.7955	18.52	-3.2	21.72	Vertical	46	27.48

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
43.871	5.7	-18.8	24.5	Vertical	40	34.3
96.348	19.1	-19.3	38.4	Vertical	43.5	24.4
155.8575	18.08	-21.9	39.98	Vertical	43.5	25.42
239.7625	16.29	-18.1	34.39	Vertical	46	29.71
502.487	18.45	-10.9	29.35	Vertical	46	27.55
911.0025	18.14	-3.5	21.64	Vertical	46	27.86

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
50.5155	6.16	-18.7	24.86	Vertical	40	33.84
96.2995	17.31	-19.3	36.61	Vertical	43.5	26.19
155.8575	18	-21.9	39.9	Vertical	43.5	25.5
239.811	16.34	-18.1	34.44	Vertical	46	29.66
505.009	18.34	-10.9	29.24	Vertical	46	27.66
935.01	19.26	-3.3	22.56	Vertical	46	26.74

For Coded 125K

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
48.1875	5.37	-18.7	24.07	Vertical	40	34.63
96.348	18.63	-19.3	37.93	Vertical	43.5	24.87
156.585	18.19	-21.8	39.99	Vertical	43.5	25.31
239.908	15.84	-18.1	33.94	Vertical	46	30.16
500.0135	17.95	-11	28.95	Vertical	46	28.05
902.806	18.02	-3.6	21.62	Vertical	46	27.98

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
46.005	6.3	-18.8	25.1	Vertical	40	33.7
96.348	16.78	-19.3	36.08	Vertical	43.5	26.72
155.9545	18.07	-21.9	39.97	Vertical	43.5	25.43
240.005	15.64	-18.1	33.74	Vertical	46	30.36
500.0135	18.05	-11	29.05	Vertical	46	27.95
944.904	18.33	-3.3	21.63	Vertical	46	27.67

Channel No.:39



Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
39.3605	6.32	-19	25.32	Vertical	40	33.68
96.348	17.98	-19.3	37.28	Vertical	43.5	25.52
156.585	17.69	-21.8	39.49	Vertical	43.5	25.81
240.975	16.27	-18	34.27	Vertical	46	29.73
382.498	18.73	-13.7	32.43	Vertical	46	27.27
899.0715	18.01	-3.7	21.71	Vertical	46	27.99

For Coded 500K
Channel No.:0


Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
52.0675	6.47	-18.8	25.27	Vertical	40	33.53
96.348	18.94	-19.3	38.24	Vertical	43.5	24.56
156.5365	18	-21.8	39.8	Vertical	43.5	25.5
240.878	15.93	-18	33.93	Vertical	46	30.07
505.009	18.28	-10.9	29.18	Vertical	46	27.72
897.5195	19.22	-3.7	22.92	Vertical	46	26.78

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
44.744	6.26	-18.8	25.06	Vertical	40	33.74
95.9115	16.42	-19.3	35.72	Vertical	43.5	27.08
155.906	17.08	-21.9	38.98	Vertical	43.5	26.42
239.908	14.59	-18.1	32.69	Vertical	46	31.41
489.198	11.19	-11.3	22.49	Vertical	46	34.81
923.661	18.05	-3.4	21.45	Vertical	46	27.95

Channel No.:39


Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
32.1825	3.92	-20.3	24.22	Vertical	40	36.08
95.9115	16.83	-19.3	36.13	Vertical	43.5	26.67
155.906	16.76	-21.9	38.66	Vertical	43.5	26.74
239.811	15.56	-18.1	33.66	Vertical	46	30.44
431.774	11.86	-12.5	24.36	Vertical	46	34.14
908.529	17.93	-3.6	21.53	Vertical	46	28.07

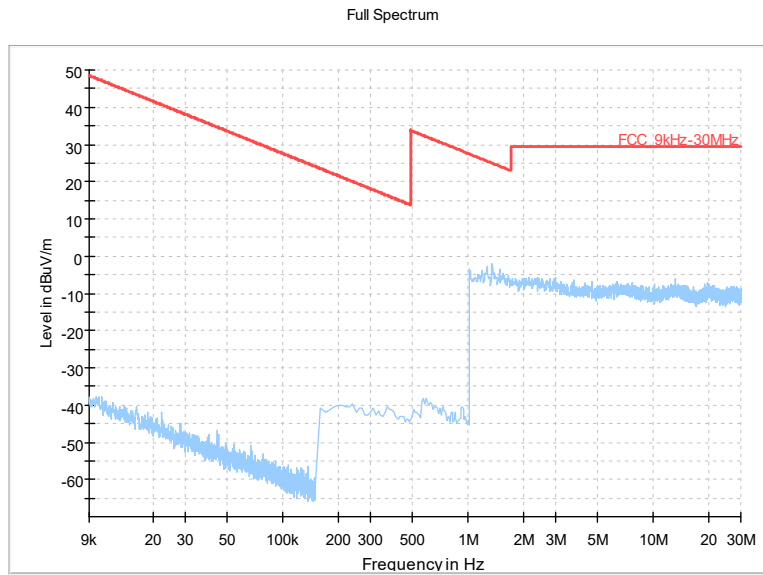

Frequency Range: 9kHz -30MHz
Detector: QP mode


Note: The relevant tests have been performed in order to verify in which mode would have the worst features, the result show above is the worst case.

Channel No.:0

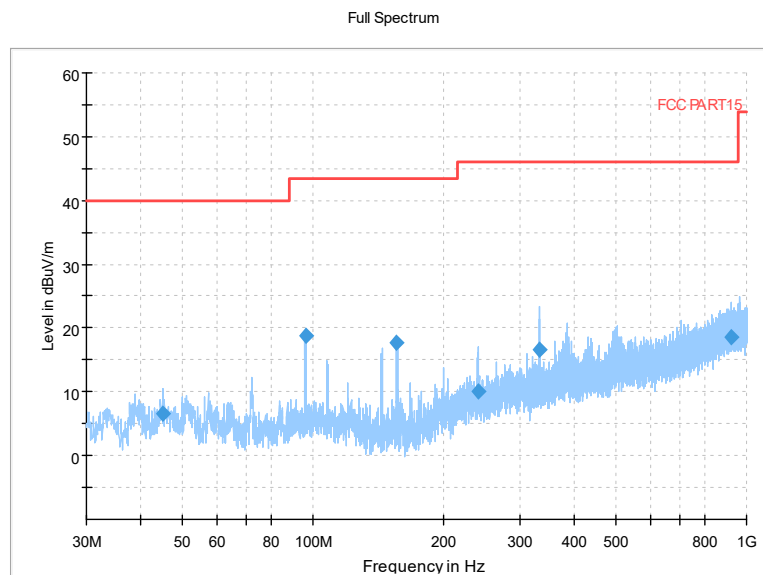




Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: GFSK (LE 1Mbps)

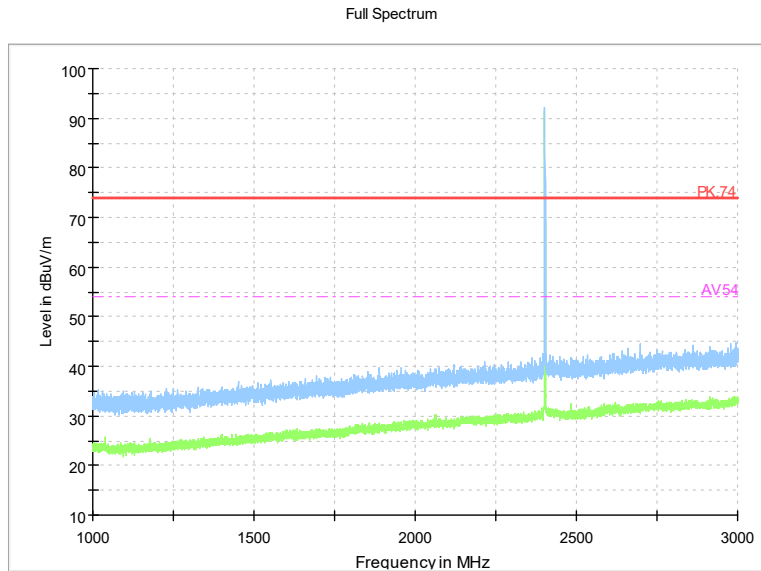


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

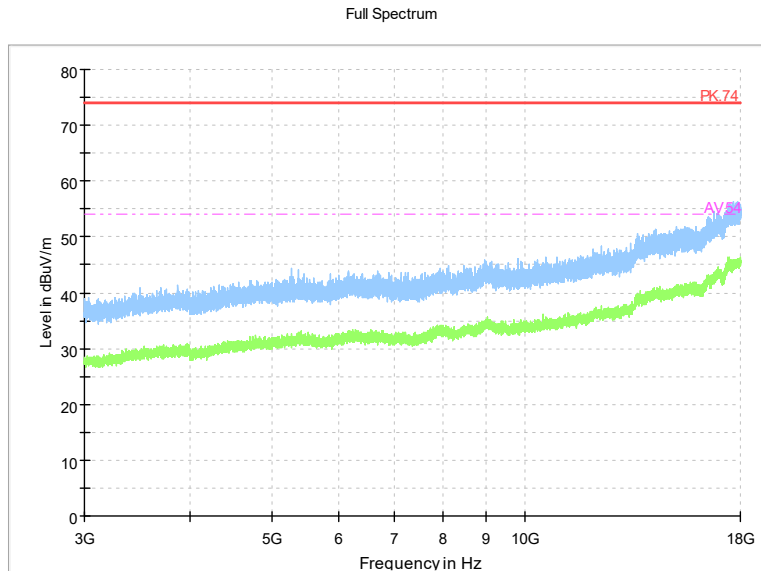

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)


Full Spectrum

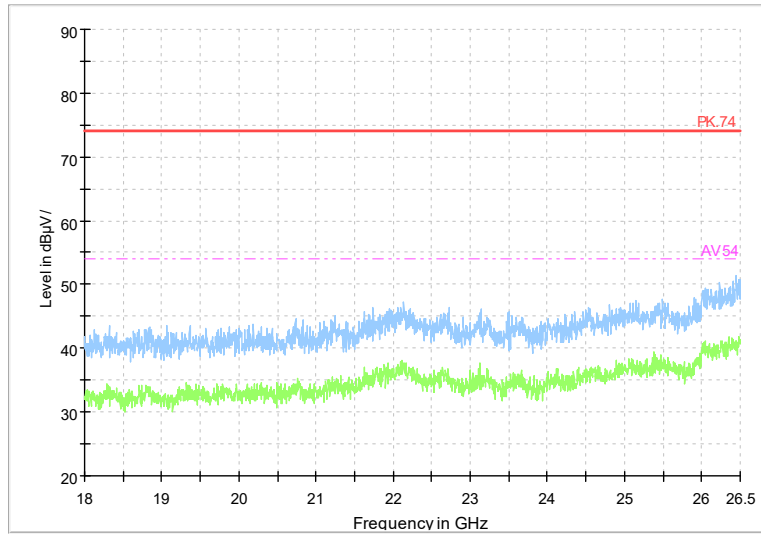

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

Channel No.:19


Full Spectrum

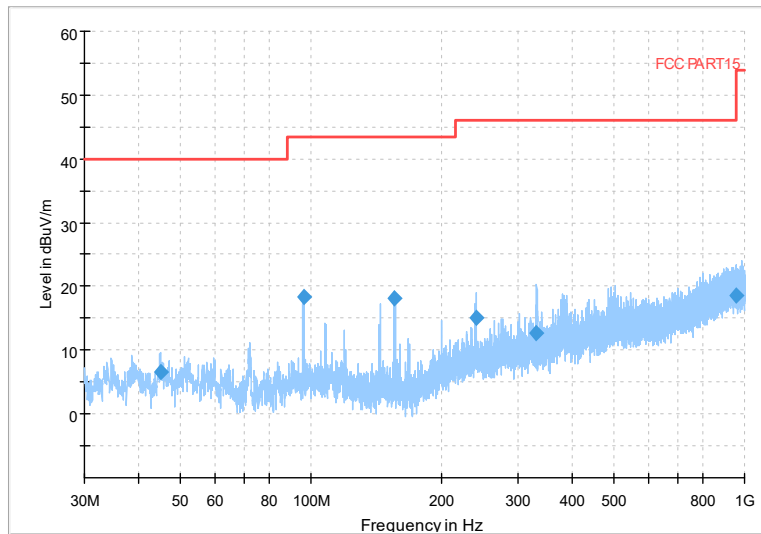

Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: GFSK (LE 1Mbps)




Full Spectrum

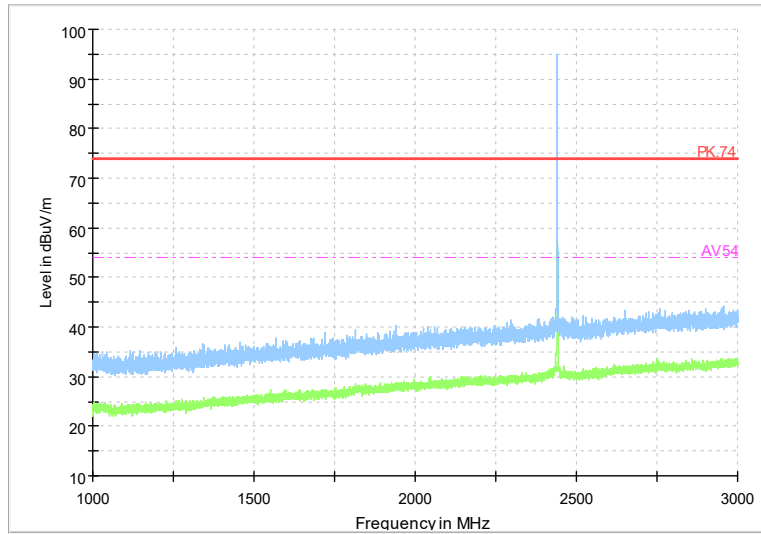


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

Full Spectrum

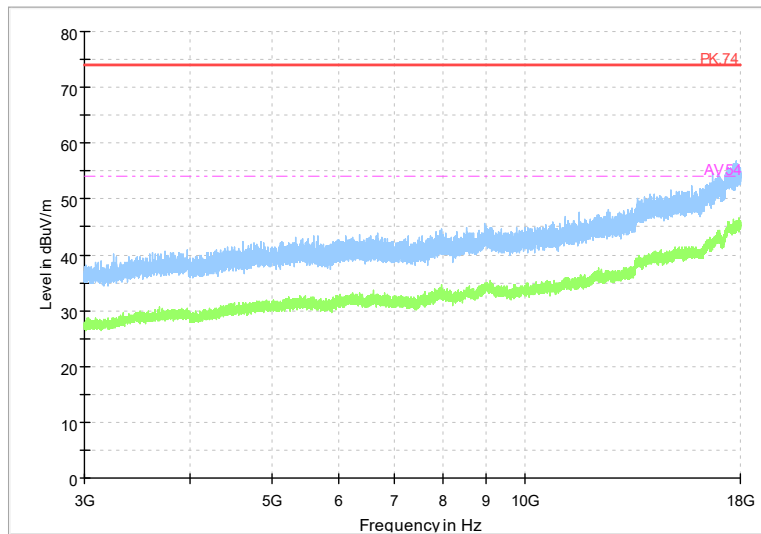

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)


Full Spectrum

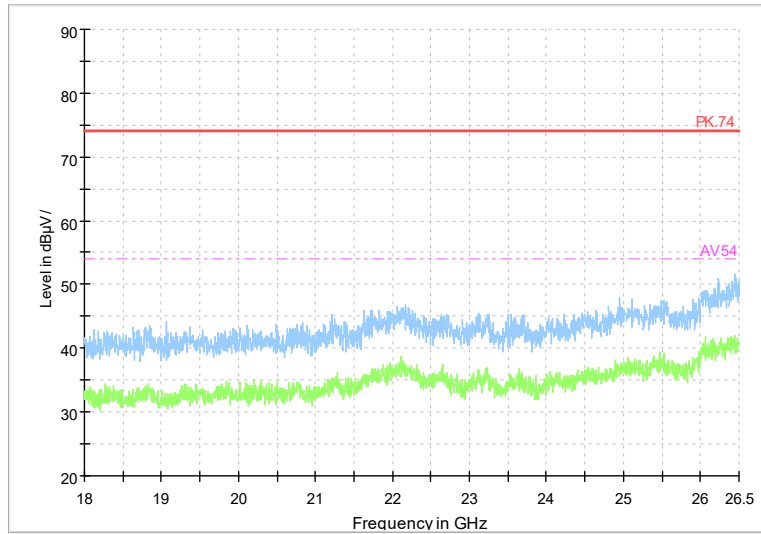

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)


Channel No.:39

Full Spectrum

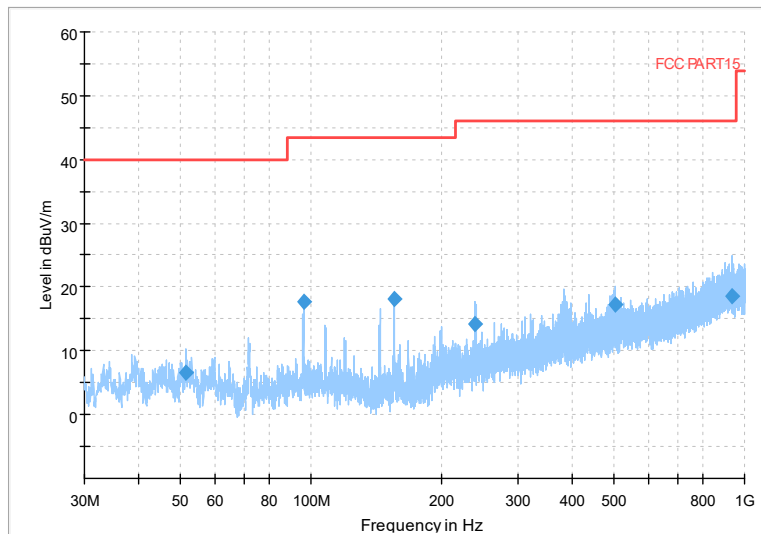


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: GFSK (LE 1Mbps)

Full Spectrum

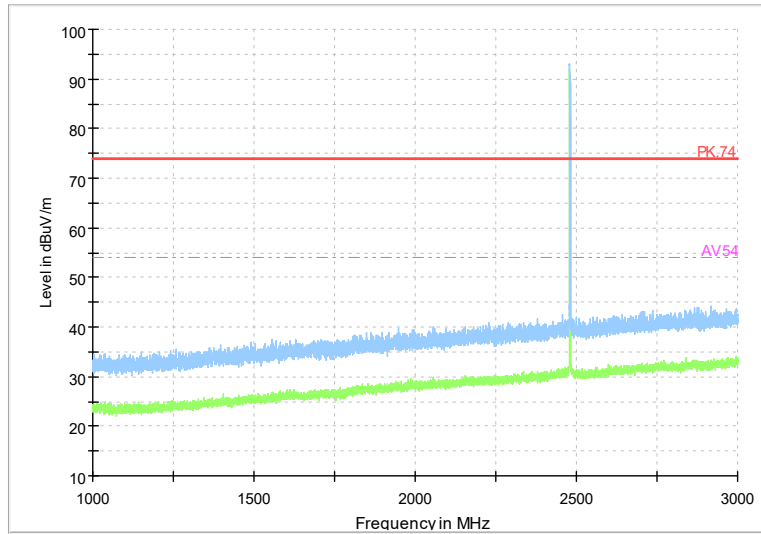


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

Full Spectrum

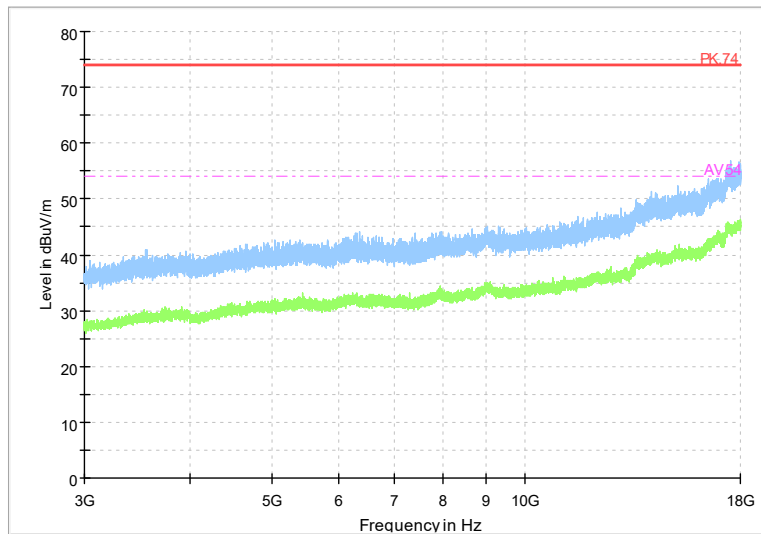

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)


Full Spectrum

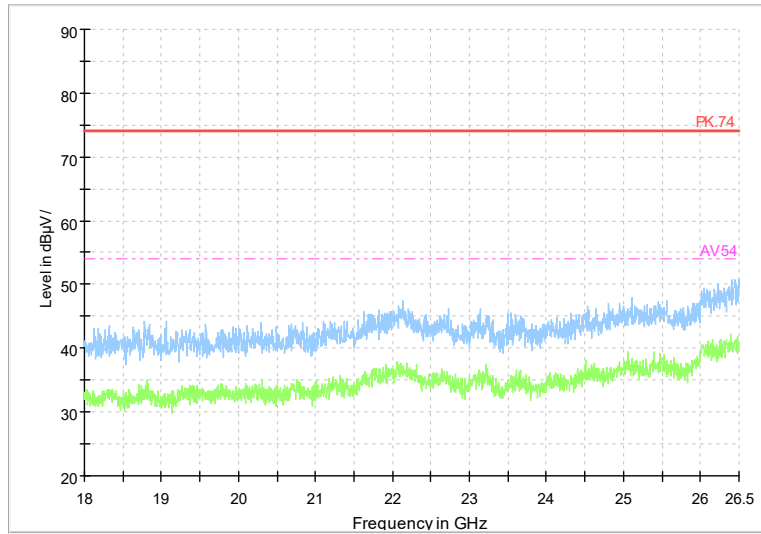

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)


Channel No.:0

Full Spectrum

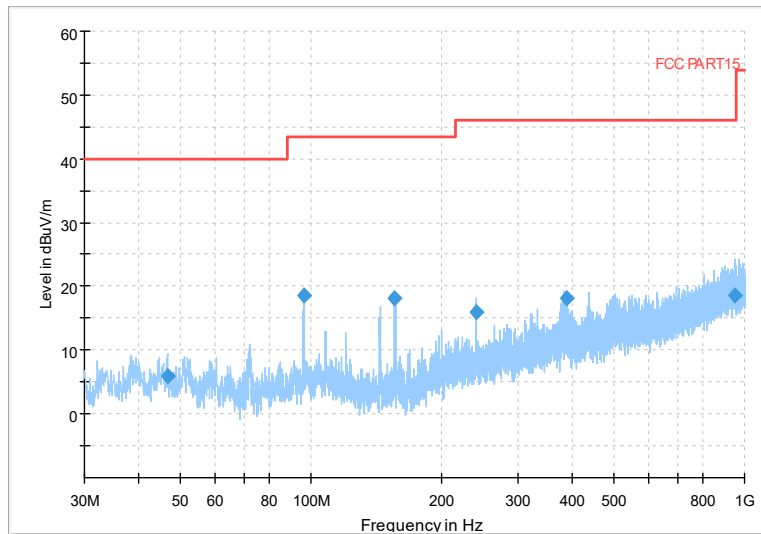


Frequency Range: 30MHz-1GHz
Detector:QP mode
Modulation type: GFSK (LE 2Mbps)

Full Spectrum

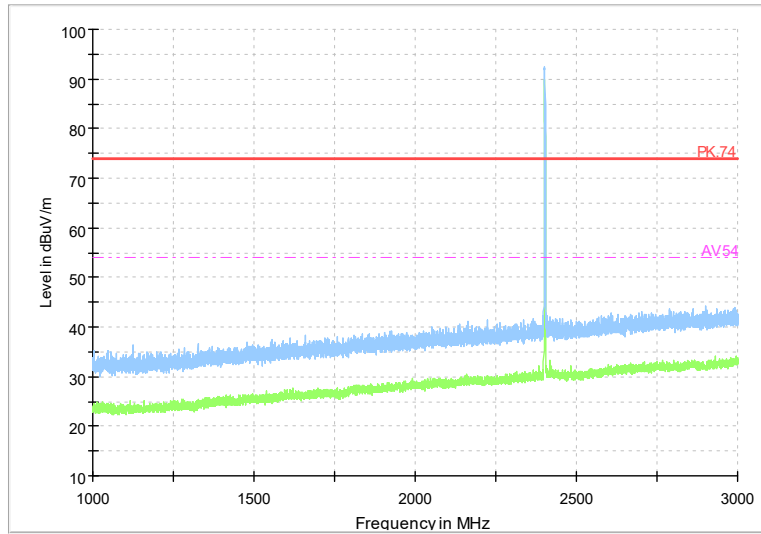


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)

Full Spectrum

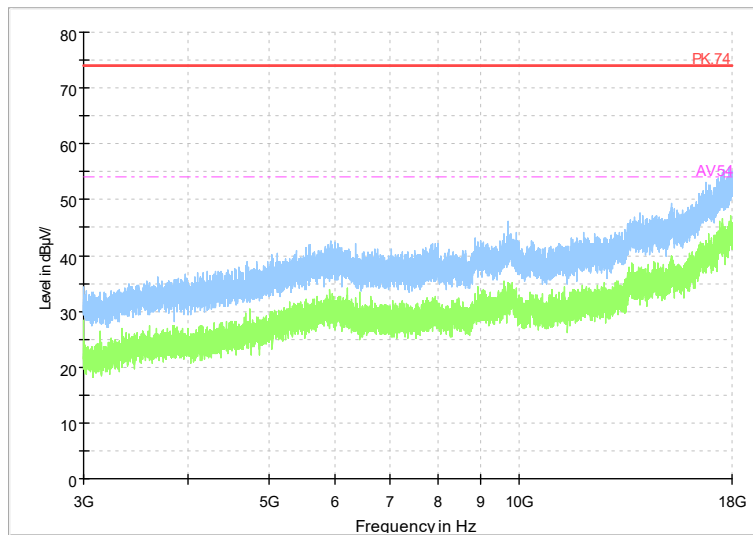

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)


Full Spectrum

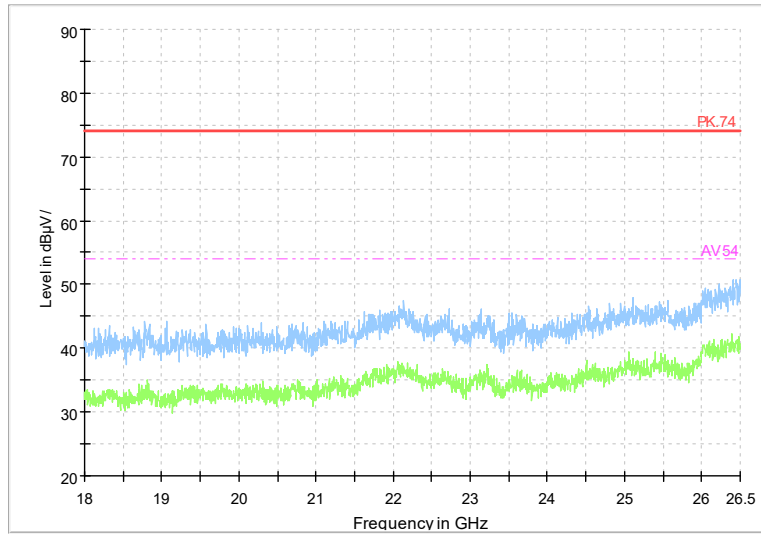

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)


Channel No.:19

Full Spectrum

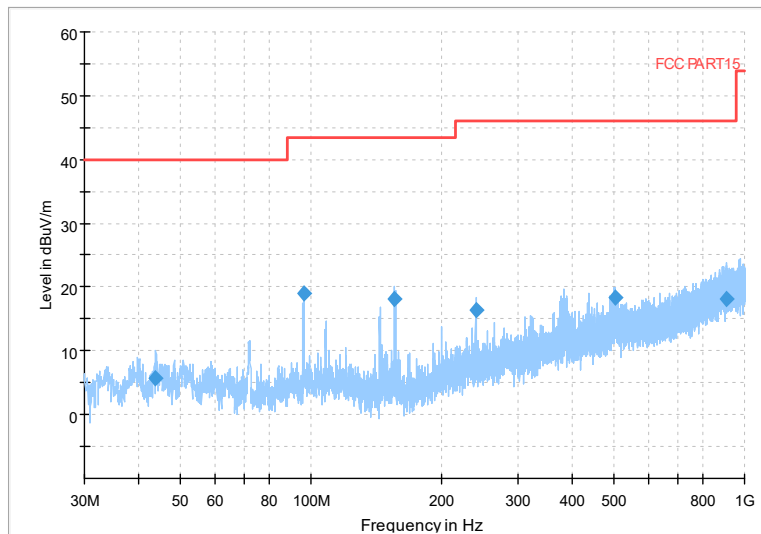


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: GFSK (LE 2Mbps)

Full Spectrum

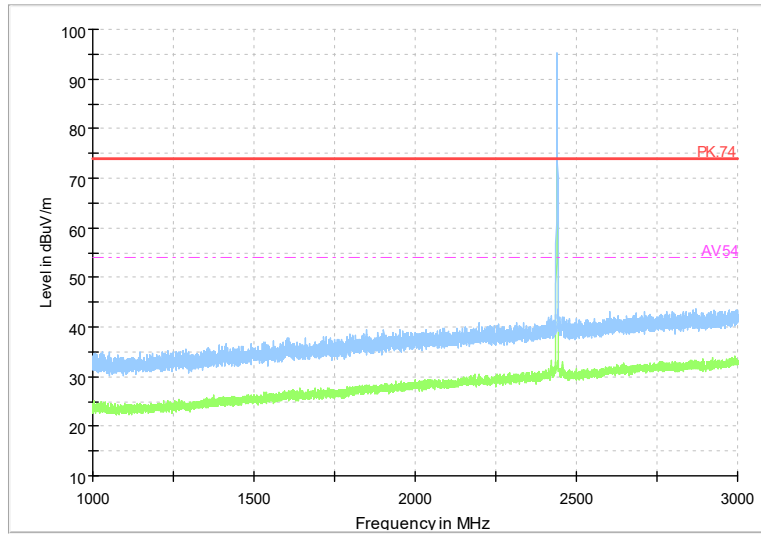


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)

Full Spectrum

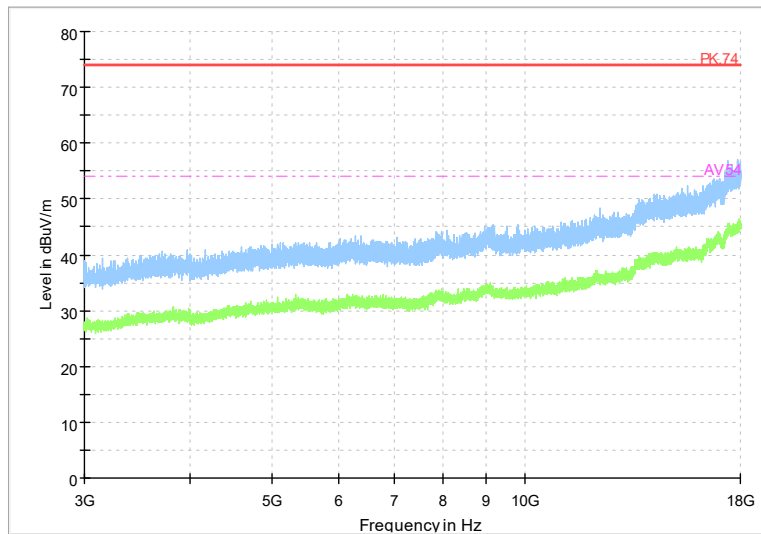

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)


Full Spectrum

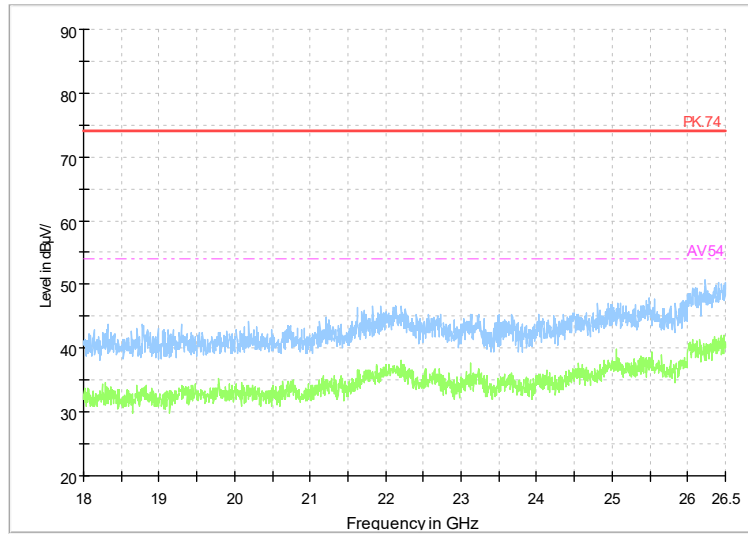

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)


Channel No.:39

Full Spectrum

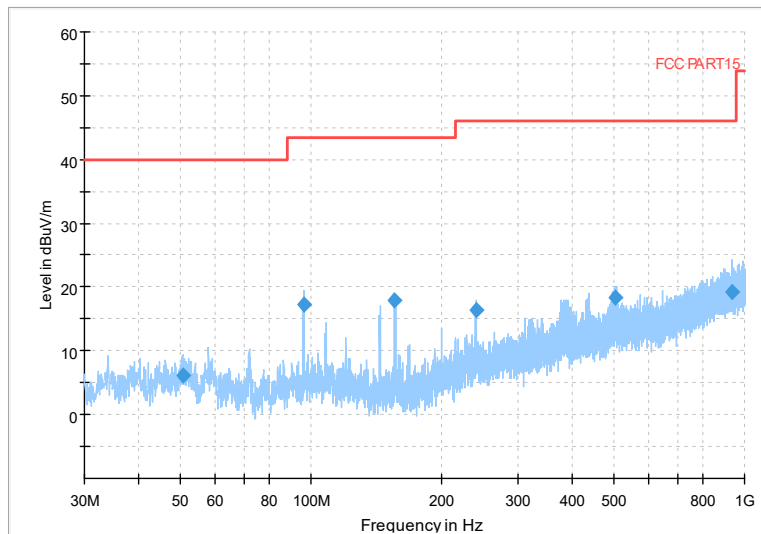


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: GFSK (LE 2Mbps)

Full Spectrum

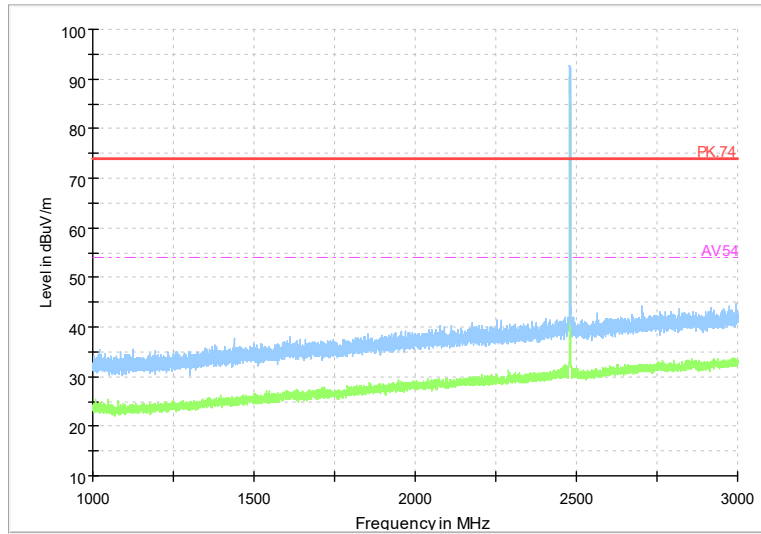

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)

Full Spectrum

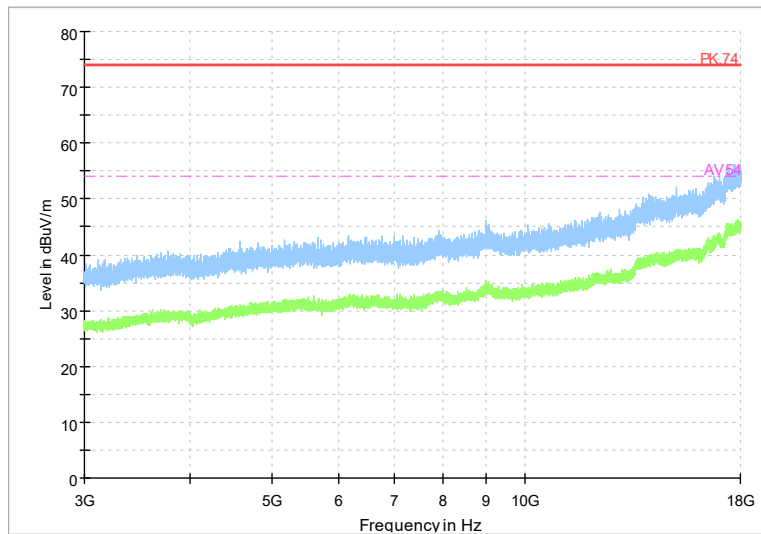

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)




Full Spectrum



Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)


Channel No.:0

Full Spectrum

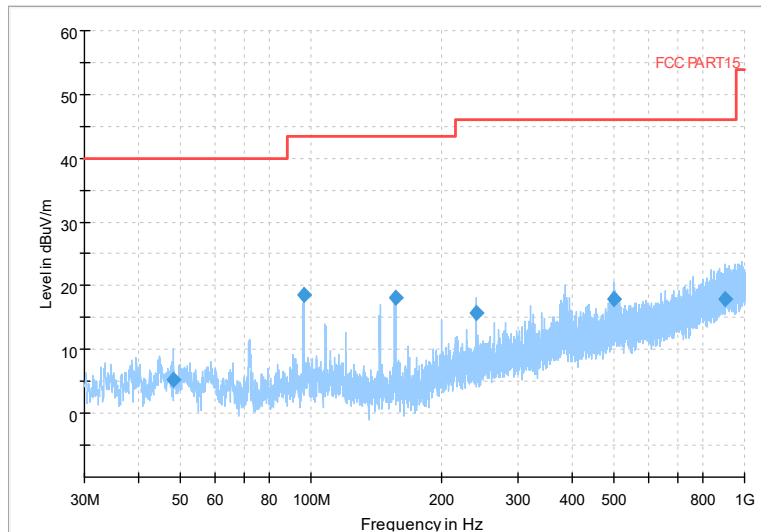


Frequency Range: 30MHz-1GHz
Detector:QP mode
Modulation type: Coded 125K

Full Spectrum

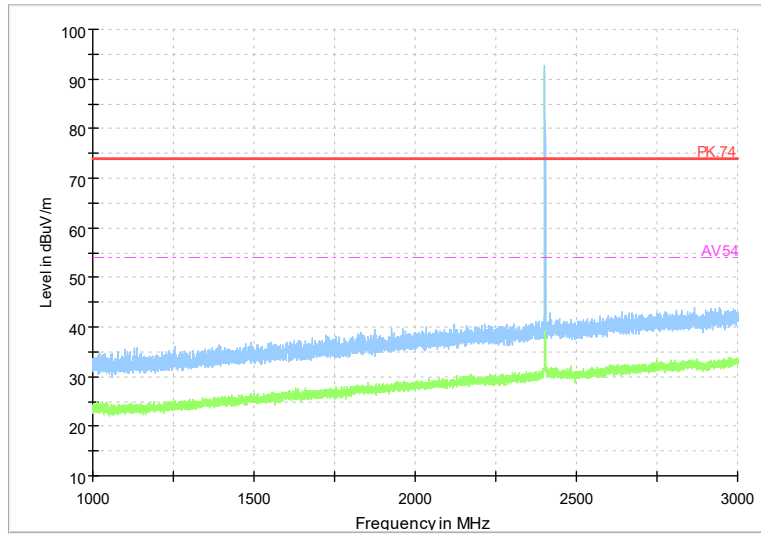

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K


Full Spectrum

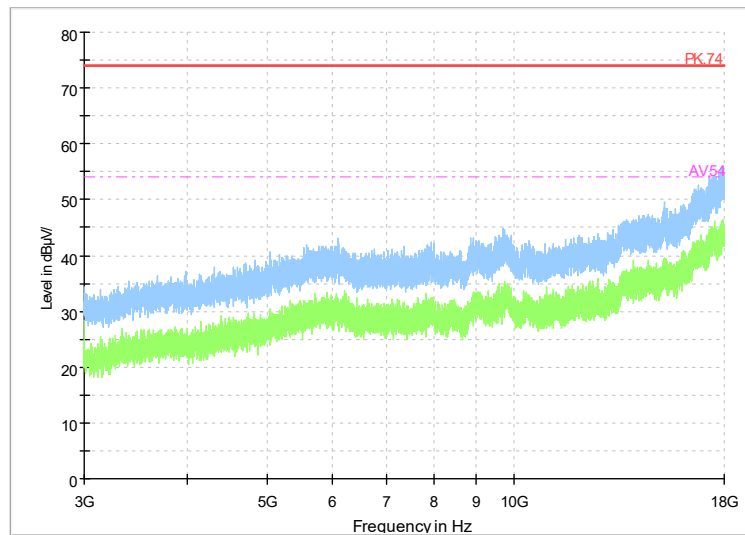

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K




Full Spectrum

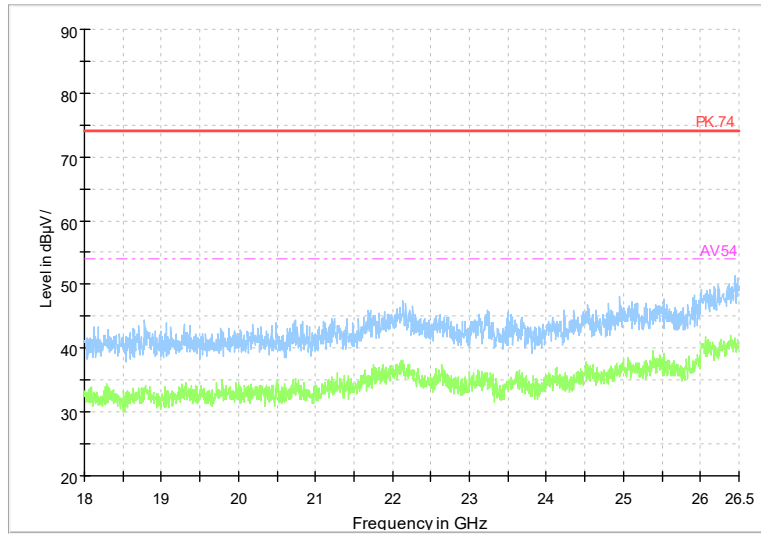

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K


Channel No.:19

Full Spectrum

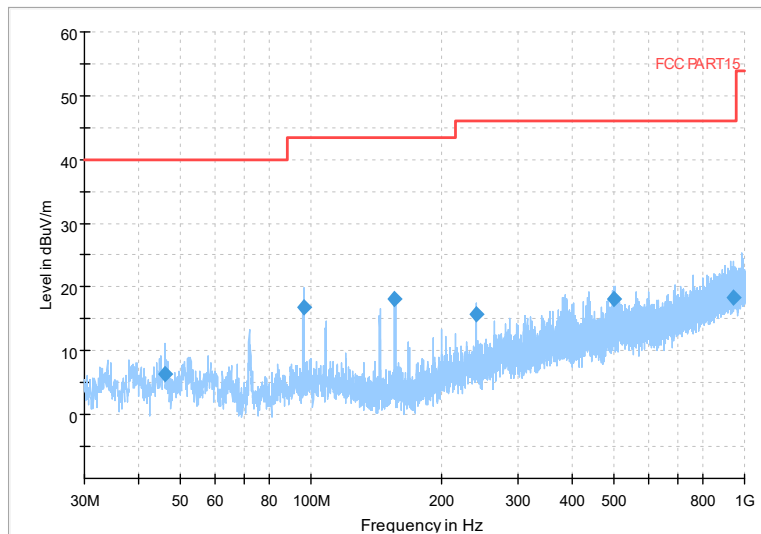


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: Coded 125K

Full Spectrum

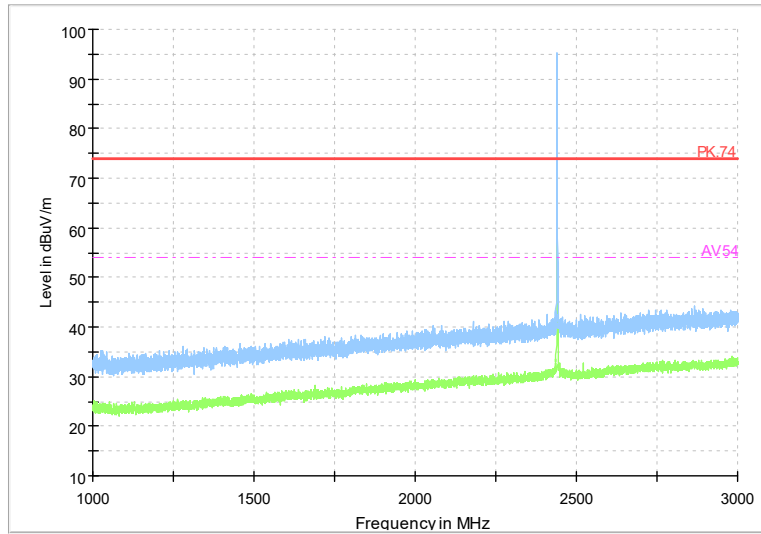


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K

Full Spectrum

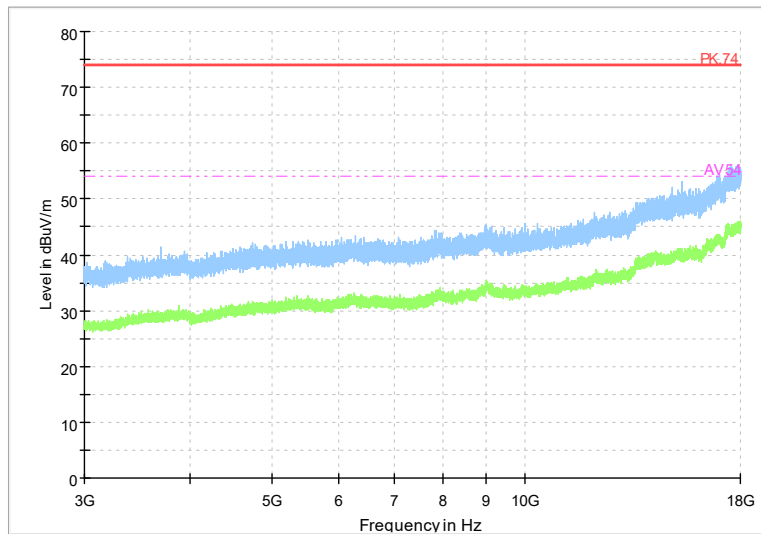

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K


Full Spectrum

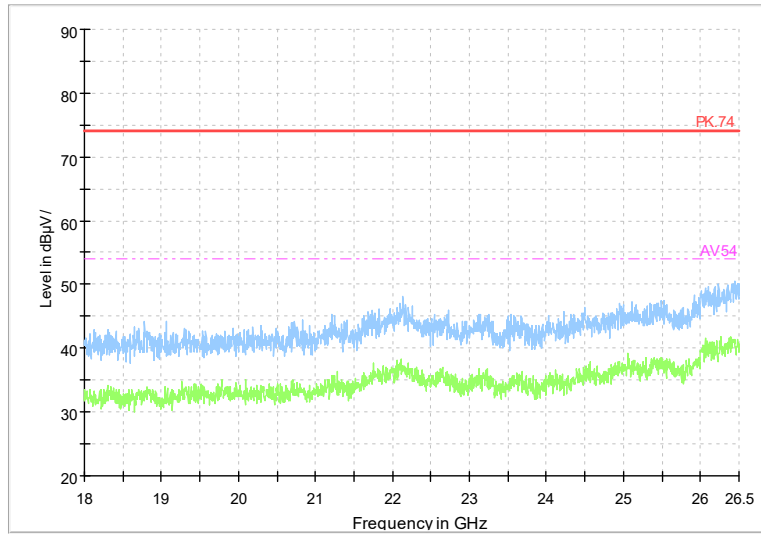

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K


Channel No.:39

Full Spectrum

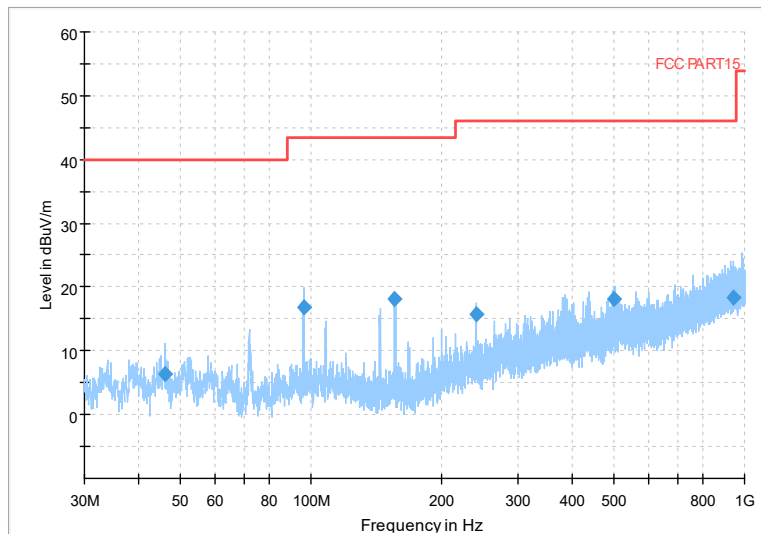


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: Coded 125K

Full Spectrum

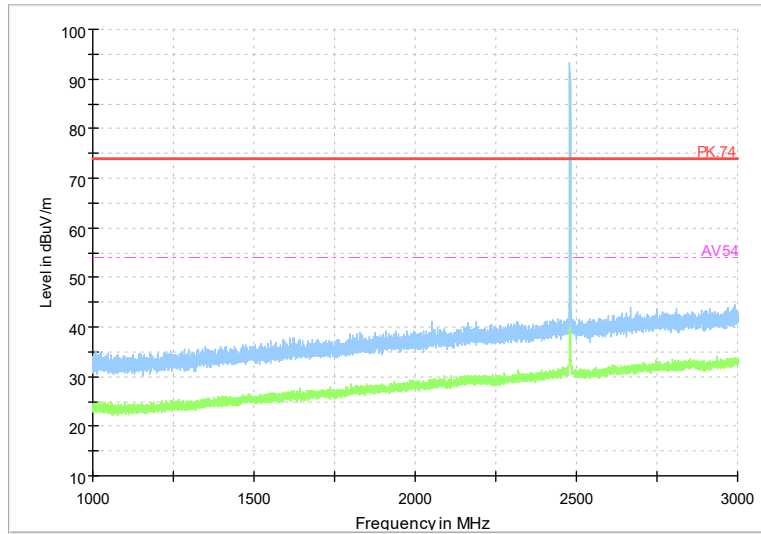

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K


Full Spectrum

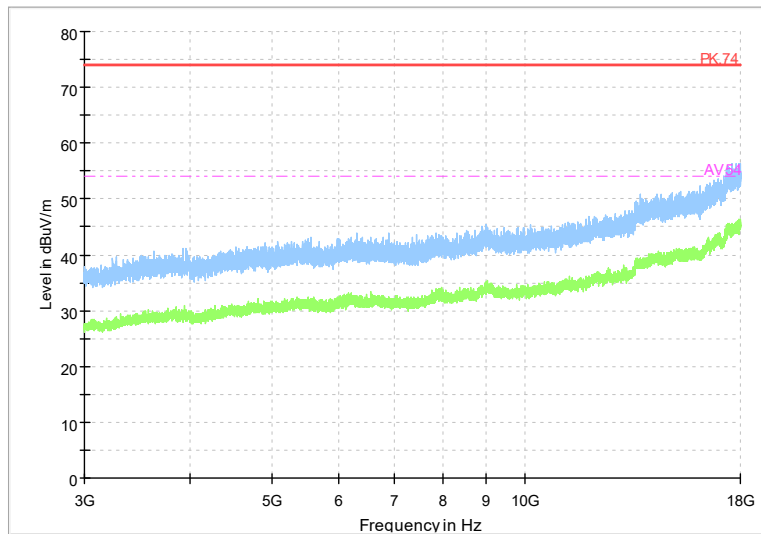

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K




Full Spectrum

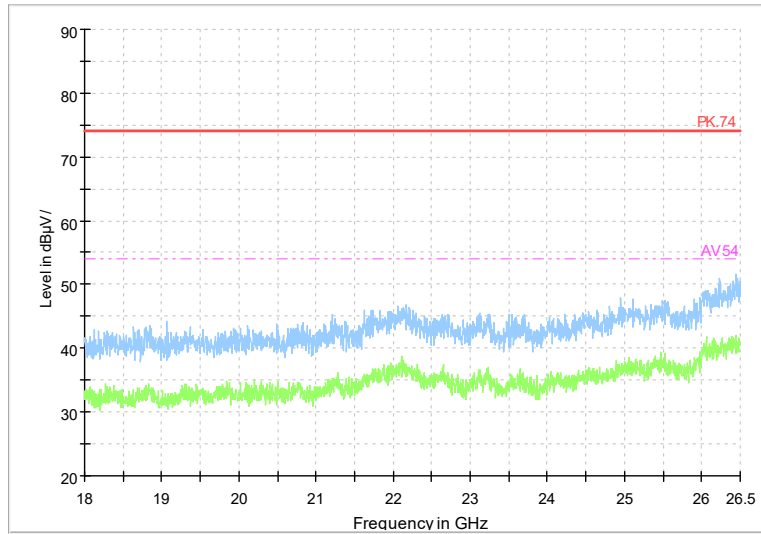

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K

Channel No.:0


Full Spectrum

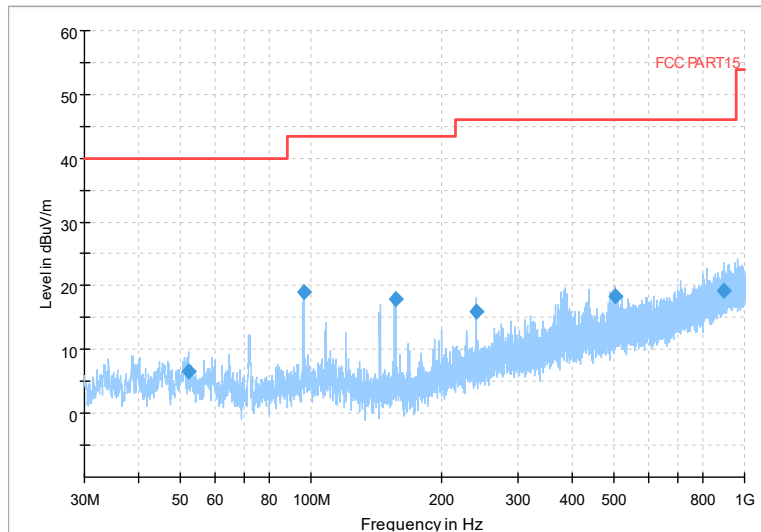

Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: Coded 500K




Full Spectrum

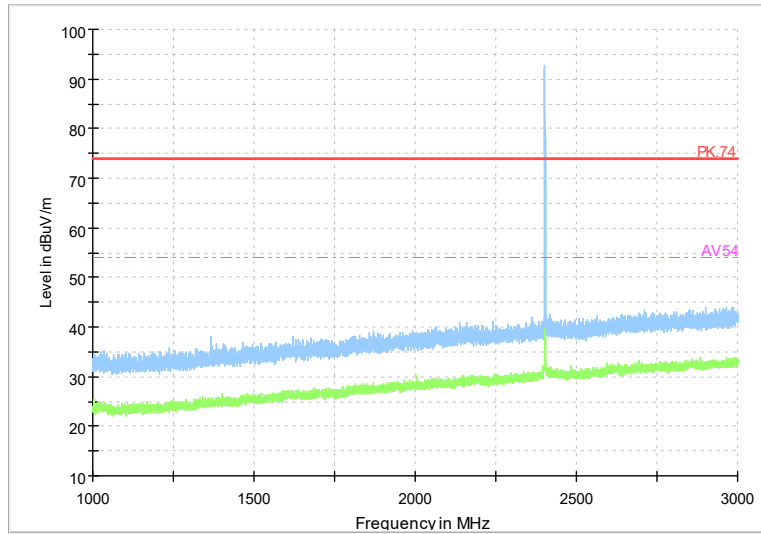


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K

Full Spectrum

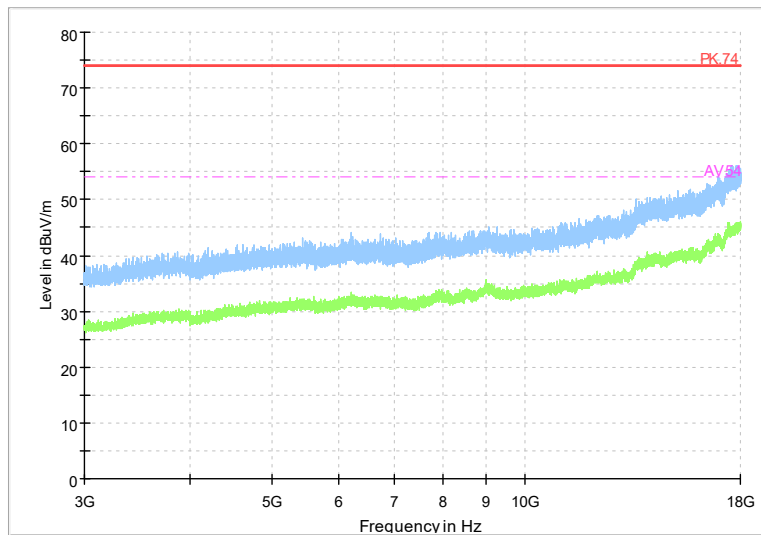

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K


Full Spectrum

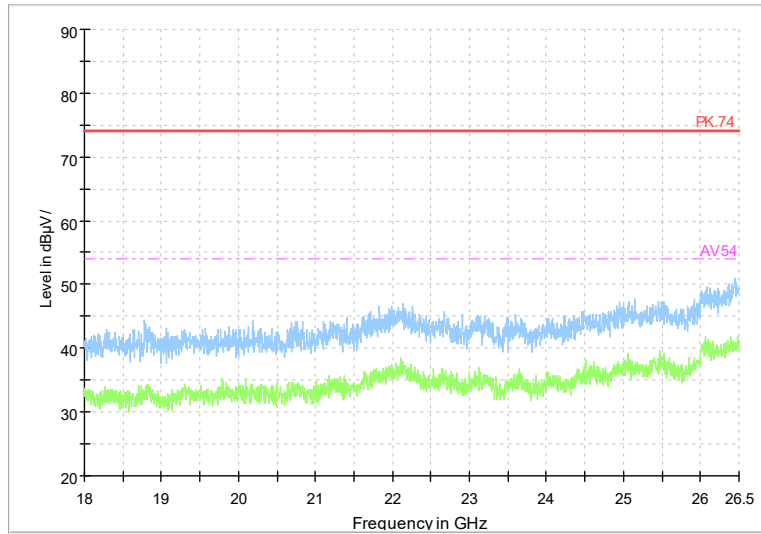

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K


Channel No.:19

Full Spectrum

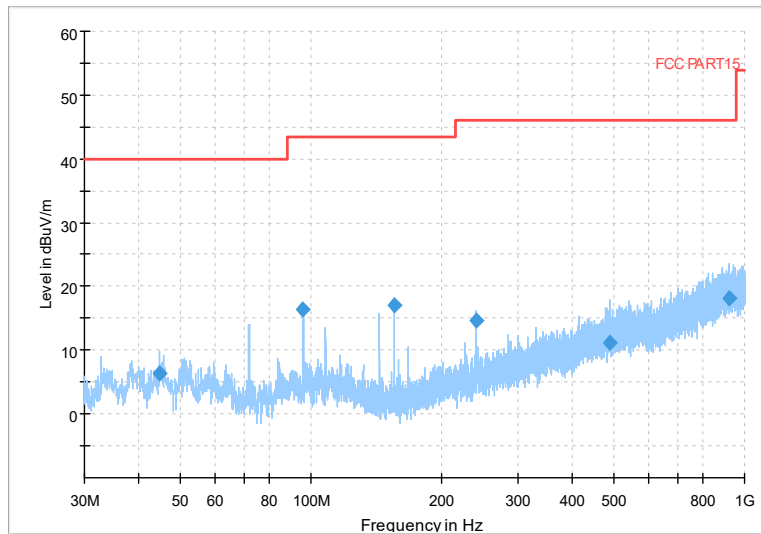


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: Coded 500K

Full Spectrum

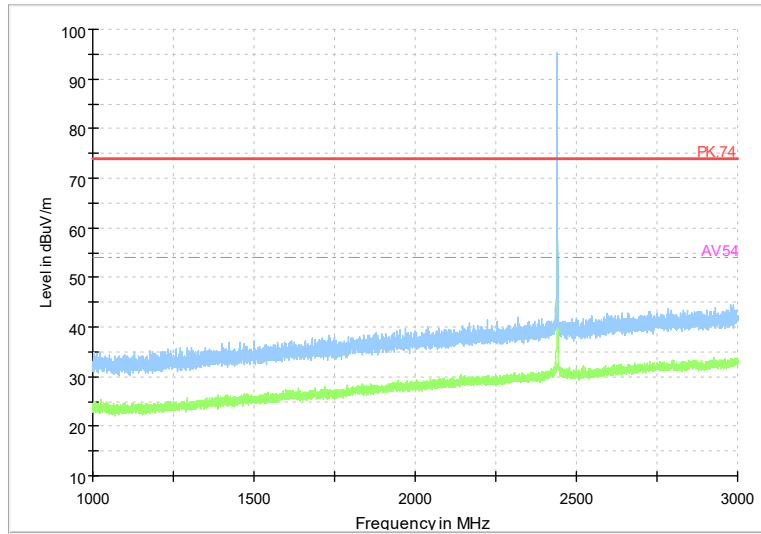

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K

Full Spectrum

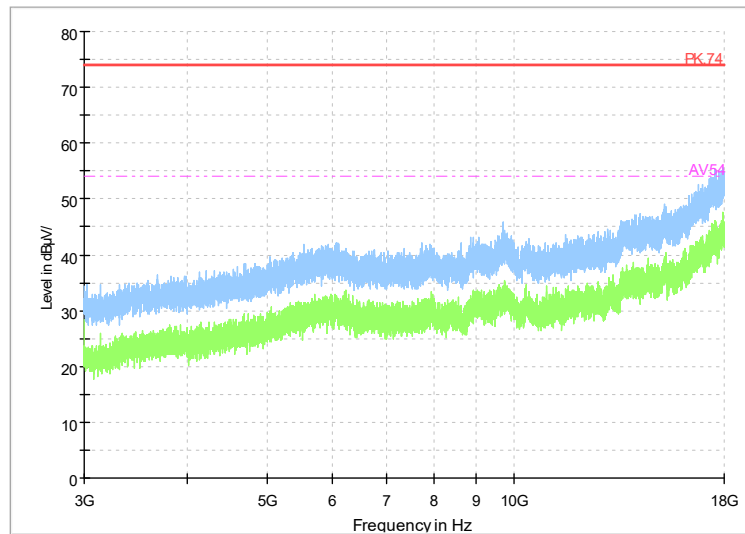

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K


Full Spectrum



Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K


Channel No.:39

Full Spectrum

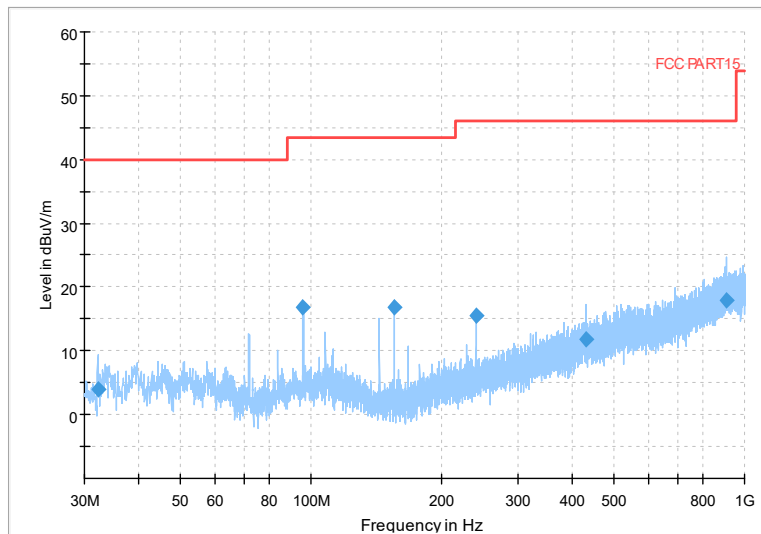


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: Coded 500K

Full Spectrum

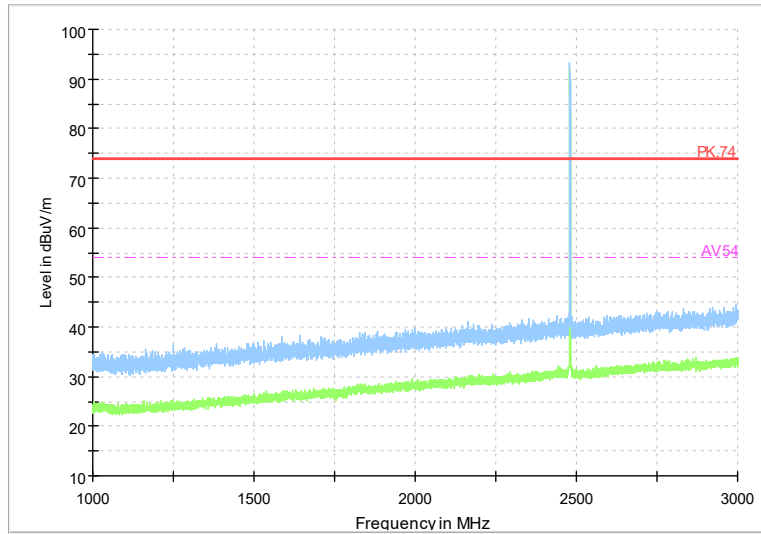

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K


Full Spectrum

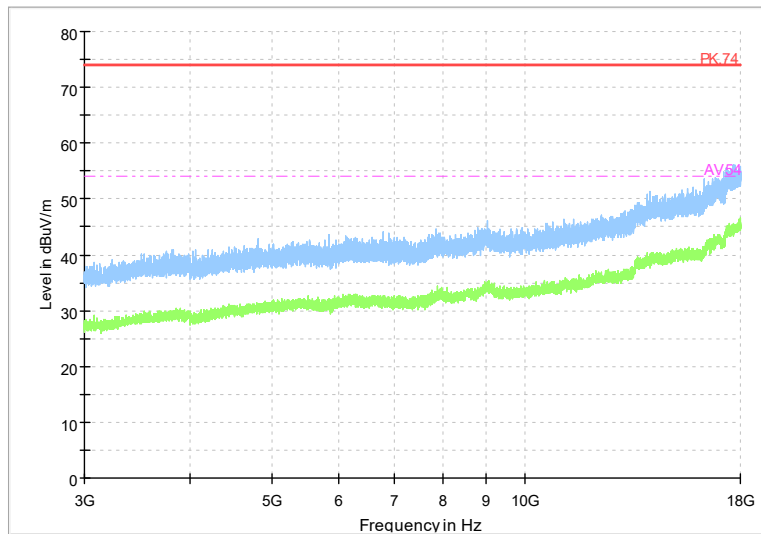

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K



Full Spectrum

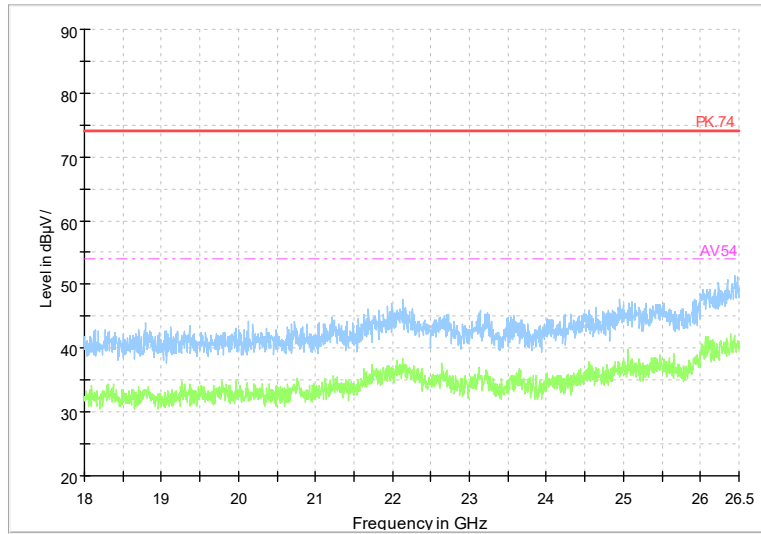

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K

---End of Test Report---