

TEST REPORT

Applicant:	LEDUP LIGHTING ECOTECH COMPANY LIMITED
Address of Applicant:	Lot CN2-6 ,Thuan Yen IZ,Hoa Thuan Ward, Tam Ky City , Quang Nam Province, Viet Nam
Manufacturer:	LEDUP LIGHTING ECOTECH COMPANY LIMITED
Address of Manufacturer:	Lot CN2-6 ,Thuan Yen IZ,Hoa Thuan Ward, Tam Ky City , Quang Nam Province, Viet Nam
Product name:	Remote
Model:	RL-08, RL-10, RL-52, SZG-BK01-30W-R, SZG-BK01-50W-R, SZG-BK01-100W-R, 18AR-2010B1
Rating(s):	DC 3V battery
Trademark:	LEDUP
Standards:	47 CFR PART 15 Subpart C: section 15.231
FCC ID:	2BFA3NR2101B1
Data of Receipt:	2025-01-14
Date of Test:	2025-01-14~2025-02-24
Date of Issue:	2025-02-24
Test Result	Pass*

* In the configuration tested, the test item complied with the standards specified above.

Authorized for issue by:

Test by:

Feb.24, 2025 Chivas Tsang

Project Engineer

Date

Name/Position

Signature

Reviewed by:

Feb.24, 2025

Victor Meng

Project Engineer

Date

Name/Position

Signature

Possible test case verdicts:

test case does not apply to the test object ...: N/A

test object does meet the requirement: P (Pass)

test object does not meet the requirement ...: F (Fail)

Testing Laboratory information:

Testing Laboratory Name: ITL Co., Ltd.

Address.....: No.8, JinQianLing street 5, DongHuan Road, Huangjiang Town, Dongguan, China.

Testing location : Same as above

Tel : 0086-769-39001678

Fax : 0086-20-62824387

E-mail : itl@i-testlab.com

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report would be invalid test report without all the signatures of testing technician and approver.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

General product information:

The models RL-08, RL-10, RL-52, SZG-BK01-30W-R, SZG-BK01-50W-R, SZG-BK01-100W-R, 18AR-2010B1 are identical to each other except for the model's name and the number of remote control buttons.

All tests were performed on the model SZG-BK01-30W-R as representative

1 Test Summary

Test	Test Requirement	Test method	Result
Radiated Emission	FCC PART 15 section 15.231(b)	ANSI C 63.10	PASS
Occupied Bandwidth	FCC PART 15 section 15.231(c)	ANSI C 63.10	PASS
Dwell Time	FCC PART 15 section 15.231(a)	FCC PART 15: Section 15.231(a)	PASS
Conducted Emission	/	/	N/A
Remark:			
N/A: because the device is battery operated. EUT: In this whole report EUT means Equipment Under Test. Tx: In this whole report Tx (or tx) means Transmitter. Rx: In this whole report Rx (or rx) means Receiver. RF: In this whole report RF means Radio Frequency. ANSI C63.10: the detail version is ANSI C63.10:2013 in the whole report.			

2 Contents

TEST REPORT	1
1 TEST SUMMARY	3
2 CONTENTS	4
3 GENERAL INFORMATION	5
3.1 CLIENT INFORMATION	5
3.2 GENERAL DESCRIPTION OF E.U.T.	5
3.3 DETAILS OF E.U.T.	5
3.4 DESCRIPTION OF SUPPORT UNITS	5
3.5 TEST LOCATION	6
3.6 DEVIATION FROM STANDARDS	6
3.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
3.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
3.9 TEST FACILITY	6
3.10 MEASUREMENT UNCERTAINTY	6
4 INSTRUMENTS USED DURING TEST	7
5 TEST RESULTS	8
5.1 E.U.T. TEST CONDITIONS	8
5.2 RADIATED EMISSIONS	9
5.3 OCCUPIED BANDWIDTH	18
5.4 DWELL TIME	20
5.5 CONDUCTED EMISSIONS AT MAINS TERMINALS 150 KHz TO 30MHz (N/A)	22

3 General Information

3.1 Client Information

Applicant: LEDUP LIGHTING ECOTECH COMPANY LIMITED
Address of Applicant: Lot CN2-6 ,Thuan Yen IZ,Hoa Thuan Ward, Tam Ky City , Quang Nam
Province, Viet Nam

3.2 General Description of E.U.T.

Name: Remote
Model No.: SZG-BK01-30W-R
Trade Mark: LEDUP
Operating Frequency: 433.92 MHz
Type of Modulation OOK
Function: Remote
Antenna Type: PCB antenna with 1dbi gain

3.3 Details of E.U.T.

EUT Power Supply: DC 3V battery
Test mode: transmitting
Power cord: /

3.4 Description of Support Units

The EUT has been tested as an independent unit for fixed frequency by testing lab.

3.5 Test Location

All tests were performed at:

ITL Co., Ltd.

No.8, JinQianLing street 5, DongHuan Road, Huangjiang Town, Dongguan, China.

0086-769-39001678

itl@i-testlab.com

No tests were sub-contracted.

3.6 Deviation from Standards

None.

3.7 Abnormalities from Standard Conditions

None.

3.8 Other Information Requested by the Customer

None.

3.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS Lab code:L9342
- FCC Designation No.:CN5035
- IC Registration NO.: 12593A
- NVLAP LAB CODE: 600199-0

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025.

3.10 Measurement Uncertainty

The below measurement uncertainties given below are based on a 95% confidence level (base on a coverage factor (k=2).)

Parameter	Uncertainty
Radio frequency	$\pm 1.06 \times 10^{-7}$
total RF power, conducted	1.37 dB
RF power density , conducted	2.89 dB
All emissions, radiated	± 3.35 dB
Temperature	± 0.23 °C
Humidity	± 0.3 %
DC and low frequency voltages	± 0.3 %

4 Instruments Used during Test

No.	Test Equipment	Manufacturer	Model	Serial No.	Cal Data	Due Date
DGITL- 301	Semi-Anechoic chamber	ETS•Lindgren	9*6*6	CT000874-1181	2023.08.02	2026.08.02
DGITL- 307	EMI test receiver	SCHWARZBEC K	ESVS10	833616 /003	2024.03.15	2025.03.15
DGITL-376	Wideband Radio Communication Tester	SCHWARZBEC K	CMW500	LR114195	2024.03.15	2025.03.15
DGITL-349a	Vector Signal Generator	ROHDE&SCHW ARZ	SMBV100A	259268	2024.03.15	2025.03.15
DGITL- 306	Spectrum Analyzer	Agilent Technologies	N9010A	MY542003 34	2024.03.15	2025.03.15
DGITL- 352	Pre Amplifier	MInl-Clrucits	ZFC-1000HX	SN2928011 10	2024.03.15	2025.03.15
DGITL-375	Spectrum Analyzer	SCHWARZBEC K	FSV40-N	6625-01- 588-5515	2024.03.15	2025.03.15
DGITL-309	Horn Antenna	ETS Lindgren	3117	SN0015226 5	2023.05.14	2025.05.14
DGITL-308	Bilog Antenna	ETS• Lindgren	3142E	156975	2023.05.14	2025.05.14
DGITL-350	Wideband Amplifier Super Ultra	MInl-Clrucits	ZVA-183X-S+	SN9864014 26	2024.03.15	2025.03.15
DGITL-371	Pre Amplifier	teramicrowave	TALA-0040G35	18081001	2024.03.15	2025.03.15
DGITL-363	Active Loop Antenna	SCHWARZBEC K	FMZB1519 B	00062	2024.05.15	2026.05.11

5 Test Results

5.1 E.U.T. test conditions

Test Voltage: DC 3V

Temperature: 20.2 -25.0 °C

Humidity: 38-50 % RH

Atmospheric Pressure: 1000 -1010 mbar

Requirements: **15.31(e):** For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test frequencies and frequency range: According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which	Number of	Location in frequency range
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz,
At or above 10 GHz to below	5th harmonic of highest fundamental frequency or to 100 GHz,
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz,

Remark: Test frequency is 433.92 MHz

5.2 Radiated Emissions

Test Requirement:	FCC Part 15 C section 15.231(b)
Test Method:	ANSI C63.10: Clause 6.4, 6.5 and 6.6
Test Status:	Test the transmitter in continuous transmitting mode.
Limit:	The field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

** linear interpolations


The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency. Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector.


The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Test Configuration:

- 1) 9 kHz to 30 MHz emissions:

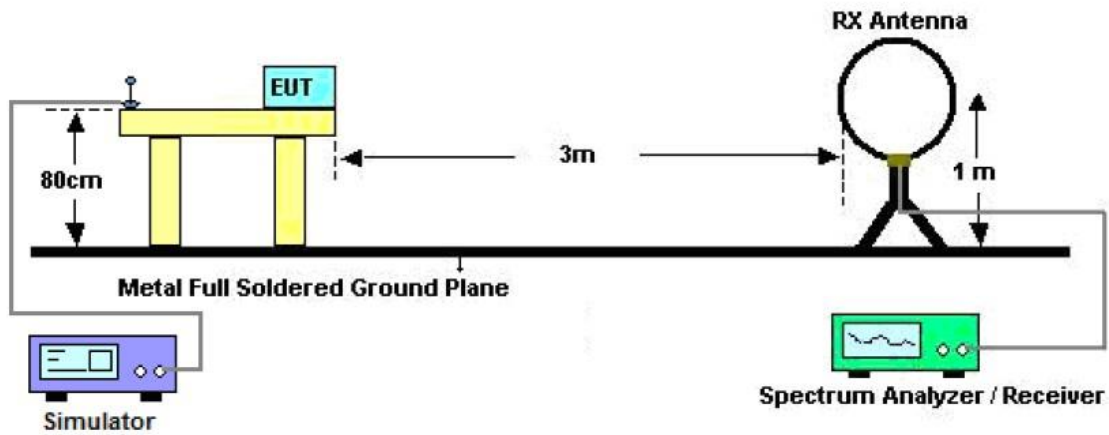

- 2) 30 MHz to 1 GHz emissions:

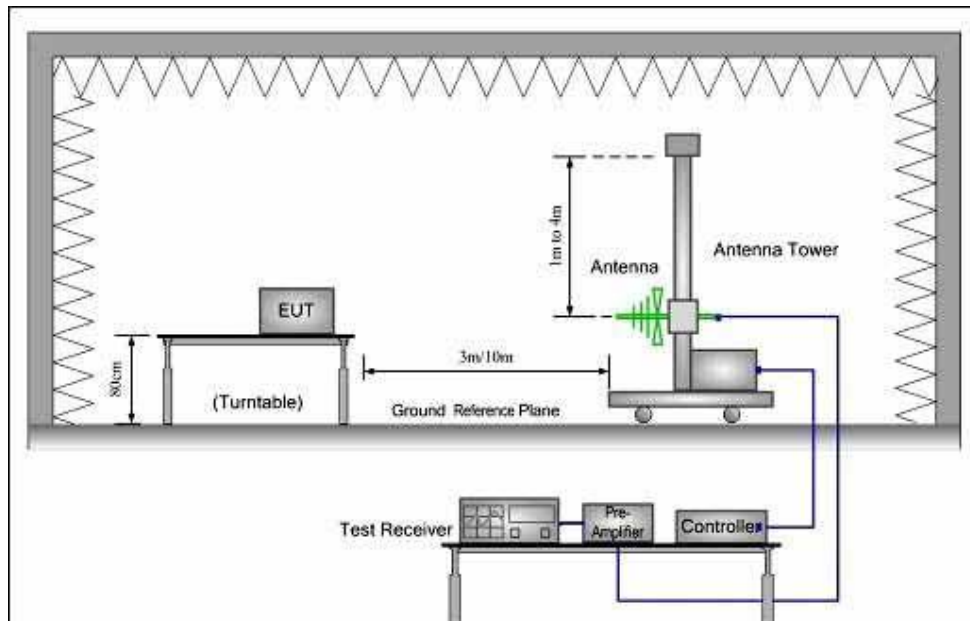

- 3) 1 GHz to 40 GHz emissions:

1 MHz for above 1 GHz,

$VBW \geq RBW$

Sweep = auto

Detector function = peak

Trace = max hold

For AV value:

Average = Peak value + $20\log$ (Duty cycle)

The average correction factor is computed by analyzing the on time in one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds, therefore the average value of fundamental frequency is: Average = Peak value + $20\log$ (Duty cycle), where the duty factor is calculated from following formula:

The duration of one cycle=51.159ms


Effective period of the cycle =(1.159x18+0.435x8) ms=24.342ms

DC=24.342/51.159=0.4758 or 47.58%


Therefore, the averaging factor is found by $20\lg 0.4758 = -6.45$

-6.45dB Duty Cycle Correction Factor was used in this report.


Please refer to below plots for more details.

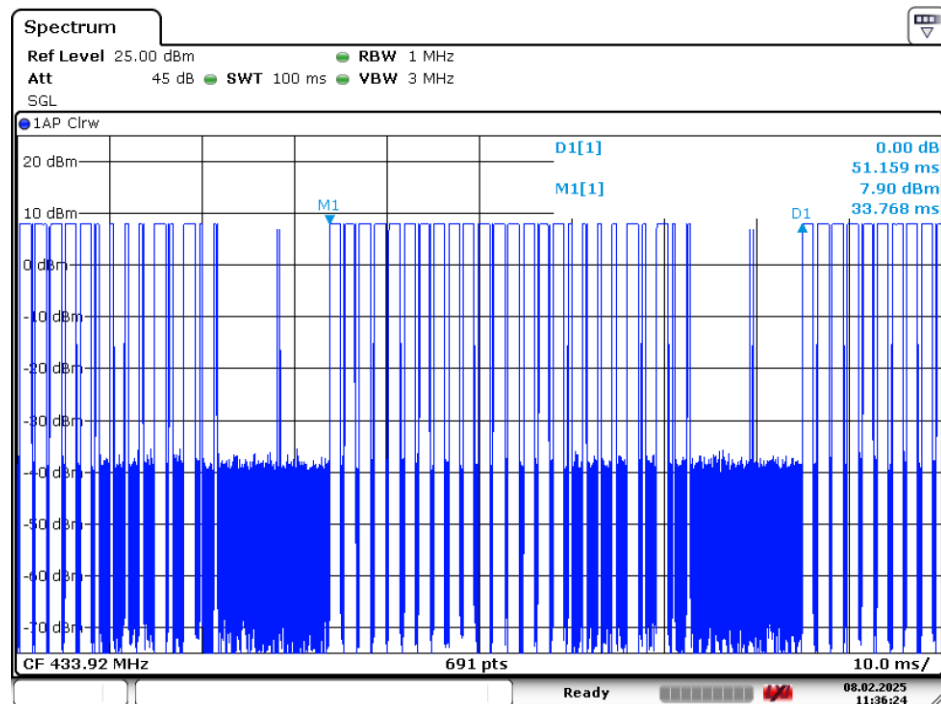

Date: 8.FEB.2025 11:36:24

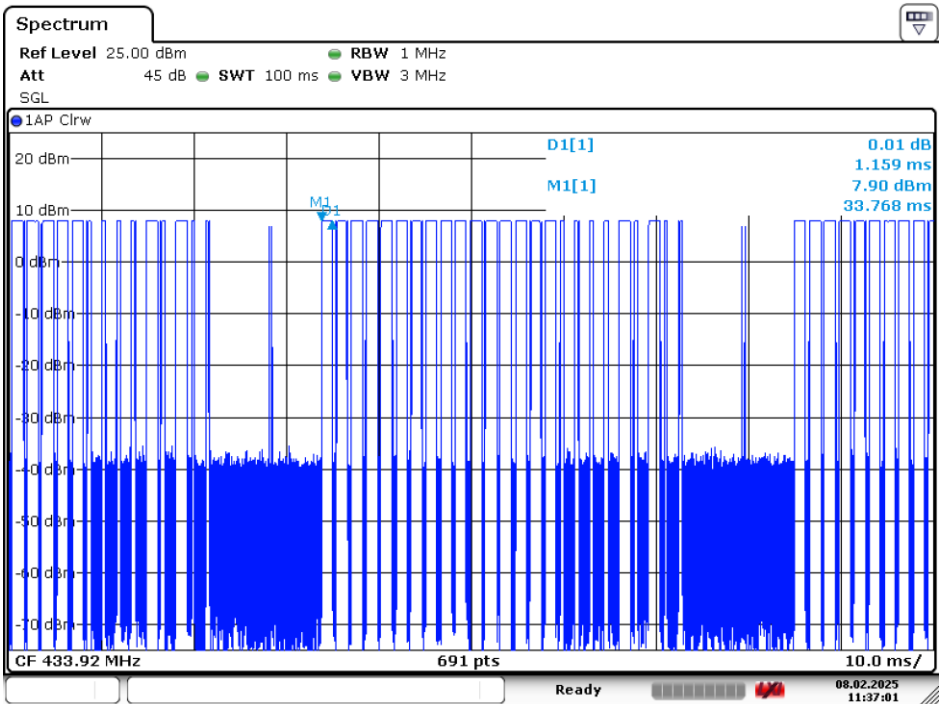


Date: 8.FEB.2025 11:37:01

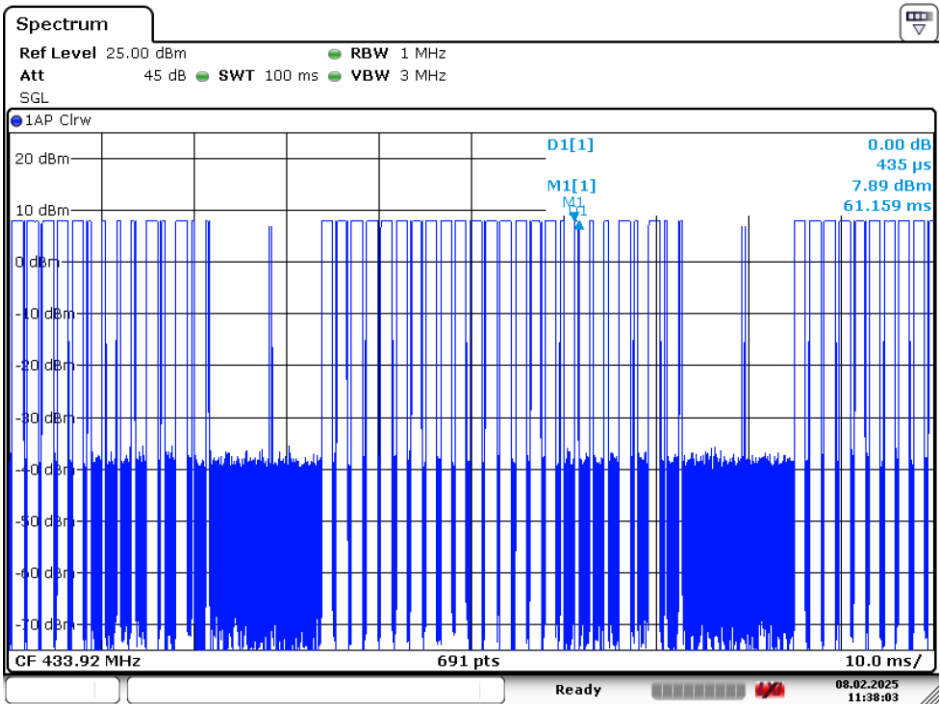

Date: 8.FEB.2025 11:38:02

Horizontal:


Peak scan

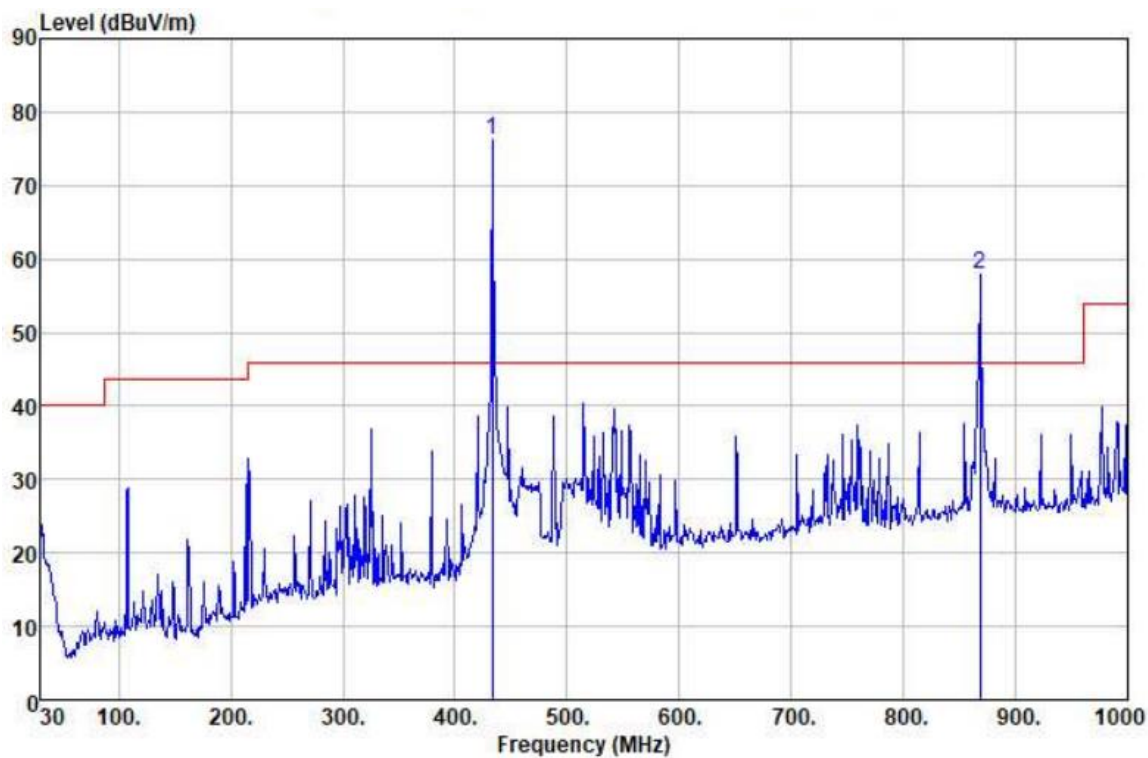

No.	Frequen cy (MHz)	Duty cycle Factor (dB)	Result (dBuV/ m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	433.92	N/A	76.25	100.8	-24.55	0	200	Peak
		-6.45	69.80	80.8	-11.00	0	200	Average
2	868.08	N/A	57.84	80.8	-22.96	90	200	Peak
		-6.45	51.39	60.8	-9.41	90	200	Average

Vertical:


Peak scan

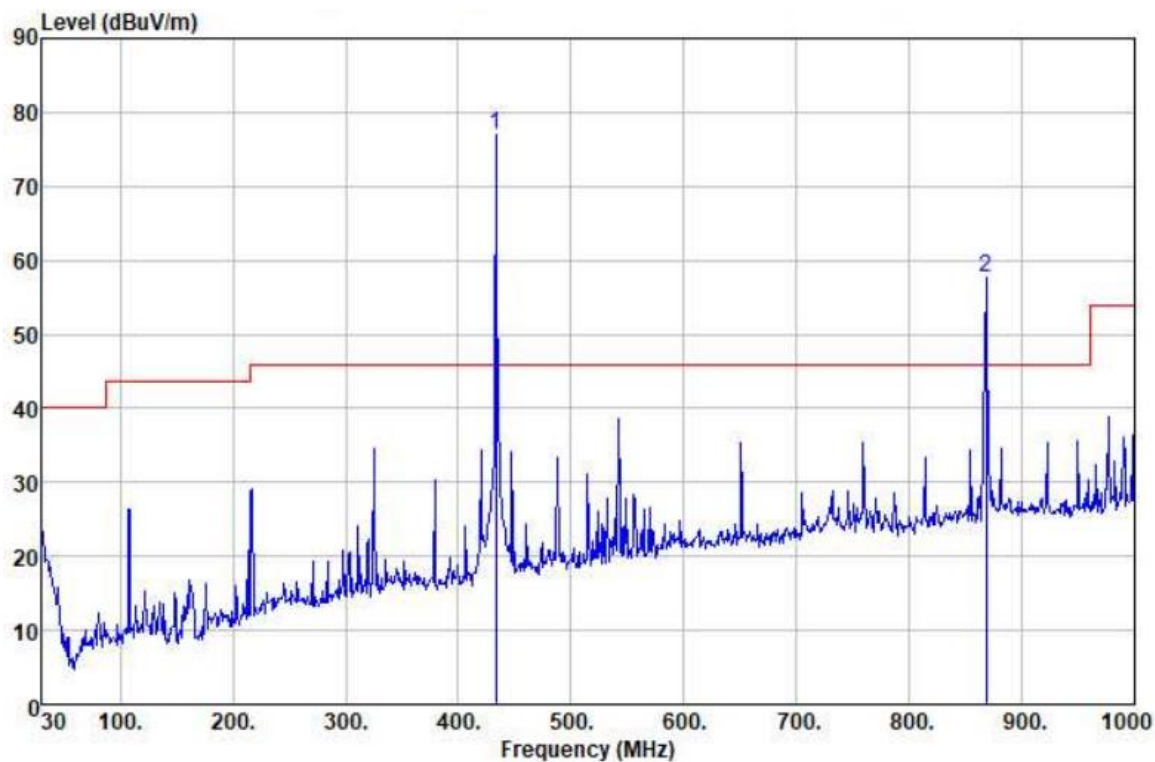

No.	Frequen cy (MHz)	Duty cycle Factor (dB)	Result (dBuV/ m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	433.92	N/A	77.07	100.8	-23.73	12	100	Peak
		-6.45	70.62	80.8	-10.18	12	100	Average
2	868.08	N/A	57.68	80.8	-23.12	340	100	Peak
		-6.45	51.23	60.8	-9.57	340	100	Average

Horizontal:


Above 1GHz

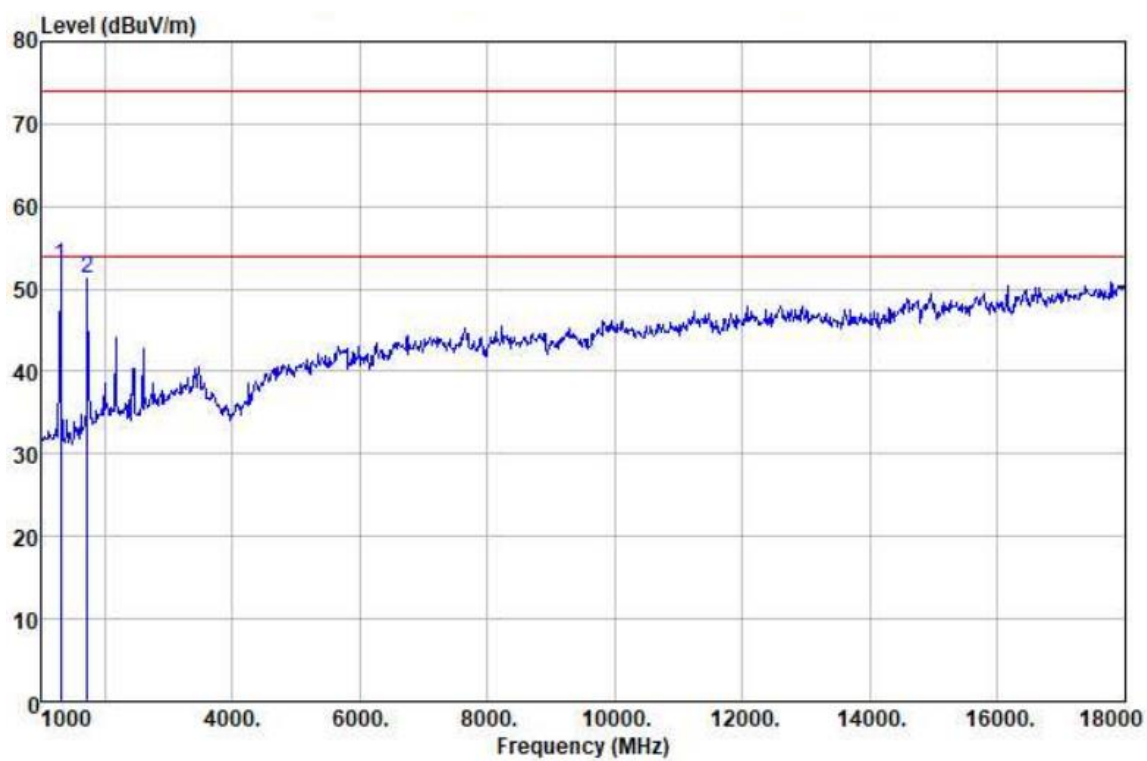

No.	Frequen cy (MHz)	Dutycy cle Factor (dB)	Result (dBuV/ m)	Limit (dBuV/ m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	1306	N/A	52.88	74.0	-21.12	0	150	Peak
		-6.45	46.43	54.0	-7.57	0	150	Average
2	1731	N/A	51.36	74.0	-22.64	45	150	Peak
		-6.45	44.91	54.0	-9.09	45	150	Average

Vertical:

Above 1GHz

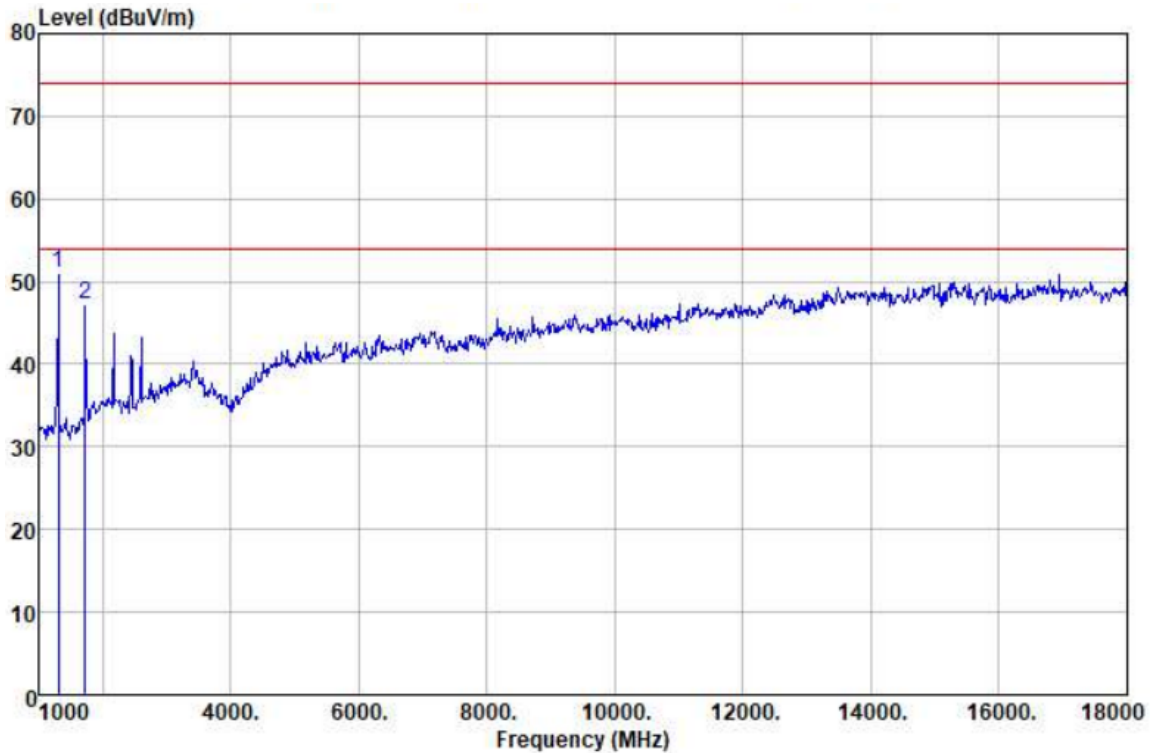

No.	Frequency (MHz)	Duty cycle Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	1306	N/A	51.09	74.0	-22.91	0	150	Peak
		-6.45	44.64	54.0	-9.36	0	150	Average
2	1731	N/A	47.35	74.0	-26.65	96	150	Peak
		-6.45	40.90	54.0	-13.10	96	150	Average

Note: Testing is carried out with frequency range 9kHz to the tenth harmonics, which above 4th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The measurements greater than 20dB below the limit from 9kHz to 30MHz.

The fundamental frequency is 433.92 MHz the fundamental and spurious emissions radiated limit base on the operating frequency 433.92 MHz

5.3 Occupied Bandwidth

Test Requirement: FCC Part 15 C section 15.231 (c)

Test Method: ANSI C63.10: Clause 6.9

Test Status: Test in transmitting mode at lowest and highest channel.

Requirements: 15.231 (c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.


Method of measurement: The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector. Record the 20 dB bandwidth of the carrier.

Test result:

Test Frequency MHz	20dB Bandwidth kHz	Limit kHz	Result
433.92	7.24	1084	PASS

Limit = Fundamental Frequency X 0.25%=433.92 x 0.0025 = 1084 kHz

Test plot:

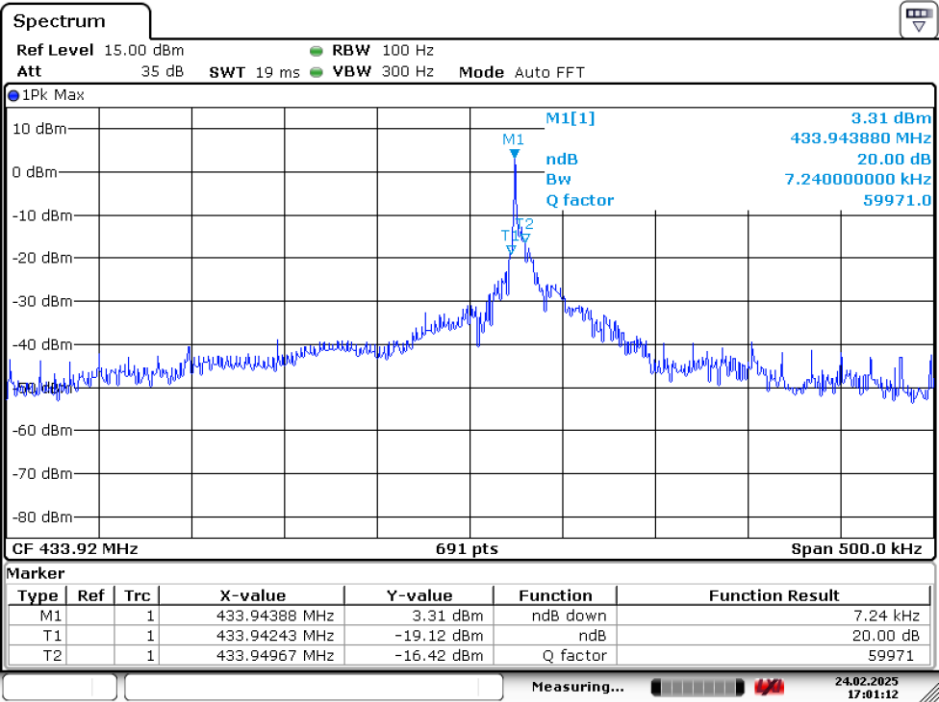

Date: 24.FEB.2025 17:01:12

5.4 Dwell Time

Test Requirement: FCC Part 15 C section 15.231(a)

Test Method: FCC Part 15 C section 15.231(a)

Test Status: Test in normal operation mode.

Requirements:

1. **Regulation 15.231 (a)** The provisions of this Section are restricted to periodic operation within the band 40.66 40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Radio control of toys is not permitted. Continuous transmissions, such as voice or video, and data transmissions are not permitted. The prohibition against data transmissions does not preclude the use of recognition codes. Those codes are used to identify the sensor that is activated or to identify the particular component as being part of the system.

Result:

The EUT is a remote switch without audio or video transmitted.


The EUT meets the requirements of this section.

2. **Regulation 15.231 (a) (1)** A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released. **Regulation 15.231 (a2)** A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Result:

Carrier Frequency MHz	Transmission Time seconds	Limit s	Result
433.92	0.197	5	PASS

Result plot:

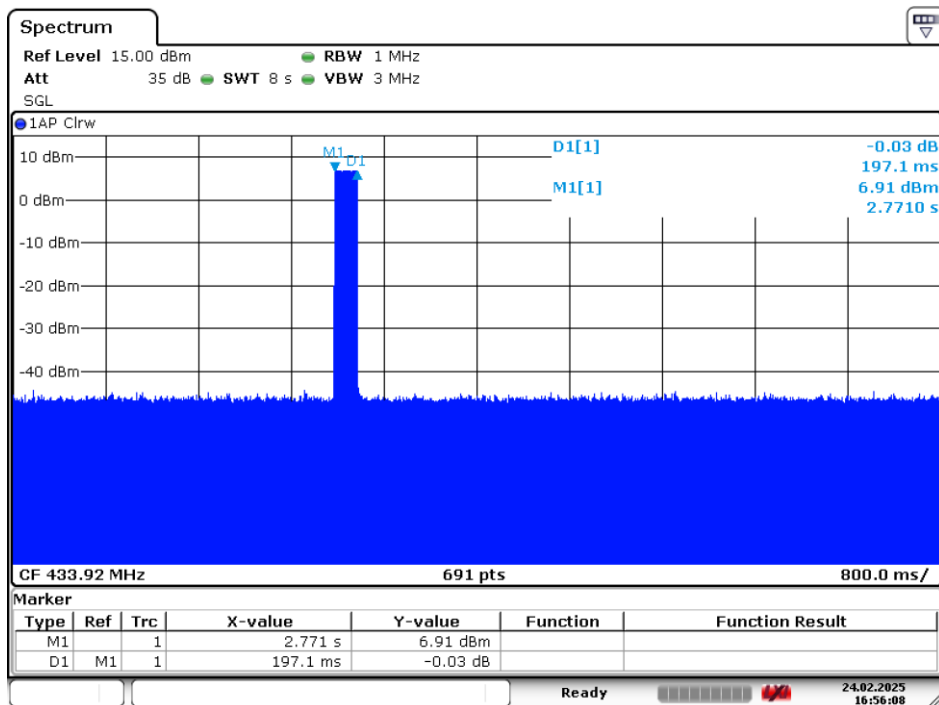

Date: 24.FEB.2025 16:56:08

Result:

The EUT does not have automatic transmission.

4. Regulation 15.231 (a3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

Result:

The EUT does not employ periodic transmission.

5. Regulation 15.231 (a4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

Result:

This section is not applicable to the EUT.

5.5 Conducted Emissions at Mains Terminals 150 kHz to 30MHz (N/A)

Test Requirement: FCC Part 15 C section 15.207

Test Method: ANSI C63.10

Frequency Range: 150 kHz to 30 MHz

Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)

Test Limit

Limits for conducted disturbance at the mains ports of class B

Frequency Range (MHz)	Class B Limit dB(μV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

-- End of test report --