

Customer name: Shenzhen Chenxing Electronic Technology Co., LTD

Customer part number: YXW-WX39

Material name: wireless chargercoil

Brand name: N / A

Specification and model:T25*23* 2.6 8.1uH 10%

edition: 1

Production lot/material number:

Sample delivery date: 2022-04-28

Sample signing date:

Customer recognition:				Supplier recognition:		
purchase	ENGINEER RING	examine	Comment	Work out	examine	Give permission
				Chen Cuizhu	Li Shupo	Zhang Jun

Shenzhen Chenxing Electronic Technology Co., LTD

Phone: 0755-3361 6363

Fax: 0755-3306 5865

Contact: Zhang Jun 18926001820

Address: 5F, Building 1, Xinke City Science and Technology Industrial Park, 51 Dabao Road, Xian'an Street, Bao'an District, Shenzhen


Update history

[illegible]

1. Basic specification


No.	Product	Model	apply	manufacturer	remark
1	Wireless charging transmitter coil	25*23*2.7			

2. Dimensions (unit :mm)

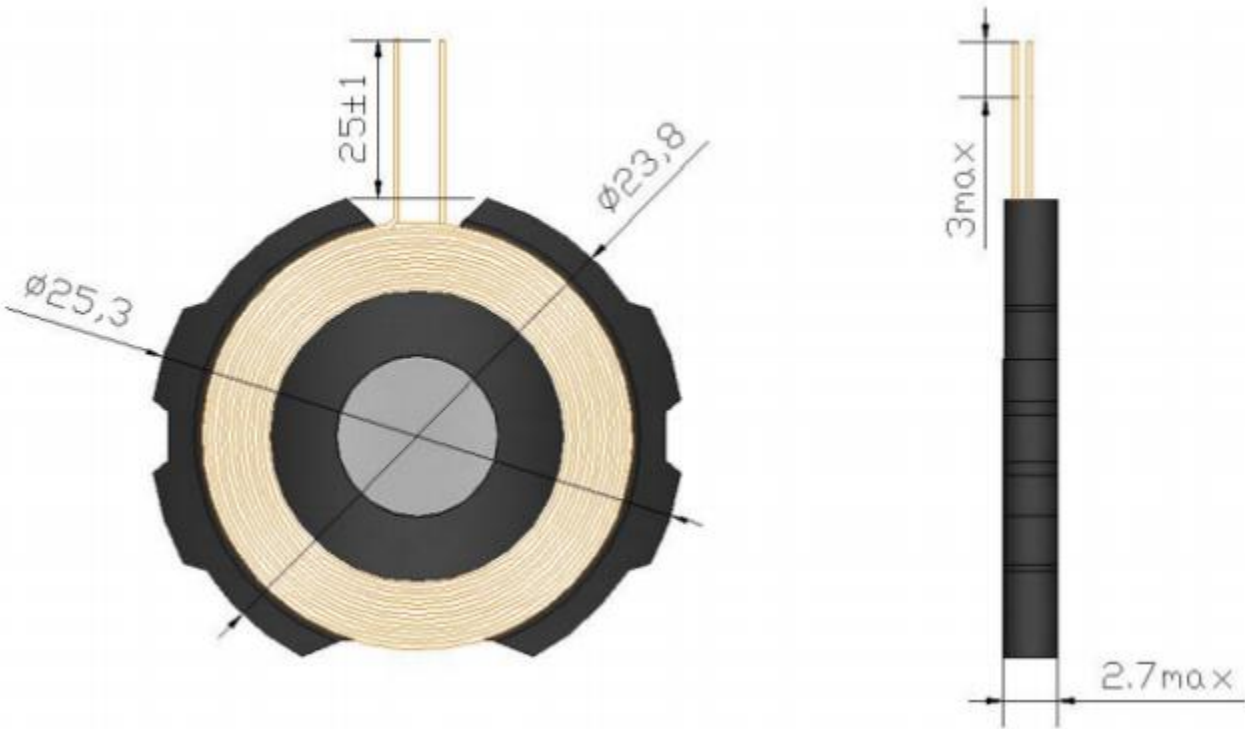

Operating frequency: 300kHz-350kHz
Antenna gain:0dBi

3. Schematic diagram

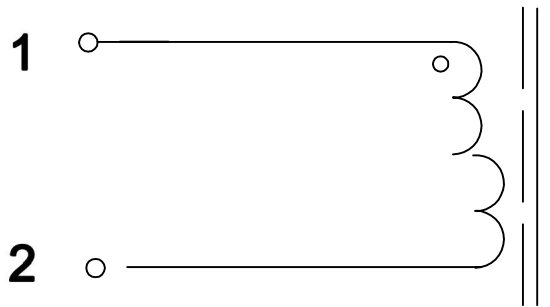

4. Winding technology

N0	winding	Wire gauge	Start	Tail	turns	rubber rings	Winding	
1	N1	2UEW-0.08*24P	1	2	14Ts			
2								
3								
4								

5. Electrical property parameter

5.1 Test condition: Ambient humidity: 65+20%

Ambient temperature: 25+5 °C


5.2 inductance: $L=8.1\mu H \pm 10\%$ at 100kHz, 1V; (Based on the number of turns) .

5.3 DCR: 70m Ω max

5.4 Max Current: 2.0A

5.5 Q value: 27(min)

6. Construction

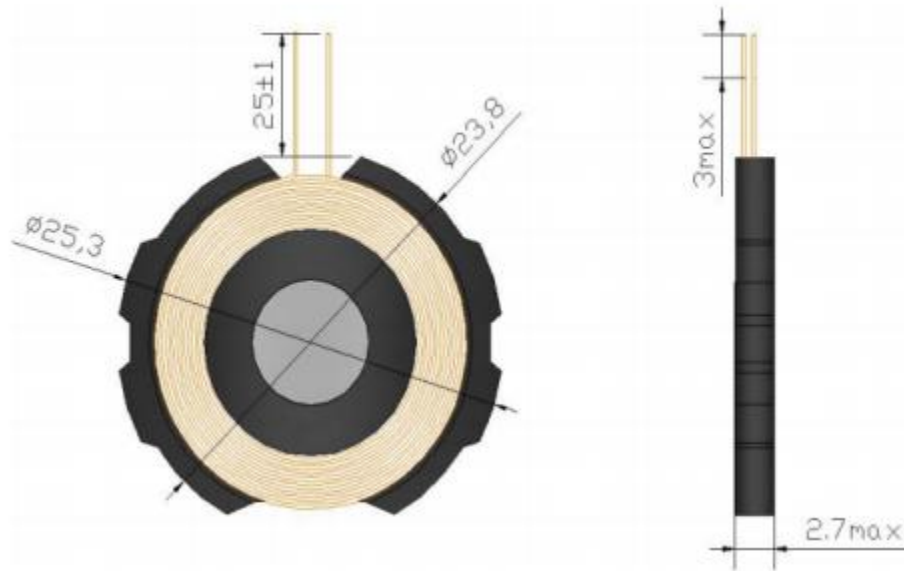

NO	Material Name
1	Rubber backing
2	Ferrite sheet
3	coil
4	
5	glue
6	Fixed adhesive paper