

T4-1C

User Manual



Please read the manuals carefully before you use it, so as to get the correct installation and quick online activation. If the appearance and color of the product are changed, the object will prevail.

Introduction

Features

- ① Fuel supply control
- ② Driving behavior analysis
- ③ Multi-GNSS
- ④ ACC detection
- ⑤ Location data re-upload
- ⑥ Smart power saving
- ⑦ Anomaly alert (vibration, over-speed, power-off, etc.)

Operating Environment

Operating voltage: 12-90VDC

Internal backup battery: 3.7V/150mAH battery

Operating current: 50mA @12V

Standby current: 5mA @12V

Operating temperature: -20°C to 60°C

Storage temperature: -40°C to +85°C

Positioning accuracy: <10m

Location modes: GPS, BDS, AGPS, and LBS

Frequency Bands

Communication network	LTE Cat1 + GSM
LTE-FDD	B1/B2/B3/B4/B5/B7/B8/B28/B66
GSM	B2/B3/B5/B8

Overview

Apearance



Connotations of Indicators

Power Indicator (Red)

Keep on	Connected to external power
Off	Not connected to external power

GNSS indicator (Blue)

Fast flashing	The device is searching for satellite signals.
Keep on	The GNSS module is already fixed a position.
Off	Device is in sleep mode or not operating

Network indicator (Green)


Fast flashing	The network is searching
Slow flashing	The network signal is normal
Keep on	The device online
Off	Device is in sleep mode or not operating

Note: By default, when the device is stationary for 3 minutes, the LED will automatically turn off and wake up after a vibration.


Installation

Inserting the SIM Card


Step 1 Prepare a proper SIM card;



Standard ✕



Micro ✓



Nano ✕

Step 2 Insert the SIM.




After the SIM card is inserted, the device powers on using the backup battery. If the device fails to power on due to low battery, you can connect the device to the external power.

Note: The SIM card must be inserted correctly, has GPRS services activated, and is not in arrears. If the SIM is identified and requires a PIN, please disable the PIN request.


Installing the Device

Product wiring diagram


- 1) Use a multimeter to find out the positive and negative terminals of the vehicle battery and the ACC line.
- 2) Connect the red wire (positive) of the device configuration power cable to the positive terminal of the vehicle battery.
- 3) Plug in the connector as shown in the figure below.

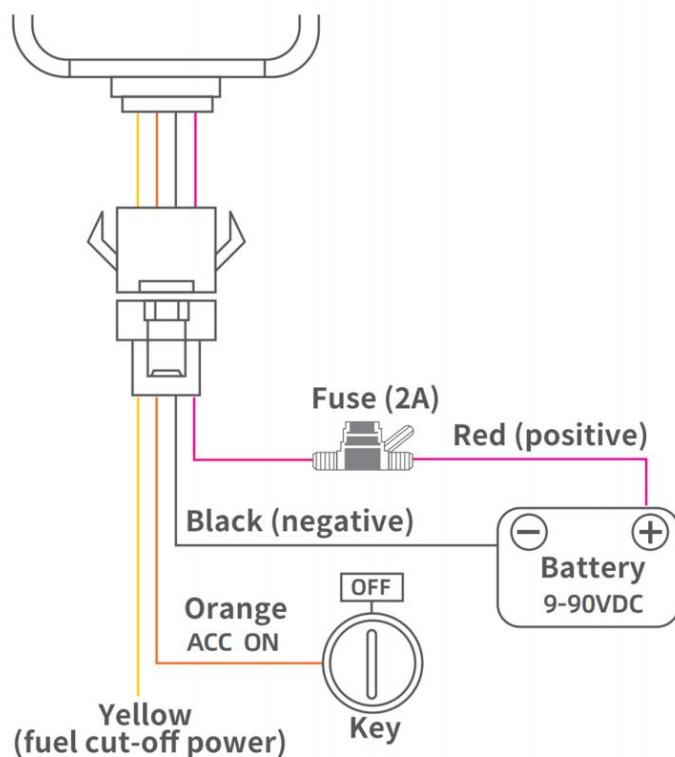


Car mounting position

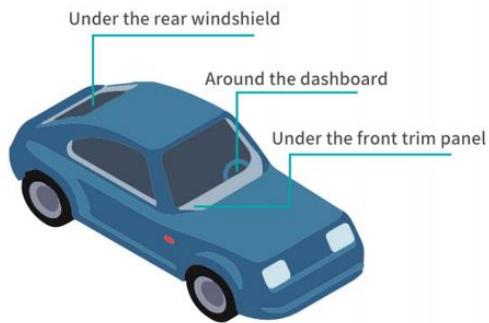

Electric car installation location

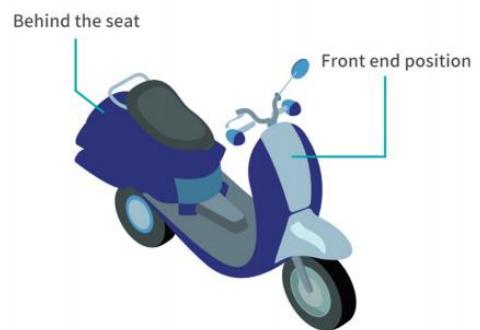

Motorcycle installation position

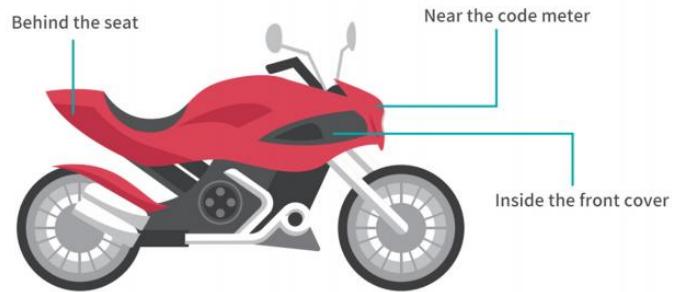

Product Features

Content	Function	Description
Positioning function	4G all-network	Support 4G network, efficient transmission, faster and more accurate.
	Timed tracking	Transmit back the positioning information such as latitude and longitude according to the set interval time.
	Street map	360 degree high-definition map
	Speeding alarm	When driving over speed, the locator will send alarm to your cell phone
	Vibration alarm	Built-in vibration sensor, continuous vibration of the vehicle, the device will immediately send alarm alerts
	Electronic fence	When the car driving range exceeds the specified area, the platform will send alarm information
	History track	Can play back 90 days of the track, playback the speed, direction, stay time and other content
	Displacement alarm	When the vehicle encounters illegal operation or theft, the fuel and electricity can be cut off remotely by computer or cell phone APP
	Fleet management	1 cell phone can manage multiple devices, or 1 device multiple cell phone management

Analysis of common problems

Failure phenomenon	Failure analysis	Treatment method
Blue light flashes slowly	Determine whether to use the terminal in areas with poor GPS signals, such as near tall buildings or underground parking lots	Move the vehicle to a location with a good signal Use the terminal
	Determine whether the front windshield of the vehicle has metal heat insulation film affecting the signal reception	If there is a film, the equipment will be changed to other vehicles to test whether the blue light is always on, such as in other vehicles without film to test no problem, then the vehicle is caused by the film
	Determine whether there is a shield or signal jammer on or around the car	If there is a shield or source of interference, remove the shield or source of interference and try to reinstall
Blue light flashing fast	Chip failure	Return to factory for repair
Yellow light is flashing fast	Determine whether the SIM card is installed properly	Check whether the SIM card is installed in place
	Determine if there is dirt or poor contact on the metal surface of the SIM card	Wipe the metal chip surface with a clean cloth or repeatedly insert and remove the card several times
The yellow light flashes slowly.	Determine if the vehicle is in a place with no mobile network, such as an underground parking lot.	Please drive the vehicle to a place with good network signal and try to reinstall it.
	Determine whether the server background is normal	Ask if the server of the background management platform is normal
	Determine whether the SIM card status is normal or not	Check whether the status of the SIM card is normal through the SIM card inquiry platform
	Determine whether there is a shield or signal interferer on the car or around	If there is a shield or source of interference, remove the shield or source of interference and try to reinstall

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.