



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Dongguan Jane Eyre Electronic Technology Co., Ltd.

Address: No. 22, Hubin North Road, Qishi Town, Dongguan City, Guangdong Province, China

FCC ID: 2BFMR-JA-007

Product Name: Vibrator

Standard(s): FCC Part 15B
ANSI C63.4-2014

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: 2403T75625E-00

Date Of Issue: 2024/5/27

Reviewed By: Calvin Chen

Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

| | |
|--|-----------|
| DOCUMENT REVISION HISTORY | 4 |
| 1. GENERAL INFORMATION..... | 5 |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 5 |
| 1.2 DESCRIPTION OF TEST CONFIGURATION | 6 |
| 1.2.1 EUT Operation Condition..... | 6 |
| 1.2.2 Support Equipment List and Details | 6 |
| 1.2.3 Support Cable List and Details | 6 |
| 1.2.4 Block Diagram of Test Setup..... | 7 |
| 1.3 MEASUREMENT UNCERTAINTY | 9 |
| 2. SUMMARY OF TEST RESULTS | 10 |
| 3. REQUIREMENTS AND TEST PROCEDURES | 11 |
| 3.1 CONDUCTED EMISSIONS..... | 11 |
| 3.1.1 EUT Setup..... | 11 |
| 3.1.2 EMI Test Receiver Setup | 11 |
| 3.1.3 Test Procedure | 12 |
| 3.1.4 Corrected Amplitude & Margin Calculation..... | 12 |
| 3.2 RADIATION EMISSIONS..... | 13 |
| 3.2.1 EUT Setup..... | 13 |
| 3.2.2 EMI Test Receiver Setup | 14 |
| 3.2.3 Test Procedure | 14 |
| 3.2.4 Corrected Amplitude & Margin Calculation..... | 14 |
| 4. TEST DATA AND RESULTS..... | 15 |
| 4.1 CONDUCTED EMISSIONS..... | 15 |
| 4.2 RADIATION SPURIOUS EMISSIONS | 18 |
| 5. EUT PHOTOGRAPHS | 27 |
| 6. TEST SETUP PHOTOGRAPHS | 28 |

DOCUMENT REVISION HISTORY

| Revision Number | Report Number | Description of Revision | Date of Revision |
|-----------------|----------------|-------------------------|------------------|
| 1.0 | 2403T75625E-00 | Original Report | 2024/5/27 |

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

| | |
|-------------------------------------|--|
| EUT Name: | Vibrator |
| EUT Model: | JA-007 |
| Highest Operation Frequency: | 2480MHz (Receiving) |
| Rated Input Voltage: | DC 5V charging from adapter or DC 3.7 from battery |
| Serial Number: | 2L93-1 |
| EUT Received Date: | 2024/5/13 |
| EUT Received Status: | Good |

Accessory Information:

| Accessory Description | Manufacturer | Model | Parameters |
|-----------------------|--------------|-------|------------|
| / | / | / | / |

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition

| | |
|---------------------------------|--|
| EUT Operation Mode: | The system was configured for testing in Typical Use Mode, which was provided by the manufacturer. |
| Equipment Modifications: | Test Mode: M1: Charging M2: Operating |
| EUT Exercise Software: | Love Spouse |

1.2.2 Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|--------------|--------------------|
| Fangxin | Adapter | FX2U-050200U | AD220930001 |
| DongFeng | Phone | P3 | UP3_BSGF187E000165 |


1.2.3 Support Cable List and Details

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port | To |
|-------------------|----------------|--------------|------------|-----------|-----|
| Power Cable | No | No | 0.8 | Adapter | EUT |

1.2.4 Block Diagram of Test Setup


AC line conducted emissions:

M1:

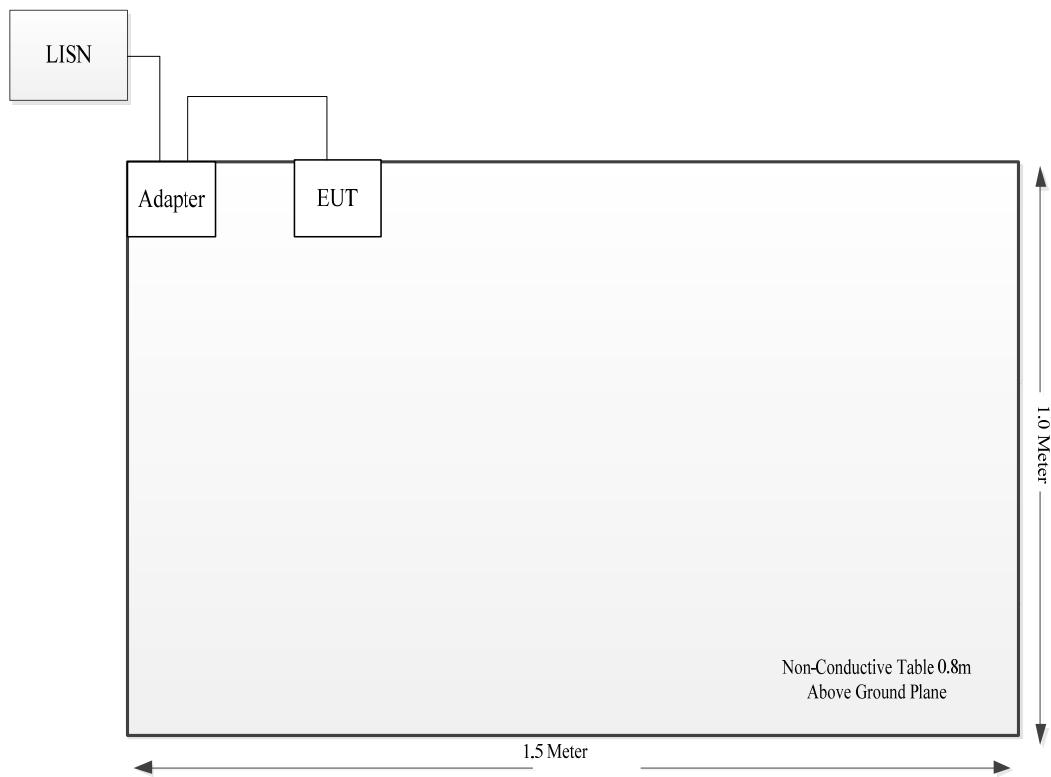


Radiated emissions:

M1:

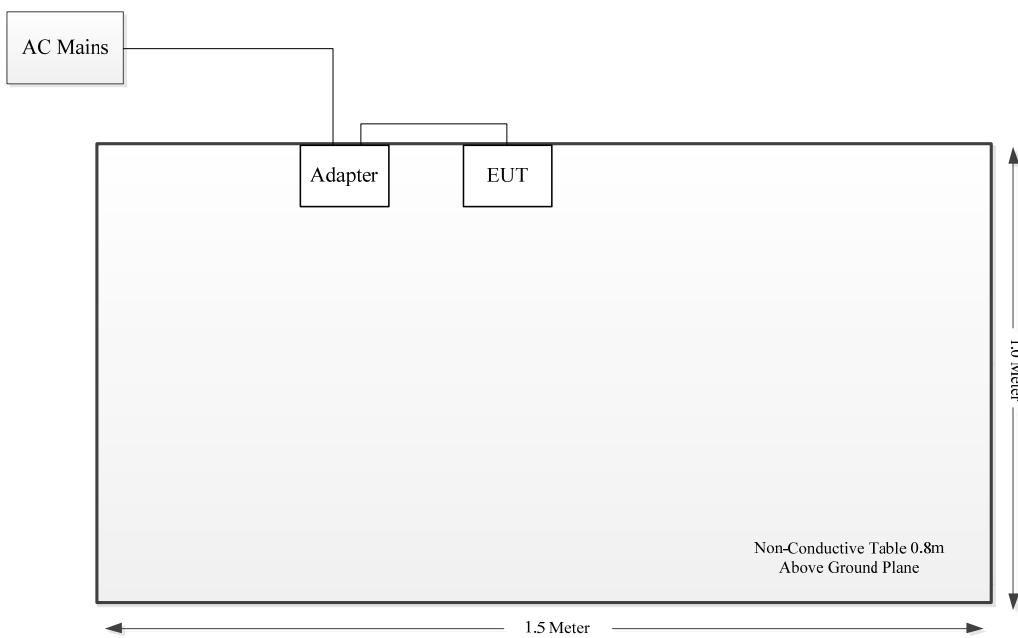

M2:

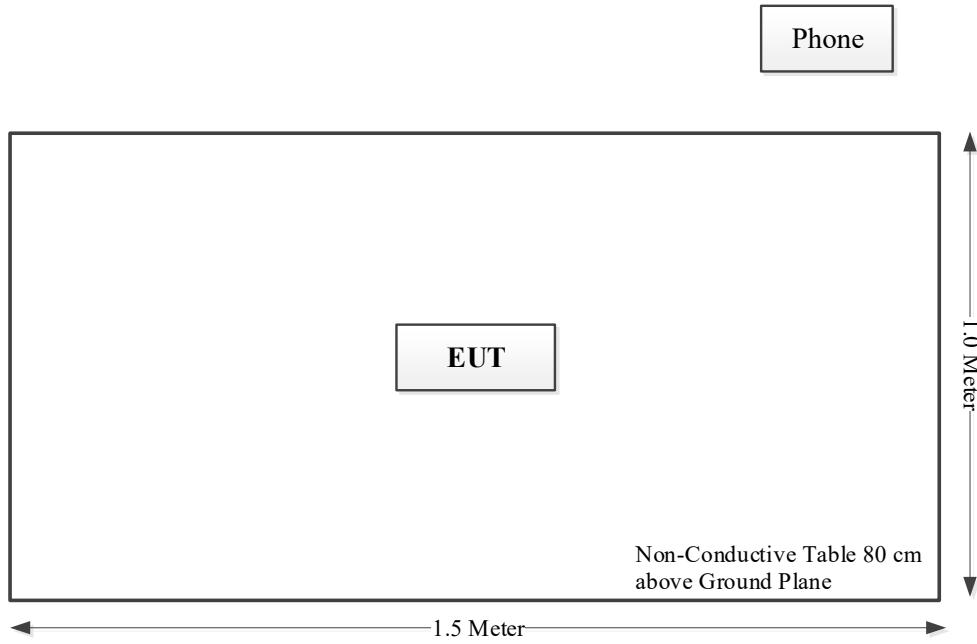

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

| Parameter | Measurement Uncertainty |
|-----------------------------------|--|
| Unwanted Emissions, radiated | 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB |
| Temperature | ±1°C |
| Humidity | ±5% |
| AC Power Lines Conducted Emission | 2.8 dB (150 kHz to 30 MHz) |


2. SUMMARY OF TEST RESULTS

| Standard(s) Section | Description of Test | Result |
|---------------------|---------------------|-----------|
| §15.107 | Conducted Emissions | Compliant |
| §15.109 | Radiated Emissions | Compliant |

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Conducted Emissions

3.1.1 EUT Setup

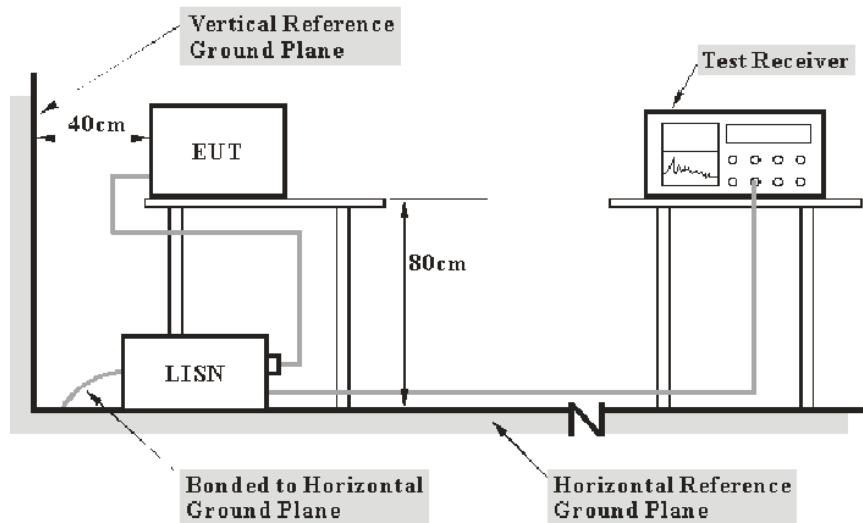

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

3.1.2 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

3.1.3 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT, the report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

3.1.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN


The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.2 Radiation Emissions

3.2.1 EUT Setup

Below 1GHz:

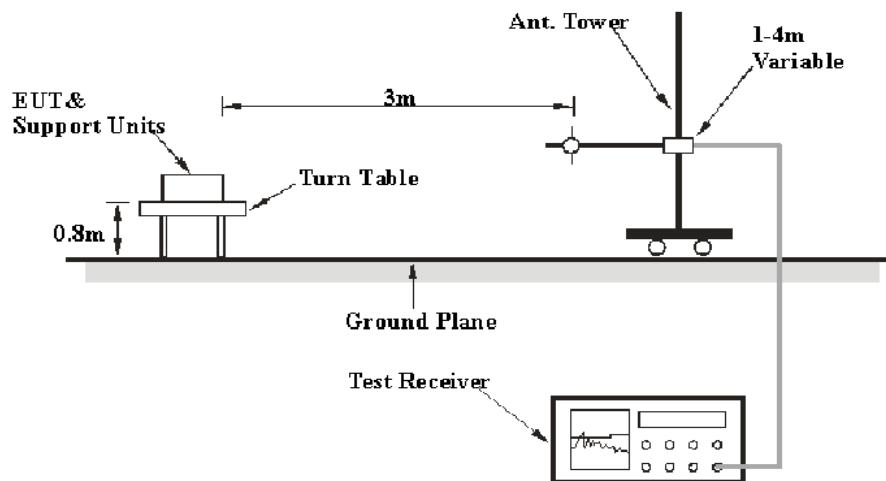

Above 1GHz:

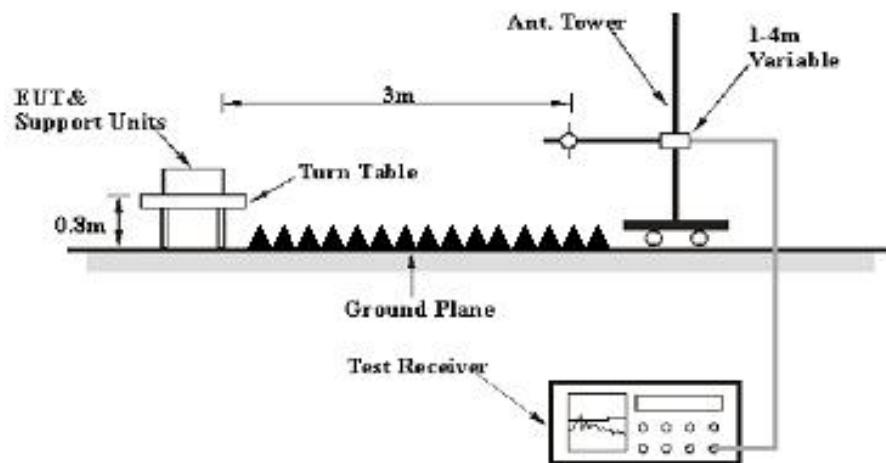

The radiated emission tests were performed in the 3 meters chamber, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

3.2.2 EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Measurement |
|-------------------|---------|-------------------------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz | / | PK |
| | / | / | 120 kHz | QP |
| Above 1 GHz | 1 MHz | 3 MHz | / | Peak |
| | 1 MHz | Reduced video bandwidth | / | AVG |

If the maximized peak measured value complies with under the limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.3 Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4. TEST DATA AND RESULTS

4.1 Conducted Emissions

| | | | |
|----------------|-------------|--------------|-----------|
| Serial Number: | 2L93-1 | Test Date: | 2024/5/15 |
| Test Site: | CE | Test Mode: | Charging |
| Tester: | David Huang | Test Result: | Pass |

Environmental Conditions:

| | | | | | |
|-------------------|------|------------------------|----|---------------------|-----|
| Temperature: (°C) | 26.4 | Relative Humidity: (%) | 58 | ATM Pressure: (kPa) | 101 |
|-------------------|------|------------------------|----|---------------------|-----|


Test Equipment List and Details:

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|---------|---------------|------------------|----------------------|
| R&S | LISN | ENV216 | 101132 | 2024/4/1 | 2025/3/31 |
| R&S | EMI Test Receiver | ESR3 | 102726 | 2024/4/1 | 2025/3/31 |
| MICRO-COAX | Coaxial Cable | UTIFLEX | C-0200-01 | 2024/1/15 | 2025/1/14 |
| Audix | Test Software | E3 | 190306 (V9) | N/A | N/A |

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Project No.: 2403T75625E-RF
Tester: David Huang
Port: Line
Note: Charing

Date: 2024-05-15

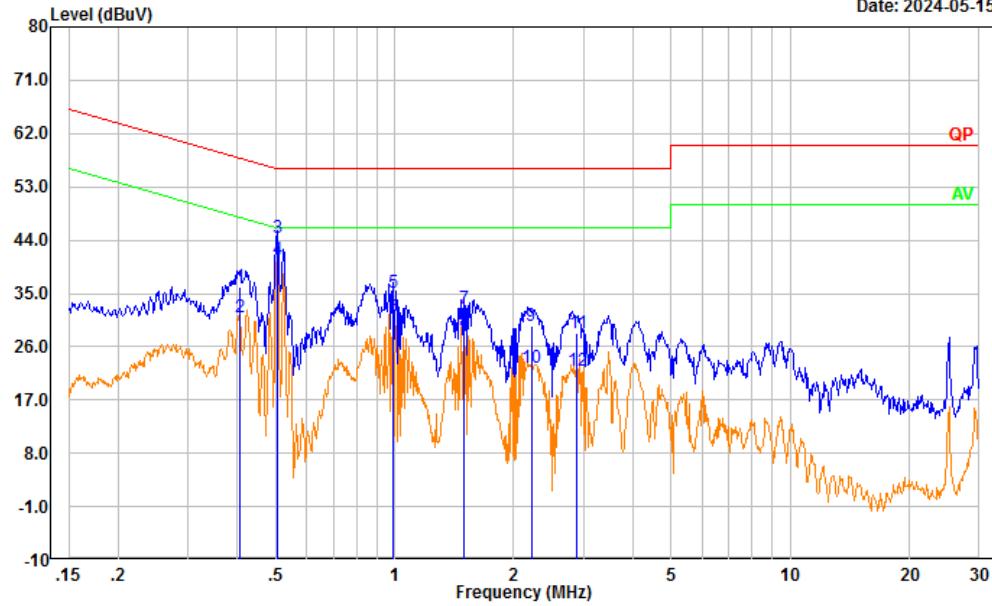

| No. | Frequency (MHz) | Reading (dB μ V) | Factor (dB) | Result (dB μ V) | Limit (dB μ V) | Margin (dB) | Detector |
|-----|-----------------|----------------------|-------------|---------------------|--------------------|-------------|----------|
| 1 | 0.407 | 25.78 | 10.35 | 36.13 | 57.71 | 21.58 | QP |
| 2 | 0.407 | 20.60 | 10.35 | 30.95 | 47.71 | 16.76 | Average |
| 3 | 0.504 | 33.99 | 10.51 | 44.50 | 56.00 | 11.50 | QP |
| 4 | 0.504 | 30.12 | 10.51 | 40.63 | 46.00 | 5.37 | Average |
| 5 | 0.990 | 24.51 | 10.62 | 35.13 | 56.00 | 20.87 | QP |
| 6 | 0.990 | 20.46 | 10.62 | 31.08 | 46.00 | 14.92 | Average |
| 7 | 1.494 | 22.18 | 10.37 | 32.55 | 56.00 | 23.45 | QP |
| 8 | 1.494 | 18.05 | 10.37 | 28.42 | 46.00 | 17.58 | Average |
| 9 | 2.212 | 19.29 | 10.15 | 29.44 | 56.00 | 26.56 | QP |
| 10 | 2.212 | 12.18 | 10.15 | 22.33 | 46.00 | 23.67 | Average |
| 11 | 2.892 | 18.09 | 10.23 | 28.32 | 56.00 | 27.68 | QP |
| 12 | 2.892 | 11.74 | 10.23 | 21.97 | 46.00 | 24.03 | Average |

Project No.: 2403T75625E-RF
Tester: David Huang
Port: neutral
Note: Charing

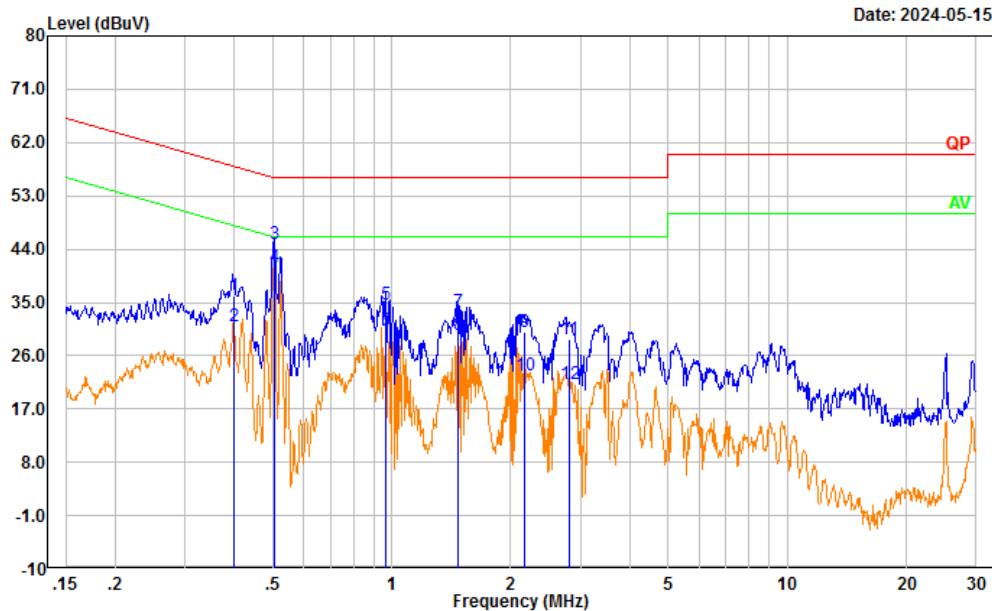

| No. | Frequency (MHz) | Reading (dB μ V) | Factor (dB) | Result (dB μ V) | Limit (dB μ V) | Margin (dB) | Detector |
|-----|-----------------|----------------------|-------------|---------------------|--------------------|-------------|----------|
| 1 | 0.400 | 25.67 | 10.44 | 36.11 | 57.86 | 21.75 | QP |
| 2 | 0.400 | 20.51 | 10.44 | 30.95 | 47.86 | 16.91 | Average |
| 3 | 0.504 | 34.27 | 10.50 | 44.77 | 56.00 | 11.23 | QP |
| 4 | 0.504 | 30.46 | 10.50 | 40.96 | 46.00 | 5.04 | Average |
| 5 | 0.965 | 24.21 | 10.49 | 34.70 | 56.00 | 21.30 | QP |
| 6 | 0.965 | 19.87 | 10.49 | 30.36 | 46.00 | 15.64 | Average |
| 7 | 1.471 | 23.00 | 10.43 | 33.43 | 56.00 | 22.57 | QP |
| 8 | 1.471 | 18.96 | 10.43 | 29.39 | 46.00 | 16.61 | Average |
| 9 | 2.166 | 19.67 | 10.31 | 29.98 | 56.00 | 26.02 | QP |
| 10 | 2.166 | 12.40 | 10.31 | 22.71 | 46.00 | 23.29 | Average |
| 11 | 2.815 | 18.50 | 10.26 | 28.76 | 56.00 | 27.24 | QP |
| 12 | 2.815 | 11.02 | 10.26 | 21.28 | 46.00 | 24.72 | Average |

4.2 Radiation Spurious Emissions

| | | | |
|----------------|-------------------|--------------|---------------------|
| Serial Number: | 2L93-1 | Test Date: | 2024/5/15~2024/5/18 |
| Test Site: | 966-1,966-2 | Test Mode: | M1, M2 |
| Tester: | Carl Xue, Tao Zhu | Test Result: | Pass |

| Environmental Conditions: | | | | | |
|---------------------------|------|------------------------|-------|---------------------|-----------|
| Temperature: (°C) | 25.3 | Relative Humidity: (%) | 57~61 | ATM Pressure: (kPa) | 100.6~101 |

Test Equipment List and Details:

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-----------------------|---------------|------------------|----------------------|
| Sunol Sciences | Antenna | JB6 | A082520-5 | 2023/12/1 | 2026/11/30 |
| R&S | EMI Test Receiver | ESR3 | 102724 | 2024/2/29 | 2025/2/28 |
| TIMES MICROWAVE | Coaxial Cable | LMR-600-UltraFlex | C-0100-03 | 2023/12/4 | 2024/12/3 |
| TIMES MICROWAVE | Coaxial Cable | LMR-600-UltraFlex | C-0370-01 | 2023/12/4 | 2024/12/3 |
| TIMES MICROWAVE | Coaxial Cable | LMR-600-UltraFlex | C-0780-01 | 2023/12/4 | 2024/12/3 |
| Sonoma | Amplifier | 310N | 186165 | 2023/12/4 | 2024/12/3 |
| Audix | Test Software | E3 | 191218 (V9) | N/A | N/A |
| ETS-Lindgren | Horn Antenna | 3115 | 9912-5985 | 2023/12/6 | 2026/12/5 |
| R&S | Spectrum Analyzer | FSV40 | 101591 | 2024/4/1 | 2025/3/31 |
| MICRO-COAX | Coaxial Cable | UFA210A-1-1200-70U300 | 217423-008 | 2024/1/15 | 2025/1/14 |
| MICRO-COAX | Coaxial Cable | UFA210A-1-2362-300300 | 235780-001 | 2024/1/15 | 2025/1/14 |
| BACL | Preamplifier | 1313-A20M18G | 4032311 | 2024/4/1 | 2025/3/31 |

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to plots.

30MHz-1GHz:


M1:

Project No.: 2403T75625E-RF
Tester: Carl Xue
Polarization: horizontal
Note: Charging

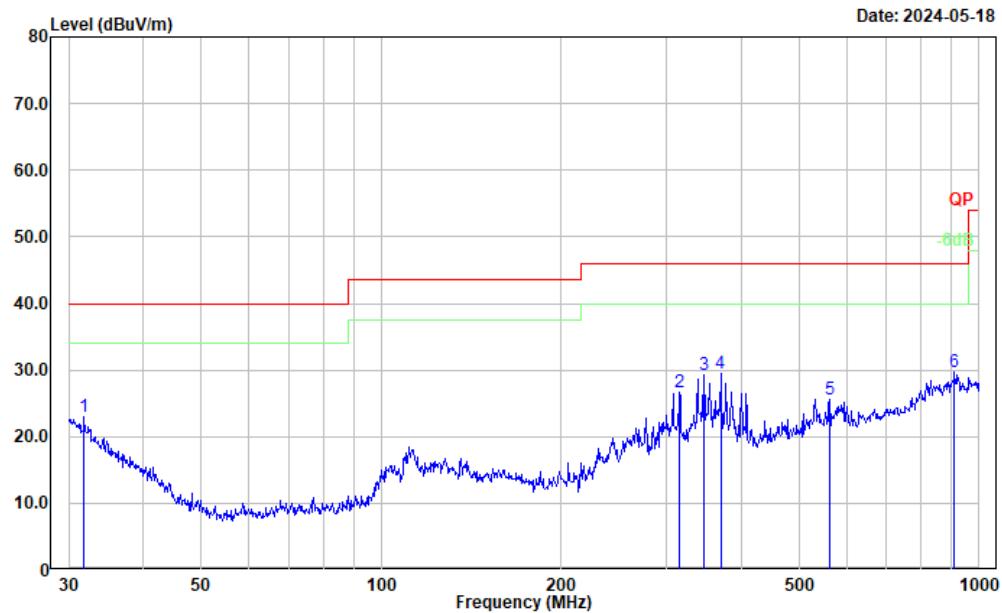

| No. | Frequency (MHz) | Reading (dB μ V) | Factor (dB/m) | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1 | 31.843 | 28.01 | -5.13 | 22.88 | 40.00 | 17.12 | Peak |
| 2 | 315.481 | 36.67 | -10.09 | 26.58 | 46.00 | 19.42 | Peak |
| 3 | 345.595 | 39.01 | -9.69 | 29.32 | 46.00 | 16.68 | Peak |
| 4 | 369.405 | 38.70 | -9.15 | 29.55 | 46.00 | 16.45 | Peak |
| 5 | 562.662 | 30.73 | -5.17 | 25.56 | 46.00 | 20.44 | Peak |
| 6 | 909.667 | 29.39 | 0.42 | 29.81 | 46.00 | 16.19 | Peak |


Project No.: 2403T75625E-RF
Tester: Carl Xue
Polarization: vertical
Note: Charging

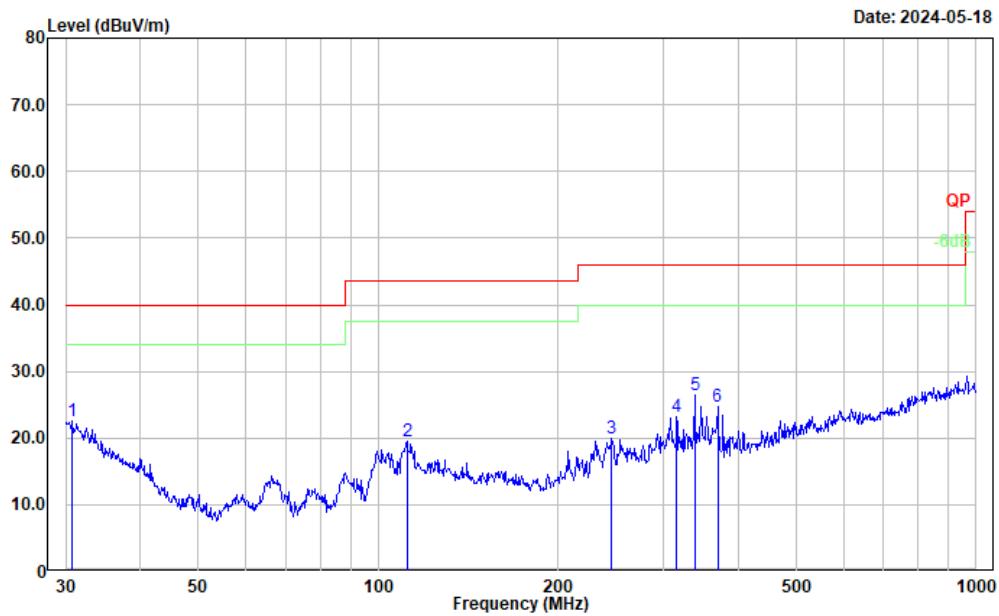

| No. | Frequency (MHz) | Reading (dB μ V) | Factor (dB/m) | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1 | 30.745 | 26.96 | -4.31 | 22.65 | 40.00 | 17.35 | Peak |
| 2 | 111.738 | 31.60 | -11.98 | 19.62 | 43.50 | 23.88 | Peak |
| 3 | 245.951 | 32.83 | -12.90 | 19.93 | 46.00 | 26.07 | Peak |
| 4 | 315.481 | 33.19 | -10.09 | 23.10 | 46.00 | 22.90 | Peak |
| 5 | 338.400 | 36.19 | -9.71 | 26.48 | 46.00 | 19.52 | Peak |
| 6 | 369.405 | 33.81 | -9.15 | 24.66 | 46.00 | 21.34 | Peak |


M2:

Project No.: 2403T75625E-RF
Tester: Carl Xue
Polarization: horizontal
Note: Operating

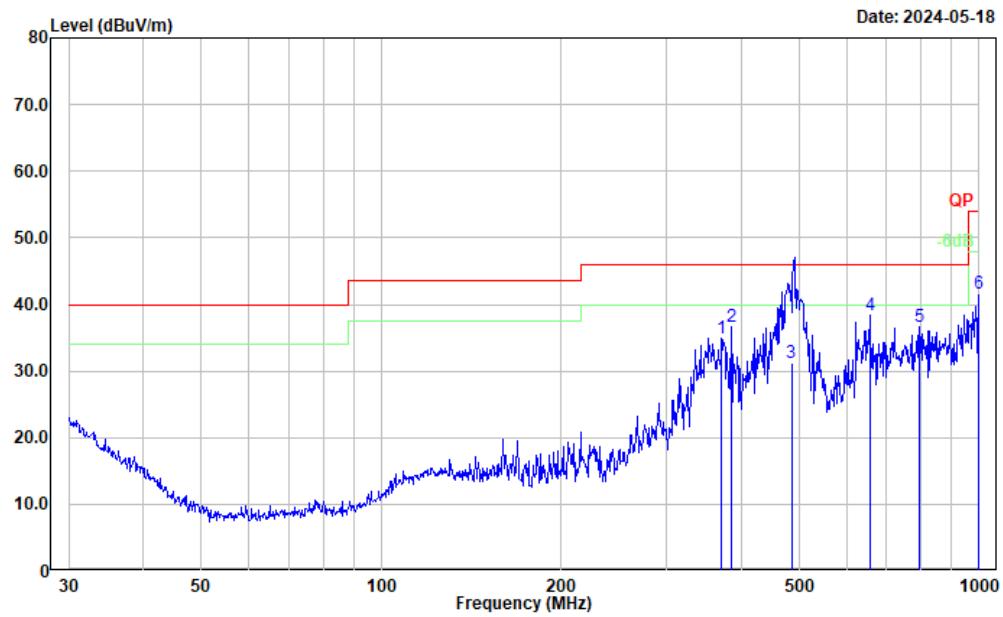

| No. | Frequency (MHz) | Reading (dB μ V) | Factor (dB/m) | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1 | 370.702 | 44.07 | -9.13 | 34.94 | 46.00 | 11.06 | Peak |
| 2 | 385.281 | 45.20 | -8.58 | 36.62 | 46.00 | 9.38 | Peak |
| 3 | 485.235 | 37.28 | -6.12 | 31.16 | 46.00 | 14.84 | QP |
| 4 | 656.530 | 41.97 | -3.53 | 38.44 | 46.00 | 7.56 | Peak |
| 5 | 796.183 | 38.00 | -1.37 | 36.63 | 46.00 | 9.37 | Peak |
| 6 | 1000.000 | 40.27 | 1.44 | 41.71 | 54.00 | 12.29 | Peak |


Project No.: 2403T75625E-RF
Tester: Carl Xue
Polarization: vertical
Note: Operating

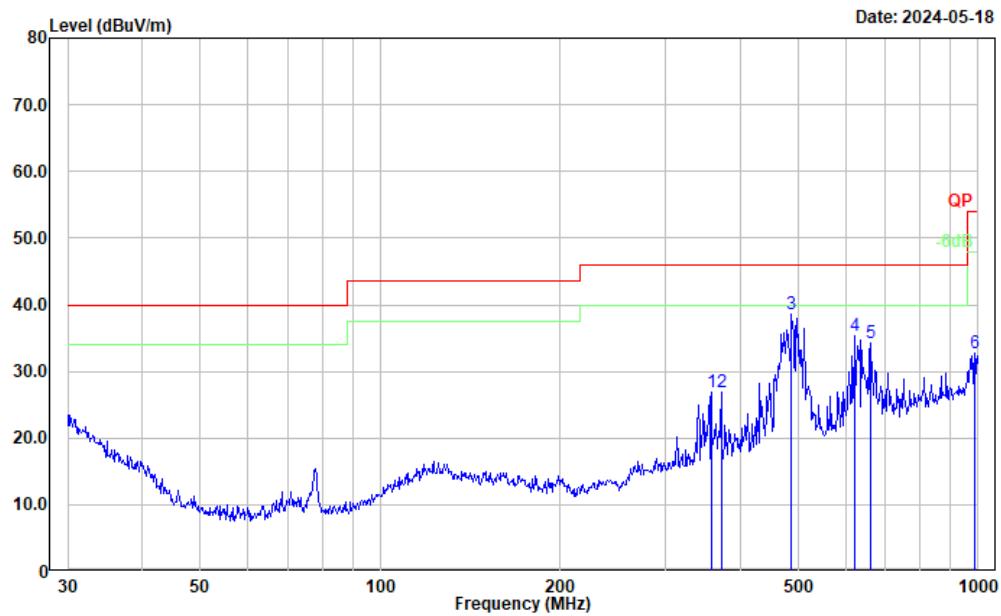

| No. | Frequency (MHz) | Reading (dB μ V) | Factor (dB/m) | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1 | 357.929 | 36.19 | -9.38 | 26.81 | 46.00 | 19.19 | Peak |
| 2 | 372.005 | 36.00 | -9.10 | 26.90 | 46.00 | 19.10 | Peak |
| 3 | 487.315 | 44.64 | -6.03 | 38.61 | 46.00 | 7.39 | Peak |
| 4 | 620.710 | 39.93 | -4.61 | 35.32 | 46.00 | 10.68 | Peak |
| 5 | 661.151 | 37.59 | -3.43 | 34.16 | 46.00 | 11.84 | Peak |
| 6 | 986.072 | 31.13 | 1.60 | 32.73 | 54.00 | 21.27 | Peak |


Above 1GHz:**M1:**

Project No.: 2403T75625E-RF
Tester: Tao Zhu
Polarization: horizontal
Note: Charging

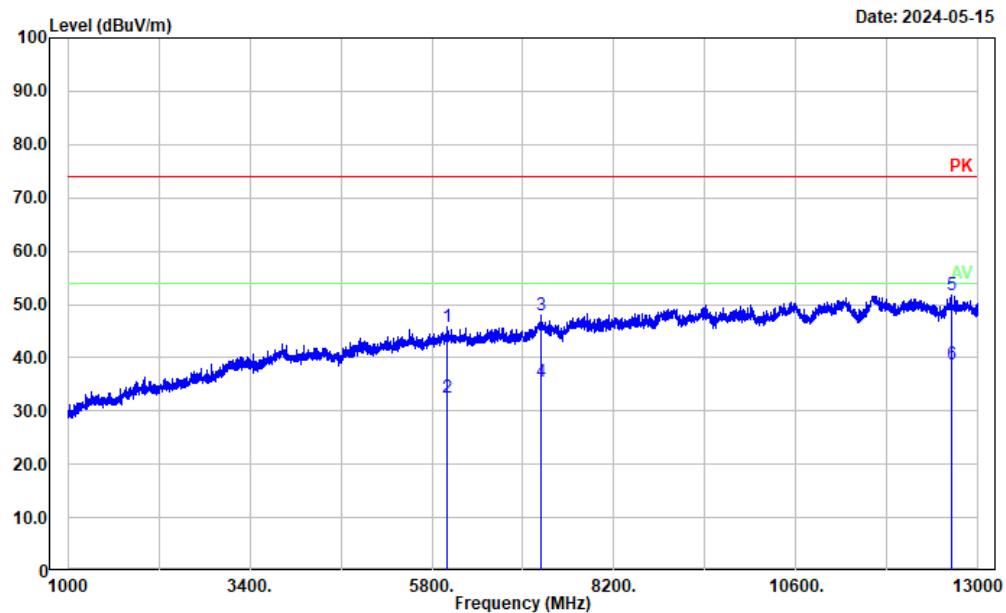


| No. | Frequency (MHz) | Reading (dB μ V) | Factor (dB/m) | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector |
|-------|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| <hr/> | | | | | | | |
| 1 | 5994.400 | 35.45 | 10.24 | 45.69 | 74.00 | 28.31 | Peak |
| 2 | 5994.400 | 22.28 | 10.24 | 32.52 | 54.00 | 21.48 | Average |
| 3 | 7240.000 | 36.67 | 11.40 | 48.07 | 74.00 | 25.93 | Peak |
| 4 | 7240.000 | 24.01 | 11.40 | 35.41 | 54.00 | 18.59 | Average |
| 5 | 12649.600 | 35.43 | 16.24 | 51.67 | 74.00 | 22.33 | Peak |
| 6 | 12649.600 | 22.45 | 16.24 | 38.69 | 54.00 | 15.31 | Average |

Project No.: 2403T75625E-RF
Tester: Tao Zhu
Polarization: vertical
Note: Charging

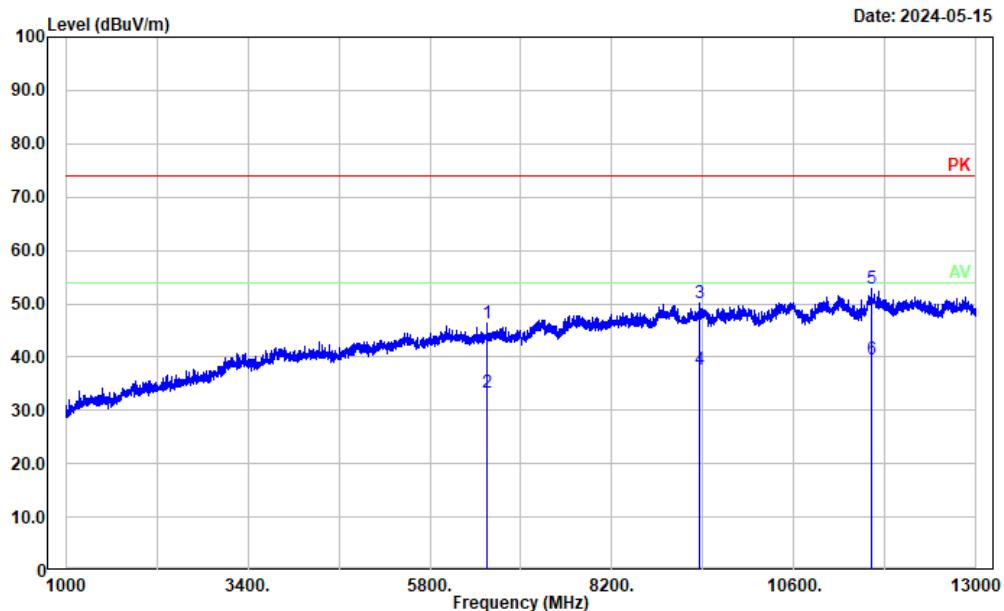


| No. | Frequency (MHz) | Reading (dB μ V) | Factor (dB/m) | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector |
|-------|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| <hr/> | | | | | | | |
| 1 | 6553.600 | 35.94 | 10.32 | 46.26 | 74.00 | 27.74 | Peak |
| 2 | 6553.600 | 22.89 | 10.32 | 33.21 | 54.00 | 20.79 | Average |
| 3 | 9361.600 | 36.36 | 13.65 | 50.01 | 74.00 | 23.99 | Peak |
| 4 | 9361.600 | 23.89 | 13.65 | 37.54 | 54.00 | 16.46 | Average |
| 5 | 11624.800 | 37.10 | 15.79 | 52.89 | 74.00 | 21.11 | Peak |
| 6 | 11624.800 | 23.87 | 15.79 | 39.66 | 54.00 | 14.34 | Average |

M2:

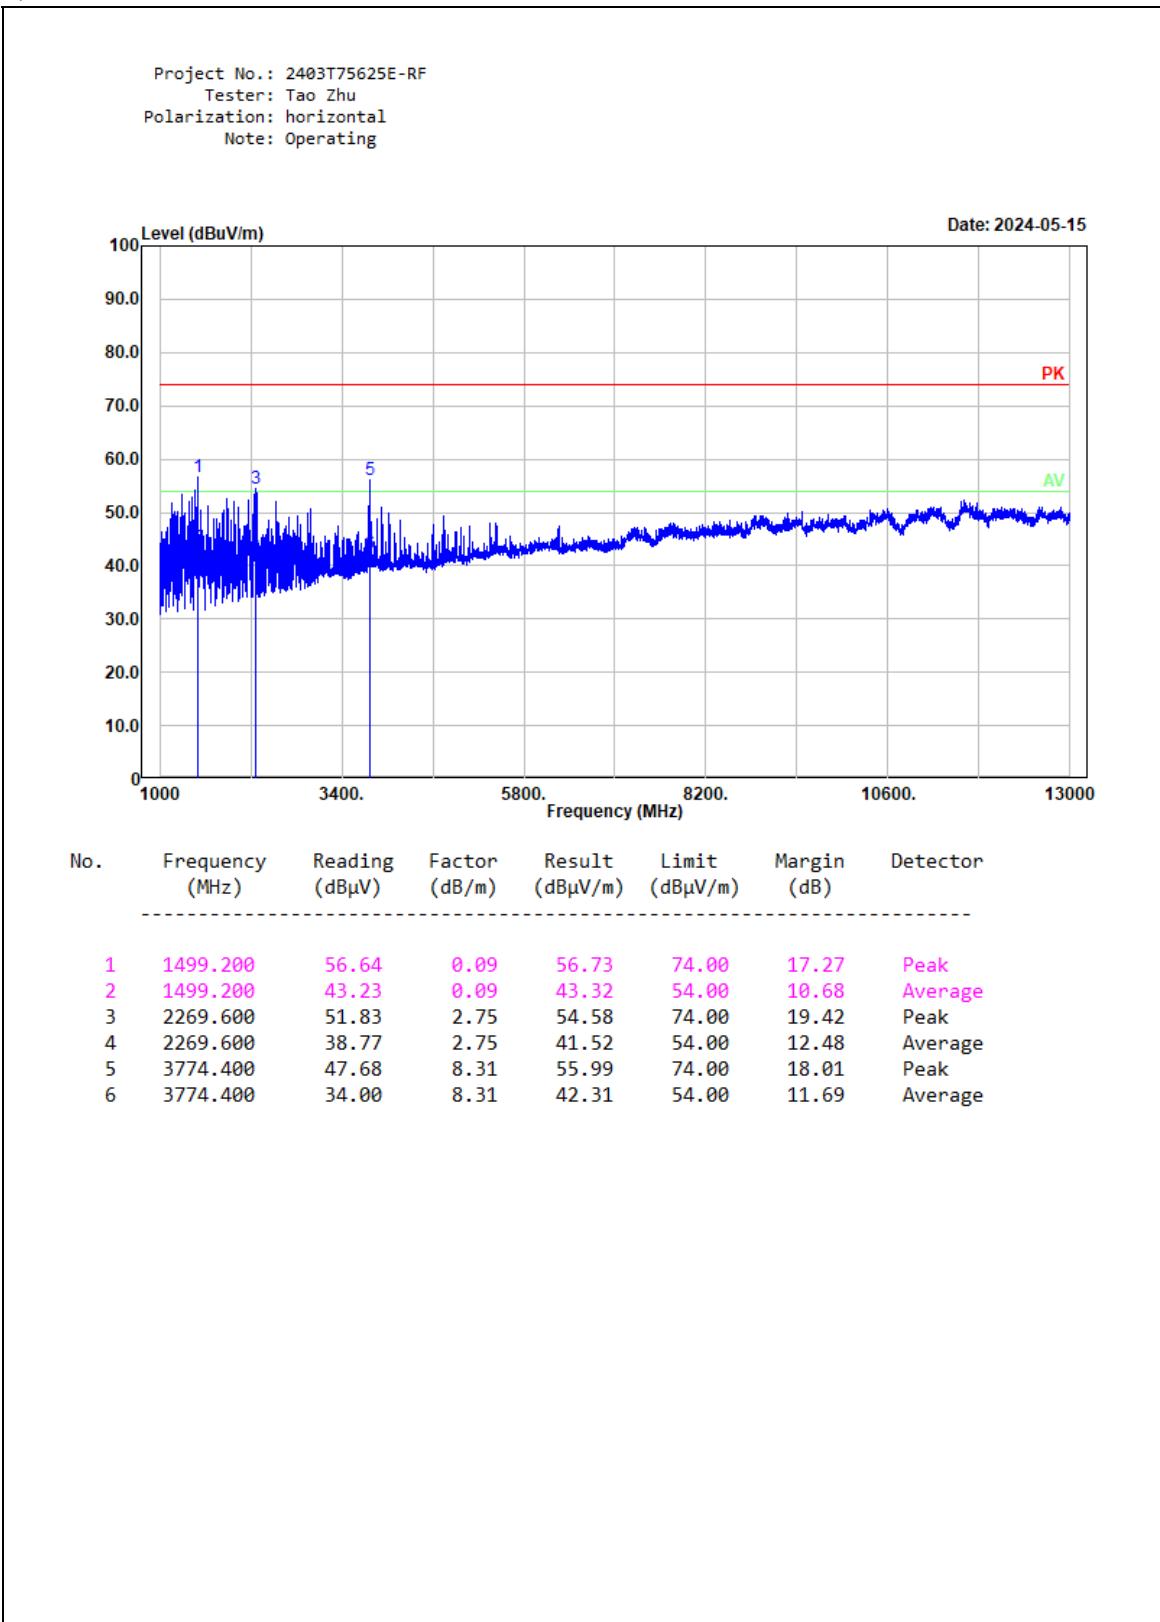

Project No.: 2403T75625E-RF
Tester: Tao Zhu
Polarization: vertical
Note: Operating

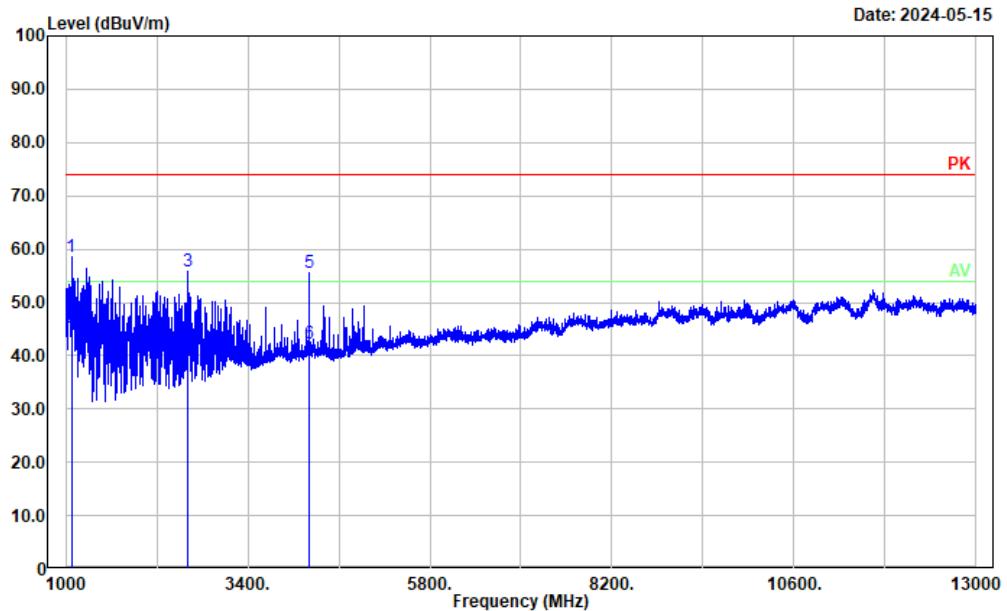

| No. | Frequency (MHz) | Reading (dB μ V) | Factor (dB/m) | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1 | 1074.400 | 60.72 | -2.17 | 58.55 | 74.00 | 15.45 | Peak |
| 2 | 1074.400 | 47.47 | -2.17 | 45.30 | 54.00 | 8.70 | Average |
| 3 | 2615.200 | 52.14 | 3.74 | 55.88 | 74.00 | 18.12 | Peak |
| 4 | 2615.200 | 38.47 | 3.74 | 42.21 | 54.00 | 11.79 | Average |
| 5 | 4211.200 | 47.95 | 7.73 | 55.68 | 74.00 | 18.32 | Peak |
| 6 | 4211.200 | 34.45 | 7.73 | 42.18 | 54.00 | 11.82 | Average |

5. EUT PHOTOGRAPHS

Please refer to the attachment 2403T75625E-EXP EUT EXTERNAL PHOTOGRAPHS and 2403T75625E-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2403T75625E-00-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====