

FCC Test Report

Report No. : 1812C50125512504

Applicant : Shenzhen Muxin Intelligent Technology Co., Ltd.

Address : Zone 1C-B, 2nd Floor, Building 1C, Tingwei Industrial Park, No.6 Liufang Road, Bao'an District, Shenzhen, China

Product Name : Robotic Lawn Mower

Report Date : 2025-06-24

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	6
1.1. Client Information.....	6
1.2. Description of Device (EUT).....	6
1.3. Auxiliary Equipment Used During Test.....	8
1.4. Description of Test Modes.....	8
1.5. Description Of Test Setup	9
1.6. Test Equipment List.....	10
1.7. Measurement Uncertainty	11
1.8. Additional Instructions	12
1.9. Description of Test Facility	13
1.10. Disclaimer	13
2. Summary of Test Results	14
3. Conducted Emission Test.....	15
3.1. Test Standard and Limit.....	15
3.2. Test Setup.....	15
3.3. Test Procedure.....	15
3.4. Test Data.....	15
4. Radiation Spurious Emission and Restricted Band Test.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	17
4.3. Test Procedure.....	18
4.4. Test Data.....	19
5. Maximum Conducted Output Power Test	30
5.1. Test Standard and Limit.....	30
5.2. Test Setup.....	30
5.3. Test Procedure.....	30
5.4. Test Data.....	31
6. 26dB Bandwidth & 99% Occupied Bandwidth Test	32
6.1. Test Standard	32
6.2. Test Setup.....	32
6.3. Test Procedure.....	32
6.4. Test Data.....	32
7. Minimum 6dB Bandwidth Test	33
7.1. Test Standard	33
7.2. Test Setup.....	33
7.3. Test Procedure.....	33
7.4. Test Data.....	33
8. Maximum Power Spectral Density Test.....	34
8.1. Test Standard and Limit.....	34
8.2. Test Setup.....	34
8.3. Test Procedure.....	34

8.4. Test Data.....35

9. Conducted Band Edge Test36

9.1. Test Standard and Limit.....36

9.2. Test Setup.....36

9.3. Test Procedure.....36

9.4. Test Data.....36

10. Frequency Stability37

10.1. Test Standard and Limit37

10.2. Test Setup37

10.3. Test Procedure37

10.4. Test Data37

11. Antenna Requirement46

11.1. Test Standard and Requirement46

11.2. Antenna Connected Construction46

APPENDIX I -- TEST SETUP PHOTOGRAPH.....47

APPENDIX II -- EXTERNAL PHOTOGRAPH47

APPENDIX III -- INTERNAL PHOTOGRAPH47

TEST REPORT

Applicant : Shenzhen Muxin Intelligent Technology Co., Ltd.

Manufacturer : Shenzhen Muxin Intelligent Technology Co., Ltd.

Product Name : Robotic Lawn Mower

Model No. : V600, V800, V1000

Trade Mark :

TERRAMOW

Rating(s) :

V600&V800:

Input: 30V=2A

Battery Capacity: DC 22.2V, 3.8Ah

V1000:

Input: 30V=2A

Battery Capacity: DC 21.9V, 4.5Ah

Test Standard(s) : 47 CFR Part 15E

Test Method(s) : ANSI C63.10: 2020

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the 47 CFR Part 15E requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

2025-03-28

Date of Test

2025-03-28 to 2025-05-15

Prepared by

Cecilia Chen

(Cecilia Chen)

Approved & Authorized Signer

Hugo Chen

(Hugo Chen)

Revision History

Report Version	Description	Issued Date
R00	Original Issue.	2025-06-24

1. General Information

1.1. Client Information

Applicant	:	Shenzhen Muxin Intelligent Technology Co., Ltd.
Address	:	Zone 1C-B, 2nd Floor, Building 1C, Tingwei Industrial Park, No.6 Liufang Road, Bao'an District, Shenzhen, China
Manufacturer	:	Shenzhen Muxin Intelligent Technology Co., Ltd.
Address	:	Zone 1C-B, 2nd Floor, Building 1C, Tingwei Industrial Park, No.6 Liufang Road, Bao'an District, Shenzhen, China
Factory	:	Shenzhen Muxin Intelligent Technology Co., Ltd.
Address	:	Zone 1C-B, 2nd Floor, Building 1C, Tingwei Industrial Park, No.6 Liufang Road, Bao'an District, Shenzhen, China

1.2. Description of Device (EUT)

Product Name	:	Robotic Lawn Mower
Model No.	:	V600, V800, V1000 (For models differences: V600: Use Battery "C1276B5" with DC 22.2V, 3.8Ah; V800: Memory size are different from "V600"; V1000: Battery and memory size are different from "V600", Use Battery "C1276B6" with DC 21.9V, 4.5Ah; The model differences will not not affect RF, so we prepare "V600" and "V1000" for EMC test, and prepare "V600" for RF test only.)
Trade Mark	:	
Test Power Supply	:	V600: DC 22.2V Battery inside V1000: DC 21.9V Battery inside
Test Sample No.	:	V600: 1-3-1(Normal Sample), 1-3-2(Engineering Sample) V1000: 1-3-3(Normal Sample)
Adapter	:	Manufacturer: Dongguan Rico Electronic Co.,Ltd Model: RKPO-UL3002000DP-6 Input: 120V~, 50/60Hz, 1.3A Output: 30V=2000mA, 60W
RF Specification		
Operation Mode	:	☒ a ☒ n(HT20) ☒ n(HT40) ☒ ac(VHT20) ☒ ac(VHT40) ☒ ac(VHT80) ☐ ac(VHT160) ☐ ax(HEW20)

	:	☐ ax(HEW40) ☐ ax(HEW80) ☐ ax(HEW160)
Device Type	:	☐ Outdoor AP ☐ Indoor AP ☐ Point-to-point AP ☒ Client
Operation Frequency	:	☒ Wi-Fi 5.2G: 5150~5250MHz ☐ Wi-Fi 5.3G: 5250~5350MHz ☐ Wi-Fi 5.6G: 5470~5725MHz ☒ Wi-Fi 5.8G: 5725~5850MHz
Number of Channel	:	Wi-Fi 5.2G: ☒ 4 Channels for 20MHz bandwidth (5180-5240MHz) ☒ 2 Channels for 40MHz bandwidth (5190-5230MHz) ☒ 1 Channels for 80MHz bandwidth (5210MHz) Wi-Fi 5.8G: ☒ 5 Channels for 20MHz bandwidth (5745MHz ~ 5825MHz) ☒ 2 Channels for 40MHz bandwidth (5755MHz ~ 5795MHz) ☒ 1 Channels for 80MHz bandwidth (5775MHz)
Modulation Type	:	☒ 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) ☒ 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM) ☒ 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) ☐ 802.11ax: OFDMA(BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Antenna Type	:	FPC Antenna
Antenna Gain(Peak)	:	Wi-Fi 5.2G: 4.48dBi Wi-Fi 5.8G: 4.17dBi
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. Only show the test worst data of the Model "V600"(with DC 22.2V, 3.8Ah Battery) in the Report.		

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
/	/	/	/

1.4. Description of Test Modes


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Frequency Band	Mode	Test channel	Frequency (MHz)
5.2GHz	OFDM 802.11a/n(HT20) /ac(VHT20)	CH 36	5180MHz
		CH 40	5200MHz
		CH 48	5240MHz
	OFDM 802.11n(HT40)/ac(VHT40)	CH 38	5190MHz
		CH 46	5230MHz
	OFDM 802.11ac(VHT80)	CH 42	5210MHz
5.8GHz	OFDM 802.11a/n(HT20) /ac(VHT20)	CH 149	5745MHz
		CH 157	5785MHz
		CH 165	5825MHz
	OFDM 802.11n(HT40)/ac(VHT40)	CH 151	5755MHz
		CH 159	5795MHz
	OFDM 802.11ac(VHT80)	CH 155	5775MHz

Note:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω, Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode.

1.5. Description Of Test Setup

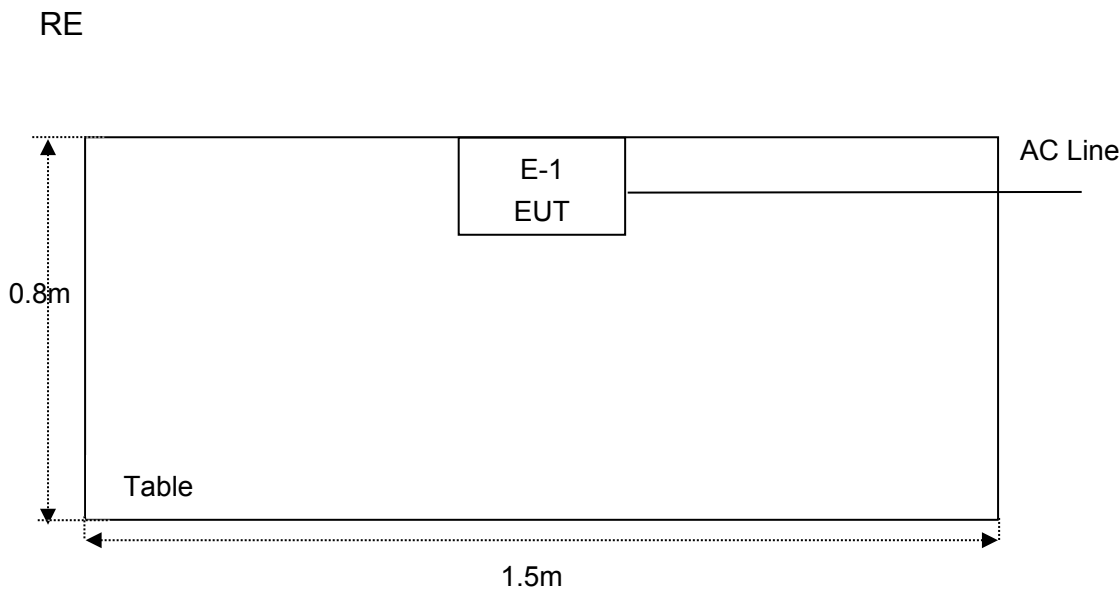

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	2024-09-09	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT00 1	2025-01-13	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	2025-01-13	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	2025-01-14	1 Year
5.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	2024-09-09	1 Year
6.	EMI Preamplifier	SKET Electronic	LNPA-0118G- 45	SKET-PA-002	2025-01-13	1 Year
7.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	2022-10-16	3 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	2022-10-23	3 Year
9.	Loop Antenna(9K-30M)	Schwarzbeck	FMZB1519B	00053	2024-09-12	1 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	2024-01-22	3 Year
11.	Pre-amplifier	SONOMA	310N	186860	2025-01-14	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	2024-09-09	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	MY47420647	2025-02-21	1 Year
15.	Signal Generator	Agilent	E4421B	MY41000743	2025-02-21	1 Year
16.	DC Power Supply	IVYTECH	IV3605	1804D360510	2024-09-09	1 Year
17.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	2024-10-14	1 Year
18.	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102150	2025-04-25	1 Year

1.7. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.2dB
Time	2%
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Conducted Spurious Emission	1.24dB
Radiated spurious emissions (Below 30MHz)	3.26dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.70dB; Vertical: 4.42dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.64dB 6G-18GHz: 4.82dB 18G-40GHz: 5.62dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.8. Additional Instructions

Power level setup in software: SecureCRT

Operation Band: U-NII Band 1

Mode	Power level	Transmitting type
802.11a	default	data pack TX
802.11n(HT20)	default	data pack TX
802.11n(HT40)	default	data pack TX
802.11ac(VHT20)	default	data pack TX
802.11ac(VHT40)	default	data pack TX
802.11ac(VHT80)	default	data pack TX
802.11ax(HEW20)	default	data pack TX
802.11ax(HEW40)	default	data pack TX
802.11ax(HEW80)	default	data pack TX

Operation Band: U-NII Band 3

Mode	Power level	Transmitting type
802.11a	default	data pack TX
802.11n(HT20)	default	data pack TX
802.11n(HT40)	default	data pack TX
802.11ac(VHT20)	default	data pack TX
802.11ac(VHT40)	default	data pack TX
802.11ac(VHT80)	default	data pack TX
802.11ax(HEW20)	default	data pack TX
802.11ax(HEW40)	default	data pack TX
802.11ax(HEW80)	default	data pack TX

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.10. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Summary of Test Results

Standard	Test Type	Result
15.207 & 15.407(b)	Conducted Emission	PASS
15.205 & 15.209 & 15.407(b)	Radiated Spurious Emission and Restricted Band	PASS
15.407(b)	Conducted Band Edge	PASS
15.407(a) & 2.1049	26dB Bandwidth & 99% Occupied Bandwidth	PASS
15.407(e)	Minimum 6dB Bandwidth (5.725-5.85GHz Band)	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(a)	Maximum Power Spectral Density	PASS
15.407(g)	Frequency Stability	PASS
15.203	Antenna Requirement	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207 & 15.407(b)		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

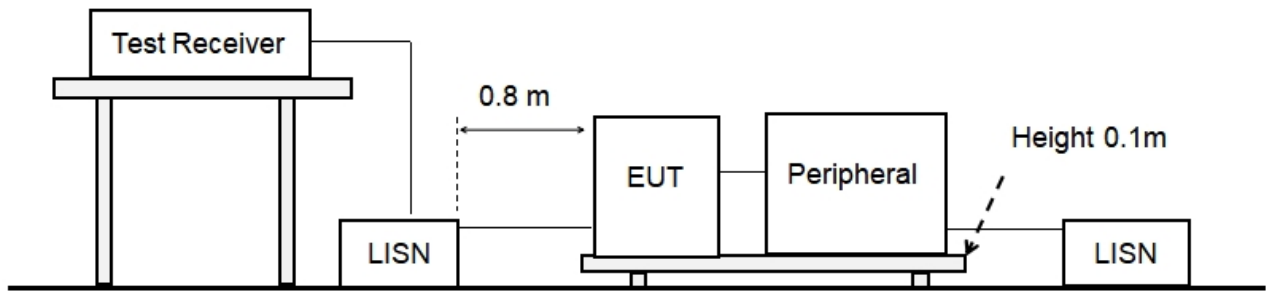

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Not applicable for DC power device.

4. Radiation Spurious Emission and Restricted Band Test

4.1. Test Standard and Limit

Radiated Spurious Emission					
Test Standard	FCC Part15 C Section 15.205 & 15.209 & 15.407(b)				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	68.2	Peak	3
Band Edge					
Test Standard	15.407(b)				
Test Limit	Operating Band	Frequency	EIRP Limit		Remark
	5150-5250MHz	Out of operation band	-27dBm/MHz(68.2dBuV/m)@3m		Peak
	5250-5350MHz	Out of operation band	-27dBm/MHz(68.2dBuV/m)@3m		Peak
	5470-5725MHz	Out of operation band	-27dBm/MHz(68.2dBuV/m)@3m		Peak
	5725-5850 MHz	Below 5.65GHz	-27dBm/MHz(68.2dBuV/m)@3m		Peak
		5.65GHz-5.7GHz	-27*dBm/MHz to 10dBm/MHz (68.2* dBuV/m to 105.6dBuV/m)		Peak
		5.7GHz-5.72GHz	10*dBm/MHz to 15.6dBm/MHz (105.6*dBuV/m to 110.8dBuV/m)		Peak
		5.72GHz-5.725GHz	15.6*dBm/MHz to 27dBm/MHz (110.8dBuV/m to* 122.2dBuV/m)		Peak
		5.85GHz-5.855GHz	27dBm/MHz to 15.6*dBm/MHz (122.2dBuV/m to110.8* dBuV/m)		Peak
		5.855GHz-5.875GHz	15.6dBm/MHz to 10*dBm/MHz (110.8dBuV/m to 105.6* dBuV/m)		Peak

	5.875GHz-5.925GHz	10dBm/MHz to -27*dBm/MHz (105.6dBuV/m to 68.2* dBuV/m)	Peak
	Above 5.925GHz	-27 dBm/MHz(68.2dBuV/m)@3m	Peak

Remark:

- (1)The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.
- (3)Above 1GHz limit: $E[dBuV/m] = EIRP[dBm] + 95.2=68.2 \text{ dBuV/m}$, for $EIPR[dBm]=-27dBm$.

4.2. Test Setup

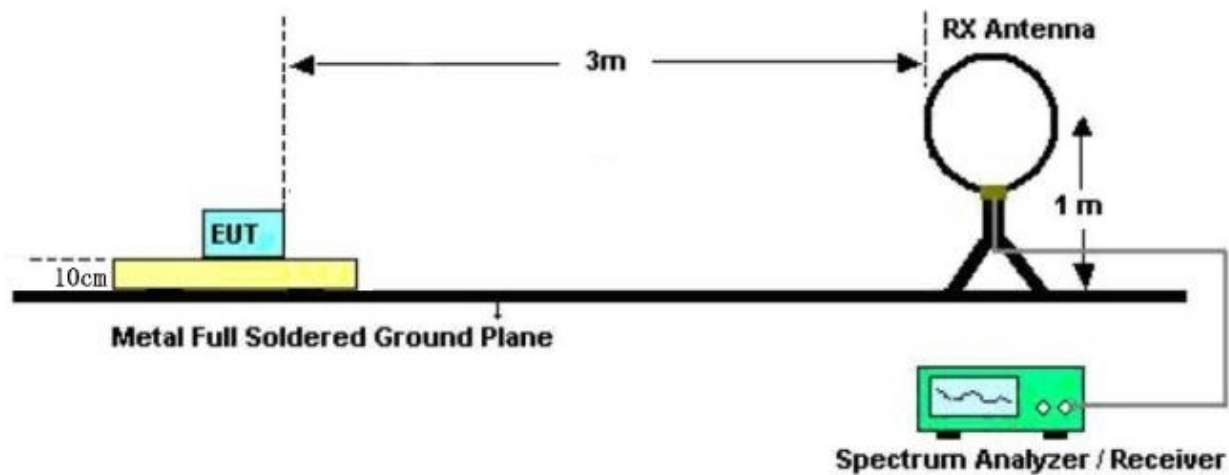


Figure 1. Below 30MHz

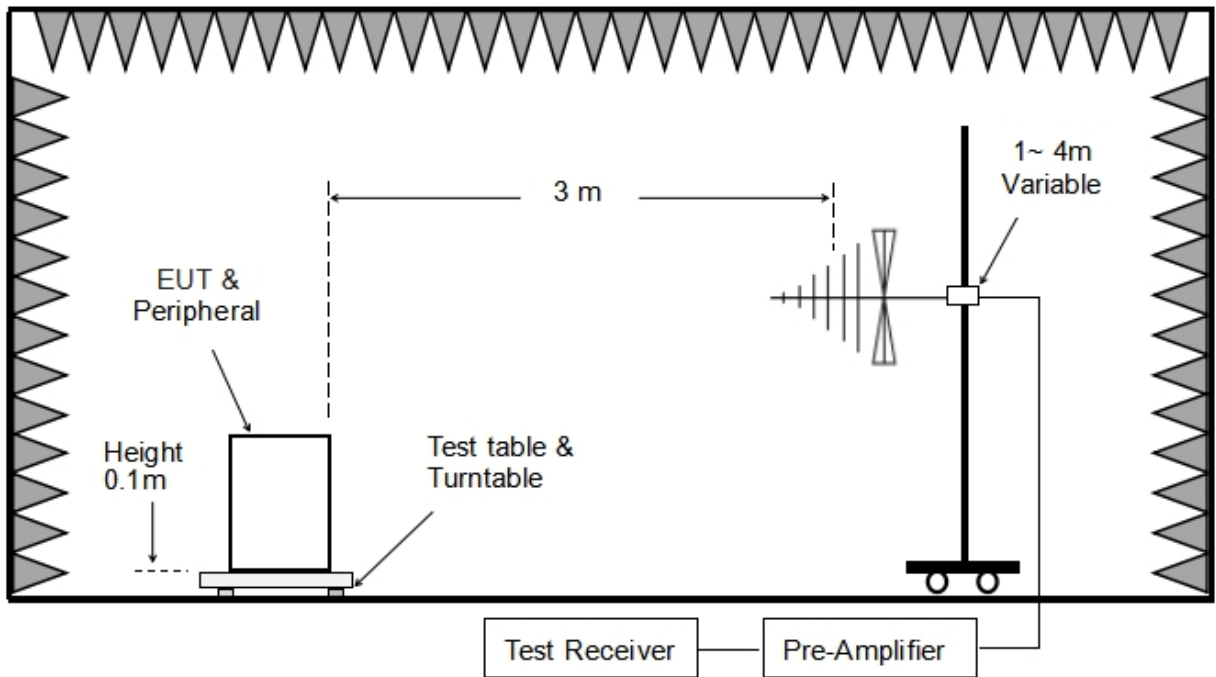


Figure 2. 30MHz to 1GHz

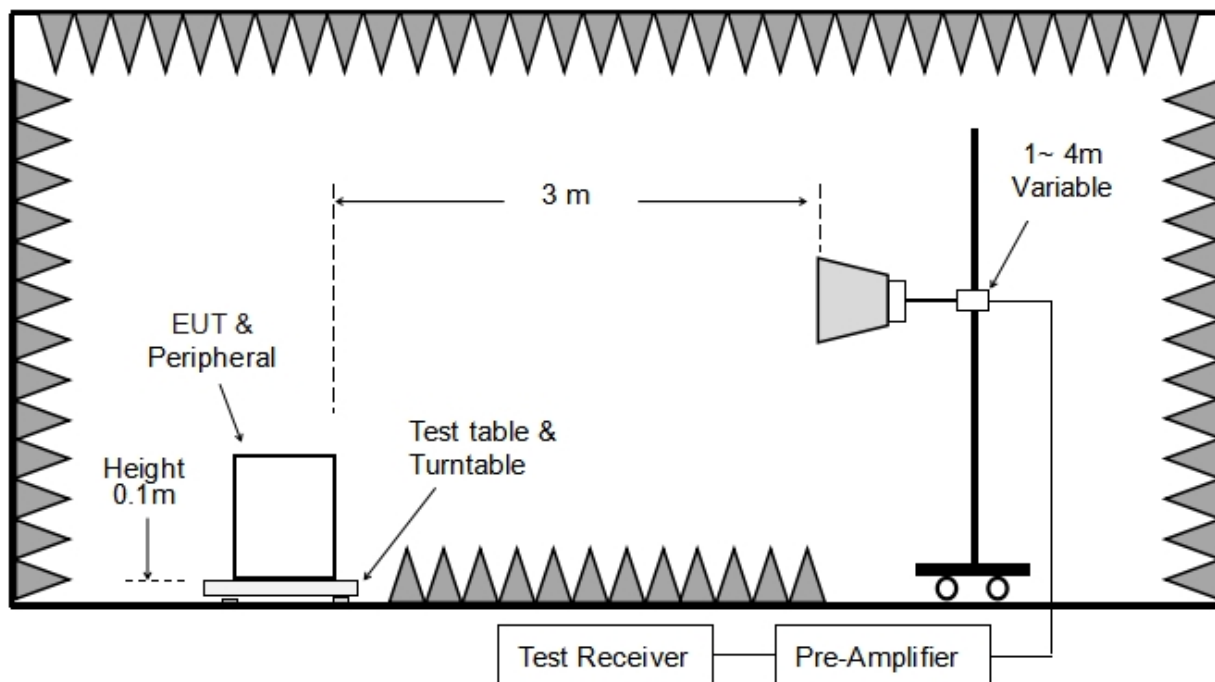


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.1m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 0.1m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.
RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

Pass

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.

Test Results (30~1000MHz)

Test Mode:

802.11n(HT20) 5240MHz

Power Source:


DC 22.2V Battery inside

Polarization:

Horizontal

Temp.(°C)/Hum.(%RH):

22.1°C/51%RH

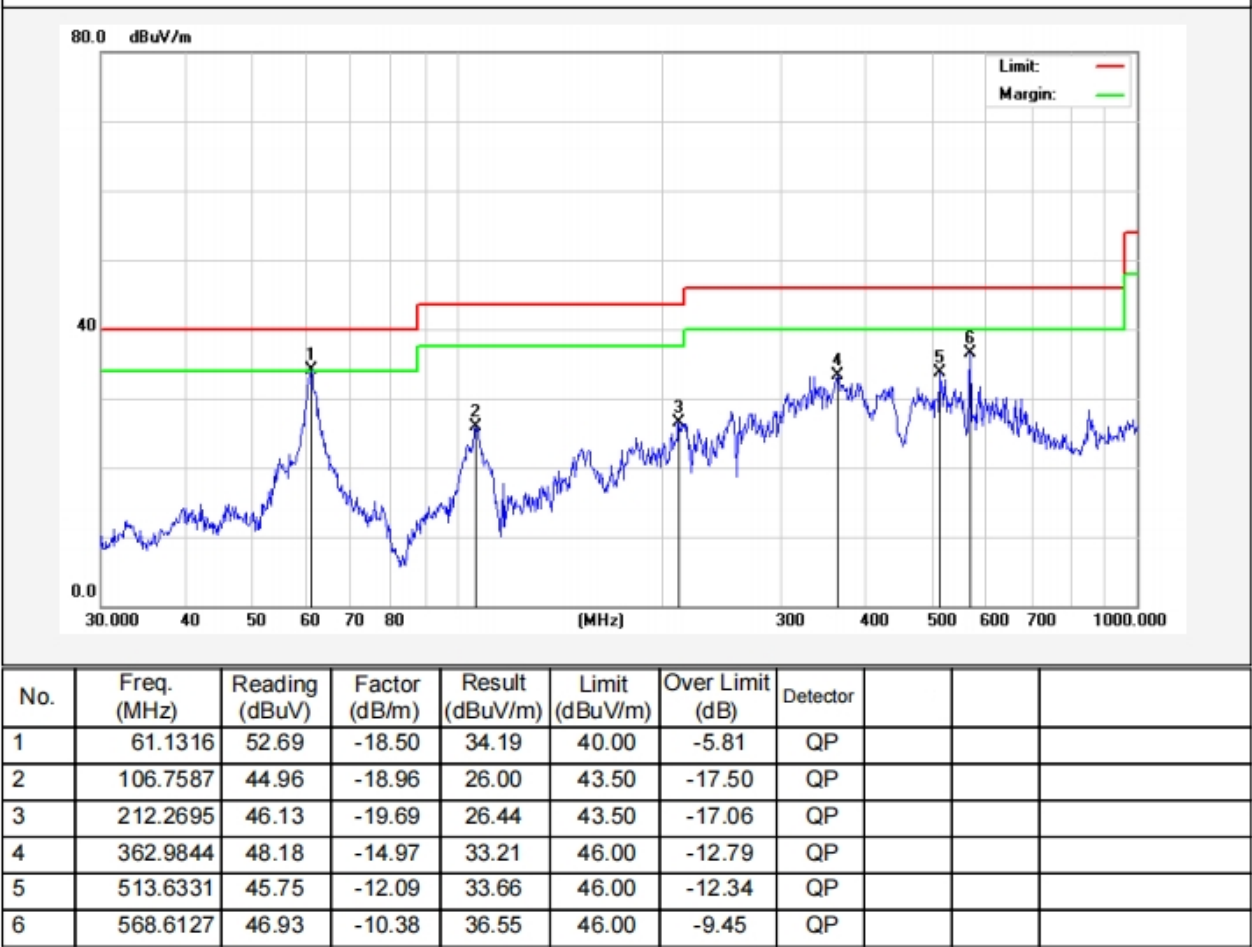

Test Results (30~1000MHz)

Test Mode:

802.11n(HT20) 5240MHz

Power Source:


DC 22.2V Battery inside

Polarization:

Vertical

Temp.(°C)/Hum.(%RH):

22.1°C/51%RH

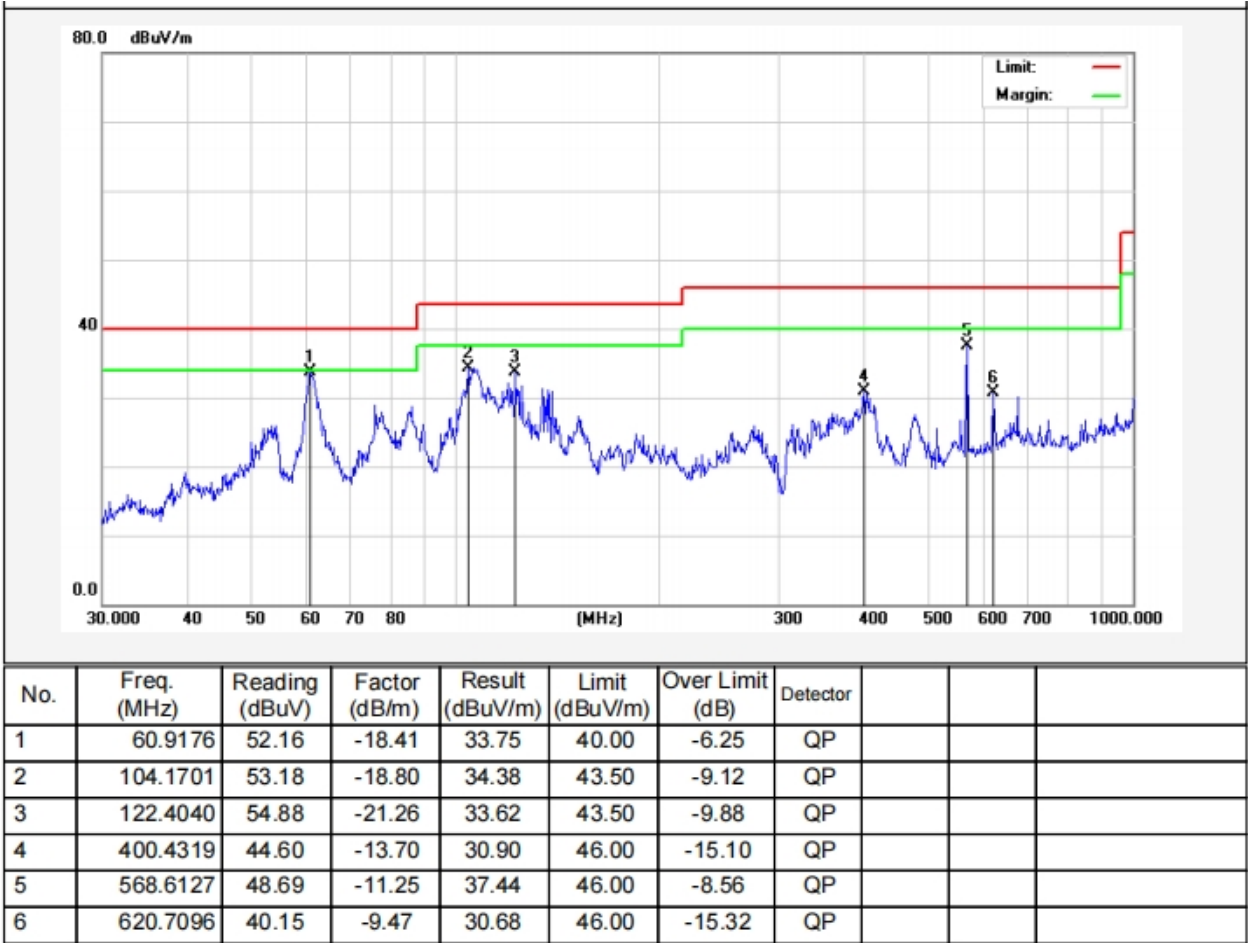

Test Results (Above 1000MHz)

Band: 5150-5250 MHz							
Test Mode: 802.11n(HT20)							
Test channel: Low CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
10360.00	31.55	23.81	55.36	68.20	-12.84	V	Peak
15540.00	32.94	28.68	61.62	68.20	-6.58	V	Peak
10360.00	32.03	23.81	55.84	68.20	-12.36	H	Peak
15540.00	32.99	28.68	61.67	68.20	-6.53	H	Peak
10360.00	20.990	23.81	44.80	54.00	-9.20	V	AVG
15540.00	22.132	28.68	50.81	54.00	-3.19	V	AVG
10360.00	21.216	23.81	45.03	54.00	-8.97	H	AVG
15540.00	21.649	28.68	50.33	54.00	-3.67	H	AVG
Test channel: Middle CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
10400.00	30.91	23.81	54.72	68.20	-13.48	V	Peak
15600.00	32.47	29.13	61.60	68.20	-6.60	V	Peak
10400.00	31.52	23.81	55.33	68.20	-12.87	H	Peak
15600.00	32.51	29.13	61.64	68.20	-6.56	H	Peak
10400.00	21.260	23.81	45.07	54.00	-8.93	V	AVG
15600.00	22.252	29.13	51.38	54.00	-2.62	V	AVG
10400.00	21.206	23.81	45.02	54.00	-8.98	H	AVG
15600.00	21.729	29.13	50.86	54.00	-3.14	H	AVG
Test channel: High CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
10480.00	30.48	23.80	54.28	68.20	-13.92	V	Peak
15720.00	31.95	30.03	61.98	68.20	-6.22	V	Peak
10480.00	31.16	23.80	54.96	68.20	-13.24	H	Peak
15720.00	31.42	30.03	61.45	68.20	-6.75	H	Peak
10480.00	19.93	23.80	43.73	54.00	-10.27	V	AVG
15720.00	21.01	30.03	51.04	54.00	-2.96	V	AVG
10480.00	20.42	23.80	44.22	54.00	-9.78	H	AVG
15720.00	20.52	30.03	50.55	54.00	-3.45	H	AVG

Remark:

1. During the test, pre-scan the all modes, Only the worst case is recorded in the report.
2. Result =Reading + Factor
3. Test frequency are from 1GHz to 40GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

Band: 5725-5850 MHz							
Test Mode: 802.11ac(VHT20)							
Test channel: Low CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11490.000	28.63	23.36	51.99	68.20	-16.21	V	Peak
17235.000	30.05	31.97	62.02	68.20	-6.18	V	Peak
11490.000	29.20	23.36	52.56	68.20	-15.64	H	Peak
17235.000	30.23	31.97	62.20	68.20	-6.00	H	Peak
11490.000	18.00	23.36	41.36	54.00	-12.64	V	AVG
17235.000	18.85	31.97	50.82	54.00	-3.18	V	AVG
11490.000	18.23	23.36	41.59	54.00	-12.41	H	AVG
17235.000	18.16	31.97	50.13	54.00	-3.87	H	AVG
Test channel: Middle CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11570.000	29.21	23.42	52.63	68.20	-15.57	V	Peak
17355.000	29.93	32.18	62.11	68.20	-6.09	V	Peak
11570.000	29.40	23.42	52.82	68.20	-15.38	H	Peak
17355.000	30.32	32.18	62.50	68.20	-5.70	H	Peak
11570.000	19.272	23.42	42.69	54.00	-11.31	V	AVG
17355.000	19.169	32.18	51.35	54.00	-2.65	V	AVG
11570.000	19.221	23.42	42.64	54.00	-11.36	H	AVG
17355.000	18.536	32.18	50.72	54.00	-3.28	H	AVG
Test channel: High CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11650.000	28.72	23.49	52.21	68.20	-15.99	V	Peak
17475.000	30.17	32.39	62.56	68.20	-5.64	V	Peak
11650.000	29.14	23.49	52.63	68.20	-15.57	H	Peak
17475.000	29.93	32.39	62.32	68.20	-5.88	H	Peak
11650.000	18.34	23.49	41.83	54.00	-12.17	V	AVG
17475.000	18.97	32.39	51.36	54.00	-2.64	V	AVG
11650.000	18.40	23.49	41.89	54.00	-12.11	H	AVG
17475.000	18.51	32.39	50.90	54.00	-3.10	H	AVG

Remark:

1. During the test, pre-scan the all modes, Only the worst case is recorded in the report.
2. Result = Reading + Factor
3. Test frequency are from 1GHz to 40GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

Radiated Band Edge: 5.2G

Test Mode: IEEE 802.11a							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	37.13	15.99	53.12	68.20	-15.08	H	Peak
5150.00	39.23	15.99	55.22	68.20	-12.98	V	Peak
5150.00	27.03	15.99	43.02	54.00	-10.98	H	AVG
5150.00	29.12	15.99	45.11	54.00	-8.89	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	37.54	16.43	53.97	68.20	-14.23	H	Peak
5250.00	40.58	16.43	57.01	68.20	-11.19	V	Peak
5250.00	28.92	16.43	45.35	54.00	-8.65	H	AVG
5250.00	29.76	16.43	46.19	54.00	-7.81	V	AVG

Remark: Result =Reading + Factor

Test Mode: IEEE 802.11n(HT20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.02	15.99	52.01	68.20	-16.19	H	Peak
5150.00	37.46	15.99	53.45	68.20	-14.75	V	Peak
5150.00	26.74	15.99	42.73	54.00	-11.27	H	AVG
5150.00	27.72	15.99	43.71	54.00	-10.29	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	37.87	16.43	54.30	68.20	-13.90	H	Peak
5250.00	38.88	16.43	55.31	68.20	-12.89	V	Peak
5250.00	27.92	16.43	44.35	54.00	-9.65	H	AVG
5250.00	29.41	16.43	45.84	54.00	-8.16	V	AVG

Remark: Result =Reading + Factor

Test Mode: IEEE 802.11n(HT40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.64	15.99	52.63	68.20	-15.57	H	Peak
5150.00	38.47	15.99	54.46	68.20	-13.74	V	Peak
5150.00	27.22	15.99	43.21	54.00	-10.79	H	AVG
5150.00	28.81	15.99	44.80	54.00	-9.20	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	38.19	16.43	54.62	68.20	-13.58	H	Peak
5250.00	37.01	16.43	53.44	68.20	-14.76	V	Peak
5250.00	28.47	16.43	44.90	54.00	-9.10	H	AVG
5250.00	29.70	16.43	46.13	54.00	-7.87	V	AVG

Remark: Result =Reading + Factor

Test Mode: IEEE 802.11ac(VHT20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	37.11	15.99	53.10	68.20	-15.10	H	Peak
5150.00	38.89	15.99	54.88	68.20	-13.32	V	Peak
5150.00	26.65	15.99	42.64	54.00	-11.36	H	AVG
5150.00	28.90	15.99	44.89	54.00	-9.11	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	37.97	16.43	54.40	68.20	-13.80	H	Peak
5250.00	38.21	16.43	54.64	68.20	-13.56	V	Peak
5250.00	27.91	16.43	44.34	54.00	-9.66	H	AVG
5250.00	28.53	16.43	44.96	54.00	-9.04	V	AVG

Remark: Result =Reading + Factor

Test Mode: IEEE 802.11ac(VHT40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.05	15.99	52.04	68.20	-16.16	H	Peak
5150.00	36.44	15.99	52.43	68.20	-15.77	V	Peak
5150.00	26.30	15.99	42.29	54.00	-11.71	H	AVG
5150.00	26.97	15.99	42.96	54.00	-11.04	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	38.17	16.43	54.60	68.20	-13.60	H	Peak
5250.00	37.27	16.43	53.70	68.20	-14.50	V	Peak
5250.00	27.58	16.43	44.01	54.00	-9.99	H	AVG
5250.00	27.69	16.43	44.12	54.00	-9.88	V	AVG

Remark: Result =Reading + Factor

Test Mode: IEEE 802.11ac(VHT80)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.11	15.99	52.10	68.20	-16.10	H	Peak
5150.00	36.63	15.99	52.62	68.20	-15.58	V	Peak
5150.00	26.79	15.99	42.78	54.00	-11.22	H	AVG
5150.00	26.98	15.99	42.97	54.00	-11.03	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	38.49	16.43	54.92	68.20	-13.28	H	Peak
5250.00	37.60	16.43	54.03	68.20	-14.17	V	Peak
5250.00	29.03	16.43	45.46	54.00	-8.54	H	AVG
5250.00	28.25	16.43	44.68	54.00	-9.32	V	AVG

Remark: Result =Reading + Factor

Radiated Band Edge: 5.8G

Test Mode: IEEE 802.11a							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	38.25	16.37	54.62	68.20	-13.58	H	Peak
5725.00	39.66	16.37	56.03	68.20	-12.17	V	Peak
5725.00	29.09	16.70	45.79	54.00	-8.21	H	AVG
5725.00	30.21	16.70	46.91	54.00	-7.09	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	39.21	17.21	56.42	68.20	-11.78	H	Peak
5850.00	39.59	17.21	56.80	68.20	-11.40	V	Peak
5850.00	29.18	17.21	46.39	54.00	-7.61	H	AVG
5850.00	29.18	17.21	46.39	54.00	-7.61	V	AVG

Remark: Result =Reading + Factor

Test Mode: IEEE 802.11n(HT20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	38.23	17.05	55.28	68.20	-12.92	H	Peak
5725.00	38.83	17.05	55.88	68.20	-12.32	V	Peak
5725.00	27.64	17.05	44.69	54.00	-9.31	H	AVG
5725.00	28.19	17.05	45.24	54.00	-8.76	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.45	17.21	54.66	68.20	-13.54	H	Peak
5850.00	38.04	17.21	55.25	68.20	-12.95	V	Peak
5850.00	27.74	17.21	44.95	54.00	-9.05	H	AVG
5850.00	28.54	17.21	45.75	54.00	-8.25	V	AVG

Remark: Result =Reading + Factor

Test Mode: IEEE 802.11n(HT40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	37.81	17.05	54.86	68.20	-13.34	H	Peak
5725.00	38.71	17.05	55.76	68.20	-12.44	V	Peak
5725.00	27.11	17.05	44.16	54.00	-9.84	H	AVG
5725.00	28.44	17.05	45.49	54.00	-8.51	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	38.17	17.21	55.38	68.20	-12.82	H	Peak
5850.00	38.53	17.21	55.74	68.20	-12.46	V	Peak
5850.00	28.35	17.21	45.56	54.00	-8.44	H	AVG
5850.00	29.42	17.21	46.63	54.00	-7.37	V	AVG

Remark: Result =Reading + Factor

Test Mode: IEEE 802.11ac(VHT20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	37.44	17.05	54.49	68.20	-13.71	H	Peak
5725.00	37.56	17.05	54.61	68.20	-13.59	V	Peak
5725.00	28.34	17.05	45.39	54.00	-8.61	H	AVG
5725.00	29.18	17.05	46.23	54.00	-7.77	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	38.18	17.21	55.39	68.20	-12.81	H	Peak
5850.00	39.05	17.21	56.26	68.20	-11.94	V	Peak
5850.00	28.04	17.21	45.25	54.00	-8.75	H	AVG
5850.00	29.14	17.21	46.35	54.00	-7.65	V	AVG

Remark: Result =Reading + Factor

Test Mode: IEEE 802.11ac(VHT40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	36.38	17.05	53.43	68.20	-14.77	H	Peak
5725.00	37.88	17.05	54.93	68.20	-13.27	V	Peak
5725.00	27.62	17.05	44.67	54.00	-9.33	H	AVG
5725.00	28.30	17.05	45.35	54.00	-8.65	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.72	17.21	54.93	68.20	-13.27	H	Peak
5850.00	38.58	17.21	55.79	68.20	-12.41	V	Peak
5850.00	27.73	17.21	44.94	54.00	-9.06	H	AVG
5850.00	27.37	17.21	44.58	54.00	-9.42	V	AVG

Remark: Result =Reading + Factor

Test Mode: IEEE 802.11ac(VHT80)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5725.00	35.65	17.05	52.70	68.20	-15.50	H	Peak
5725.00	37.20	17.05	54.25	68.20	-13.95	V	Peak
5725.00	26.70	17.05	43.75	54.00	-10.25	H	AVG
5725.00	27.24	17.05	44.29	54.00	-9.71	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.73	17.21	54.94	68.20	-13.26	H	Peak
5850.00	38.00	17.21	55.21	68.20	-12.99	V	Peak
5850.00	28.16	17.21	45.37	54.00	-8.63	H	AVG
5850.00	28.37	17.21	45.58	54.00	-8.42	V	AVG


Remark: Result =Reading + Factor

5. Maximum Conducted Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407(a)	
Test Limit	5.15 - 5.25GHz	1) Outdoor AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 6\text{dBi}$, then $P_{out} = 30 - (GT_x - 6)$. e.i.r.p. at any elevation angle above 30 degrees $\leq 125\text{mW}$ (21dBm) 2) Indoor AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 6\text{dBi}$, then $P_{out} = 30 - (GT_x - 6)$. 3) Point-to-point AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 23\text{dBi}$, then $P_{out} = 30 - (GT_x - 23)$. 4) Client devices The maximum conducted output power (Pout) shall not exceed the lesser of 250W (23.98dBm). if $GT_x > 6\text{dBi}$, then $P_{out} = 24 - (GT_x - 6)$.
	5.25 - 5.35GHz	The maximum conducted output power (Pout) shall not exceed the lesser of 250mW (24dBm) or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. if $GT_x > 6\text{dBi}$, then $P_{out} = 24 - (GT_x - 6)$.
	5.47- 5.725GHz	The maximum conducted output power (Pout) shall not exceed the lesser of 250mW (23.98dBm) or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. if $GT_x > 6\text{dBi}$, then $P_{out} = 24 - (GT_x - 6)$.
	5.725 - 5.85GHz	1) Point-to-multipoint systems (P2M) The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 6\text{dBi}$, then $P_{out} = 30 - (GT_x - 6)$. 2) Point-to-point systems (P2P) The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm).

5.2. Test Setup



5.3. Test Procedure

1. Measure the duty cycle D of the transmitter output signal.
2. Set span to encompass the entire 99% OBW of the signal.
3. Set RBW = 1 MHz.
4. Set VBW $\geq [3 \times \text{RBW}]$.

5. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
6. Sweep time = auto.
7. Detector = RMS
8. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
9. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
10. Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.

Additional test for duty cycle.


Please refer to Appendix B of the Appendix Test Data.

6. 26dB Bandwidth & 99% Occupied Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.407(a) & 2.1049
Test Limit	N/A

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
 - 26 dB & 99% bandwidth**
 - RBW = approximately 1% of the emission bandwidth;
 - Set the VBW > RBW;
 - Detector= Peak
 - Trace mode= Max hold.
 - Sweep- auto couple.
4. Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.
5. Repeat until all the rest channels are investigated.

6.4. Test Data

Pass


Please refer to Appendix A1&A2 of the Appendix Test Data.

7. Minimum 6dB Bandwidth Test

7.1. Test Standard

Test Standard	FCC Part15 C Section 15.407(e)
Test Limit	≥500 kHz

7.2. Test Setup



7.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set the spectrum analyzer as:
6 dB bandwidth
RBW = approximately 1% of the emission bandwidth;
Set the VBW>RBW;
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Measure the maximum width of the emission that is 6dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer.
5. Repeat until all the rest channels are investigated.

7.4. Test Data


Pass
Please refer to Appendix A3 of the Appendix Test Data.

8. Maximum Power Spectral Density Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407(a)	
Test Limit	5.15 - 5.25GHz	1) Outdoor AP The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if $GT_x > 6\text{dBi}$, then $PSD = 17 - (GT_x - 6)$. 2) Indoor AP The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if $GT_x > 6\text{dBi}$, then $PSD = 17 - (GT_x - 6)$. 3) Point-to-point AP The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if $GT_x > 23\text{dBi}$, then $PSD = 17 - (GT_x - 23)$. 4) Client devices The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if $GT_x > 6\text{dBi}$, then $PSD = 11 - (GT_x - 6)$.
	5.25 - 5.35GHz	The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if $GT_x > 6\text{dBi}$, then $PSD = 11 - (GT_x - 6)$.
	5.47- 5.725GHz	The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if $GT_x > 6\text{dBi}$, then $PSD = 11 - (GT_x - 6)$.
	5.725 - 5.85GHz	1) Point-to-multipoint systems (P2M) The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz. if $GT_x > 6\text{dBi}$, then $PSD = 30 - (GT_x - 6)$. 2) Point-to-point systems (P2P) The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.

8.2. Test Setup



8.3. Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =1MHz;
3. Set VBW $\geq$ 3 RBW=3MHz;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;

- 5. Detector=RMS;
- 6. Sweep time= auto couple;
- 7. Trace mode=max. hold;

8.4. Test Data

Pass


Please refer to Appendix D of the Appendix Test Data.

9. Conducted Band Edge Test

9.1. Test Standard and Limit

Test Standard	15.407(b)			
Test Limit	Operating Band	Frequency	EIRP Limit	Remark
	5150-5250MHz	Out of operation band	-27dBm/MHz	Peak
	5250-5350MHz	Out of operation band	-27dBm/MHz	Peak
	5470-5725MHz	Out of operation band	-27dBm/MHz	Peak
	5725-5850 MHz	Below 5.65GHz	-27dBm/MHz	Peak
		5.65GHz-5.7GHz	-27dBm/MHz to 10dBm/MHz	Peak
		5.7GHz-5.72GHz	10dBm/MHz to 15.6dBm/MHz	Peak
		5.72GHz-5.725GHz	15.6dBm/MHz to 27dBm/MHz	Peak
		5.85GHz-5.855GHz	27dBm/MHz to 15.6dBm/MHz	Peak
		5.855GHz-5.875GHz	15.6dBm/MHz to 10dBm/MHz	Peak
		5.875GHz-5.925GHz	10dBm/MHz to -27dBm/MHz	Peak
		Above 5.925GHz	-27dBm/MHz	Peak

9.2. Test Setup



9.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 1MHz.
2. Set the VBW = 3MHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

9.4. Test Data

Pass


Please refer to Appendix E of the Appendix Test Data.

10. Frequency Stability

10.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.407(g)
Test Limit	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

10.2. Test Setup



10.3. Test Procedure

The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

10.4. Test Data

Pass

Please to see the following pages.

Test Mode: 5.2G							
Mode	Tx Type	Frequency (MHz)	Temperature (°C)	Voltage (VDC)	Measured Frequency (MHz)	Limit	Verdict
802.11a	SISO	5180	20	18.87	5180.02	5172 to 5188	Pass
				22.20	5180.03	5172 to 5188	Pass
				25.53	5180.03	5172 to 5188	Pass
			-30	22.20	5180.12	5172 to 5188	Pass
			-20	22.20	5180.05	5150 to 5250	Pass
			-10	22.20	5180.02	5150 to 5250	Pass
			0	22.20	5180.03	5150 to 5250	Pass
			10	22.20	5180.07	5150 to 5250	Pass
			30	22.20	5180.00	5150 to 5250	Pass
			40	22.20	5180.06	5150 to 5250	Pass
			50	22.20	5180.13	5172 to 5188	Pass
		5200	20	18.87	5200.13	5192 to 5208	Pass
				22.20	5200.01	5192 to 5208	Pass
				25.53	5200.03	5192 to 5208	Pass
			-30	22.20	5200.02	5192 to 5208	Pass
			-20	22.20	5200.11	5150 to 5250	Pass
			-10	22.20	5200.02	5150 to 5250	Pass
			0	22.20	5200.02	5150 to 5250	Pass
			10	22.20	5200.02	5150 to 5250	Pass
			30	22.20	5200.07	5150 to 5250	Pass
			40	22.20	5200.04	5150 to 5250	Pass
			50	22.20	5200.07	5192 to 5208	Pass
		5240	20	18.87	5240.06	5232 to 5248	Pass
				22.20	5240.01	5232 to 5248	Pass
				25.53	5240.00	5232 to 5248	Pass
			-30	22.20	5240.01	5232 to 5248	Pass
			-20	22.20	5240.02	5150 to 5250	Pass
			-10	22.20	5240.05	5150 to 5250	Pass
			0	22.20	5240.02	5150 to 5250	Pass
			10	22.20	5240.12	5150 to 5250	Pass
			30	22.20	5240.11	5150 to 5250	Pass
			40	22.20	5240.08	5150 to 5250	Pass
			50	22.20	5240.13	5232 to 5248	Pass
802.11n (HT20)	SISO	5180	20	18.87	5180.13	5172 to 5188	Pass
				22.20	5180.10	5172 to 5188	Pass
				25.53	5180.07	5172 to 5188	Pass
			-30	22.20	5180.13	5172 to 5188	Pass
			-20	22.20	5180.05	5150 to 5250	Pass

			-10	22.20	5180.06	5150 to 5250	Pass
			0	22.20	5180.05	5150 to 5250	Pass
			10	22.20	5180.03	5150 to 5250	Pass
			30	22.20	5180.08	5150 to 5250	Pass
			40	22.20	5180.08	5150 to 5250	Pass
			50	22.20	5180.13	5172 to 5188	Pass
		5200	20	18.87	5200.12	5192 to 5208	Pass
				22.20	5200.12	5192 to 5208	Pass
				25.53	5200.08	5192 to 5208	Pass
			-30	22.20	5200.07	5192 to 5208	Pass
			-20	22.20	5200.05	5150 to 5250	Pass
			-10	22.20	5200.07	5150 to 5250	Pass
			0	22.20	5200.13	5150 to 5250	Pass
			10	22.20	5200.09	5150 to 5250	Pass
			30	22.20	5200.12	5150 to 5250	Pass
			40	22.20	5200.08	5150 to 5250	Pass
			50	22.20	5200.11	5192 to 5208	Pass
		5240	20	18.87	5240.12	5232 to 5248	Pass
				22.20	5240.09	5232 to 5248	Pass
				25.53	5240.13	5232 to 5248	Pass
			-30	22.20	5240.12	5232 to 5248	Pass
			-20	22.20	5240.04	5150 to 5250	Pass
			-10	22.20	5240.06	5150 to 5250	Pass
			0	22.20	5240.11	5150 to 5250	Pass
			10	22.20	5240.03	5150 to 5250	Pass
			30	22.20	5240.02	5150 to 5250	Pass
			40	22.20	5240.10	5150 to 5250	Pass
			50	22.20	5240.02	5232 to 5248	Pass
802.11n (HT40)	SISO	5190	20	18.87	5190.13	5174 to 5206	Pass
				22.20	5190.03	5174 to 5206	Pass
				25.53	5190.07	5174 to 5206	Pass
			-30	22.20	5190.11	5174 to 5206	Pass
			-20	22.20	5190.02	5150 to 5250	Pass
			-10	22.20	5190.02	5150 to 5250	Pass
			0	22.20	5190.02	5150 to 5250	Pass
			10	22.20	5190.12	5150 to 5250	Pass
			30	22.20	5190.12	5150 to 5250	Pass
			40	22.20	5190.11	5150 to 5250	Pass
			50	22.20	5190.01	5174 to 5206	Pass
		5230	20	18.87	5230.04	5214 to 5246	Pass
				22.20	5230.07	5214 to 5246	Pass

802.11ac (VHT20)	SISO			25.53	5230.06	5214 to 5246	Pass
			-30	22.20	5230.04	5214 to 5246	Pass
			-20	22.20	5230.11	5150 to 5250	Pass
			-10	22.20	5230.09	5150 to 5250	Pass
			0	22.20	5230.02	5150 to 5250	Pass
			10	22.20	5230.13	5150 to 5250	Pass
			30	22.20	5230.00	5150 to 5250	Pass
			40	22.20	5230.11	5150 to 5250	Pass
			50	22.20	5230.12	5214 to 5246	Pass
		5180	20	18.87	5180.05	5172 to 5188	Pass
				22.20	5180.05	5172 to 5188	Pass
				25.53	5180.02	5172 to 5188	Pass
			-30	22.20	5180.13	5172 to 5188	Pass
			-20	22.20	5180.04	5150 to 5250	Pass
			-10	22.20	5180.07	5150 to 5250	Pass
			0	22.20	5180.11	5150 to 5250	Pass
			10	22.20	5180.06	5150 to 5250	Pass
			30	22.20	5180.07	5150 to 5250	Pass
			40	22.20	5180.07	5150 to 5250	Pass
			50	22.20	5180.12	5172 to 5188	Pass
		5200	20	18.87	5200.11	5192 to 5208	Pass
				22.20	5200.05	5192 to 5208	Pass
				25.53	5200.00	5192 to 5208	Pass
			-30	22.20	5200.06	5192 to 5208	Pass
			-20	22.20	5200.05	5150 to 5250	Pass
			-10	22.20	5200.07	5150 to 5250	Pass
			0	22.20	5200.10	5150 to 5250	Pass
			10	22.20	5200.11	5150 to 5250	Pass
			30	22.20	5200.00	5150 to 5250	Pass
			40	22.20	5200.03	5150 to 5250	Pass
			50	22.20	5200.02	5192 to 5208	Pass
		5240	20	18.87	5240.10	5232 to 5248	Pass
				22.20	5240.11	5232 to 5248	Pass
				25.53	5240.13	5232 to 5248	Pass
			-30	22.20	5240.07	5232 to 5248	Pass
			-20	22.20	5240.00	5150 to 5250	Pass
			-10	22.20	5240.06	5150 to 5250	Pass
			0	22.20	5240.05	5150 to 5250	Pass
			10	22.20	5240.08	5150 to 5250	Pass
			30	22.20	5240.02	5150 to 5250	Pass
			40	22.20	5240.06	5150 to 5250	Pass

			50	22.20	5240.09	5232 to 5248	Pass
802.11ac (VHT40)	SISO	5190	20	18.87	5190.11	5174 to 5206	Pass
				22.20	5190.11	5174 to 5206	Pass
				25.53	5190.05	5174 to 5206	Pass
			-30	22.20	5190.03	5174 to 5206	Pass
			-20	22.20	5190.01	5150 to 5250	Pass
			-10	22.20	5190.06	5150 to 5250	Pass
			0	22.20	5190.11	5150 to 5250	Pass
			10	22.20	5190.04	5150 to 5250	Pass
			30	22.20	5190.02	5150 to 5250	Pass
			40	22.20	5190.09	5150 to 5250	Pass
			50	22.20	5190.09	5174 to 5206	Pass
		5230	20	18.87	5230.02	5214 to 5246	Pass
				22.20	5230.09	5214 to 5246	Pass
				25.53	5230.10	5214 to 5246	Pass
			-30	22.20	5230.04	5214 to 5246	Pass
			-20	22.20	5230.11	5150 to 5250	Pass
			-10	22.20	5230.07	5150 to 5250	Pass
			0	22.20	5230.11	5150 to 5250	Pass
			10	22.20	5230.03	5150 to 5250	Pass
			30	22.20	5230.07	5150 to 5250	Pass
			40	22.20	5230.02	5150 to 5250	Pass
			50	22.20	5230.03	5214 to 5246	Pass
802.11ac (VHT80)	SISO	5210	20	18.87	5210.11	5178 to 5242	Pass
				22.20	5210.12	5178 to 5242	Pass
				25.53	5210.12	5178 to 5242	Pass
			-30	22.20	5210.02	5178 to 5242	Pass
			-20	22.20	5210.03	5150 to 5250	Pass
			-10	22.20	5210.04	5150 to 5250	Pass
			0	22.20	5210.09	5150 to 5250	Pass
			10	22.20	5210.02	5150 to 5250	Pass
			30	22.20	5210.13	5150 to 5250	Pass
			40	22.20	5210.07	5150 to 5250	Pass
			50	22.20	5210.02	5178 to 5242	Pass

Test Mode: 5.8G							
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VDC)	Measured Frequency (MHz)	Limit	Verdict
802.11a	SISO	5745	20	18.87	5745.01	5737 to 5753	Pass
				22.20	5745.03	5737 to 5753	Pass
				25.53	5745.04	5737 to 5753	Pass
			-30	18.87	5745.06	5737 to 5753	Pass
			-20	22.20	5745.08	5725 to 5850	Pass
			-10	22.20	5745.03	5725 to 5850	Pass
			0	22.20	5745.09	5725 to 5850	Pass
			10	22.20	5745.09	5725 to 5850	Pass
			30	22.20	5745.01	5725 to 5850	Pass
			40	22.20	5745.03	5725 to 5850	Pass
			50	22.20	5745.06	5737 to 5753	Pass
		5785	20	18.87	5785.11	5777 to 5793	Pass
				22.20	5785.13	5777 to 5793	Pass
				25.53	5785.13	5777 to 5793	Pass
			-30	18.87	5785.02	5777 to 5793	Pass
			-20	22.20	5785.02	5725 to 5850	Pass
			-10	22.20	5785.10	5725 to 5850	Pass
			0	22.20	5785.04	5725 to 5850	Pass
			10	22.20	5785.04	5725 to 5850	Pass
			30	22.20	5785.12	5725 to 5850	Pass
			40	22.20	5785.01	5725 to 5850	Pass
			50	22.20	5785.02	5777 to 5793	Pass
		5825	20	18.87	5825.02	5817 to 5833	Pass
				22.20	5825.09	5817 to 5833	Pass
				25.53	5825.11	5817 to 5833	Pass
			-30	18.87	5825.13	5817 to 5833	Pass
			-20	22.20	5825.00	5725 to 5850	Pass
			-10	22.20	5825.03	5725 to 5850	Pass
			0	22.20	5825.09	5725 to 5850	Pass
			10	22.20	5825.04	5725 to 5850	Pass
			30	22.20	5825.01	5725 to 5850	Pass
			40	22.20	5825.04	5725 to 5850	Pass
			50	22.20	5825.06	5817 to 5833	Pass
802.11n (HT20)	SISO	5745	20	18.87	5745.12	5737 to 5753	Pass
				22.20	5745.10	5737 to 5753	Pass
				25.53	5745.13	5737 to 5753	Pass
			-30	18.87	5745.10	5737 to 5753	Pass
			-20	22.20	5745.03	5725 to 5850	Pass

			-10	22.20	5745.13	5725 to 5850	Pass
			0	22.20	5745.06	5725 to 5850	Pass
			10	22.20	5745.10	5725 to 5850	Pass
			30	22.20	5745.04	5725 to 5850	Pass
			40	22.20	5745.06	5725 to 5850	Pass
			50	22.20	5745.04	5737 to 5753	Pass
		5785	20	18.87	5785.01	5777 to 5793	Pass
				22.20	5785.09	5777 to 5793	Pass
				25.53	5785.00	5777 to 5793	Pass
			-30	18.87	5785.05	5777 to 5793	Pass
			-20	22.20	5785.09	5725 to 5850	Pass
			-10	22.20	5785.05	5725 to 5850	Pass
			0	22.20	5785.04	5725 to 5850	Pass
			10	22.20	5785.01	5725 to 5850	Pass
			30	22.20	5785.11	5725 to 5850	Pass
			40	22.20	5785.03	5725 to 5850	Pass
			50	22.20	5785.10	5777 to 5793	Pass
		5825	20	18.87	5825.10	5817 to 5833	Pass
				22.20	5825.12	5817 to 5833	Pass
				25.53	5825.12	5817 to 5833	Pass
			-30	18.87	5825.03	5817 to 5833	Pass
			-20	22.20	5825.02	5725 to 5850	Pass
			-10	22.20	5825.08	5725 to 5850	Pass
			0	22.20	5825.12	5725 to 5850	Pass
			10	22.20	5825.06	5725 to 5850	Pass
			30	22.20	5825.06	5725 to 5850	Pass
			40	22.20	5825.02	5725 to 5850	Pass
			50	22.20	5825.01	5817 to 5833	Pass
802.11n (HT40)	SISO	5755	20	18.87	5755.03	5739 to 5771	Pass
				22.20	5755.01	5739 to 5771	Pass
				25.53	5755.13	5739 to 5771	Pass
			-30	18.87	5755.12	5739 to 5771	Pass
			-20	22.20	5755.07	5725 to 5850	Pass
			-10	22.20	5755.07	5725 to 5850	Pass
			0	22.20	5755.07	5725 to 5850	Pass
			10	22.20	5755.04	5725 to 5850	Pass
			30	22.20	5755.08	5725 to 5850	Pass
			40	22.20	5755.09	5725 to 5850	Pass
			50	22.20	5755.05	5739 to 5771	Pass
		5795	20	18.87	5795.02	5779 to 5811	Pass
				22.20	5795.11	5779 to 5811	Pass



802.11ac (VHT20)	SISO			25.53	5795.04	5779 to 5811	Pass
			-30	18.87	5795.08	5779 to 5811	Pass
			-20	22.20	5795.07	5725 to 5850	Pass
			-10	22.20	5795.07	5725 to 5850	Pass
			0	22.20	5795.04	5725 to 5850	Pass
			10	22.20	5795.05	5725 to 5850	Pass
			30	22.20	5795.03	5725 to 5850	Pass
			40	22.20	5795.13	5725 to 5850	Pass
			50	22.20	5795.04	5779 to 5811	Pass
		5745	20	18.87	5745.04	5737 to 5753	Pass
				22.20	5745.05	5737 to 5753	Pass
				25.53	5745.03	5737 to 5753	Pass
			-30	18.87	5745.00	5737 to 5753	Pass
			-20	22.20	5745.02	5725 to 5850	Pass
			-10	22.20	5745.13	5725 to 5850	Pass
			0	22.20	5745.03	5725 to 5850	Pass
			10	22.20	5745.05	5725 to 5850	Pass
			30	22.20	5745.06	5725 to 5850	Pass
			40	22.20	5745.12	5725 to 5850	Pass
			50	22.20	5745.10	5737 to 5753	Pass
		5785	20	18.87	5785.07	5777 to 5793	Pass
				22.20	5785.07	5777 to 5793	Pass
				25.53	5785.07	5777 to 5793	Pass
			-30	18.87	5785.02	5777 to 5793	Pass
			-20	22.20	5785.09	5725 to 5850	Pass
			-10	22.20	5785.07	5725 to 5850	Pass
			0	22.20	5785.12	5725 to 5850	Pass
			10	22.20	5785.06	5725 to 5850	Pass
			30	22.20	5785.10	5725 to 5850	Pass
			40	22.20	5785.11	5725 to 5850	Pass
			50	22.20	5785.04	5777 to 5793	Pass
		5825	20	18.87	5825.10	5817 to 5833	Pass
				22.20	5825.09	5817 to 5833	Pass
				25.53	5825.04	5817 to 5833	Pass
			-30	18.87	5825.11	5817 to 5833	Pass
			-20	22.20	5825.12	5725 to 5850	Pass
			-10	22.20	5825.10	5725 to 5850	Pass
			0	22.20	5825.11	5725 to 5850	Pass
			10	22.20	5825.04	5725 to 5850	Pass
			30	22.20	5825.07	5725 to 5850	Pass
			40	22.20	5825.02	5725 to 5850	Pass

			50	22.20	5825.08	5817 to 5833	Pass
802.11ac (VHT40)	SISO	5755	20	18.87	5755.01	5739 to 5771	Pass
				22.20	5755.04	5739 to 5771	Pass
				25.53	5755.05	5739 to 5771	Pass
				-30	18.87	5739 to 5771	Pass
			-20	22.20	5755.04	5725 to 5850	Pass
			-10	22.20	5755.08	5725 to 5850	Pass
			0	22.20	5755.02	5725 to 5850	Pass
			10	22.20	5755.03	5725 to 5850	Pass
			30	22.20	5755.12	5725 to 5850	Pass
			40	22.20	5755.12	5725 to 5850	Pass
			50	22.20	5755.02	5739 to 5771	Pass
		5795	20	18.87	5795.06	5779 to 5811	Pass
				22.20	5795.06	5779 to 5811	Pass
				25.53	5795.08	5779 to 5811	Pass
				-30	18.87	5779 to 5811	Pass
			-20	22.20	5795.08	5725 to 5850	Pass
			-10	22.20	5795.04	5725 to 5850	Pass
			0	22.20	5795.10	5725 to 5850	Pass
			10	22.20	5795.08	5725 to 5850	Pass
			30	22.20	5795.06	5725 to 5850	Pass
			40	22.20	5795.02	5725 to 5850	Pass
			50	22.20	5795.02	5779 to 5811	Pass
802.11ac (VHT80)	SISO	5775	20	18.87	5775.10	5743 to 5807	Pass
				22.20	5775.11	5743 to 5807	Pass
				25.53	5775.05	5743 to 5807	Pass
			-30	18.87	5775.12	5743 to 5807	Pass
			-20	22.20	5775.02	5725 to 5850	Pass
			-10	22.20	5775.05	5725 to 5850	Pass
			0	22.20	5775.00	5725 to 5850	Pass
			10	22.20	5775.00	5725 to 5850	Pass
			30	22.20	5775.13	5725 to 5850	Pass
			40	22.20	5775.13	5725 to 5850	Pass
			50	22.20	5775.07	5743 to 5807	Pass

11. Antenna Requirement

11.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.407 requirement: if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Antenna Connected Construction

The antenna is a FPC Antenna which permanently attached, and the best case gain of the antenna is 0dBi. It complies with the standard requirement.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----